




(86) Date de dépôt PCT/PCT Filing Date: 2003/01/24
 (87) Date publication PCT/PCT Publication Date: 2003/07/31
 (45) Date de délivrance/Issue Date: 2011/11/01
 (85) Entrée phase nationale/National Entry: 2004/08/23
 (86) N° demande PCT/PCT Application No.: EP 2003/000734
 (87) N° publication PCT/PCT Publication No.: 2003/062763
 (30) Priorité/Priority: 2002/01/24 (DE202 01 092.9)

(51) Cl.Int./Int.Cl. *G01G 11/08* (2006.01),
B65G 53/46 (2006.01), *G01G 13/02* (2006.01)
 (72) Inventeurs/Inventors:
HAFNER, HANS WILHELM, DE;
WOLFSCHAFFNER, HUBERT, DE
 (73) Propriétaire/Owner:
PFISTER GMBH, DE
 (74) Agent: NEXUS LAW GROUP LLP

(54) Titre : DISPOSITIF DE DOSAGE GRAVIMETRIQUE EN CONTINU ET DE CONVOYAGE PNEUMATIQUE DE MATIERE EN VRAC
 (54) Title: DEVICE FOR THE CONTINUOUS GRAVIMETRIC METERING AND PNEUMATIC CONVEYING OF POURABLE MATERIAL

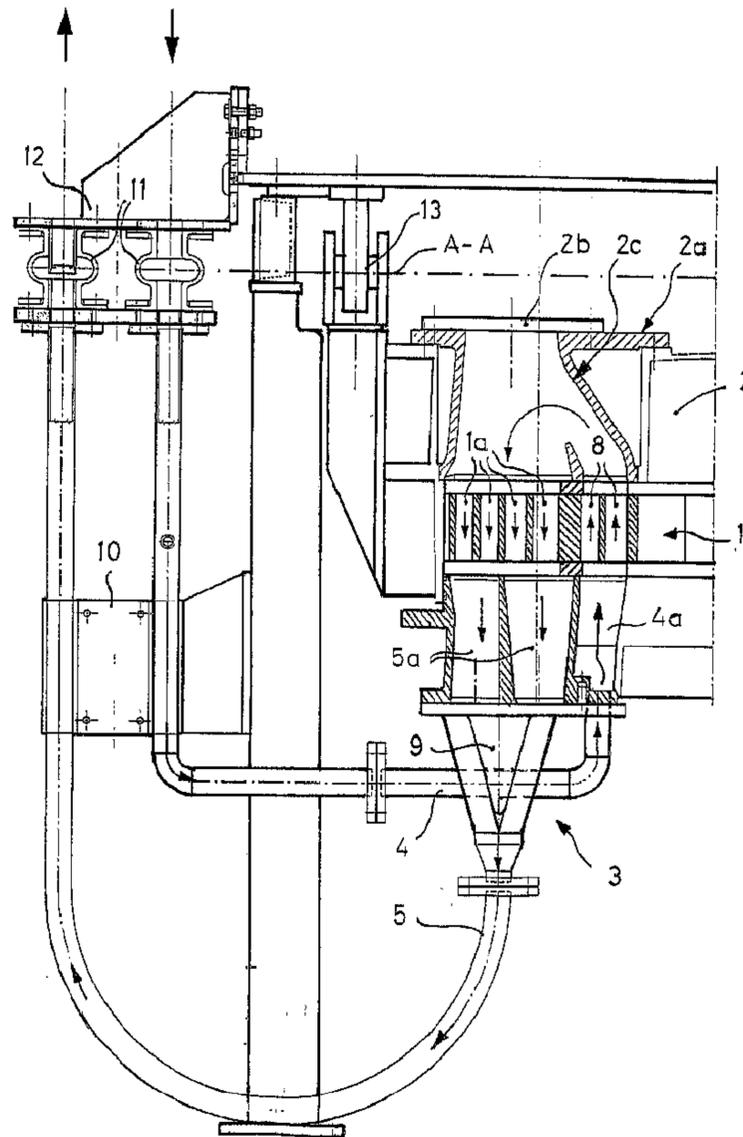

(57) Abrégé/Abstract:

Disclosed is a device for the continuous gravimetric metering and pneumatic conveying of pourable material which is conveyed across a given distance by a metering rotor (1) which is arranged in a pressure-proof manner in a housing (2) and is provided with

(57) **Abrégé(suite)/Abstract(continued):**

conveying pockets (1a). Said housing (2) comprises a charging station and a discharging station for the pourable material, which are connected to the inlet/outlet (4, 5) of a pneumatic conveyor system. The housing (2) is connected to a force metering device which detects the momentary load generated on the metering rotor (1) by the conveyed material. The inlet and outlet of the pneumatic conveyor system are connected to the bottom of the housing (2). In order to build the inventive device in a compact manner while reducing the assembly requirements and improving flow guidance, the flow from the inlet (4) to the outlet (5) is deflected within the upper area of the housing (2).

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum
Internationales Büro(43) Internationales Veröffentlichungsdatum
31. Juli 2003 (31.07.2003)

PCT

(10) Internationale Veröffentlichungsnummer
WO 03/062763 A1(51) Internationale Patentklassifikation⁷: G01G 11/08,
13/02, B65G 53/46(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von
US): PFISTER GMBH [DE/DE]; Stätzlinger Strasse 70,
86165 Augsburg (DE).

(21) Internationales Aktenzeichen: PCT/EP03/00734

(22) Internationales Anmeldedatum:
24. Januar 2003 (24.01.2003)

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): HÄFNER,
Hans, Wilhelm [DE/DE]; Fichtenweg 15, 86551
Aichach-Walchshofen (DE). WOLFSCHAFFNER,
Hubert [DE/DE]; Paarstr. 16, 86453 Dasing (DE).

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch


(30) Angaben zur Priorität:
202 01 092.9 24. Januar 2002 (24.01.2002) DE

(74) Anwalt: FIENER, Josef; J. Fiener et Col, Maximilianstrasse 57, Postfach 12 49, 87712 Mindelheim (DE).

[Fortsetzung auf der nächsten Seite]

(54) Title: DEVICE FOR THE CONTINUOUS GRAVIMETRIC METERING AND PNEUMATIC CONVEYING OF POURABLE MATERIAL

(54) Bezeichnung: VORRICHTUNG ZUM KONTINUIERLICHEN, GRAVIMETRISCHEN DOSIEREN UND PNEUMATISCHEN FÖRDERN VON SCHÜTTGUT

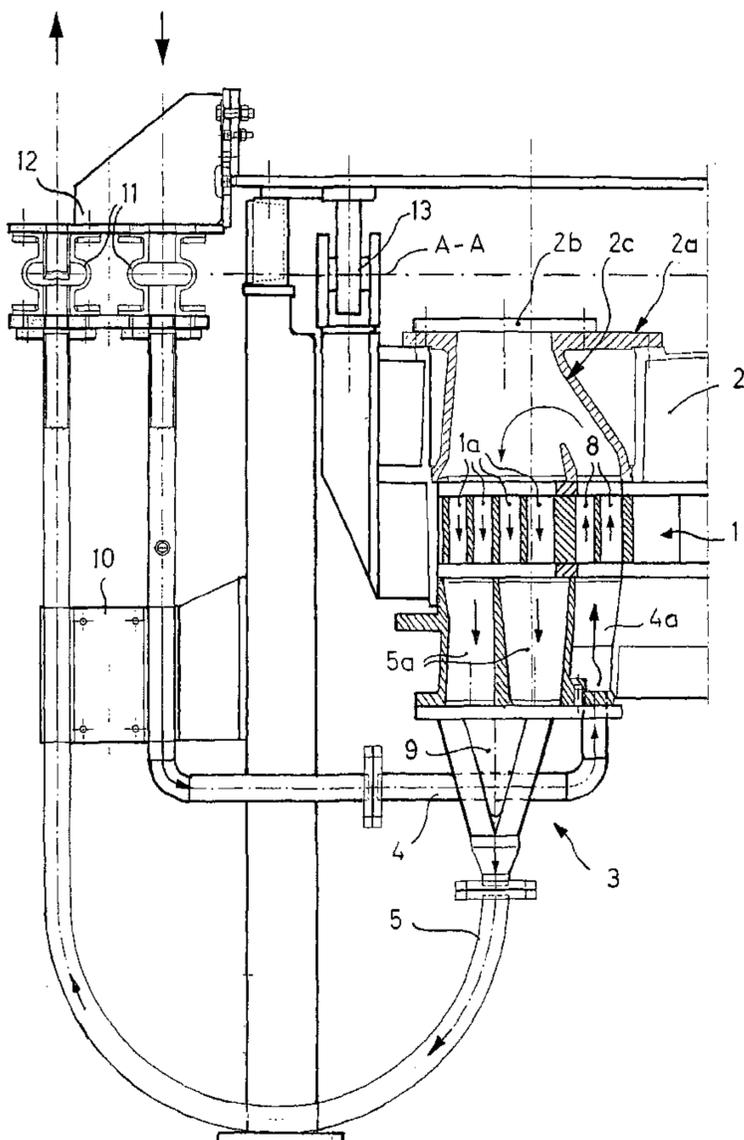

(57) Abstract: Disclosed is a device for the continuous gravimetric metering and pneumatic conveying of pourable material which is conveyed across a given distance by a metering rotor (1) which is arranged in a pressure-proof manner in a housing (2) and is provided with conveying pockets (1a). Said housing (2) comprises a charging station and a discharging station for the pourable material, which are connected to the inlet/outlet (4, 5) of a pneumatic conveyor system. The housing (2) is connected to a force metering device which detects the momentary load generated on the metering rotor (1) by the conveyed material. The inlet and outlet of the pneumatic conveyor system are connected to the bottom of the housing (2). In order to build the inventive device in a compact manner while reducing the assembly requirements and improving flow guidance, the flow from the inlet (4) to the outlet (5) is deflected within the upper area of the housing (2).

(57) Zusammenfassung: Für eine kompakte Bauweise einer Vorrichtung zum kontinuierlichen, gravimetrischen Dosieren und pneumatischen Fördern von Schüttgut, das mit einem druckdicht in einem Gehäuse (2) angeordneten, mit Fördertaschen (1a) versehenen Dosierrotor (1) über eine Messstrecke geführt wird, wobei das Gehäuse (2) eine Schüttgut-Aufgabestation und eine Entleerungsstation mit Anschlüssen an Zu-/Ableitungen (4, 5) eines pneumatischen Fördersystems aufweist und mit einer Kraftmesseinrichtung verbunden ist, über die die auf den Dosierrotor (1) durch das geförderte Gut ausgeübte Momentlast festgestellt wird, sowie die Zuleitung und Ableitung des pneumatischen Fördersystems an die Unterseite des Gehäuses (2) angeschlossen sind, wird vorgeschlagen, dass die Strömungsumlenkung von der Zuleitung (4) zur Ableitung (5) innerhalb des oberen Bereiches des Gehäuses (2) angeordnet

[Fortsetzung auf der nächsten Seite]

WO 03/062763 A1

WO 03/062763 A1

(81) Bestimmungsstaaten (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Bestimmungsstaaten (regional): ARIPO-Patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ,

TM), europäisches Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI-Patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Veröffentlicht:

— mit internationalem Recherchenbericht

Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.

Description

Device for the continuous gravimetric metering and pneumatic conveying of pourable material

The present invention relates to a device for continuous gravimetric metering and pneumatic conveying of pourable material, which is conducted over a measuring length using a metering rotor positioned pressure-tight in a housing and provided with conveyor pockets, the housing having a pourable material delivery station and an emptying station having connections to lines of a pneumatic conveyor system and being connected to a force measurement device, via which the torque load exerted on the metering rotor by the material conveyed is determined.

A device of this type is known as a metering rotor scale from US Patent 4,682,915 of the present applicant. In this case, a pneumatic conveyor system is provided for "blowing out" the conveyor pockets of the metering rotor, the feed line being guided from below to the metering rotor in order to blow out the pourable material upward from the conveyor pockets to the removal line and convey it further. This device has proven itself in principle. Since the compensators in the feed and removal lines and in the pourable material delivery station, which are necessary for decoupling, are positioned on a line with the pivot axis of the metering rotor, construction problems may occur, however, in order to house these compensators above the metering rotor. The pourable material funnel on the delivery station is thus generally offset upward in order to guide the removal line of the pneumatic conveyor system further upward without a large deflection. In addition, a minimum air velocity must be maintained to blow through from bottom to top, in order to ensure the required discharge under all conditions. However, in the event of low conveyance quantities, this may lead to disproportionate quantities of air of the pneumatic conveyor system.

The present invention is thus based on the object of improving a device according to the features according to the preamble in regard to construction and installation complexity and flow guiding.

This object is achieved by a device according to the features of Claim 1. Preferred embodiments are the object of the subclaims.

In summary, the invention may be briefly described, at least in part, by the following enumerated statements.

Statement 1. A device for continuous gravimetric metering and pneumatic conveying of pourable material, which is guided using a metering rotor (1), positioned pressure-tight in the housing (2) and provided with conveyor pockets (1a), over a measuring length, the housing (2) having a pourable material delivery station and an emptying station having connections to feed/removal lines (4, 5) of a pneumatic conveyor system and being connected to a force measurement device, via which the torque load exerted on the metering rotor (1) by the material conveyed may be determined, and the feed line and removal line of the pneumatic conveyor system being connected to the bottom of the housing (2), characterized in that the flow deflection from the feed line (4) to the removal line (5) is positioned inside the upper region of the housing (2).

Statement 2. The device described in Statement 1, further characterized in that the feed line (4) of the pneumatic conveyor system (3) is connected to radially internal openings (8) in the metering rotor (1).

Statement 3. The device described in Statement 2, further characterized in that the openings (8) are implemented in the form of shafts, which are positioned concentrically to one another.

Statement 4. The device described in at least one of Statements 1 through 3, further characterized in that the housing (2) is closed on top (2a) by a sealing plate (2b).

Statement 5. The device described in at least one of Statements 1 through 4, further characterized in that the flow deflection inside the housing (2) is implemented at the emptying station in the form of a deflection curve (2c).

Statement 6. The device described in Statements 1 through 5, further characterized in that the conveyor pockets (1a) of the metering rotor (1) are positioned concentrically to one another.

Statement 7. The device described in Statement 6, further characterized in that a collection funnel (9), for transferring the cross-section of the conveyor pockets (1a) to the tubular cross-section of the removal line (5), is implemented on the bottom of the housing (2).

Statement 8. The device described in at least one of Statements 1 through 7, further characterized in that the connection (5a) of the removal line (5) is implemented as a double connecting piece.

Statement 9. The device described in at least one of Statements 1 through 8, further characterized in that the feed line (4) and the removal line (5) are connected to one another laterally from the housing (2) by a clamp (10).

Statement 10. The device described in at least one of Statements 1 through 9, further characterized in that compensators (11) of the feed line (4) and the removal line (5) are attached to a shared bracket (12) laterally from the housing (2).

2b

Through the flow reversal of the pneumatic conveyor system within the housing, the line arrangement of the pneumatic conveyor system may be simplified and designed compactly. Thus, the two compensators of the feed line and the removal line may be positioned outside the support frame of the metering rotor scale, so that the tight construction space above the metering rotor may be used better, for example, by a pourable material funnel which is placed lower or a smaller overall height of the support frame. In addition, the installation and possible necessary maintenance or checking of the pneumatic conveyor system is made easier in this way through the better accessibility to the components. The improved flow guiding in the conveyor pockets of the metering rotor is especially advantageous in this case, since the feed air guiding within the housing is reversed in its upper region directly above the metering rotor and is directed from above through the conveyor pockets, so that the discharge of the pourable product is also supported through gravity. In addition, improved discharge out of the conveyor pockets and transfer into the removal line results, particularly for small conveyed quantities, through the eddying during the air reversal. Furthermore, the energy required for the pneumatic conveyor system is reduced, since smaller quantities of air and/or lower air velocities of the conveying air are to be provided. Furthermore, the installation complexity is reduced since the flow reversal elements are integrated in the housing and no longer need to be mounted and/or sealed separately.

In the following, an exemplary embodiment of the device will be described in greater detail on the basis of the drawing.

- Figure 1 shows a schematic cross-section of a metering rotor scale for basic explanation of the construction principle;
- Figure 2 shows a side view of a metering rotor scale according to the related art; and
- Figure 3 shows an enlarged illustration of one-half of the metering rotor scale having the design of the arrangement of the lines according to the present invention.

A metering rotor scale is shown in cross-section in Figure 1. This essentially includes a housing 2 having a metering rotor 1, which has multiple conveyor pockets 1a, rotating between sealing plates therein. The metering rotor 1 is driven by a controllable motor M. The conveyor pockets 1a are positioned in the form of concentric rings in the metering rotor 1. In addition, openings (8; cf. Figure 3) are provided radially on the inside, which are used in the related art to generate blocking air. A pneumatic conveyor system having feed and removal lines is connected to housing 2, in order to thus form an emptying station. Furthermore, a pourable material delivery station 14 (cf. Figure 2) is implemented above the housing 2, the housing 2 being mounted so it is pivotable around a horizontal axis, in order to act on a force measurement cell 6 via a suspension 7 at a distance therefrom (cf. Figure 2). Because of the pivoting around the pivot axis A-A, shown in Figure 2 and formed by bearing 13 (cf. also Figure 3), the torque load which is exerted by the material conveyed on the metering rotor 1 as the measuring length is thus detected. Compensators, which are positioned together with the compensator 11 at the pourable material delivery station on the pivot axis A-A, are provided for decoupling force influences.

The suggested guiding of the pneumatic conveyor system 3 according to the present invention is shown in Figure 3. In this case, both connections 4a, 5a of the feed line 4 and the removal line 5, respectively, of the pneumatic conveyor system 3 are connected to the bottom of the housing 2. The feed line 4 leads to radially internal openings 8 in the metering rotor 1 in this case, in order to be

guided directly over them within the housing 2 in a deflection curve 2c back downward to the conveyor pockets. The top 2a of the housing 2 is sealed by a simple sealing plate 2b, in contrast to the earlier construction.

Through this flow deflection and/or reversal within the housing 2, the discharge out of the conveyor pockets 1a is significantly improved, since even at low air velocities, vortexes arise which make the discharge of the pourable material out of the conveyor pockets 1a easier and, in particular, gravity also acts on the pourable material located in the conveyor pockets 1a. Therefore, the discharge may be performed reliably via the collection funnel 9 located underneath and the removal line 5. The connection 5a is implemented as a double connecting piece in this case and is used, like the collecting funnel 9, for continuous transfer of the sector cross-section of the conveyor pockets 1a to the tubular cross-section of the removal line 5.

The removal line 5 and the feed line 4 of the pneumatic conveyor system 3 are preferably connected laterally to one another in this case via a clamp 10 on the support stand, so that the installation complexity is reduced. This is correspondingly true for the attachment of the compensators 11 of the feed line 4 and the removal line 5 on a shared bracket 12, so that the mounting complexity for the required compensators 11 is also reduced here, since they may form one installation unit. Therefore, the maintenance outlay possibly required in long-term use is reduced, since the compensators 11 are positioned so they are easily accessible.

Claims:

1. A device for continuous gravimetric metering and pneumatic conveying of pourable material in a pneumatic conveyor system (3), said device comprising:
 - a) a housing (2) comprising:
 - i. a bottom region comprising a pourable material delivery station and a pourable material emptying station; and,
 - ii. an upper region comprising a material flow deflection member (2c);
 - b) a feed line (4) connected to said delivery station;
 - c) a removal line (5) connected to said emptying station;
 - d) a metering rotor (1) positioned pressure-tight within said housing (2), wherein said metering rotor (1) comprises a plurality of conveyor pockets (1a), and wherein said metering rotor guides the material over a measuring length;
 - e) a force measurement device (6) connected to said housing (2), wherein said force measurement device determines a torque load exerted on said metering rotor (1) by the material,wherein flow of the material from said feed line (4) is deflected to said removal line (5) by said material flow deflection member (2c).
2. The device according to Claim 1, further comprising radially disposed internal openings (8) in said metering rotor (1), wherein said feed line (4) is connected to said radially disposed internal openings (8).
3. The device according to Claim 2, wherein said openings (8) are implemented in the form of shafts positioned concentrically to one another.

4. The device according to one of Claims 1 through 3, further comprising a sealing plate (2b), wherein said upper region of said housing (2) is closed on top (2a) by said sealing plate (2b).
5. The device according to one of Claims 1 through 4, wherein said flow deflection member (2c) is a deflection curve.
6. The device according to one of Claims 1 through 5, wherein said conveyor pockets (1a) of said metering rotor (1) are positioned concentrically to one another.
7. The device according to Claim 6, further comprising a collection funnel (9), wherein said collection funnel (9) transfers a cross-section of said conveyor pockets (1a) to a tubular cross-section of said removal line (5).
8. The device according to one of Claims 1 through 7, further comprising a double connecting piece (5a) for connecting said metering rotor (1) to said removal line (5).
9. The device according to one of Claims 1 through 8, further comprising a clamp (10), wherein said feed line (4) and said removal line (5) are connected laterally to one another by said clamp (10).
10. The device according to one of Claims 1 through 9, further comprising a plurality of compensators (11) and at least one bracket (12), wherein said compensators and said removal line (5) are attached to said bracket (12).

1/2

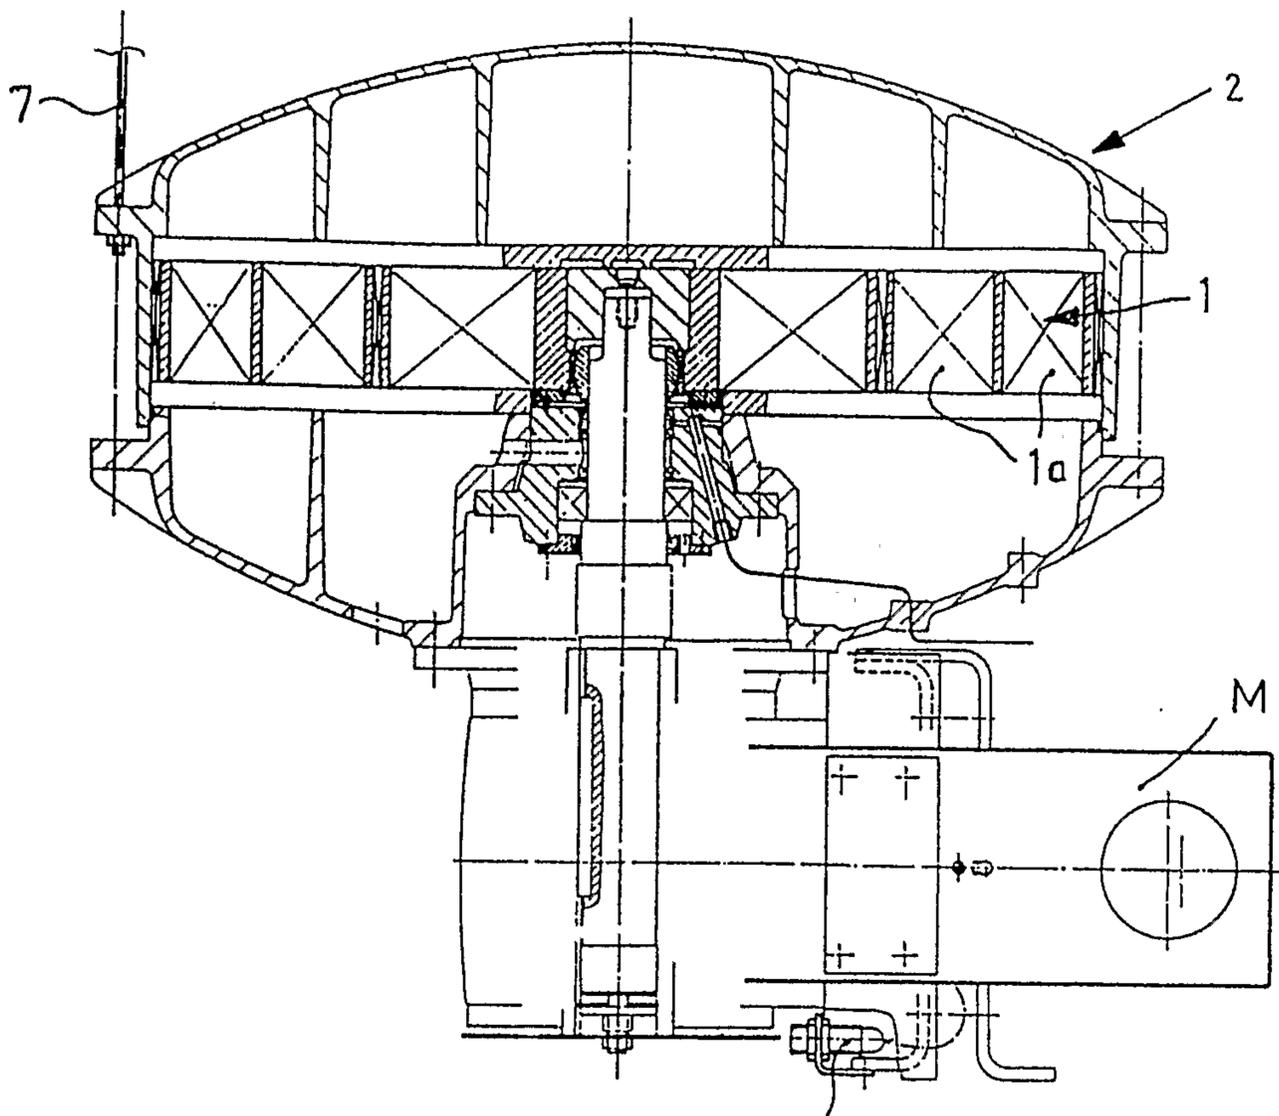


FIG. 1

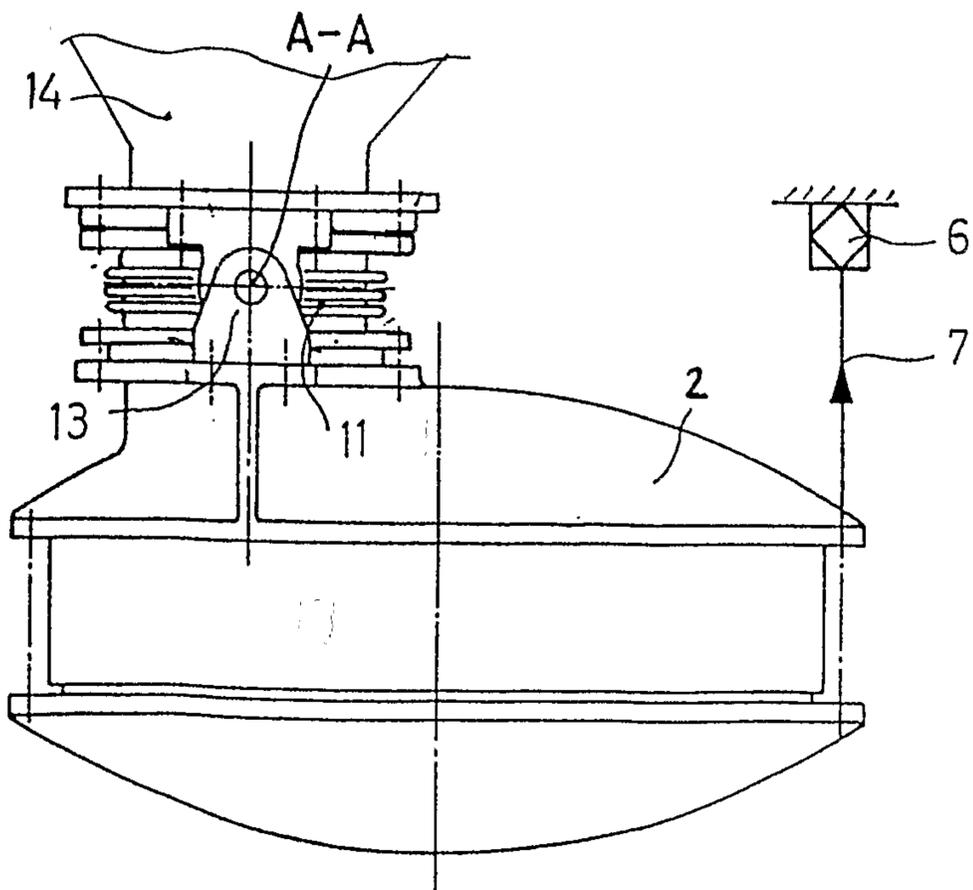


FIG. 2

