




(86) Date de dépôt PCT/PCT Filing Date: 2019/04/26
 (87) Date publication PCT/PCT Publication Date: 2020/01/30
 (45) Date de délivrance/Issue Date: 2022/11/22
 (85) Entrée phase nationale/National Entry: 2021/01/21
 (86) N° demande PCT/PCT Application No.: US 2019/029428
 (87) N° publication PCT/PCT Publication No.: 2020/023096
 (30) Priorité/Priority: 2018/07/24 (US62/702,432)

(51) Cl.Int./Int.Cl. *E21B 43/12* (2006.01),
F04B 47/12 (2006.01)
 (72) Inventeurs/Inventors:
ROMER, MICHAEL C., US;
HORD, TONY W., US
 (73) Propriétaire/Owner:
EXXONMOBIL UPSTREAM RESEARCH COMPANY,
US
 (74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : MANDRIN DE POCHE LATÉRALE POUR POMPE A PISTON PLONGEUR
 (54) Title: SIDE POCKET MANDREL FOR PLUNGER LIFT

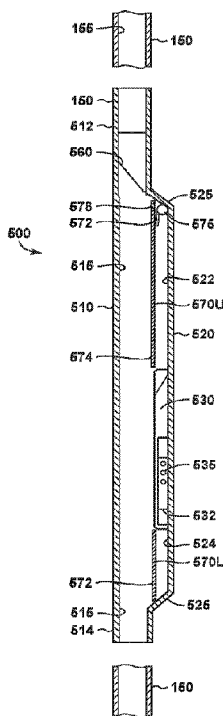

(57) **Abrégé/Abstract:**

A side pocket mandrel, including defining a tubular body having opposing ends and a bore formed within the tubular body. The tubular body comprises an eccentric portion such that a first inner diameter (ID_1) is formed at the opposing upper and lower ends, and a second larger inner diameter (ID_2) is formed along an eccentric portion. The mandrel includes a movable curtain disposed along the eccentric portion, wherein in a first position the movable curtain covers a portion of the eccentric portion above the pocket to provide a reduced inner diameter that approximates (ID_1), and in a second position the curtain is movable to a larger inner diameter (ID_2) that enables access by a kick-over tool to install a gas lift valve in or to retrieve the gas lift from the pocket. A method of producing hydrocarbon fluids is also provided.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
30 January 2020 (30.01.2020)(10) International Publication Number
WO 2020/023096 A1

(51) International Patent Classification:

E21B 43/12 (2006.01) *F04B 47/12* (2006.01)

(21) International Application Number:

PCT/US2019/029428

(22) International Filing Date:

26 April 2019 (26.04.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/702,432 24 July 2018 (24.07.2018) US

(71) Applicant: **EXXONMOBIL UPSTREAM RESEARCH COMPANY** [US/US]; (EMHC-N1-4A-607), 22777 Springwoods Village Parkway, Spring, TX 77389 (US).(72) Inventors: **ROMER, Michael, C.**; 34 Red Moon Place, The Woodlands, TX 77375 (US). **HORD, Tony, W.**; 5526 Bryanhurst Lane, Spring, TX 77379 (US).(74) Agent: **JAMES, Ricky, F.** et al.; Exxonmobile Upstream Research Company, (EMHC-N1-4A-607), 22777 Springwoods Village Parkway, Spring, TX 77389 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

(54) Title: SIDE POCKET MANDREL FOR PLUNGER LIFT

(57) Abstract: A side pocket mandrel, including defining a tubular body having opposing ends and a bore formed within the tubular body. The tubular body comprises an eccentric portion such that a first inner diameter (ID_1) is formed at the opposing upper and lower ends, and a second larger inner diameter (ID_2) is formed along an eccentric portion. The mandrel includes a movable curtain disposed along the eccentric portion, wherein in a first position the movable curtain covers a portion of the eccentric portion above the pocket to provide a reduced inner diameter that approximates (ID_1), and in a second position the curtain is movable to a larger inner diameter (ID_2) that enables access by a kick-over tool to install a gas lift valve in or to retrieve the gas lift from the pocket. A method of producing hydrocarbon fluids is also provided.

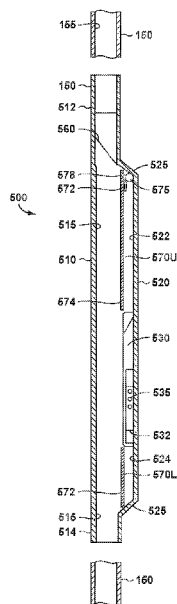


FIG. 5A



WO 2020/023096 A1

WO 2020/023096 A1 

Published:

— *with international search report (Art. 21(3))*

SIDE POCKET MANDREL FOR PLUNGER LIFT

[0001] *(This paragraph is intentionally left blank.)*

BACKGROUND OF THE INVENTION

5 [0002] This section is intended to introduce various aspects of the art, which may be associated with exemplary embodiments of the present disclosure. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the present disclosure. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

10 **Field of the Invention**

[0003] The present disclosure relates to the field of hydrocarbon recovery operations. More specifically, the present invention relates to artificial lift systems for a producing wellbore. Further still, the invention relates to a side pocket mandrel as may be used in connection with a plunger lift operation for lifting wellbore fluids to the surface.

15 **Technology in the Field of the Invention**

[0004] In the drilling of oil and gas wells, a wellbore is formed using a drill bit that is urged downwardly at a lower end of a drill string. The drill bit is rotated while force is applied through the drill string and against the rock face of the formation being drilled. After drilling to a predetermined depth, the drill string and bit are removed and the wellbore is lined with a
20 string of casing.

[0005] In completing a wellbore, it is common for the drilling company to place a series of casing strings having progressively smaller outer diameters into the wellbore. These include a string of surface casing, at least one intermediate string of casing, and a production casing. The process of drilling and then cementing progressively smaller strings of casing is repeated until
25 the well has reached total depth. In some instances, the final string of casing is a liner, that is, a string of casing that is not tied back to the surface. In either instance, the final string of casing, referred to as a production casing, is also typically cemented into place.

[0006] To prepare the wellbore for the production of hydrocarbon fluids, a string of tubing is run into the casing. The tubing then becomes a string of production pipe through which
30 hydrocarbon fluids flow from the reservoir and up to the surface.

[0007] Some wellbores are completed primarily for the production of gas (or compressible hydrocarbon fluids), as opposed to oil. Other wellbores initially produce hydrocarbon fluids, but over time transition to the production of gas. In either of such wellbores, the formation will frequently produce fluids in both gas and liquid phases. Liquids may include water, oil and condensate. At the beginning of production, the formation pressure is typically capable of driving the liquids with the gas up the wellbore and to the surface. Liquid fluids will travel up to the surface with the gas, through the production tubing, primarily in the form of entrained droplets.

[0008] During the life of the well, the natural reservoir pressure will decrease as gases and liquids are removed from the formation. As the natural downhole pressure of the well decreases, the gas velocity moving up the well drops below a so-called critical flow velocity. See G. Luan and S. He, *A New Model for the Accurate Prediction of Liquid Loading in Low-Pressure Gas Wells*, Journal of Canadian Petroleum Technology, p. 493 (November 2012) for a recent discussion of mathematical models used for determining a critical gas velocity in a wellbore. In addition, the hydrostatic head of fluids in the wellbore will work against the formation pressure and block the flow of *in situ* gas into the wellbore. The result is that formation pressure is no longer able, on its own, to force fluids from the formation and up the production tubing in commercially viable quantities.

[0009] In response, various remedial measures have been taken by operators. One option is to simply reduce the inner diameter of the production tubing a small amount, thereby increasing pressure. Operators have sought to monitor tubing pressure through the use of pressure gauges and orifice plates at the surface. U.S. Patent No. 5,636,693 entitled "Gas Well Tubing Flow Rate Control," issued in 1997, disclosed the use of an orifice plate and a differential pressure controller at the surface for managing natural wellbore flow up more than one flow conduit. U.S. Patent No. 7,490,675, entitled "Methods and Apparatus for Optimizing Well Production," also proposed the use of an orifice plate and a differential pressure controller to operate a control valve at the surface, but in the context of a plunger lift system.

[0010] A common technique for artificial lift in both oil and gas wells is the gas-lift system. Gas lift refers to a process wherein a gas (typically methane, ethane, nitrogen and related produced gas combinations) is injected into the wellbore downhole and then into the production tubing. This serves to reduce the density of the fluid column. Gas injection may be done through so-called gas-lift valves stacked vertically along the production tubing within the annulus. The injection of gas into the annulus, then through the valves, and then into the

production tubing lightens the density of the wellbore fluids, reducing the hydrostatic head and decreasing the backpressure against the formation.

[0011] Multiple gas lift valves may be required to effectively “unload” production fluids. For gas lift operations, the injection rate is set by the operator at a continuous high level to ensure that fluids can travel to the surface, without regard to fluctuations in fluid densities or tubing pressure. Gas lift is frequently used for high-volume offshore wells, but is also enjoying a renaissance on land in connection with horizontal wells. This is primarily because of the ability of gas lift systems to manage entrained solids such as frac sand and scale. This is also because gas-lift wells do not experience the mechanical limitations that beam lift and electric submersible lift wells experience with non-vertical wells.

[0012] A related artificial lift technique that does not require continuous gas injection is referred to as plunger lift. Plunger lift production systems are typically used to deliquesce gas wells (or wells that are gas dominated). More specifically, the systems are used to unload relatively small volumes of liquid and any associated sands from the tubing, periodically carrying them to the surface. Plunger lift wells are typically used onshore.

[0013] Plunger lift systems employ a small cylindrical plunger which travels vertically along the production tubing within the wellbore. The cylindrical plunger is similar in form to a pipeline pig, but is designed to force the hydrostatic head up the wellbore and to the surface in response to a build-up of reservoir pressure. In operation, the metal cylinder, or “plunger,” travels between the wellhead and a downhole bumper spring in a cyclic fashion.

[0014] The plunger provides a barrier that inhibits gas breakthrough and effectively carries a liquid slug to the surface. The differential pressure created by this action assists the well in lifting lighter liquids to the surface with lower gas velocities than those normally reached. This mitigates against the cost of installing a smaller-i.d. production tubing to increase the gas velocity.

[0015] In a plunger lift system, a specialized wellhead having a lubricator and a “catcher” is provided at the surface. The plunger will typically rest in the lubricator (or perhaps a pup joint) at the surface above the wellhead valves. The well is normally shut in to allow the plunger to fall to bottom. The lubricator can drop the plunger into the well on an as-needed basis, as determined by surface measurements and gauges. After a sufficient measured (or estimated) time, the well is allowed to produce again, causing the plunger to be raised back up to the surface along with the liquids. Stated another way, the plunger is forced back up the tubing by the accumulated pressure in the wellbore.

[0016] After the fluids are removed, gas will flow more freely from the formation into the wellbore for delivery to a gas distribution system such as a sales line at the surface. The production system is operated so that after the flow of gas from the well has again become restricted due to the further accumulation of fluids downhole, the valve is closed so that the
5 plunger falls back down the tubing. Thereafter, the plunger is ready to lift another load of fluids to the surface upon the re-opening of the valve.

[0017] As the well continues to age, it is common that the cycle for dropping the plunger becomes longer and longer. This is due to the declining reservoir pressure available to operate the plunger. Shut-ins of several days or even a week may be required to build up enough
10 pressure to return a plunger to the surface. At this point, the operator will consider alternative artificial lift methods to enable economic production volumes.

[0018] A relatively recent solution has been to combine plunger lift with gas lift. This is sometimes referred to as Gas-Assisted Plunger Lift, or "GAPL." With GAPL, gas is injected into the back side of the production tubing, creating enough pressure along with the reservoir
15 below the plunger and enough gas velocity to assist the plunger and associated liquids in traveling up to the surface.

[0019] In GAPL, the operator typically will not include gas lift valves; rather, the lift gas is forced down the annulus and all the way to the bottom of the well, where it enters the bottom of the production tubing and then travels back up to the surface. Obviously, no packer is
20 installed in the well completion. Some in the industry refer to this as "poor boy" gas lift.

[0020] Poor boy gas lifting is considered an inefficient process as there is little control over the injected gas rates at the lift point. Further, all gas is injected at the bottom of the well creating a potentially undesirable build-up of well pressure. Conventional gas lift mandrels can be installed in the tubing string to improve efficiency and to incorporate "standard" gas lift
25 principles. In this instance, conventional mandrels may optionally be welded to the outer diameter of the production tubing with integral gas lift valves such that the tubing I.D. is minimally affected. Plungers can operate as designed in both the poor-boy and the conventional mandrel configurations since there are no changes to the internal dimensions of the production tubing.

[0021] A drawback to the use of conventional mandrels during GAPL is that the tubing must be pulled to replace the gas lift valves. This is because there is no way to access the valves from the tubing I.D. This is an expensive operation that requires a workover rig to be
30 brought out to the well site.

[0022] Therefore, it is desirable to be able to use side pocket mandrels since side pocket mandrels allow access to gas lift valves using a wireline through the tubing I.D. This is particularly beneficial during offshore operations. However, the side pocket mandrel access points are large, creating changes in the inner diameter flow path. The result is that a plunger would not be able to transit across a side pocket mandrel.

[0023] Accordingly, a need exists for a side pocket mandrel that is configured for use in connection with a plunger lift operation. A need further exists for a method of artificial lift that combines plunger lift with gas lift and that reduces the cost for accessing the gas lift valves for installation.

10 **BRIEF SUMMARY OF THE DISCLOSURE**

[0024] A side pocket mandrel is first provided herein. The side pocket mandrel is designed to be threadedly connected in series to a string of production tubing. The production tubing, in turn, is run into a hydrocarbon-producing wellbore.

[0025] The mandrel first comprises a tubular body. The tubular body has an upper end, an opposing lower end, and a bore formed within the tubular body extending from the upper to the lower end. The tubular body comprises an eccentric portion residing between the upper and lower ends such that a first inner diameter (ID_1) is formed at the opposing upper and lower ends, and a second larger inner diameter (ID_2) is formed along the eccentric portion. The eccentric portion has a centerline that is offset from a centerline of the tubing.

[0026] The mandrel further comprises a tubular pocket, or “receiver.” The tubular pocket resides within the eccentric portion of the tubular body and is dimensioned to slidably and sealingly receive a gas lift valve. This is done by means of a kick-over tool which is run into the wellbore by means of a wireline.

[0027] Typically, a length of the pocket is less than a length of the eccentric portion. This creates an open area within the eccentric portion above the pocket. The open area is configured to receive the gas lift valve during an installation or retrieval procedure.

[0028] The mandrel includes ports. The ports reside adjacent the pocket and place the gas lift valve in fluid communication with the annulus of the wellbore when the side pocket mandrel is run down hole.

[0029] The side pocket mandrel further comprises a movable curtain. The movable curtain is disposed along the eccentric portion. In a first position (P_1), the movable curtain covers the open area of the eccentric portion above the pocket. This also creates a reduced inner diameter that approximates (ID_1). In a second position (P_2), the movable curtain is movable to create a

larger inner diameter that approximates (ID_2). (ID_2) enables access by the kick-over tool above the pocket to selectively install the gas lift valve in, or to retrieve the gas lift from, the pocket.

[0030] In a preferred embodiment, the side pocket mandrel is used in conjunction with a so-called Gas-Assisted Plunger Lift operation. Thus, in its (P_1) position, the movable curtain
5 is uniquely dimensioned and configured to allow a metal cylinder used as part of a plunger lift system to pass along the side pocket mandrel without catching on the pocket.

[0031] In one aspect, the upper end of the tubular body comprises an orienting sleeve. The orienting sleeve resides at an upper end of the side pocket mandrel. The orienting sleeve is provided with a longitudinal orienting slot having a downwardly facing shoulder at the upper
10 end thereof. The orienting sleeve is provided with a pair of downwardly facing guide surfaces which guide the kick-over tool towards the slot.

[0032] The orienting sleeve is integral to the inner diameter of the tubular body, and is configured to catch a guide key of the kick-over tool when the kick-over tool is raised across the side pocket mandrel. In this way, the kick-over tool is properly oriented towards the
15 eccentric portion, above the pocket.

[0033] In one embodiment, the pocket is positioned within the eccentric portion such that an open area is also left below the pocket. In this instance, the side pocket mandrel may also comprise a stationary curtain. The stationary curtain is disposed along the open area below the pocket, wherein an upper end of the stationary curtain is adjacent to a bottom of the pocket
20 while a lower end of the stationary curtain is fixed to a lower end of the tubular body, thereby reducing the inner diameter of the open area below the pocket to approximately (ID_1).

[0034] An artificial lift system for a wellbore is also provided herein. In this invention, the wellbore has a tubing string therein for conveying production fluids up to the surface. The artificial lift system first comprises a plunger lift system. The plunger lift system may be any
25 known plunger lift system used for assisting in the production of hydrocarbon fluids. Such a system will include a cylinder. The cylinder is dimensioned to travel through the production tubing, up and down, cyclically in response to pressure differential.

[0035] The plunger lift system will also include a lubricator. The lubricator is positioned over the well head. The lubricator will have an associated plunger catcher for holding the
30 cylinder when it is lifted to the surface, and then releasing it again in accordance with instructions from a timer or controller at the surface.

[0036] The plunger lift system will further have a bumper. Typically, the bumper is a spring residing in the production tubing proximate a bottom of the vertical portion of the

wellbore. The bumper is configured to receive the cylinder when it gravitationally travels towards the bottom of the wellbore upon being released by the plunger catcher.

[0037] The artificial lift system also comprises at least two side pocket mandrels. Each mandrel is configured in accordance with any of the embodiments described above. The side
5 pocket mandrels are disposed along the production tubing using threaded connections. In addition, the pocket of each side pocket mandrel holds (or is configured to hold) a gas lift valve.

[0038] A method of producing hydrocarbon fluids from a wellbore is also provided herein. The wellbore comprises a wellhead at a surface, and at least one string of casing extending down from the wellhead. The wellbore has been formed for the purpose of producing
10 hydrocarbon fluids to the surface in commercially viable quantities. Typically, the well will produce primarily hydrocarbon fluids that are compressible at surface conditions, e.g., methane and ethane, but there will likely also be at least some hydrocarbon liquids, albeit in diminishing quantities.

[0039] The method first comprises running a string of production tubing into the wellbore.
15 The string of production tubing comprises a series of tubing joints threadedly connected end-to-end. The production tubing will also include at least two side pocket mandrels threadedly connected along the production tubing.

[0040] The side pocket mandrels are configured in accordance with any of the embodiments described above. Of importance, the pocket of each side pocket mandrel will
20 contain a gas lift valve that is in fluid communication with the annulus formed between the production tubing and the surrounding casing.

[0041] The method also includes producing hydrocarbon fluids from a subsurface reservoir, through the production tubing, and up to the wellhead at the surface.

[0042] Preferably, in its (P₁) position, the movable curtain is dimensioned and configured
25 to allow a metal cylinder used as part of a plunger lift system to pass along the side pocket mandrel without catching on the pocket. The method then further comprises:

- releasing the metal cylinder from a lubricator disposed over the wellhead into the wellbore; and
- allowing the metal cylinder to gravitationally fall to the bumper spring positioned along
30 the production tubing below the at least two side pocket mandrels.

BRIEF DESCRIPTION OF THE DRAWINGS

[0043] So that the manner in which the present inventions can be better understood, certain illustrations, charts and/or flow charts are appended hereto. It is to be noted, however, that the drawings illustrate only selected embodiments of the inventions and are therefore not to be

considered limiting of scope, for the inventions may admit to other equally effective embodiments and applications.

[0044] Figure 1A is a schematic side view of a known side pocket mandrel. The mandrel is intended to be threadedly connected to a string of production tubing within a wellbore. A portion of a production tubing is illustrated above and below the side pocket mandrel.

[0045] Figure 1B is a side view of the side pocket mandrel of Figure 1A. Here, a so-called kick-over tool has been run into the production tubing and then partially past the side pocket mandrel. A wireline is shown as a working string for the kick-over tool.

[0046] Figure 1C shows another view of the side pocket mandrel of Figure 1A. In this view, the kick-over tool has been raised up the wellbore. It can be seen that a gas lift valve is connected to a pivot arm of the kick-over tool.

[0047] Figure 1D is still another view of the side pocket mandrel of Figure 1A. Here, the kick-over tool has been actuated. This is in response to a guide key of the kick-over tool catching on a slot within an orienting sleeve of the side pocket mandrel.

[0048] Figure 1E is yet another side view of the side pocket mandrel of Figure 1A. Figure 1E shows a step where the gas lift mandrel is lowered into the pocket (or “receiver”) of the side pocket mandrel.

[0049] Figure 1F provides another side view of the side pocket mandrel of Figure 1A. In this step, the gas lift valve has been seated into the pocket of the side pocket mandrel.

[0050] Figure 1G is still another side view of the side pocket mandrel of Figure 1A. Here, the frictional connection between the pivot arm connector and the gas lift valve. has been released.

[0051] Figure 1H is a final side view of the side pocket mandrel of Figure 1A. The view of Figure 1H is the same as Figure 1A, except the gas lift valve now resides in the pocket of the side pocket mandrel, ready for use in a gas lift operation.

[0052] Figure 2 is a side view of a known kick-over tool as may be used to install or retrieve a gas lift valve.

[0053] Figure 3A is a schematic side view of the side pocket mandrel of Figure 1A. In this view, the gas lift valve is seated in the pocket of the side pocket mandrel. Thus, Figure 3A is the same as Figure 1H.

[0054] Figure 3B is a side view of the side pocket mandrel of Figure 3A. Here, the kick-over tool has been run back into the production tubing, and then partially past the side pocket mandrel. A wireline is again shown as a working string for the kick-over tool.

[0055] Figure 3C shows another view of the side pocket mandrel of Figure 3A. In this view, the kick-over tool has been raised up the wellbore.

[0056] Figure 3D is still another view of the side pocket mandrel of Figure 3A. Here, the kick-over tool has been actuated. This is in response to a guide key catching on the slot within
5 an orienting sleeve of the side pocket mandrel.

[0057] Figure 3E is yet another side view of the side pocket mandrel of Figure 3A. Figure 3E shows a step where a pivot arm on the kick-over tool is lowered into the pocket (or “receiver”) of the side pocket mandrel. The pivot arm latches onto the gas lift valve.

[0058] Figure 3F provides another side view of the side pocket mandrel of Figure 3A. In
10 this step, the gas lift valve has been unseated from the pocket of the side pocket mandrel.

[0059] Figure 3G is still another side view of the side pocket mandrel of Figure 3A. Here, the pivot arm assembly is folded back into its run-in position.

[0060] Figure 3H is a final side view of the side pocket mandrel of Figure 3A. The kick-over tool and connected gas lift valve have been removed from the wellbore. Figure 3H is the
15 same as Figure 3A, except the gas lift valve has been unseated.

[0061] Figure 4A is a side, partial cut-away view of a first wellbore having been completed for the production of hydrocarbon fluids. A plunger lift system has been installed. Of interest the well is completed to have a horizontal portion.

[0062] Figure 4B is a side, partial cut-away view of a second wellbore having been
20 completed for the production of hydrocarbon fluids. A plunger lift system has again been installed. Here, the well is completed vertically.

[0063] Figure 5A is a schematic side view of a side pocket mandrel of the present invention, in one embodiment. This mandrel is intended to be threadedly connected to a string of production tubing within a wellbore. This embodiment employs a flexible metal curtain to
25 movably cover an upper open portion of the side pocket mandrel.

[0064] Figure 5B is a side view of the side pocket mandrel of Figure 5A. Here, a kick-over tool has been run into the production tubing and then partially past the side pocket mandrel. A wireline is again shown as a working string for the kick-over tool.

[0065] Figure 5C shows another view of the side pocket mandrel of Figure 5A. In this view,
30 the kick-over tool has been raised up the wellbore. It can be seen that a gas lift valve is connected to a pivot arm of the kick-over tool.

[0066] Figure 5D is still another view of the side pocket mandrel of Figure 5A. Here, the kick-over tool has been actuated. This is in response to a guide key catching on a slot within

an orienting sleeve of the side pocket mandrel. Actuation of the pivot arm flexes the movable curtain, allowing the gas lift valve to access the pocket.

5 [0067] Figure 5E is yet another side view of the side pocket mandrel of Figure 5A. Figure 5E shows a step where the gas lift valve is lowered into the pocket (or “receiver”) of the side pocket mandrel.

[0068] Figure 5F provides another side view of the side pocket mandrel of Figure 5A. In this step, the gas lift valve has been seated into the pocket of the side pocket mandrel. Notice that the pivot arm keeps the flexible metal curtain pushed back against the wall of the mandrel.

10 [0069] Figure 5G is still another side view of the side pocket mandrel of Figure 5A. Here, the pivot arm assembly has released the frictional connection with the gas lift valve.

[0070] Figure 5H is a final side view of the side pocket mandrel of Figure 5A. The view of Figure 5H is the same as Figure 5A, except the gas lift valve now resides in the pocket of the side pocket mandrel, ready for use in a gas lift operation. The curtain has returned to its operational position.

15 [0071] Figure 6A is a schematic side view of a side pocket mandrel of the present invention, in a second illustrative embodiment. This mandrel is also intended to be threadedly connected to a string of production tubing within a wellbore. This embodiment employs a sliding metal curtain that moves vertically to cover and uncover an upper open portion of the side pocket mandrel.

20 [0072] Figure 6B is a side view of the side pocket mandrel of Figure 6A. Here, a kick-over tool has been run into the production tubing and then partially past the side pocket mandrel. A wireline is again shown as a working string for the kick-over tool.

[0073] Figure 6C shows another view of the side pocket mandrel of Figure 6A. In this view, the kick-over tool has been raised up the wellbore. It can be seen that a gas lift valve is connected to a pivot arm of the kick-over tool. It can also be seen that raising of the kick-over tool causes the sliding metal curtain to be raised.

[0074] Figure 6D is still another view of the side pocket mandrel of Figure 6A. Here, the kick-over tool has been actuated. This is in response to a guide key catching on a slot within an orienting sleeve of the side pocket mandrel.

30 [0075] Figure 6E is yet another side view of the side pocket mandrel of Figure 6A. Figure 6E shows a step where the gas lift mandrel is lowered into the pocket (or “receiver”) of the side pocket mandrel.

[0076] Figure 6F provides another side view of the side pocket mandrel of Figure 6A. In this step, the gas lift valve has been seated into the pocket of the side pocket mandrel while the sliding metal curtain remains raised.

[0077] Figure 6G is still another side view of the side pocket mandrel of Figure 6A. Here, 5 the pivot arm assembly has released the frictional connection with the gas lift valve.

[0078] Figure 6H is a final side view of the side pocket mandrel of Figure 6A. The view of Figure 6H is the same as Figure 6A, except the gas lift valve now resides in the pocket of the side pocket mandrel, ready for use in a gas lift operation. Notice that a metal cylinder is again passing P across the side pocket mandrel in connection with a plunger lift operation.

10 [0079] Figure 7A is an enlarged perspective view of a bow spring. The bow spring may be used in lieu of the flexible metal curtain of the Figure 5 series of drawings.

[0080] Figure 7B is an enlarged perspective view of the flexible metal curtain of the Figure 5 series of drawings.

15 [0081] Figure 8 is an enlarged cross-sectional view of the sliding metal curtain of the Figure 6 series of drawings.

DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

Definitions

[0082] For purposes of the present application, it will be understood that the term “hydrocarbon” refers to an organic compound that includes primarily, if not exclusively, the 20 elements hydrogen and carbon. Hydrocarbons may also include other elements, such as, but not limited to, halogens, metallic elements, nitrogen, oxygen, and/or sulfur.

[0083] As used herein, the term “hydrocarbon fluids” refers to a hydrocarbon or mixtures of hydrocarbons that are gases or liquids. For example, hydrocarbon fluids may include a hydrocarbon or mixtures of hydrocarbons that are gases or liquids at formation conditions, at 25 processing conditions, or at ambient condition. Hydrocarbon fluids may include, for example, oil, natural gas, coalbed methane, shale oil, pyrolysis oil, pyrolysis gas, a pyrolysis product of coal, and other hydrocarbons that are in a gaseous or liquid state, or combination thereof.

[0084] As used herein, the terms “produced fluids,” “reservoir fluids” and “production fluids” refer to liquids and/or gases removed from a subsurface formation, including, for 30 example, an organic-rich rock formation. Produced fluids may include both hydrocarbon fluids and non-hydrocarbon fluids. Production fluids may include, but are not limited to, oil, natural gas, pyrolyzed shale oil, synthesis gas, a pyrolysis product of coal, oxygen, carbon dioxide, hydrogen sulfide and water.

[0085] As used herein, the term “fluid” refers to gases, liquids, and combinations of gases and liquids, as well as to combinations of gases and solids, combinations of liquids and solids, and combinations of gases, liquids, and solids.

[0086] As used herein, the term “wellbore fluids” means water, hydrocarbon fluids, formation fluids, or any other fluids that may be within a wellbore during a production operation.

[0087] As used herein, the term “gas” refers to a fluid that is in its vapor phase. A gas may be referred to herein as a “compressible fluid.” In contrast, a fluid that is in its liquid phase is an “incompressible fluid.”

[0088] As used herein, the term “subsurface” refers to geologic strata occurring below the earth's surface.

[0089] As used herein, the term “formation” refers to any definable subsurface region regardless of size. The formation may contain one or more hydrocarbon-containing layers, one or more non-hydrocarbon containing layers, an overburden, and/or an underburden of any geologic formation. A formation can refer to a single set of related geologic strata of a specific rock type, or to a set of geologic strata of different rock types that contribute to or are encountered in, for example, without limitation, (i) the creation, generation and/or entrapment of hydrocarbons or minerals, and (ii) the execution of processes used to extract hydrocarbons or minerals from the subsurface.

[0090] As used herein, the term “wellbore” refers to a hole in the subsurface made by drilling or insertion of a conduit into the subsurface. A wellbore may have a substantially circular cross section. The term “well,” when referring to an opening in the formation, may be used interchangeably with the term “wellbore.” The term “bore” refers to the diametric opening formed in the subsurface by the drilling process.

25 **Description of Selected Specific Embodiments**

[0091] **Figure 1A** is a side view of a known side pocket mandrel **100**. The side pocket mandrel **100** defines a tubular body **110** that is intended to be threadedly connected, in series, to a string of production tubing **150**. It is understood that the production tubing **110** is made up of a long series of tubing joints threadedly connected while being run into a wellbore (shown at **400A** in **Figure 4A**).

[0092] It is also understood that the wellbore exists for the purpose of producing hydrocarbon fluids from subsurface reservoir, or “pay zone.” In one aspect, the wellbore produces primarily gas, with diminishing liquid production and diminishing reservoir pressure. In one aspect, produced fluids may have a GOR in excess of 500 or, more preferably, above

3,000. In any event, production fluids are intended to flow from the reservoir, up the production tubing **150**, past the mandrel **100**, and on up to the surface.

[0093] The tubular body **110** comprises a wall that forms a bore **115**. The bore **115** is in fluid communication with a bore **155** of the production tubing **110**. The tubular body **110** also includes an upper end **112** and a lower end **114**. The bore **115** extends from the lower **114** to the upper **112** end.

[0094] The side pocket mandrel **120** includes upper and lower shoulders **125**. The shoulders **125** form an eccentric portion **120** of the body **110**. The eccentric portion **120** forms an enlarged outer diameter portion. In this respect, the upper **112** and lower **114** ends have an inner diameter (**ID₁**) while the eccentric portion **120** has a larger inner diameter (**ID₂**).

[0095] The eccentric portion **120** holds an elongated barrel, or “pocket” **130**. The pocket **130** is dimensioned to receive a gas lift valve. For this reason the pocket is sometimes referred to as a “receiver.” An illustrative gas lift valve is shown at **140** in **Figures 1B** through **1H**.

[0096] The pocket **130** includes one or more ports **135**. The ports **135** are in fluid communication with an annulus formed between the production tubing **150** and a surrounding string of casing (shown at **410** of **Figure 4A**) within the wellbore. In this way, gas that is injected behind the production tubing **150** may flow through the ports **135**, into the pocket **130**, and into the gas lift valve **140**. From there, gas is controllably released into the bore **155** of the production tubing **150** as part of a gas lift operation.

[0097] The pocket **130** also includes one or more seating nipples **132**. The seating nipples **132** are dimensioned to frictionally receive and hold a gas lift valve **140** within the pocket **130**. In **Figure 1A**, the pocket **130** is empty, meaning that it has not yet received a gas lift valve **140**.

[0098] In order to deliver a gas lift valve **140** to the pocket **130**, a so-called kick-over tool is used. The kick-over tool is run into the wellbore on a wireline **250**. **Figure 1B** is a side view of the side pocket mandrel **100** of **Figure 1A**. In this view, a portion of a kick-over tool **200** is shown. The kick-over tool **200** is lowered to a depth of the side pocket mandrel **100**. The depth of the mandrel **100** is known from well records.

[0099] **Figure 2** is an enlarged cut-away view of the kick-over tool **200**. The illustrative kick-over tool **200** is the McMurry-Macco KOT tool offered by Weatherford Technology Holdings, LLC of Houston, Texas. In general, kick-over tools may be used for the installation (or retrieval) of flow devices for downhole applications. Such applications may include chemical injection, waterflood and corrosion monitoring. In the present application, the kick-over tool **200** is intended for the installation and retrieval of a gas lift valve, and particularly for a gas lift valve **140** residing in a side pocket mandrel **130**.

[00100] The kick-over tool **200**, or “KOT”, has a top end **202** and a bottom end **204**. The top end **202** is connected to the wireline **250** by means of a standard wireline run-in connection (not shown). The bottom end **204** is simply a stabber designed to avoid hanging up on the pocket **130** during run-in.

5 [00101] The KOT **200** operates with a pivot arm **210**. The pivot arm **210** is designed to kick out when tension is applied to a guide key **205**. A valve connector **220** is linked to the pivot arm **210**. The valve connector **220** provides a frictional connection **225** with an upper end of a gas lift valve **140**.

[00102] Returning to **Figure 1B**, it is understood that the kick-over tool **200** is running a gas lift valve into the production tubing **150**. In this view, the kick-over tool **200** has intentionally over-shot the side pocket mandrel **100**, meaning that the gas lift valve is not visible. In order to run the kickover tool **200** into the wellbore, the kick-over tool **200** is made up onto the bottom of the wireline tool string **250**. The assembly is then placed in a lubricator (not shown) at the surface for launch.

15 [00103] **Figure 1C** is another side view of the side pocket mandrel **100** of **Figure 1A**. Here, the kick-over tool **200** is being slowly pulled back up the bore **115** of the side pocket mandrel **100**. The KOT **200** includes a guide key **205**. The guide key **205** will make contact with an orienting sleeve **160**. The orienting sleeve **160** is integral to the bore **115** of the tubular body **110**, and serves as a guide surface for the guide key **205**.

20 [00104] The key **205**, upon engaging one of the guide surfaces, will follow the guide surface, causing the KOT **200** to rotate about its longitudinal axis until the guide key **205** becomes aligned with and enters the orienting slot. When the guide key **205** is in the orienting slot, the KOT **200** is properly oriented in the side pocket mandrel **100** with respect to the side pocket bore **120**. Additionally, when the kick-over tool **200** stops, this indicates to the operator at the surface that the guide key **205** has contacted the slot at the top of the orienting sleeve **160**.

[00105] **Figure 1D** is still another side view of the side pocket mandrel **100** of **Figure 1A**. Here, tension is being pulled on the wireline **250**, causing the kick-over tool **200** to rotate into proper alignment. At the surface, tension is pulled until the weight indicator of the wireline unit indicates that enough weight is being applied to actuate the kick-over tool **200** to cause it to “kick out” into the bore of the eccentric portion **120**. When this occurs, the gas lift valve **140** will be positioned over the pocket **130**.

30 [00106] **Figure 1E** is yet another side view of the side pocket mandrel **100** of **Figure 1A**. Here, the kick-over tool **200** is lowered back down the bore **115** of the side pocket mandrel **100**. Simultaneously, the connected gas lift valve **140** is lowered into the pocket **130**. The

operator will know that the gas lift valve has hit the pocket **130** when a weight loss is registered on the weight indicator. Of interest, if no weight loss is registered, this will indicate that the kick-over tool **200** did not release to its kicked over position and the gas lift valve **140** has missed the pocket **130**. In this case, the steps of **Figures 1B, 1C** and **1D** are repeated.

5 **[00107]** **Figure 1F** is another side view of the side pocket mandrel **100** of **Figure 1A**. Here, the gas lift valve **140** is jarred into position within the pocket **130**. This is done by the operator quickly releasing tension on the wireline **250**, reducing weight on the weight indicator to “0.” The gas lift valve **140** is seated in the seating nipples **132**.

[00108] **Figure 1G** is still another side view of the side pocket mandrel **100** of **Figure 1A**.
10 In this view, the kick-over tool **200** is raised. The guide key **205** associated with the kick-over tool **200** catches in the orienting sleeve **160**, allowing the wireline **250** and connected kick-over tool **200** to “hang up” in the wellbore. The operator then jars upward on the kick-over tool **200**. This is done by rapidly applying tension to the wireline **250**, up to a designated weight. This will cause a frictional run-in connection to become disconnected, releasing the KOT **200**
15 from the gas lift valve **140**.

[00109] It is observed that so-called KOT series tools do not require pinning between runs during running and pulling procedures. When the tool **200** is retrieved through the top **112** of the side-pocket mandrel **100**, the arm assembly **210** is pushed back into a run-in position. This quick re-cock feature greatly reduces wireline time by eliminating the need to remove the tool
20 from the tool string for disassembly and re-pinning. It also allows the operator several attempts to either set or retrieve the gas lift valve **140** without pulling out of the well.

[00110] **Figure 1H** is a final side view of the side pocket mandrel **100** of **Figure 1A**. The kick-over tool **200** has been removed from the side pocket mandrel **100** and is being pulled up to the lubricator.

25 **[00111]** It is incidentally observed that the same kick-over tool **200** may be used to retrieve the gas lift valve **100** back from the pocket **130**. **Figure 3A** is a side view of the gas lift valve **140**, residing within a pocket **130**. (This is actually the same view as **Figure 1H**.) The pocket **130**, again, is part of the side pocket mandrel **100**.

[00112] **Figure 3B** is another side view of the gas lift mandrel **100** of **Figure 3A**. In this
30 view, a portion of the kick-over tool **200** is again shown. The kick-over tool **200** has been lowered to a depth of the side pocket mandrel **100**. The KOT **200** is again made up onto the bottom of the wireline tool string and then placed in the lubricator for launch from the surface. In this case, the KOT **200** does not have an attached gas lift valve; rather, the kick-over tool

200 will be used to latch onto the gas lift valve 140 (shown in **Figure 3E**) using the connector 225.

[00113] **Figure 3C** is still another side view of the gas lift mandrel 100 of **Figure 3A**. Here, the kick-over tool 200 is being slowly pulled back up the side pocket mandrel 100 and against the orienting sleeve 160. This again aligns the pivot arm 210 with the pocket 130. When the KOT 200 stops, this indicates to the operator at the surface that the locating finger has contacted the top of the orienting sleeve 160 and the pivot arm 210 is in position.

[00114] **Figure 3D** is yet another side view of the gas lift mandrel 100 of **Figure 3A**. Here, tension is being pulled on the wireline 250, causing the kick-over tool 200 to rotate into proper alignment. Tension is pulled from the surface until the weight indicator of the wireline unit indicates that enough weight is being applied to actuate the kick-over tool 200 to its kicked over position.

[00115] **Figure 3E** is still another side view of the gas lift mandrel 100 of **Figure 3A**. Here, the kick-over tool 200 is lowered back down the bore 115 of the side pocket mandrel 100. The operator will know that the kick-over tool 200 has landed on the gas lift valve 140 within the pocket 130 when a weight loss is registered on the weight indicator.

[00116] **Figure 3F** is still another side view of the gas lift mandrel 100 of **Figure 3A**. Here, the kick-over tool 200 is jarred down onto the gas lift valve 140 within the pocket 130. This is done by the operator slightly raising the wireline 250, and then quickly releasing tension on the wireline 250, reducing weight on the weight indicator to "0."

[00117] **Figure 3G** is still another side view of the gas lift mandrel 100 of **Figure 3A**. In this view, the kick-over tool 200 and attached gas lift valve 140 are raised. The guide key 205 associated with the kick-over tool 200 catches in the orienting sleeve 160, allowing the wireline 250 and connected kick-over tool 200 to "hang up" in the wellbore. The operator then jars upward on the kick-over tool 200. This is done by rapidly applying tension to the wireline 250, up to a designated weight. The pivot arm 210 will collapse into and re-latch to its run-in position.

[00118] **Figure 3H** is still another side view of the gas lift mandrel 100 of **Figure 3A**. Here, the wireline 250 and connected kick-over tool 200 and gas lift valve 140 are no longer seen as they are being pulled up the production tubing 150 and to the surface. **Figure 3H** is actually the same view as **Figure 1A**.

[00119] It is desirable to incorporate a plunger lift system into the wellbore, that is, a wellbore having one or more, or two or more, gas lift mandrels 100. **Figure 4A** presents a side

view of a wellbore **400A** having been fitted with gas lift valves **426**. The illustrative wellbore **400A** is completed horizontally, meaning that it includes a horizontal leg **430**.

[00120] In **Figure 4A**, the wellbore **400A** extends from a surface **405** down into a subsurface **450**. The wellbore **400A** ultimately extends to a reservoir, or “pay zone,” **455**. The wellbore **400A** is completed with at least one string of casing **410**. While only one illustrative casing string **410** is shown, it is understood that the wellbore **400A** will likely include multiple strings of casing, including a string of surface casing, one or more intermediate casing strings, and a string of production casing.

[00121] The string of production casing runs along the horizontal leg **430**. The horizontal leg **430** will have a heel **432** and a toe **434**. Perforations **435** are shown in the casing **410** proximate the toe **434**. Those of ordinary skill in the art will understand that horizontally-completed wells may extend one, two, or even more miles, and will have multiple stages of perforations **435**. In addition, the formation along the pay zone **455** is fractured through each of the sets of perforations **435** using various perf-and-frac techniques.

[00122] The wellbore **400A** also includes a string of production tubing **420**. The production tubing **420** defines a bore **415** through which reservoir fluids will travel to the surface **405**. The gas lift valves **426** are placed in series along the production tubing **420**. In addition, a packer **425** resides at a lower end of the vertical portion of the wellbore **400A**. This ensures that gas injected into the annular region between the production tubing **420** and the surrounding casing **410** will enter the gas lift valves **426**.

[00123] In a typical gas lift operation, light hydrocarbon gases are separated from the production fluids at the surface. A portion of the separated gases are then injected back into the annular region. In **Figure 4A**, an injection line **422** is shown at the surface **405** for delivering the gases to the wellbore **400A**.

[00124] Above the wellbore **400A** is a well head **460**. The well head **460** includes a casing head **462** and a tubing head **464**. A sales line **466** is provided from the well head **460**. A master valve **468** is placed above the tubing head **464** as a way of shutting in the wellbore **400A**. An optional solar panel **469** is provided by local power.

[00125] Above the master valve **468** is a lubricator **470**. The lubricator **470** defines an elongated and sealed cylindrical pipe **475**. Along the pipe **475** is a plunger catcher **472** and an MSO sensor **474**.

[00126] The plunger catcher **472** is designed to “catch” a metal cylinder, or “plunger” **480** when the plunger **480** is forced up to the surface **405**. The plunger **480** moves up in response to a build-up of reservoir pressure, combined with the reduced hydrostatic head produced by

the gas lift valves **426**. The plunger **480** is then held at the plunger catcher **472** until such a time as it is released. The well head **460** includes a motor valve **465** and a controller **468** that assist in controlling the cycle for dropping the plunger **480**.

5 [00127] When the plunger **480** is dropped from the lubricator **470**, the plunger **480** will gravitationally fall **P** into the production tubing **420**. The plunger **480** will ultimately land on a bumper spring **482**. The bumper spring **482** sits on an optional screened orifice that permits injection gases to flow into the production tubing **420** from below the bumper spring **482**, further assisting upward flow of the plunger **480**.

10 [00128] **Figure 4B** is a side, partial cut-away view of a second wellbore **400B** having been completed for the production of hydrocarbon fluids. The wellbore **400B** is constructed in accordance with the wellbore **400A**; however, the wellbore **400B** has been completed vertically.

15 [00129] It is noted that the wellbore **400A** is again completed to provide a gas-assisted plunger lift system. Here, in lieu of a screened orifice (**484** in **Figure 4A**), a gas lift valve **426** is provided below the bumper spring **482**. Also, the well head **460** of **Figure 4B** shows a valve **424** for controlling flow of injection gases from the injection line **422**.

20 [00130] As noted above, known gas lift valves are not well-suited for use in conjunction with plunger lift systems. This is because the metal cylinder **480** tends to hang up on the pocket **130** of the side pocket mandrel **100**. Therefore, the present disclosure provides various improved embodiments for an improved side pocket mandrel.

[00131] **Figure 5A** is a side view of a new side pocket mandrel **500** of the present invention, in one embodiment. As with mandrel **100** described above, the mandrel **500** is also intended to be threadedly connected to a string of production tubing **150**, in series, within a wellbore. Beneficially, the mandrel **500** employs a flexible metal curtain **570U** to movably cover an upper
25 portion **522** of the side pocket mandrel **500**.

[00132] The mandrel **500** is generally constructed in accordance with the mandrel **100** described above. In this respect, the side pocket mandrel **500** has a tubular body **510** comprising a wall that forms a bore **515**. The bore **515** is in fluid communication with a bore **155** of the production tubing **150**. The tubular body **510** also includes an upper end **512** and a
30 lower end **514**. The bore **515** extends from the lower end **514** up to the upper **512** end.

[00133] The side pocket mandrel **500** includes upper and lower shoulders **525**. The shoulders **525** form an eccentric portion **520** of the body **510**. The eccentric portion **520** forms an enlarged outer diameter portion. In this respect, the upper **512** and lower **514** ends have an inner diameter (**ID₁**) while the eccentric portion **520** has an increased inner diameter (**ID₂**).

[00134] The eccentric portion **520** holds an elongated barrel, or “pocket” **530**. The pocket **530** is dimensioned to receive a gas lift valve **140**. The pocket **530** includes one or more ports **535**. The ports **535** are in fluid communication with an annulus formed between the production tubing **150** and a surrounding string of casing within the wellbore. In this way, gas that is
5 injected behind the production tubing **150** may flow through the ports **535**, into the pocket **530**, and into the gas lift valve **140**. From there, gas is controllably released into the bore **155** of the production tubing **150** as part of a gas lift operation.

[00135] The pocket **530** also includes one or more seating nipples **532**. The seating nipples **532** are dimensioned to frictionally receive and hold the gas lift valve **140** within the pocket
10 **530**. In **Figure 5A**, the pocket **530** is empty, meaning that it has not yet received a gas lift valve **140**.

[00136] Also noted from **Figure 5A**, there is an open portion **522** within the eccentric portion **520** above the pocket **530**. Similarly, there is an open portion **524** below the pocket **530**. These create areas of potential hang-up for the metal cylinder **480** moving through the
15 production tubing **150** during a plunger lift operation.

[00137] To remedy this, a vertical curtain **570** is provided within the side pocket mandrel **500**. The vertical curtain **570** includes an upper portion **570U** and a lower portion **570L**. The upper curtain **570U** resides in or covers an open area **522** while the lower curtain **570L** resides in or covers an open area **524**. The upper curtain **570U** is flexible, permitting access to the
20 pocket **530** when the upper curtain **570U** is moved, or flexed, from a closed position to an open position. In contrast, the lower curtain **570L** is stationary, being fixed generally at upper and lower ends along the side pocket mandrel **500**.

[00138] Both portions of the curtain **570U**, **570L** are preferably fabricated from a metal material. Preferably, each curtain **570U**, **570L** comprises a concave profile within the body
25 **510**.

[00139] The upper portion of the upper curtain **570U** has an upper end **572** and a lower end **574**. The upper end **572** is pivotally connected or otherwise pinned to the upper portion **512** of the mandrel **500** using a pin **578**. The upper curtain **570U** is biased in an outward position as shown in **Figure 5A** using, for example, a spring **575**. At the same time, the lower end **574** is
30 free to travel in response to an inward force that overcomes the biasing force of the spring **575**.

[00140] **Figure 7A** is a perspective view of the upper curtain **570U**, in one embodiment. It can be seen that the upper end **572** of the curtain **570U** is pinned along or near the upper end **512** of the mandrel **500** using pin **578**. The lower end **574** of the curtain **570U** flexes back

towards the tubular wall **510**. Arrows **F** demonstrate a direction of movement in response to a lateral or inward force applied by a pivot arm **210** of a KOT **200**.

[00141] It is noted that the lower end **574** of the curtain **570U** straddles the pocket **530**. To accommodate lateral movement of the lower end **574** during flexure of the curtain **570U**, the lower end **574** reserves an opening **576** dimensioned to pass across the pocket **530**.

[00142] Returning to the **Figure 5** series of drawings, **Figure 5B** is a side view of the side pocket mandrel **500** of **Figure 5A**. Here, a kick-over tool **200** has been run into the production tubing **150** and then partially past the side pocket mandrel **500**. A wireline **250** is again shown as a working string for the kick-over tool **200**.

10 [00143] **Figure 5C** shows another view of the side pocket mandrel **500** of **Figure 5A**. In this view, the kick-over tool **200** is being slowly raised up the wellbore alongside the mandrel **500**. It can be seen that a gas lift valve **140** is connected to a pivot arm **210** of the kick-over tool **200**.

[00144] As noted above in connection with **Figure 1C**, the KOT **200** includes a guide key **205**. The guide key **205** will make contact with an orienting sleeve **560** within the bore **115** of the tubular body **110**.

[00145] Upon engaging a portion of the guide surface, the key **205** will follow the guide surface, causing the KOT **200** to rotate about its longitudinal axis until the guide key **205** becomes aligned with and enters an orienting slot. When the guide key **205** is in the orienting slot, the KOT **200** is properly oriented in the side pocket mandrel **100** with respect to the side pocket bore **120**. Additionally, when the kick-over tool **200** stops, this indicates to the operator at the surface that the guide key **205** has contacted the slot at the top of the orienting sleeve **160**.

[00146] **Figure 5D** is still another view of the side pocket mandrel **500** of **Figure 5A**. Here, tension is being pulled on the wireline **250**, causing the kick-over tool **200** to rotate into proper alignment. At the surface, tension is pulled until the weight indicator of the wireline unit indicates that enough weight is being applied to actuate the kick-over tool **200** to cause it to “kick out” into the bore of the eccentric portion **120**. When this occurs, the gas lift valve **140** will be positioned over the pocket **130**.

25 [00147] **Figure 5E** is yet another side view of the side pocket mandrel **500** of **Figure 5A**. **Figure 5E** shows a step where the gas lift valve **140** is lowered into the pocket (or “receiver”) **130** of the side pocket mandrel **500**. Notice that the pivot arm **210** keeps the flexible upper curtain **570U** pushed back against the tubular wall **510** of the mandrel **500**.

[00148] **Figure 5F** provides another side view of the side pocket mandrel **500** of **Figure 5A**. In this step, the gas lift valve **140** has been seated into the pocket **530**. This is done by the operator quickly releasing tension on the wireline **250**, reducing weight on the weight indicator to essentially “0.” The gas lift valve **140** is seated in the seating nipples **532**. Notice again that
5 the pivot arm **210** keeps the flexible curtain **570U** pushed back against the tubular wall **510** of the mandrel **500**.

[00149] **Figure 5G** is still another side view of the side pocket mandrel **500** of **Figure 5A**. In this view, the kick-over tool **200** is raised. The guide key **205** associated with the kick-over tool **200** catches in the orienting sleeve **160**, allowing the wireline **250** and connected kick-over
10 tool **200** to “hang up” in the wellbore. The operator then jars upward on the kick-over tool **200**. This is done by rapidly applying tension to the wireline **250**, up to a designated weight. This will cause a frictional run-in connection to become disconnected, releasing the KOT **200** from the gas lift valve **140**.

[00150] In operation, as the KOT **200** is raised, it will hit the upper shoulder **525** of the eccentric portion **520**. This will fold the pivot arm **210** back into its run-in position.
15

[00151] **Figure 5H** is a final side view of the side pocket mandrel **500** of **Figure 5A**. The view of **Figure 5H** is the same as **Figure 5A**, except the gas lift valve **140** now resides in the pocket **530** of the side pocket mandrel **500**, ready for use in a gas lift operation.

[00152] An alternate embodiment may be employed for the upper curtain. **Figure 7B** is an enlarged perspective view of the flexible metal curtain **570U'** of the **Figure 5** series of
20 drawings, in an alternate embodiment. Here, the upper metal curtain **570U'** is in the form of a bow spring. The upper end **572** of the bow spring **570U'** is connected to the tubular wall **510** by means of pin **571**, while the lower end **574** of the curtain **570U'** is connected to the tubular wall **510** by means of pin **577**.

[00153] Pin **571** resides within slot **573**, while pin **577** resides in slot **579**. Each pin **571**,
25 **577** is configured to slide relative to its respective slot **573**, **579**. In operation, a lateral force is applied by the pivot arm **210** against the bow spring **570U'**. This causes the bow spring **570U'** to flex inwardly according to Arrow **F**.

[00154] To accommodate the inward movement, the upper end **572** of the bow spring **570U'**
30 will slide upward per Arrow **T₁**, guided by pin **571**. Similarly, the lower end **574** of the bow spring **570U'** will slide downward per Arrow **T₂**, guided by pin **577**. Note that slot **579** is preferably much longer than slot **573**, permitting the bow spring **570U'** to flatten out more easily along the bottom end **574**.

[00155] **Figure 6A** is a schematic side view of a side pocket mandrel **600** of the present invention, in a second illustrative embodiment. As with mandrel **100** described above, the mandrel **600** is also intended to be threadedly connected to a string of production tubing, in series, within a wellbore. Beneficially, the mandrel **600** employs a sliding metal curtain that
5 moves vertically to cover and uncover an upper open portion **622** of the side pocket mandrel **600**.

[00156] The mandrel **600** is generally constructed in accordance with the mandrel **100** described above. In this respect, the side pocket mandrel **600** has a tubular body **610** comprising a wall that forms a bore **615**. The bore **615** is in fluid communication with a bore
10 **155** of the production tubing **150**. The tubular body **610** also includes an upper end **612** and a lower end **614**. The bore **615** extends from the lower end **614** up to the upper **612** end.

[00157] The side pocket mandrel **600** includes upper and lower shoulders **625**. The shoulders **625** form an eccentric portion **620** of the body **610**. The eccentric portion **620** forms an enlarged outer diameter portion. In this respect, the upper **612** and lower **614** ends have an
15 inner diameter (ID_1) while the eccentric portion **620** has an inner diameter (ID_2).

[00158] The eccentric portion **620** holds an elongated barrel, or “pocket” **630**. The pocket **630** is dimensioned to receive a gas lift valve **140**. The pocket **630** includes one or more ports **635**. The ports **635** are in fluid communication with an annulus formed between the production tubing **150** and a surrounding string of casing (shown at **410** of **Figure 4A**) within the wellbore.
20

[00159] The pocket **630** also includes one or more seating nipples **632**. The seating nipples **632** are dimensioned to frictionally receive and hold the gas lift valve **140** within the pocket **630**. In **Figure 6A**, the pocket **630** is empty, meaning that it has not yet received a gas lift valve **140**.

[00160] Also noted from **Figure 6A**, there is an open portion **622** within the eccentric portion **620** above the pocket **630**. Similarly, there is an open portion **624** below the pocket **630**. These create areas of potential hang-up for the metal cylinder **480** moving **P** through the production tubing **150** during a plunger lift operation.
25

[00161] To remedy this, a vertical curtain **670** (represented in two parts at **670U** and **670L**) is provided within the side pocket mandrel **600**. An upper curtain **670U** resides in the open
30 area **622** while a lower curtain **670L** resides in the open area **624**. The upper curtain **670U** is slidably movable vertically, permitting access to the pocket **630** when the upper curtain **670U** is raised from a closed position to an open position. In contrast, the lower curtain **670L** is stationary, being fixed at upper and lower ends along the side pocket mandrel **600**. Both portions of the curtain **670U**, **670L** are preferably fabricated from a metal material.

[00162] The upper portion of the upper curtain 670U has an upper end 672 and a lower end 674. The upper end 672 is in the form of a shoulder that lands on the upper shoulder 625 of the tubular body 610. At the same time, the lower end 674 comprises a travel stop, limiting the upward mobility of the upper curtain 670U when it is raised.

5 [00163] **Figure 8** is a cut-away view of the upper curtain 670U, in one embodiment. It can be seen that the upper curtain 670U is in its lowered position, covering the upper portion 622 of the eccentric portion 620. The upper curtain 670U is configured to slide vertically through a slot 679 residing within the shoulder 625. Arrow V indicates a direction of movement of the upper curtain 670U in response to upward force supplied by the pivot member 210 during
10 upward translation across the side pocket mandrel 600.

[00164] As the curtain 670U slides upward, it enters a sleeve 673. The sleeve 673 is formed between the upper portion 612 of the mandrel 600 and a vertical guide wall 675. The vertical guide wall 675 extends upward from the shoulder 625 of the tubular body 610. Preferably, an elastomeric gasket 677 creates a seal around the sliding curtain 670.

15 [00165] Returning to the **Figure 6** series of drawings, **Figure 6B** is a side view of the side pocket mandrel 600 of **Figure 6A**. Here, a kick-over tool 200 has been run into the production tubing 150 and then partially past the side pocket mandrel 600. A wireline 250 is again shown as a working string for the kick-over tool 200. The upper curtain 670U remains in its lowered position.

20 [00166] **Figure 6C** shows another view of the side pocket mandrel 600 of **Figure 6A**. In this view, the kick-over tool 200 is being slowly raised up the wellbore alongside the mandrel 600. It can be seen that a gas lift valve 140 is connected to a pivot arm 210 of the kick-over tool 200.

[00167] As noted above in connection with **Figure 1C**, the KOT 200 includes a guide key
25 205. The guide key 205 will make contact with an orienting sleeve 660 within the bore 115 of the tubular body 110. Upon engaging one of the guide surfaces, the key 205 will follow the guide surface, causing the KOT 200 to rotate about its longitudinal axis until the guide key 205 becomes aligned with and enters the orienting slot. When the guide key 205 is in the orienting slot, the KOT 200 is properly oriented in the side pocket mandrel 100 with respect to the side
30 pocket bore 120. Additionally, when the kick-over tool 200 stops, this indicates to the operator at the surface that the guide key 205 has contacted the slot at the top of the orienting sleeve 160.

[00168] It is also observed from **Figure 6C** that the upper curtain 670U has been raised into the sleeve 673. This is done by a knob 212 placed along the KOT, such as at an upper end of

the pivot arm **210**, catching the lower end **674** of the curtain **670U**. Thus, as the KOT **200** is raised, the curtain **670U** is raised with it.

[00169] **Figure 6D** is still another view of the side pocket mandrel **600** of **Figure 6A**. Here, tension is being pulled on the wireline **250**, causing the kick-over tool **200** to rotate into proper alignment. At the surface, tension is pulled until the weight indicator of the wireline unit indicates that enough weight is being applied to actuate the kick-over tool **200** to cause it to “kick out” into the bore of the eccentric portion **120**. When this occurs, the gas lift valve **140** will be positioned over the pocket **130**.

[00170] **Figure 6E** is yet another side view of the side pocket mandrel **600** of **Figure 6A**. **Figure 6E** shows a step where the gas lift valve **140** is lowered into the pocket (or “receiver”) **630** of the side pocket mandrel **600**. As long as the knob **212** is present below the shoulder forming the lower end **674** of the curtain **670U**, the upper curtain **670U** will remain in its raised position.

[00171] **Figure 6F** provides another side view of the side pocket mandrel **600** of **Figure 6A**. In this step, the gas lift valve **140** has been seated into the pocket **630**. This is done by the operator quickly releasing tension on the wireline **250**, reducing weight on the weight indicator to essentially “0.” The gas lift valve **140** is seated in the seating nipples **632**. Notice again that the KOT **200** keeps the sliding metal curtain **670U** from gravitationally falling all the way back down into the eccentric portion **620**.

[00172] In one aspect, the sliding metal curtain **670U** will ride on the knob **212** as the KOT **200** is lowered. Once a valve **140** is set or pulled and the KOT **200** is raised back up, it will temporarily lift the curtain **670U** again until the KOT **200** is pulled out of the mandrel **600**. The curtain **670U** will then gravitationally fall back into place across the upper open (or eccentric) portion **620**.

[00173] **Figure 6G** is still another side view of the side pocket mandrel **600** of **Figure 6A**. In this view, the kick-over tool **200** is raised. The guide key **205** associated with the kick-over tool **200** catches in the orienting sleeve **160**, allowing the wireline **250** and connected kick-over tool **200** to “hang up” in the wellbore. The operator then jars upward on the kick-over tool **200**. This is done by rapidly applying tension to the wireline **250**, up to a designated weight. This will cause a frictional run-in connection to become disconnected, releasing the KOT **200** from the gas lift valve **140**.

[00174] In operation, as the KOT **200** is raised, it will hit the upper shoulder **625** of the eccentric portion **620**. This will fold the pivot arm **210** back into its run-in position.

[00175] **Figure 6H** is a final side view of the side pocket mandrel **600** of **Figure 6A**. The view of **Figure 6H** is the same as **Figure 6A**, except the gas lift valve **140** now resides in the pocket **630** of the side pocket mandrel **600**, ready for use in a gas lift operation. Notice that a metal cylinder **480** is again passing across the side pocket mandrel in connection with a plunger lift operation.

[00176] A method of producing hydrocarbon fluids from a wellbore is also provided herein. The wellbore comprises a wellhead at a surface, and at least one string of casing extending down from the wellhead. The wellbore has been formed for the purpose of producing hydrocarbon fluids to the surface in commercially viable quantities. Typically, the well will produce primarily hydrocarbon fluids that are compressible at surface conditions, e.g., methane and ethane, but there will likely also be at least some hydrocarbon liquids, albeit in diminishing quantities.

[00177] The method first comprises running a string of production tubing into the wellbore. The string of production tubing comprises a series of tubing joints threadedly connected end-to-end. The production tubing will also include at least one, and preferably two or more side pocket mandrels threadedly connected along the production tubing.

[00178] The side pocket mandrels are configured in accordance with any of the embodiments described above. Of importance, the pocket of each side pocket mandrel will contain a gas lift valve that is in fluid communication with the annulus formed between the production tubing and the surrounding casing.

[00179] The method also includes producing hydrocarbon fluids from a subsurface reservoir, through the production tubing, and up to the wellhead at the surface.

[00180] Preferably, in its (P₁) position, the movable curtain is dimensioned and configured to allow a metal cylinder used as part of a plunger lift system to pass along the side pocket mandrel without catching on the pocket. The method then further comprises:

- releasing the metal cylinder from a lubricator disposed over the wellhead into the wellbore; and
- allowing the metal cylinder to gravitationally fall to a bumper spring positioned along the production tubing below the side pocket mandrels.

[00181] The movable curtain comprises an elongated metal wall positioned above the receiver. The curtain flexes in response to a lateral force, moving the curtain from a first position (ID₁) having a first inner diameter to a second position (ID₂) having a second larger diameter.

[00182] As can be seen, an improved artificial lift system for a wellbore is provided. In accordance with the invention, gas lift valves are provided that will accommodate the cyclical vertical travel of a metal cylinder during a plunger lift operation.

CLAIMS

What is claimed is:

1. A side pocket mandrel for a wellbore, comprising:
 - a tubular body having an upper end, an opposing lower end, and a bore formed within
 - 5 the tubular body extending from the upper to the lower end, and wherein the tubular body comprises an eccentric portion residing between the upper and lower ends such that a first inner diameter is formed at the opposing upper and lower ends, and a second larger inner diameter is formed along the eccentric portion;
 - a tubular pocket residing within the eccentric portion of the tubular body, the tubular
 - 10 pocket being dimensioned to slidably receive a gas lift valve;
 - one or more ports disposed within the tubular body adjacent the pocket, placing the pocket in fluid communication with an environment external to the tubular body; and
 - a movable curtain disposed along the eccentric portion, wherein in a first position the movable curtain covers a portion of the eccentric portion above the pocket to provide a reduced
 - 15 inner diameter that approximates the first inner diameter, and in a second position the movable curtain is movable to the second larger inner diameter that enables access by a kick-over tool above the pocket to selectively install the gas lift valve in or to retrieve the gas lift valve from the pocket.
2. The side pocket mandrel of claim 1, wherein in the first position, the movable curtain
- 20 is dimensioned and configured to allow a metal cylinder used as part of a plunger lift system to pass along the side pocket mandrel without catching on the pocket.
3. The side pocket mandrel of claim 2, wherein:
 - each of the first and second opposing ends of the tubular body is configured to
 - threadedly connect to a joint of production tubing;
 - 25 the upper end of the tubular body comprises an orienting sleeve configured to catch a guide key of a kick-over tool when the kick-over tool is raised across the side pocket mandrel, thereby orienting the kick-over tool towards the eccentric portion; and
 - a length of the pocket is less than a length of the eccentric portion, leaving an open area within the eccentric portion above the pocket that is configured to receive a gas lift valve during
 - 30 the installation or the retrieval.
4. The side pocket mandrel of claim 3, wherein:
 - the pocket is placed within the eccentric portion such that an open area is further left
 - below the pocket; and

the side pocket mandrel further comprises a stationary curtain disposed along the open area below the pocket, wherein an upper end of the stationary curtain resides adjacent to a bottom of the pocket while a lower end of the stationary curtain is fixed to a lower end of the tubular body, thereby reducing the inner diameter of the open area below the pocket to approximately the first inner diameter.

5. The side pocket mandrel of any one of claims 1-4, wherein each of the movable curtain and the stationary curtain is fabricated from a metal material.

6. The side pocket mandrel of any one of claims 1-4, wherein the movable curtain comprises:

10 an upper end pinned to the tubular body proximate an upper end of the eccentric portion; and

a lower end configured to flex in response to a lateral force initiated by the kick-over tool during the installation or the retrieval.

7. The side pocket mandrel of claim 6, wherein the movable curtain comprises a bow spring configured to flex within the recessed portion such that at least a lower end of the bow spring moves from the first inner diameter to the second larger inner diameter in response to the lateral force.

8. The side pocket mandrel of claim 6, wherein the movable curtain comprises:
20 a top end pivotally pinned to the tubular body proximate an upper end of the eccentric portion; and

a bottom end that flexes inward towards the tubular body from the first inner diameter to the second larger inner diameter in response to the lateral force initiated by the kick-over tool during the installation or the retrieval.

9. The side pocket mandrel of claim 8, wherein upon flexing, either:
25 the bottom end of the movable curtain is configured to clear the upper end of the pocket to allow for the flexure; or

the bottom end of the movable curtain extends beyond the upper end of the pocket, but comprises an opening that passes across the upper end of the pocket to allow for the flexure.

10. The side pocket mandrel of any one of claims 1-4, wherein:
30 a shoulder is formed along the tubular body where the upper end of the tubular body meets the eccentric portion;

the shoulder comprises a slot; and

the movable curtain comprises an elongated body having an upper end and a lower end, wherein the movable curtain is configured to move upward through the slot in the shoulder in

response to an upward force provided by the kick-over tool when the kick-over tool is raised across the eccentric portion.

11. The side pocket mandrel of claim 10, wherein:
the elongated body of the movable curtain comprises a concave profile;
- 5 the movable curtain is configured to be moved upward through the slot upon contact with a knob of the kick-over tool when the kick-over tool is raised across the eccentric portion; and
- the movable curtain is configured to gravitationally fall through the slot and back into the eccentric portion when the kick-over tool is raised back out of the side pocket mandrel.
- 10 12. The side pocket mandrel of any one of claims 1-11, wherein:
the side pocket mandrel is threadedly connected to adjacent joints of a tubing string;
the tubing string is a string of production tubing residing with a wellbore;
the environment external to the tubular body is an annular region formed between the production tubing and a surrounding casing string;
- 15 the wellbore resides below a well head, with the well head having a lubricator and a plunger catcher; and
- the production tubing has a bumper residing therein configured to receive the metal cylinder as part of the plunger lift system.

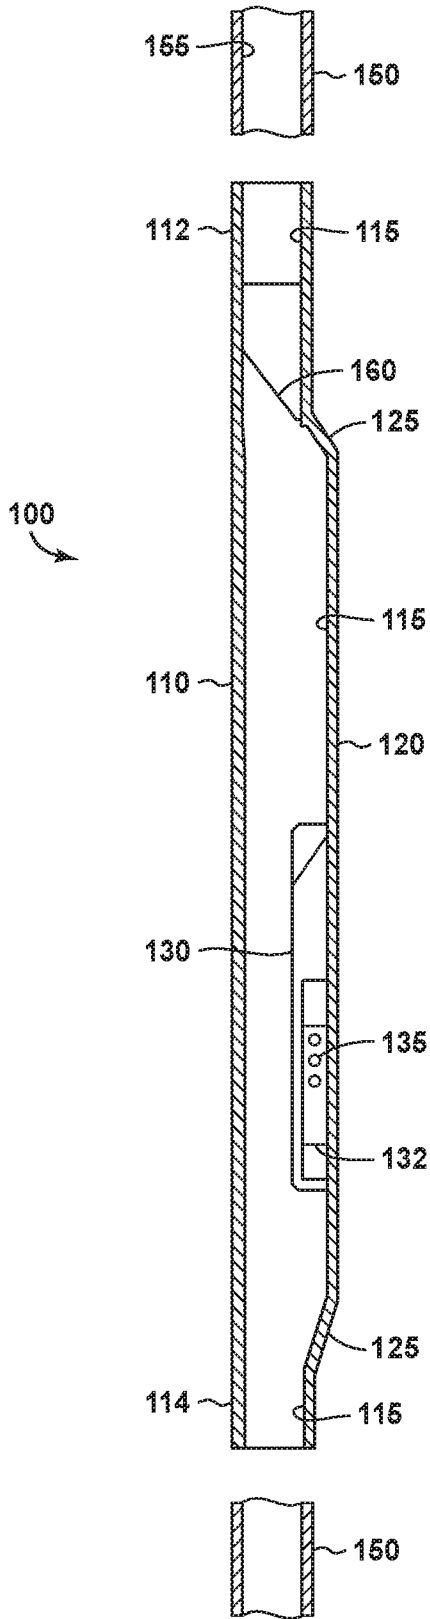


FIG. 1A
(Prior Art)

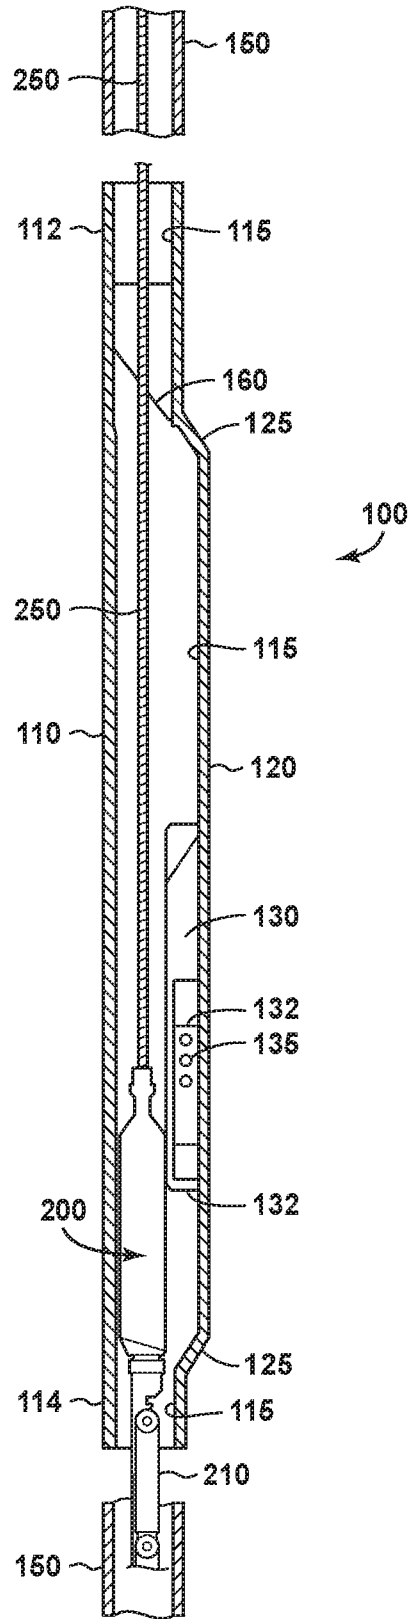


FIG. 1B
(Prior Art)

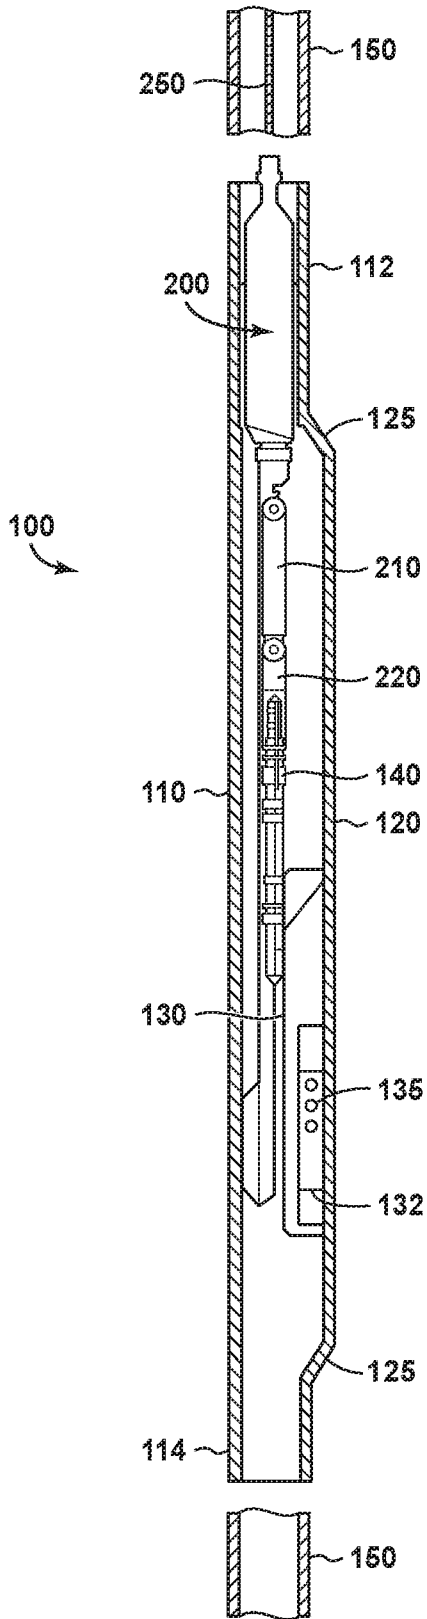


FIG. 1C
(Prior Art)

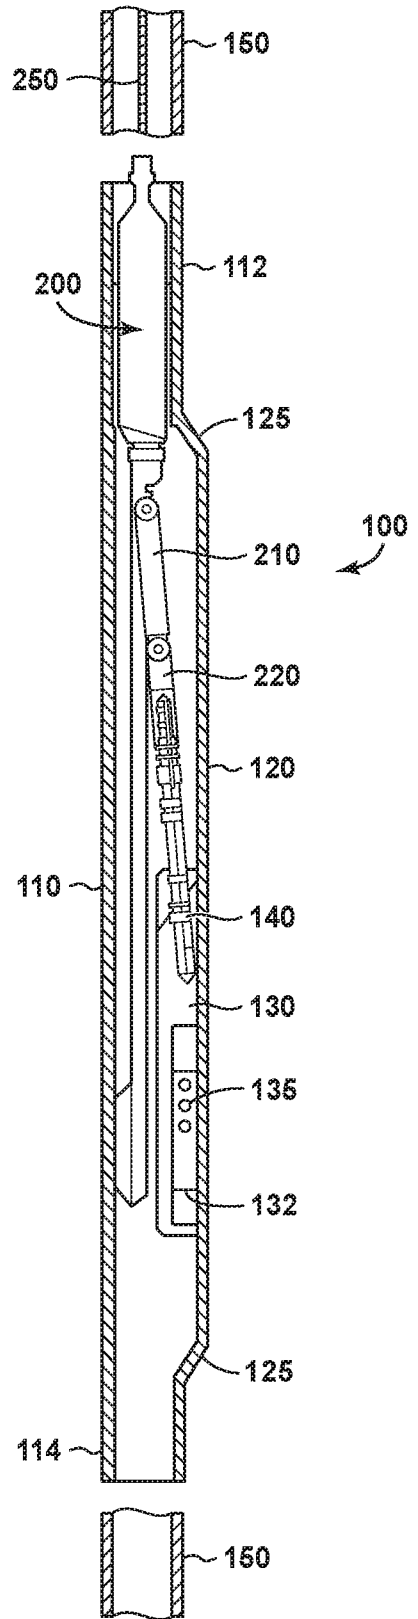


FIG. 1D
(Prior Art)

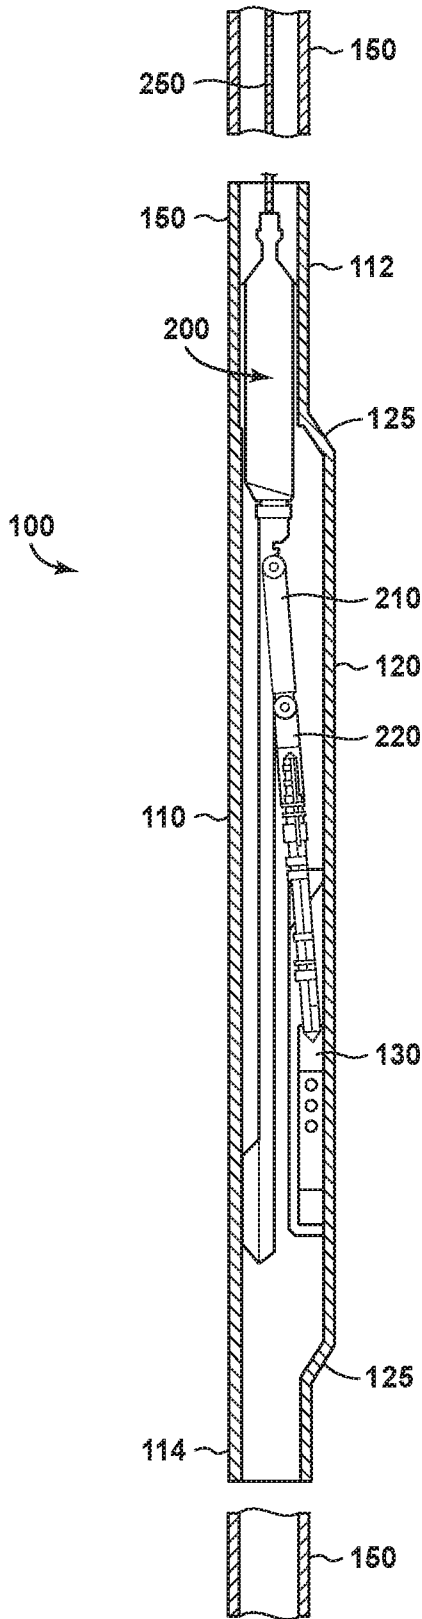


FIG. 1E
(Prior Art)

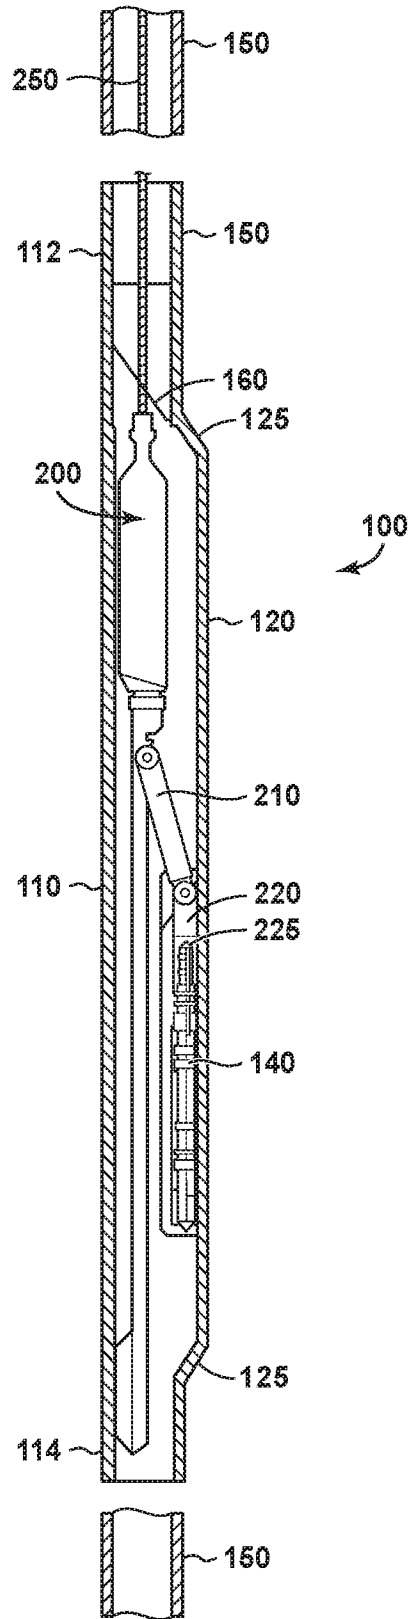


FIG. 1F
(Prior Art)

4/22

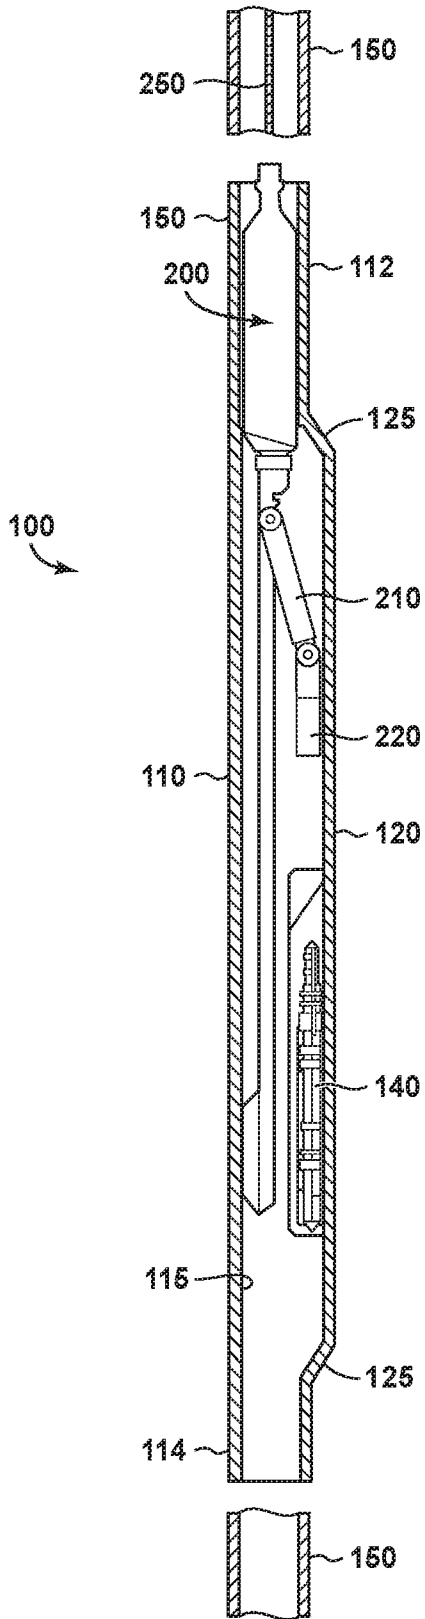


FIG. 1G
(Prior Art)

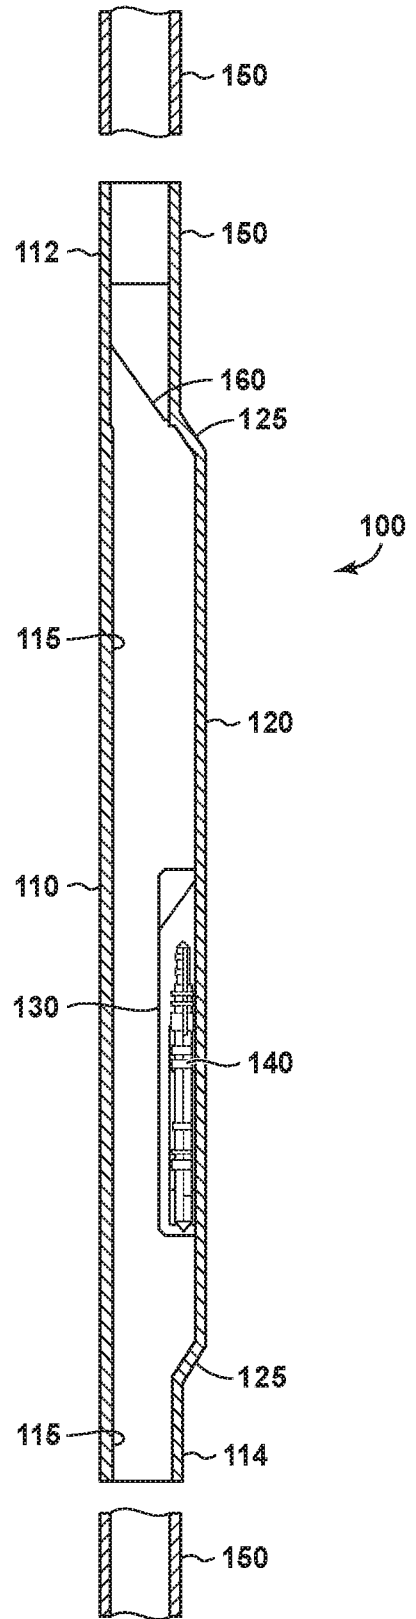


FIG. 1H
(Prior Art)

5/22

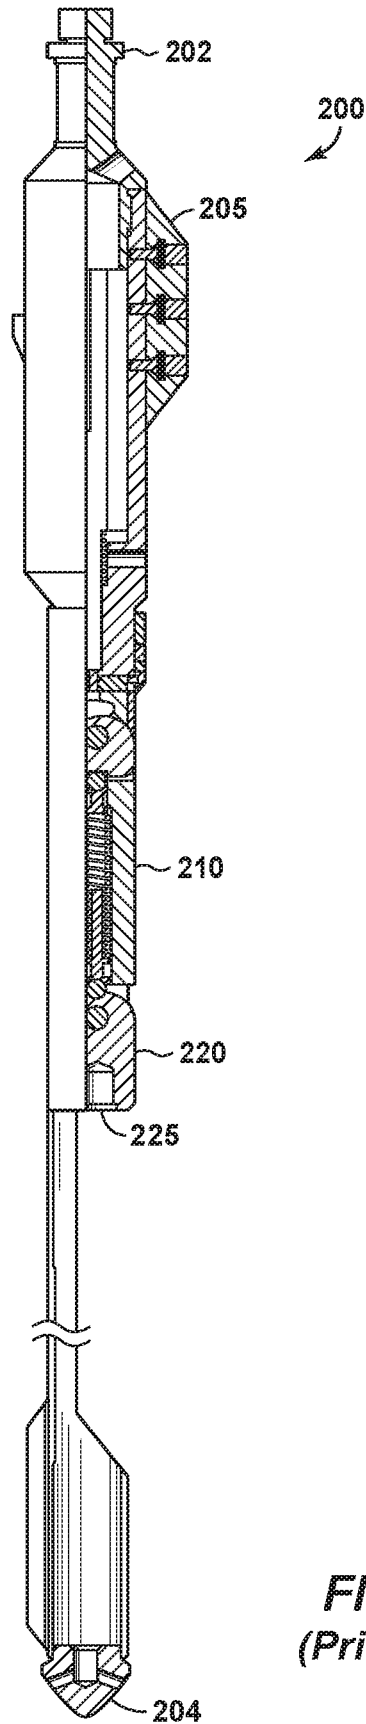


FIG. 2
(Prior Art)

6/22

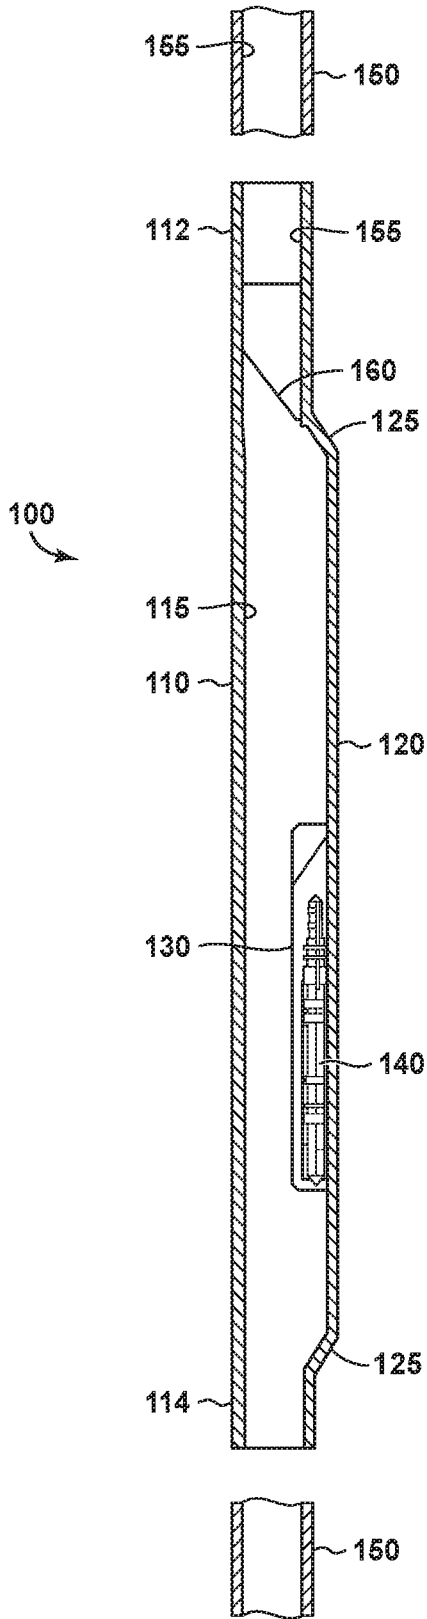


FIG. 3A
(Prior Art)

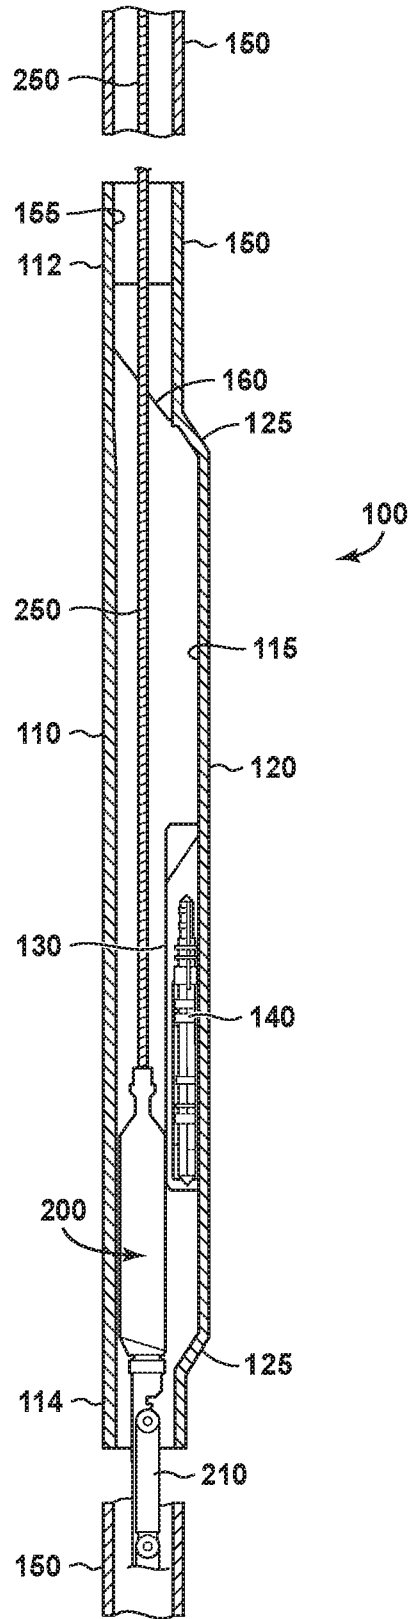


FIG. 3B
(Prior Art)

7/22

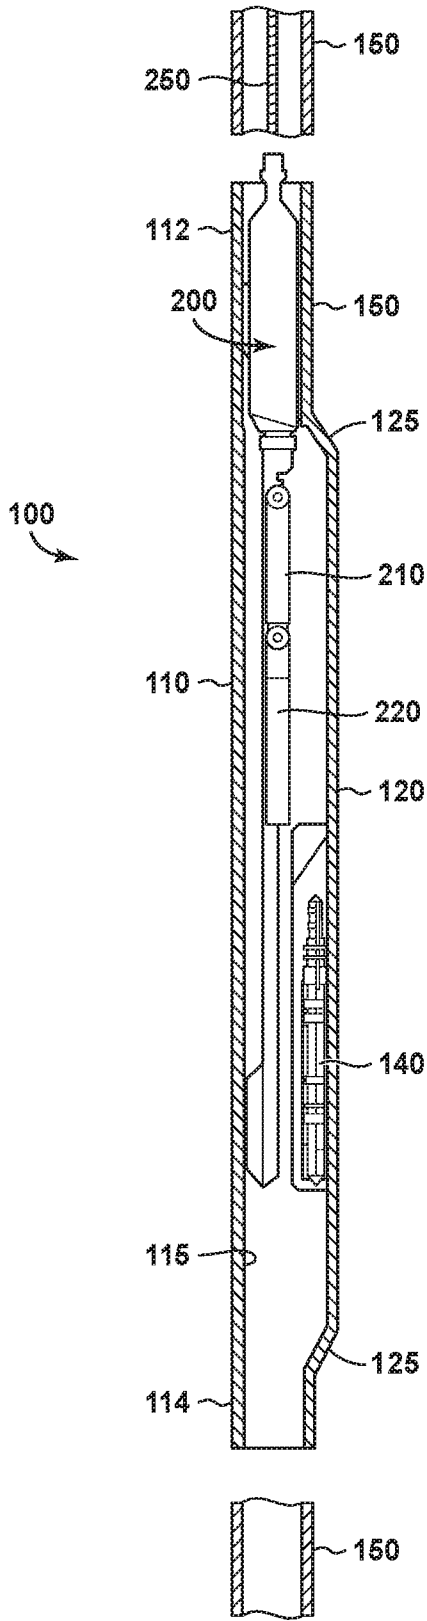


FIG. 3C
(Prior Art)

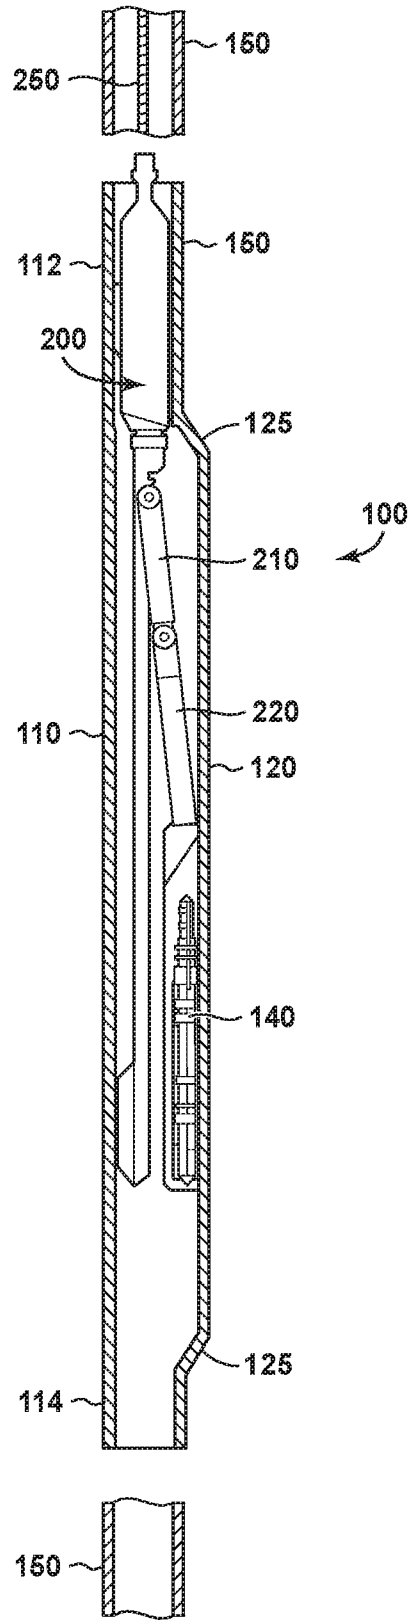


FIG. 3D
(Prior Art)

8/22

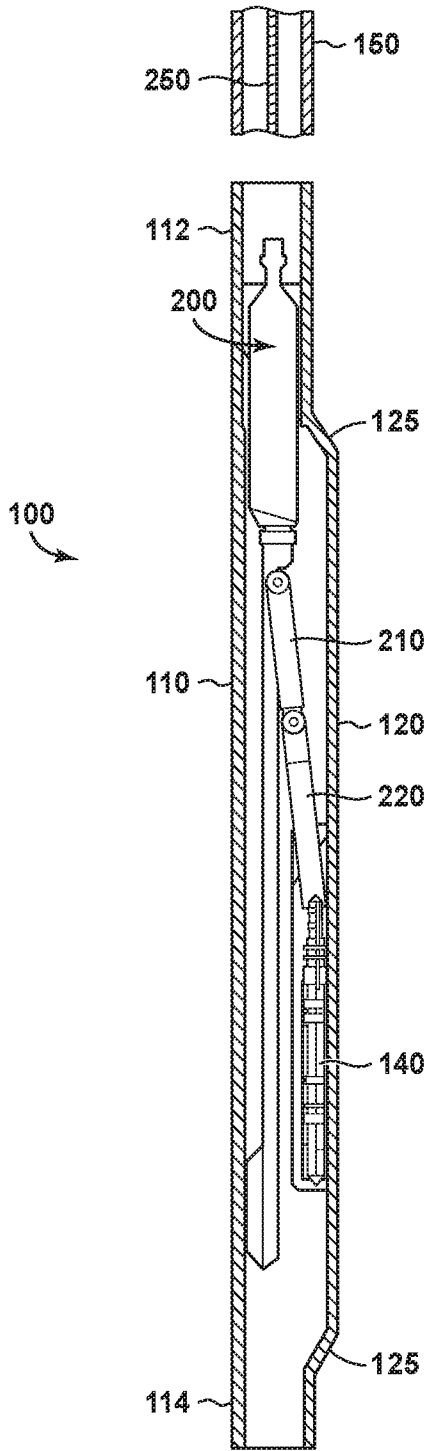


FIG. 3E
(Prior Art)

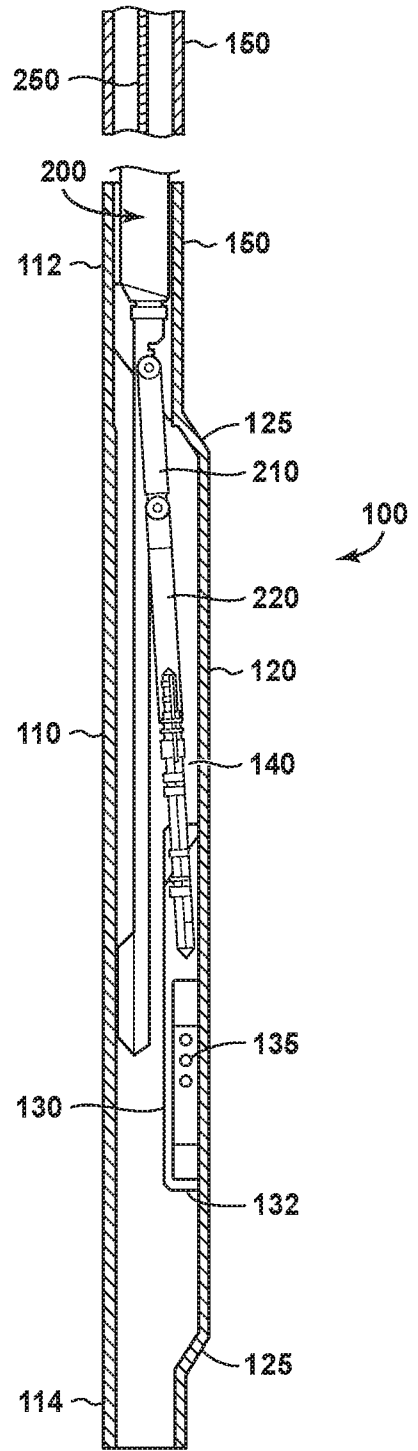


FIG. 3F
(Prior Art)

9/22

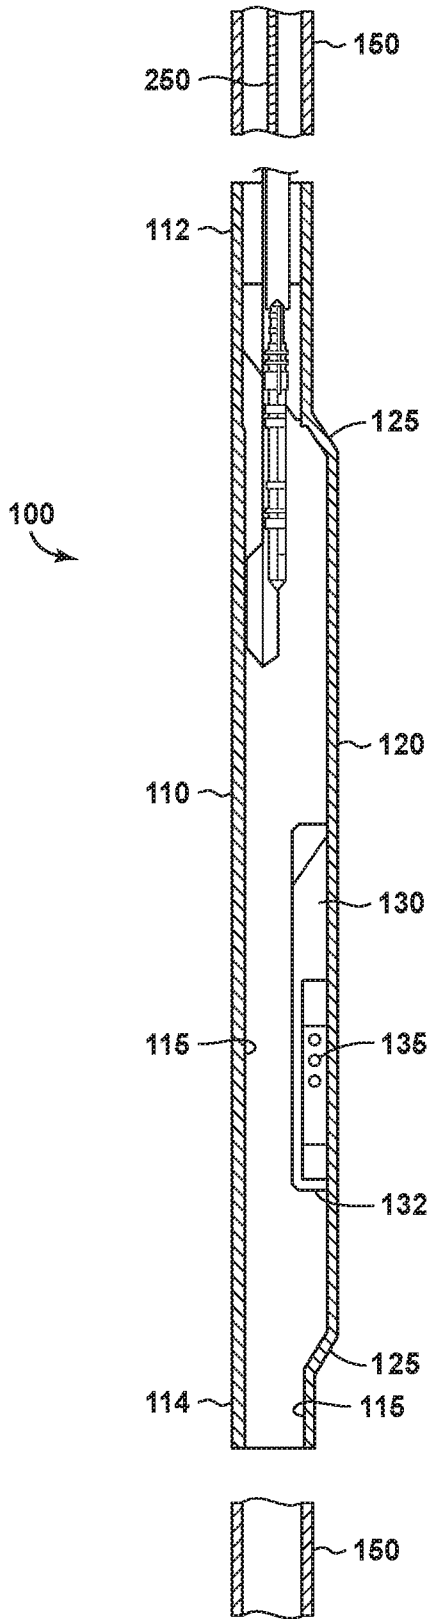


FIG. 3G
(Prior Art)

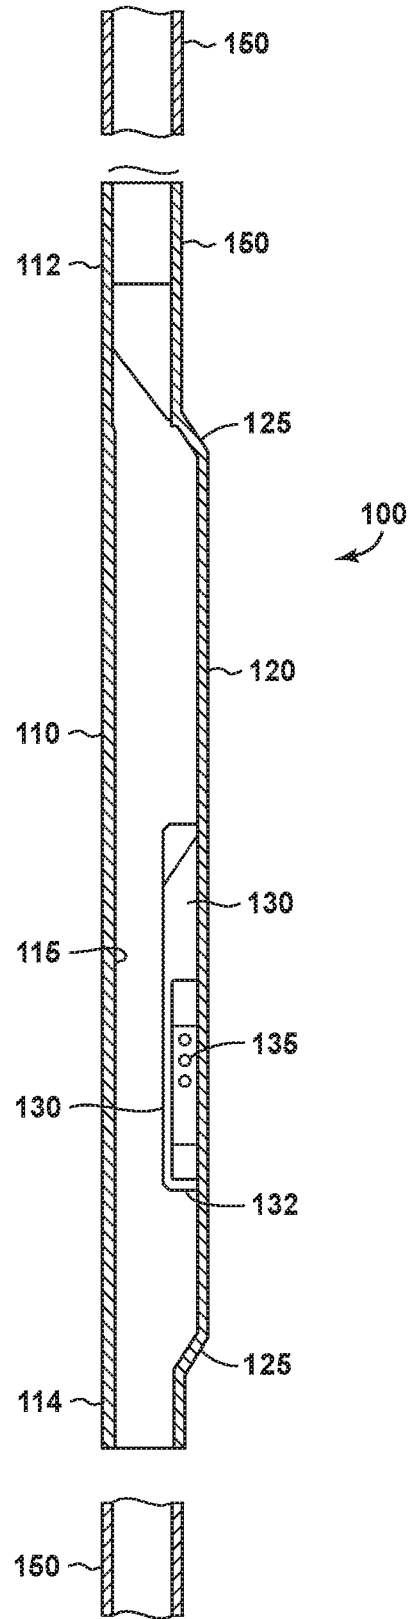


FIG. 3H
(Prior Art)

10/22

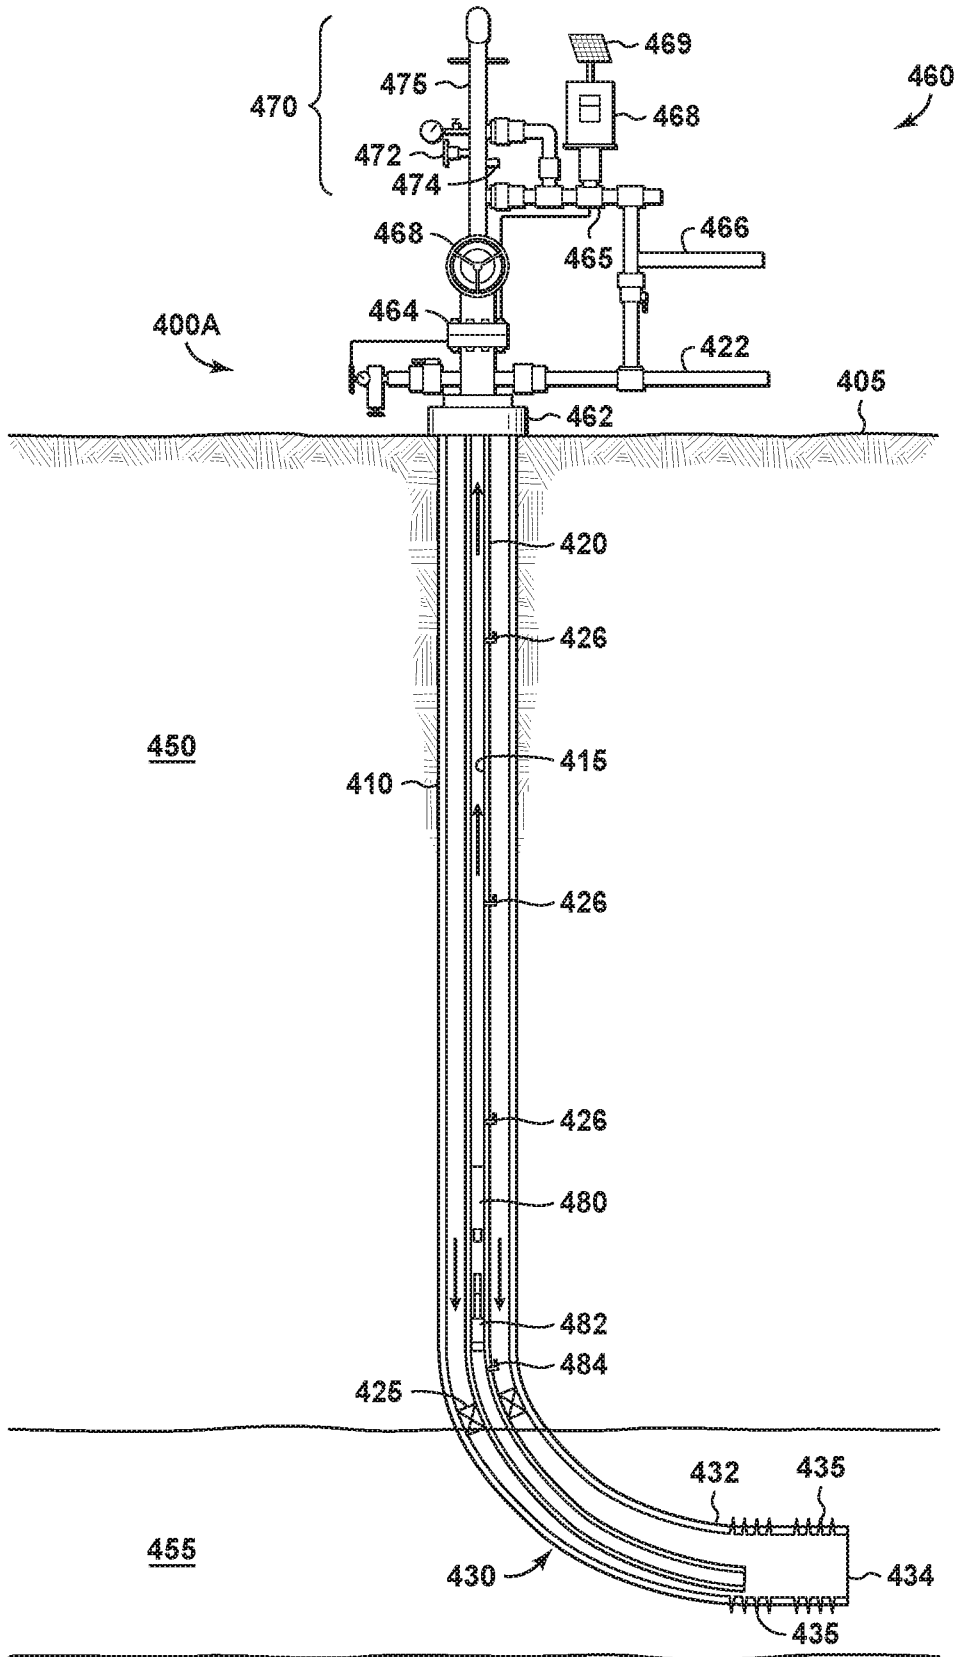


FIG. 4A

11/22

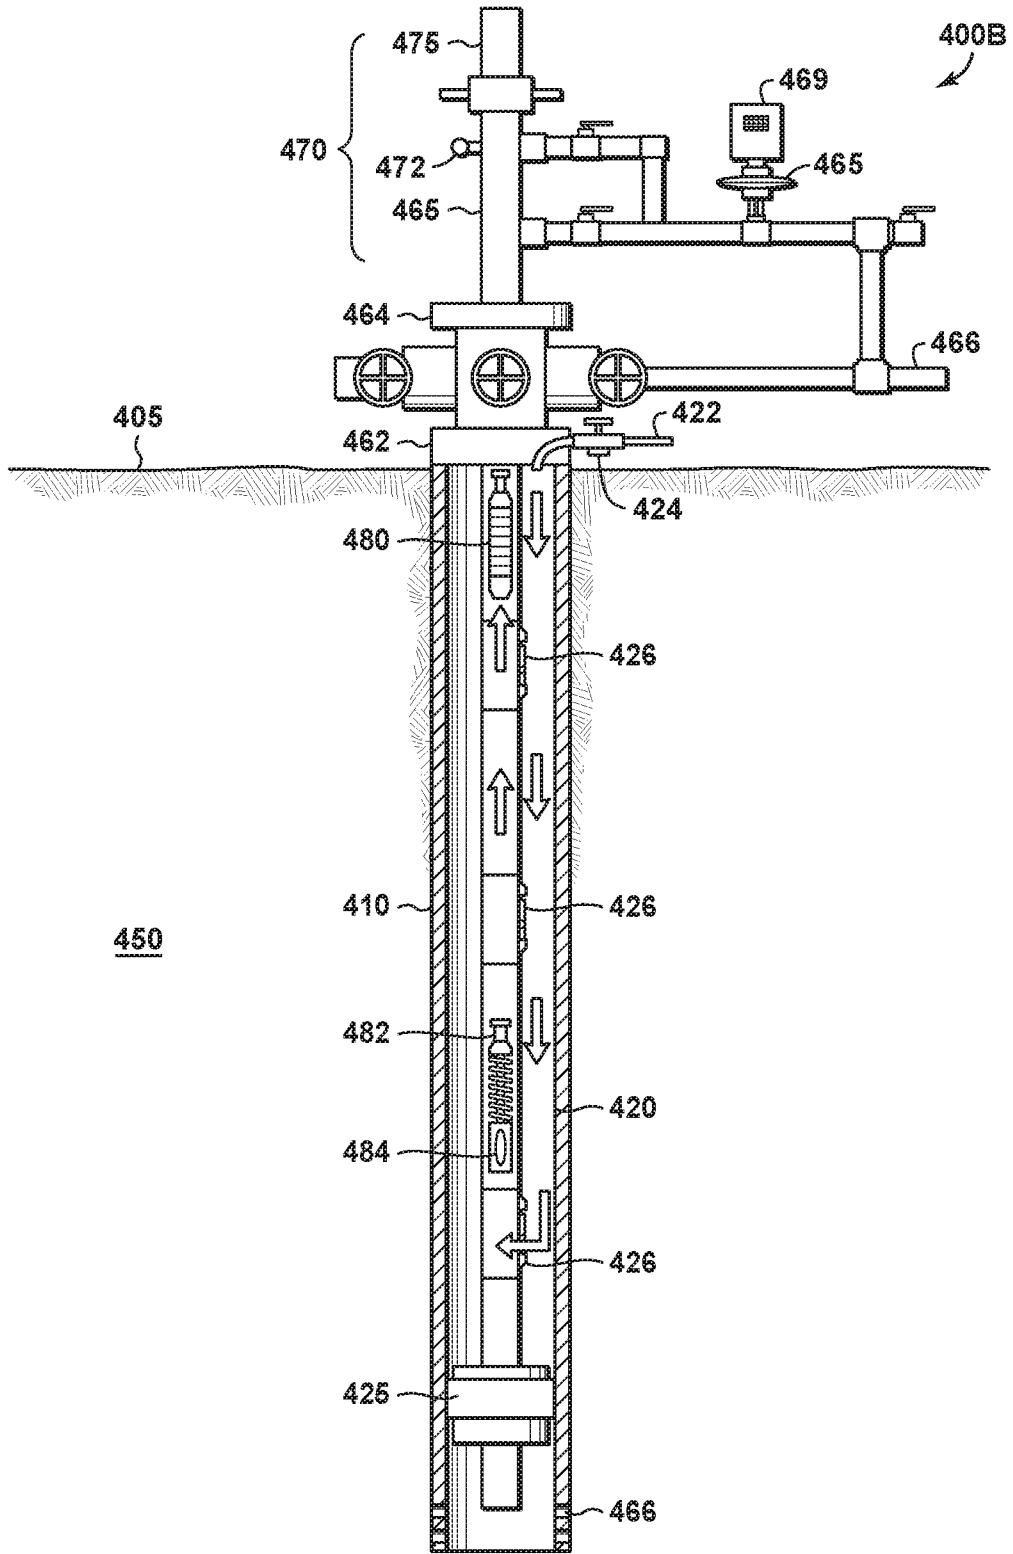


FIG. 4B

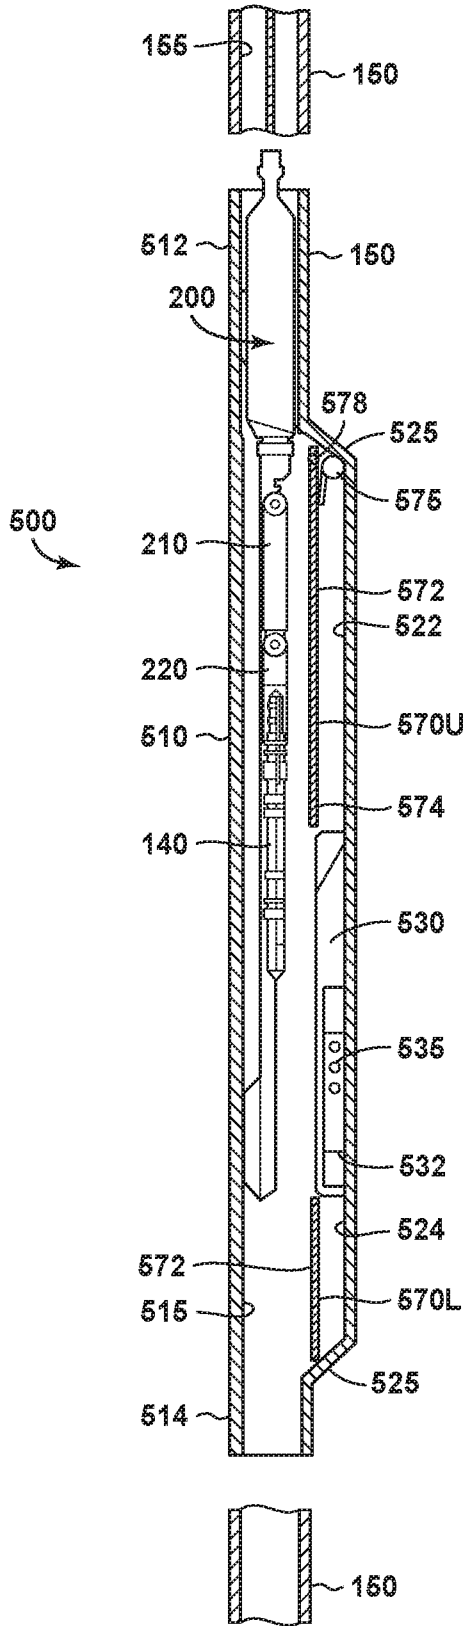


FIG. 5C

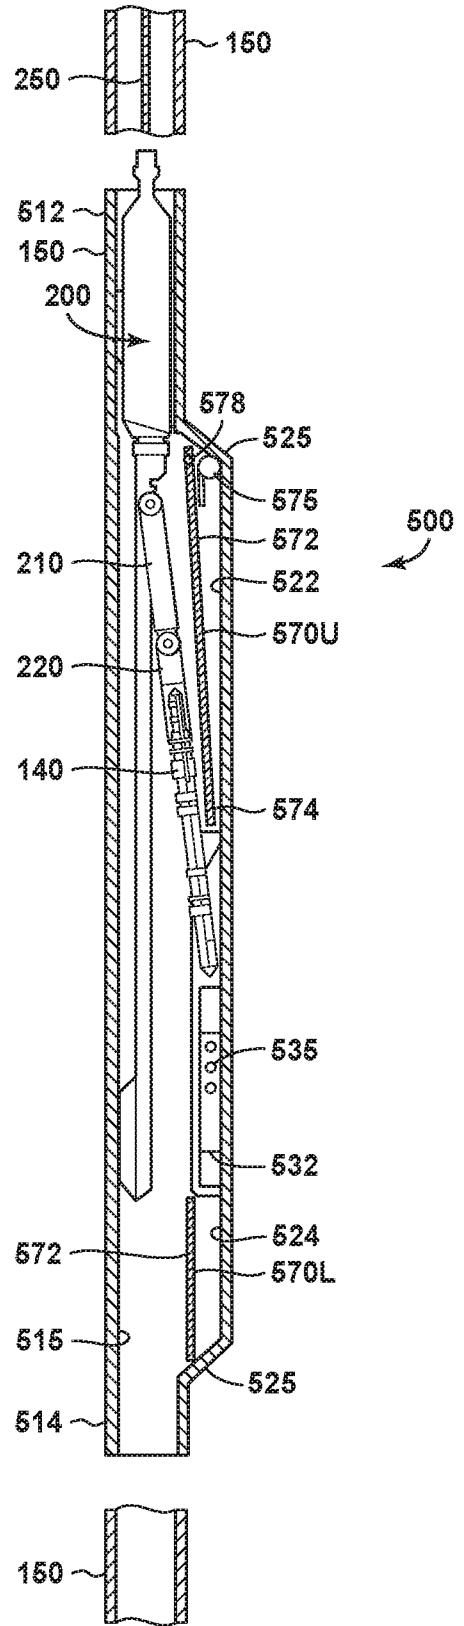


FIG. 5D

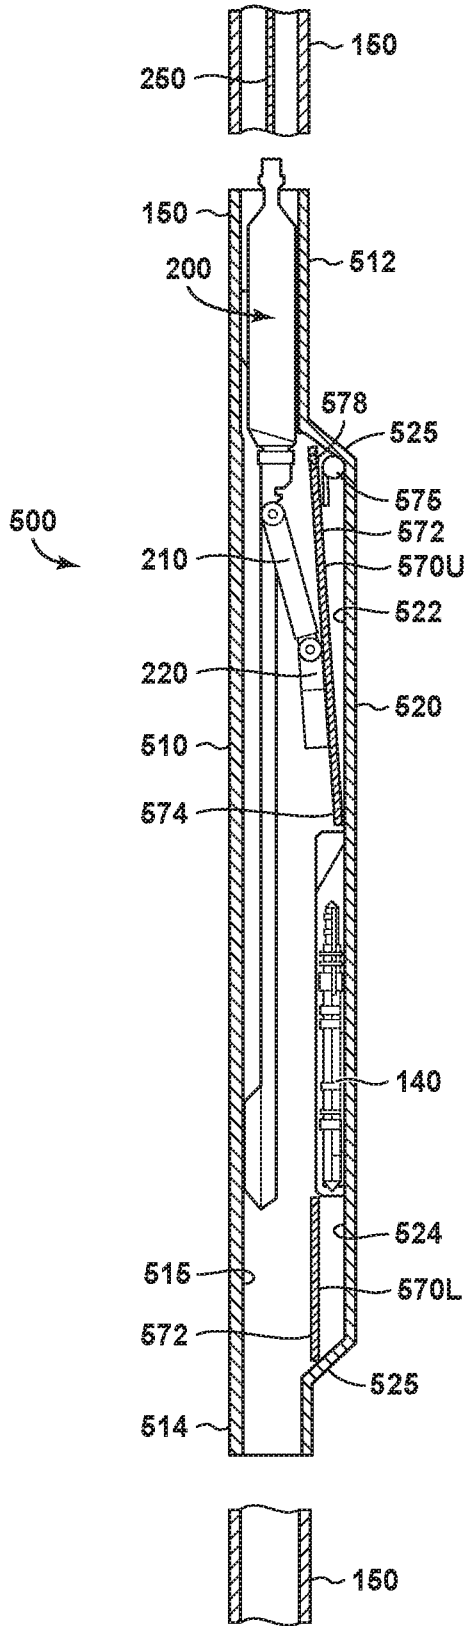


FIG. 5G

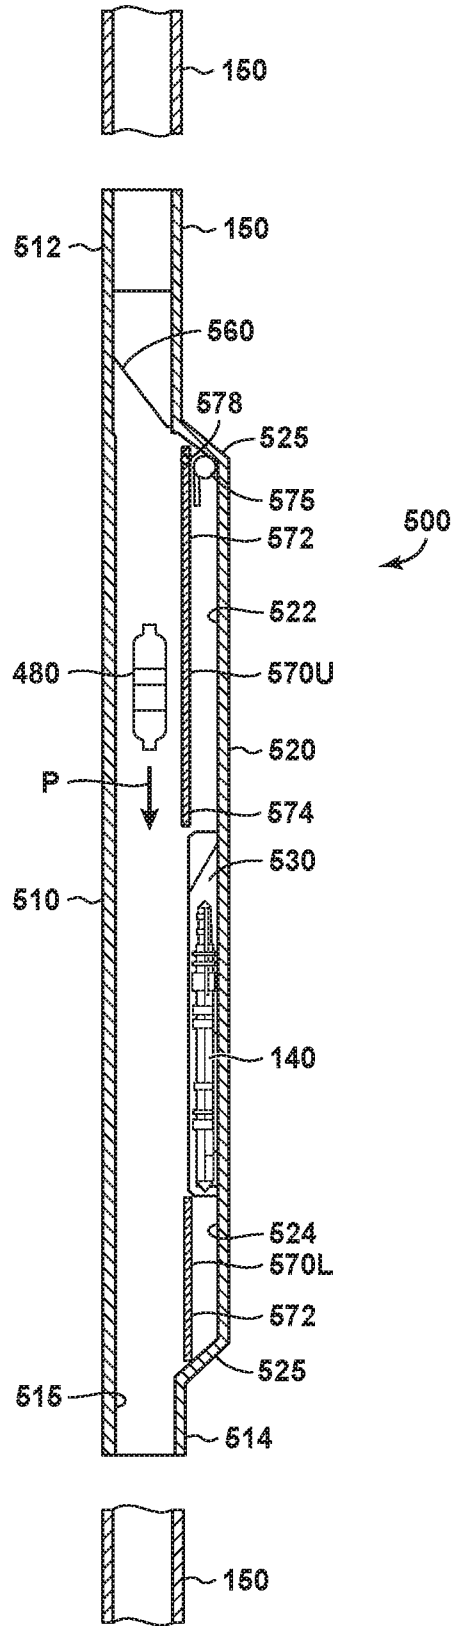


FIG. 5H

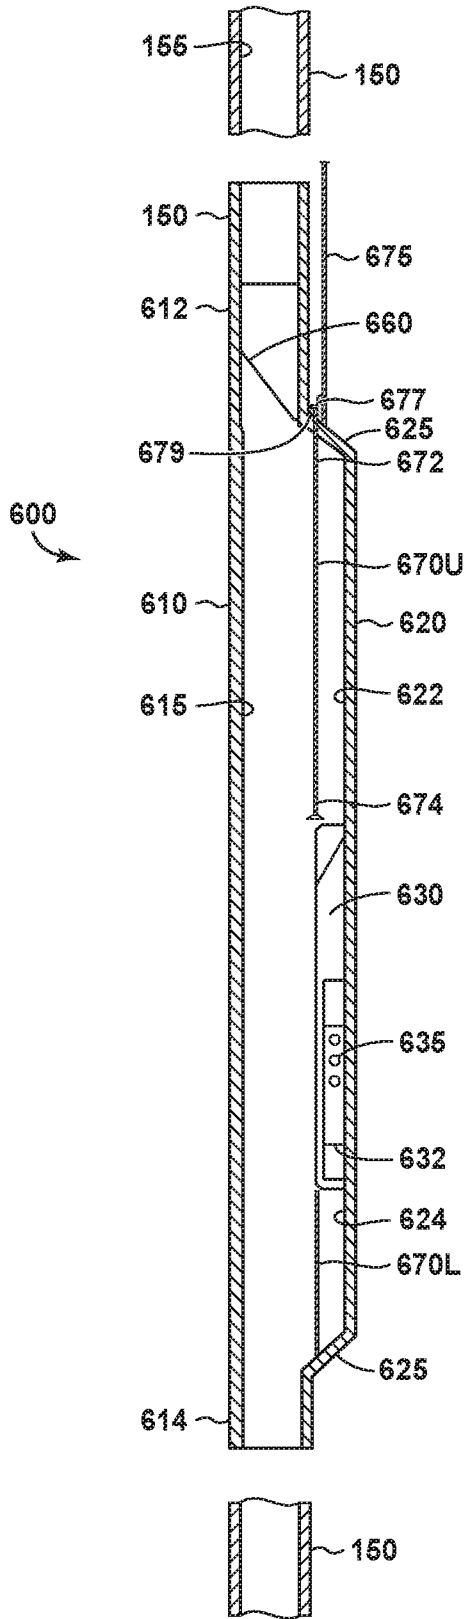


FIG. 6A

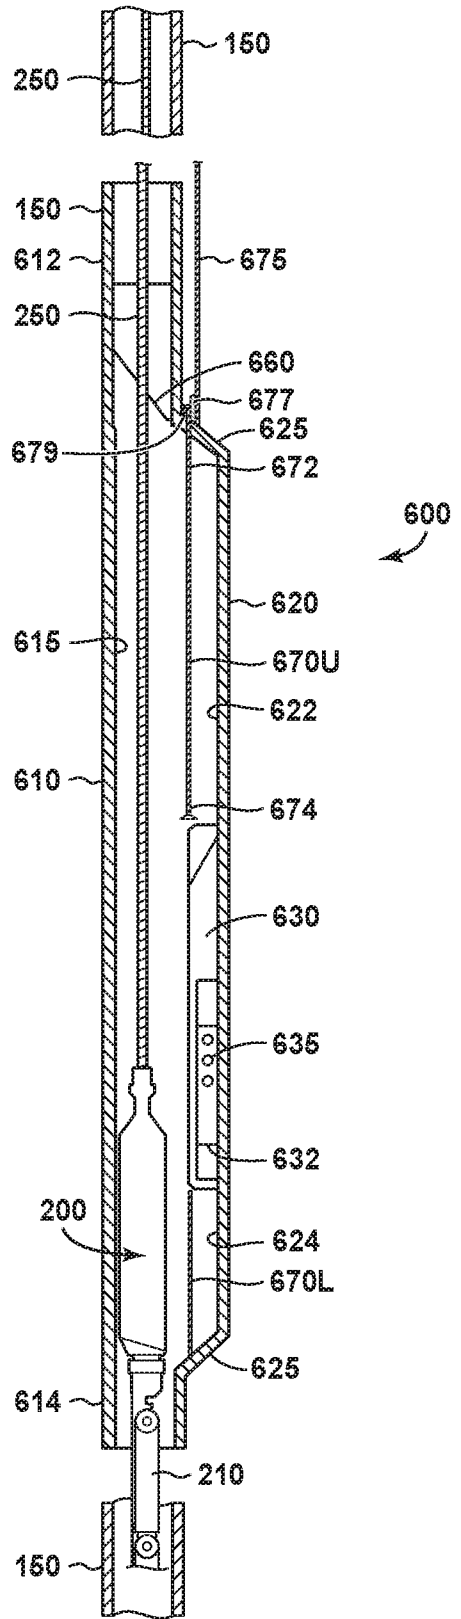


FIG. 6B

17/22

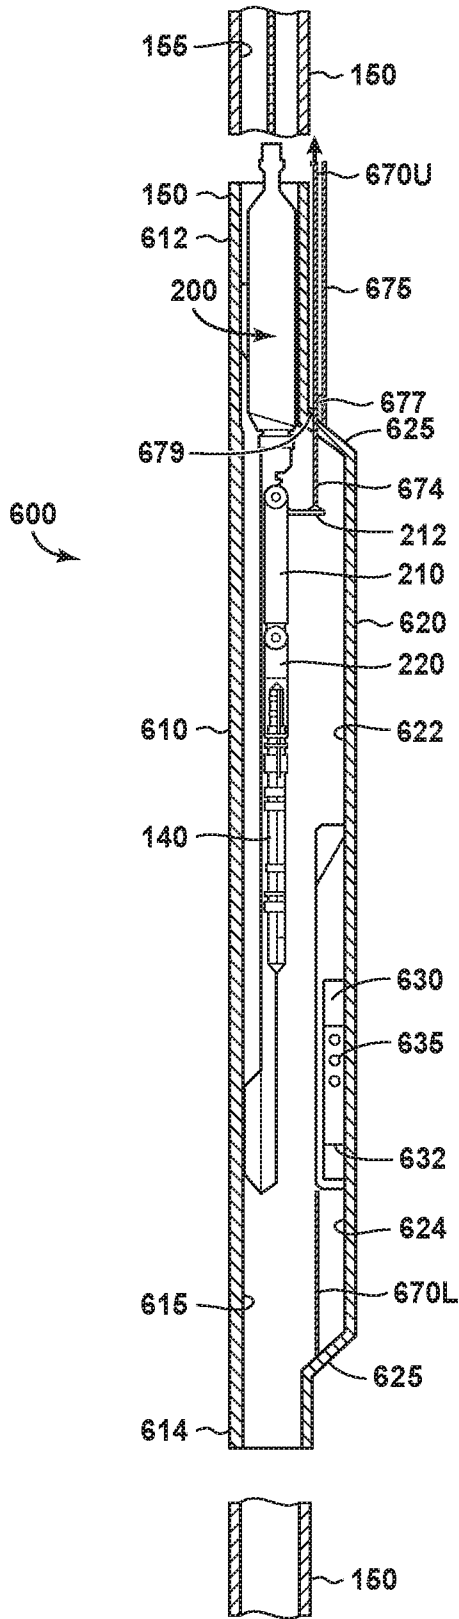


FIG. 6C

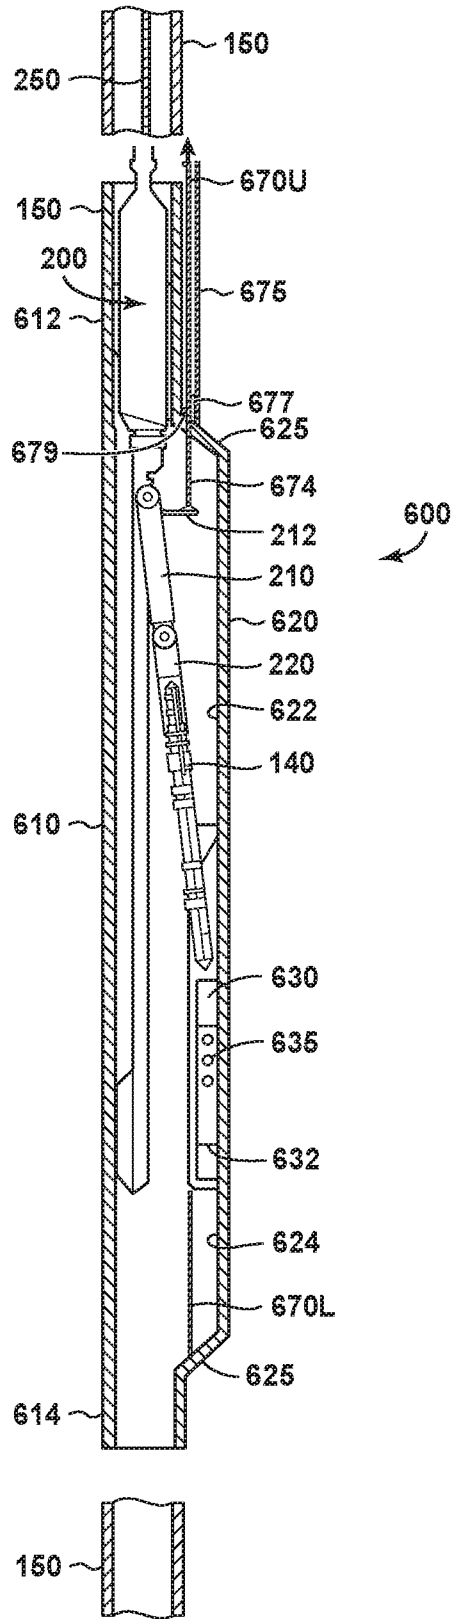


FIG. 6D

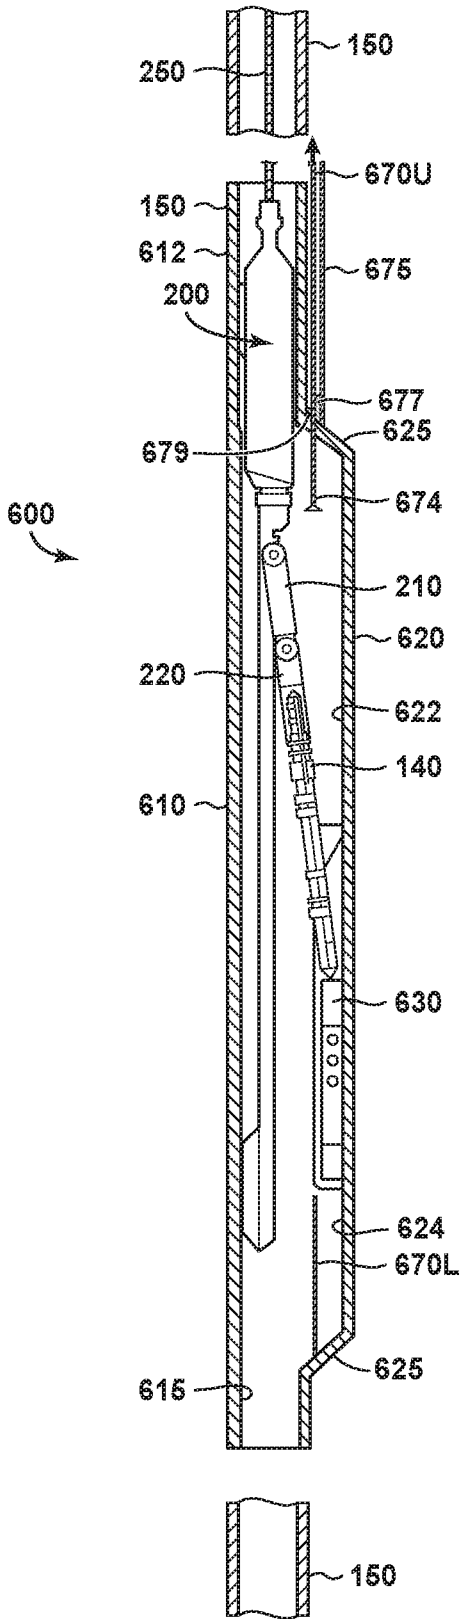


FIG. 6E

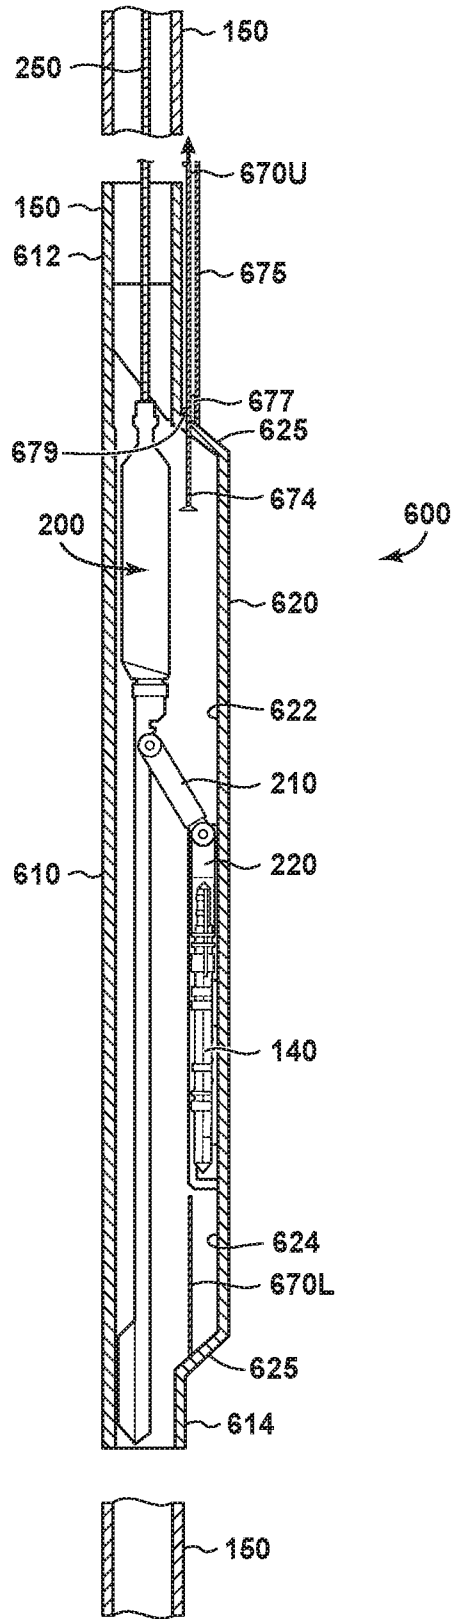


FIG. 6F

20/22

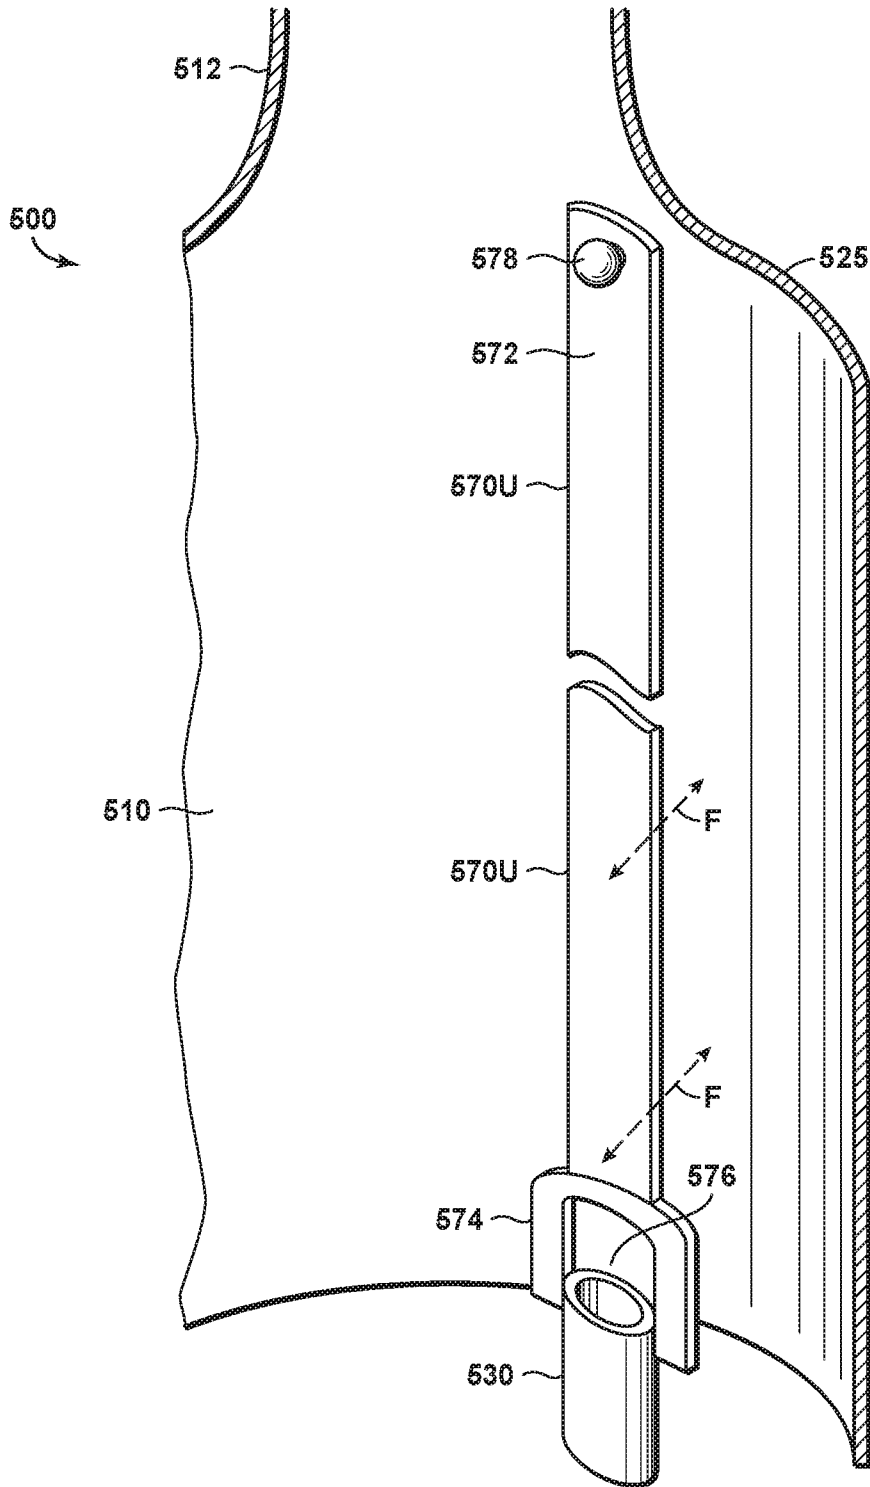


FIG. 7A

21/22

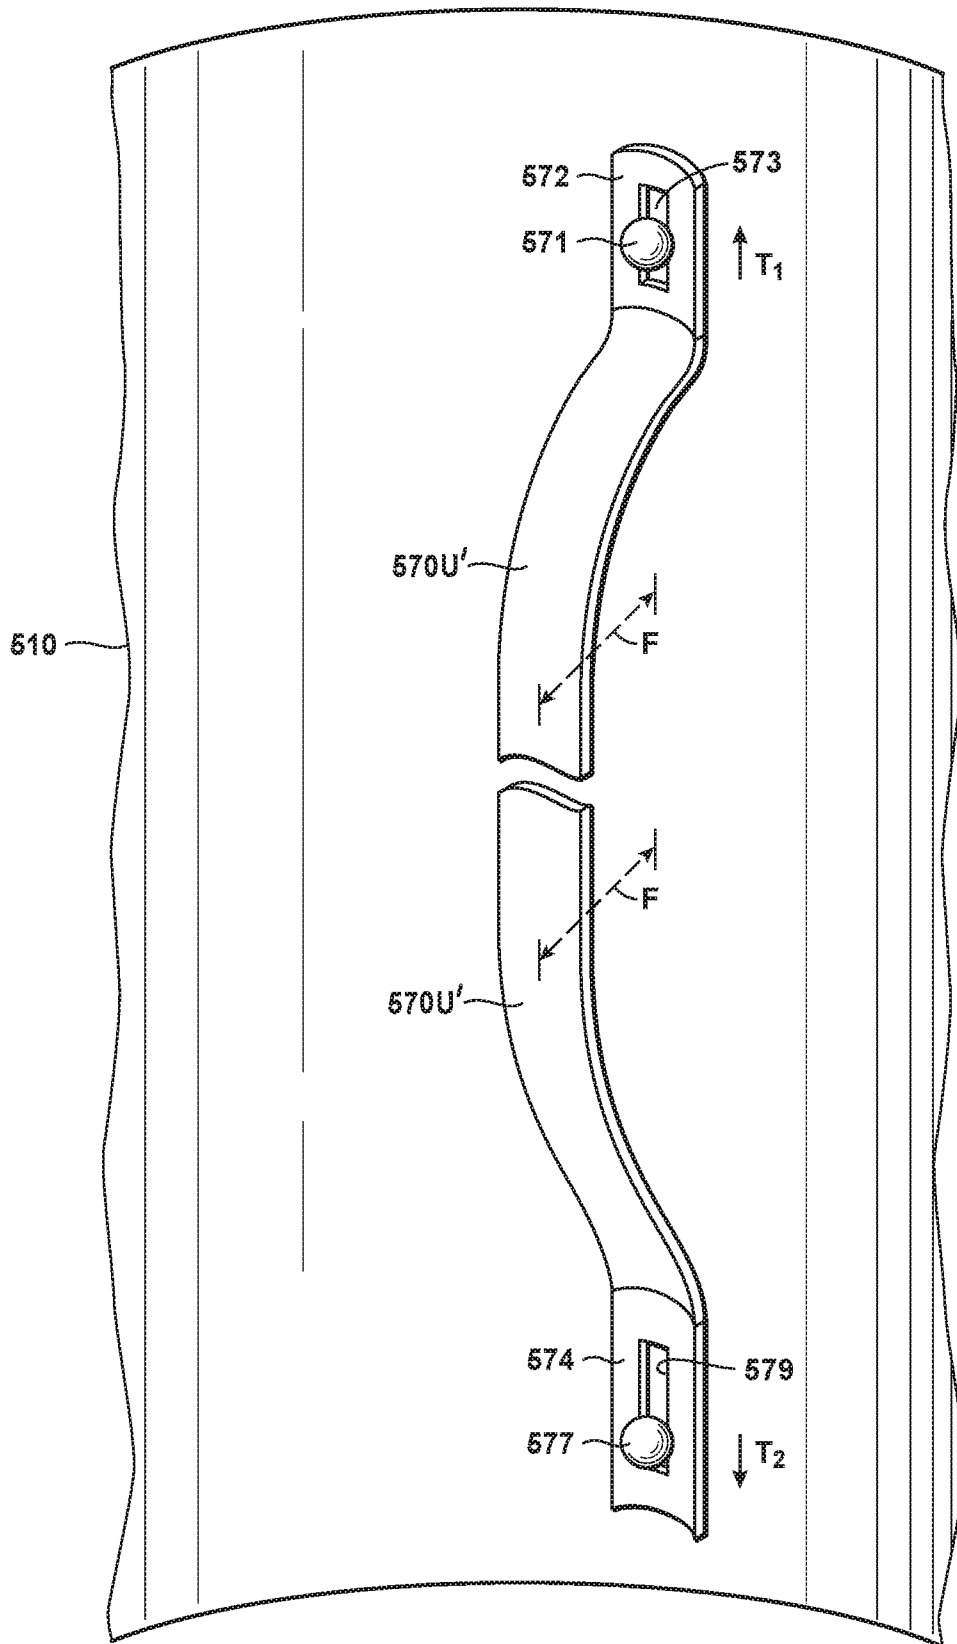


FIG. 7B

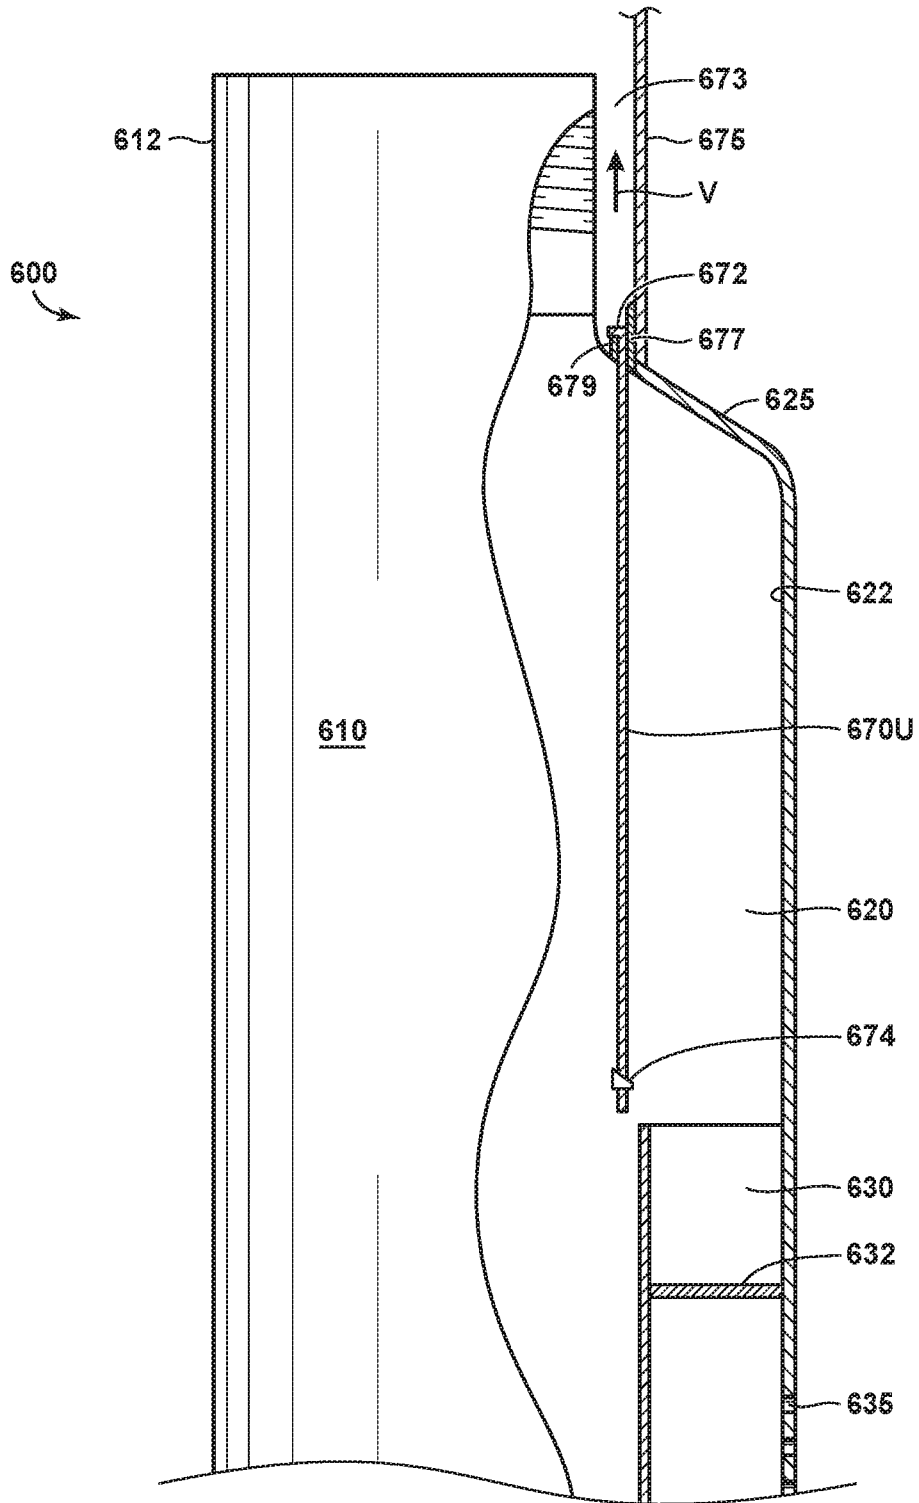


FIG. 8

