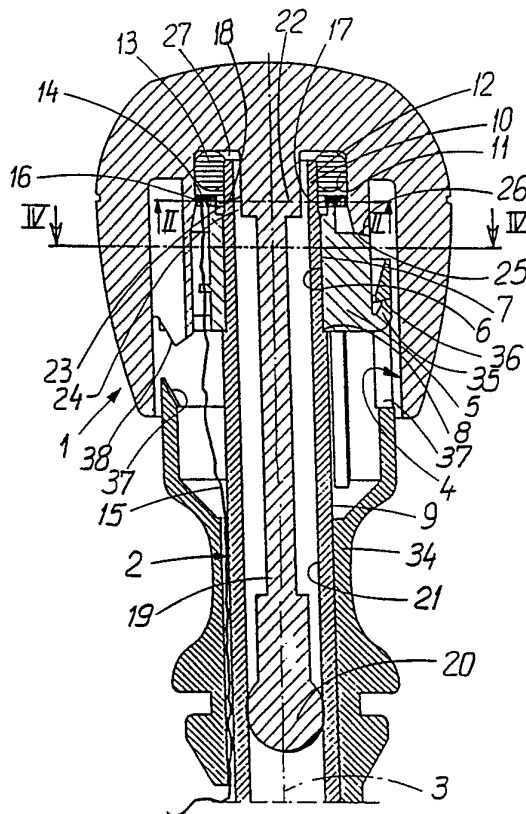




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : F16H 59/04, B60K 20/02, 41/22	A1	(11) International Publication Number: WO 91/02912 (43) International Publication Date: 7 March 1991 (07.03.91)
(21) International Application Number: PCT/SE90/00544 (22) International Filing Date: 24 August 1990 (24.08.90) (30) Priority data: 8902828-6 25 August 1989 (25.08.89) SE 8903702-2 6 November 1989 (06.11.89) SE (71) Applicant (for all designated States except US): SCAND- MEC MECANIA AB [SE/SE]; Box 504, S-565 00 Mullsjö (SE). (72) Inventors; and (75) Inventors/Applicants (for US only) : SKOGWARD, Kenneth [SE/SE]; Blåvingevägen 3, S-561 49 Huskvarna (SE). STENEVI, Jan [SE/SE]; Videgata 4, S-565 00 Mullsjö (SE).		(74) Agents: GRAUDUMS, Valdis et al.; Albihn West AB, Box 142, S-401 22 Göteborg (SE). (81) Designated States: AT, AT (European patent), AU, BB, BE (European patent), BG, BR, CA, CH, CH (European patent), DE*, DE (European patent)*, DK, DK (Euro- pean patent), ES, ES (European patent), FI, FR (Euro- pean patent), GB, GB (European patent), HU, IT (Euro- pean patent), JP, KP, KR, LK, LU, LU (European pa- tent), MC, MG, MW, NL, NL (European patent), NO, RO, SD, SE, SE (European patent), SU, US. Published <i>With international search report.</i> <i>In English translation (filed in Swedish).</i>
(54) Title: ACTUATING LEVER (57) Abstract Lever with a knob (1) and an elongated part (2). In one of its ends the elongated part (2) carries the knob and is at a distance from the end connected to a mechanism that is to be operated. The knob includes an electrical switch (14, 12). The knob (1) is movable radially relative to the longitudinal axis (3) of the lever part and has a cavity (4) into which the lever part (2) protrudes with one of its ends (10). The cavity (4) has a peripheral surface (11) which defines a space to the surface (12) of said end of the lever part. In the space there is located an elastically, ring-shaped centering element (13) which at its outer periphery abuts against said peripheral surface of the space and at its inner periphery abuts against the surface (12) of the lever part and a ring-shaped, electrical contact element (14) being part of the switch which is immovably connected to the knob and adapted to follow this in its radial movements. The centering element (13) strives at centering the contact element relative to the end part (10) of the lever part. In a neutral position for the knob the movable contact element defines a space to the end part of the lever part (the end part is included as a second contact element in the switch). By a manual sideways movement of the knob relative to the lever part the ring-shaped contact element will be moved into an eccentric position and into contact with the second contact element.		



DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MC	Monaco
AU	Australia	FI	Finland	MG	Madagascar
BB	Barbados	FR	France	ML	Mali
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GR	Greece	NL	Netherlands
BJ	Benin	HU	Hungary	NO	Norway
BR	Brazil	IT	Italy	PL	Poland
CA	Canada	JP	Japan	RO	Romania
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
DE	Germany	LU	Luxembourg	TD	Chad
DK	Denmark			TG	Togo
				US	United States of America

Title:

ACTUATING LEVER

Technical area:

The present invention relates to a control lever having a knob and an elongated lever part which at its one end carries the knob and at some distance from said end is connected to a mechanism that is to be operated, the knob having an electrical switch.

Prior art:

The present invention relates to that type of control levers that have a knob in which an electrical switch has been arranged, which can be actuated manually for changing between different positions of the switch. It is earlier known to arrange electrical switches in levers, for example a pushing switch which is attainable with the hand for switching in for instance an overdrive gear at a lever. For the operation of airplanes it is further known to arrange different types of switches in joy sticks.

10 Technical problem:

The object of the present invention is to obtain a lever by which a change of the electric switch is obtained automatically as early as possible during an operation and thereby obtain maximal precision in the contact function during mass production.

The solution:

The above object is obtained by means of a lever according to the invention which is characterized in that the knob is somewhat movable in different directions radially relative to the shaft of the lever and includes a cavity into which the lever part protrudes with one of

its end parts and that said cavity has a peripheral surface which defines a distance to the surface of said end part of the lever, that in said space an elastic, ring-shaped centering element is located which by means of one of its peripheries abuts against said peripheral surface of the space and with its second periphery abuts against said end part of the lever, and at least one ring-shaped movable, electrical contact element included in the switch which is connected to the knob and adapted to follow it in its radial movements, that said centering element strives at centering said contact element relative to said end part of the lever so that in a neutral position of the knob the movable contact element has a distance to said end part of the lever, which end part forms one contact element rigidly fastened in the knob, said contact element being part of the switch and that by a manual transverse movement of the knob relative to the lever in some of said different directions, the ring-shaped contact element is moved radially to one or more different contact positions in contact with the second contact element.

Description of the figures:

The invention shall be explained in detail below in connection with some embodiment examples with reference to the attached drawings, in which

Fig. 1 is a central, axial section through the lever according to the invention in a first embodiment example along the line I-I in Fig. 4,

Fig. 2 is a radial section through the device along the line II-II in Fig. 1,

Fig. 3 is a central, axial section through the device along the line III-III in Fig. 4,

Fig. 4 is a radial section through the device along the line IV-IV in Fig. 1,

Fig. 5 is a section, corresponding to the one in Fig. 2 but with the device in an activated position,

Fig. 6 is a section, corresponding to the section in Fig. 1 through the lever in a second embodiment example,

Fig. 7 is a section along the line VII-VII in Fig. 6,

Fig. 8 is a section, corresponding to the section in Fig. 6 through the lever in a third embodiment example, and

Fig. 9 is a section along the line IX-IX in Fig. 8.

Preferred embodiments:

The lever according to the invention is intended to bring about a mechanical change of a mechanism as well as an electric activation of a means which either is a part of said mechanism or is completely separated from this in one and the same movement of the lever. The lever in the examples shown is particularly suitable to be used as a lever for changing between different gear positions by manual operation. The lever consists, as appears from Fig. 1, substantially of a knob 1 and a substantially elongated lever part 2, of which only the upper part is shown in the drawings. The lever part 2 carries at its upper end the knob 1 and is at its lower end coupled to the mechanism that is to be operated or transfer the

operation movement, which is a swinging movement. The movement of the knob will then substantially occur to the sides, that means transversally to the length axis 3 of the lever part. The lever part 2 consists of a cylindrically shaped pipe which is inserted in a cavity 4 in the knob 1, having its opening turned downwardly. A bushing 5 is mounted on the lever part. It has been made from an electrically isolating material, for example relatively shape-stable plastics. The bushing has through-going holes, with an inwardly turned cylindrical surface 6, which with good fit is connected to a corresponding outwardly turned cylindrical surface 7 of a part of the lever part 2 so that the bushing is rigidly connected to this one. This part 7 ends via a step 8 to the below located surface of the lever, which has a greater diameter. Hereby, a stop for the bushing 5 is obtained which consequently can not be pushed further downwardly. The bushing is so located that above the bushing an end part 10 of the lever protrudes, which in the example shown has a further reduced diameter in relation to the part 7 of the surface of the lever part. The end part 10 protrudes into an inner cylinder-shaped part of said cavity 4 in the knob 1, having an inward, cylindrical surface 11 which makes a ring-shaped cavity to the outwardly turned surface 12 on the end part 10. In said space an elastically centering element 13 of a highly elastic material, such as silicon in the shape of an O-ring, has been pushed in, which, by means of its inner periphery, abuts against the surface 12 of the end part 10 of the lever part and, by means of its outer periphery, abuts against the cylindrical surface 11 in the knob 1.

In the space in the knob, and more particularly in the same cylindrical part as in which the centering ring is located, a ring-shaped electrical contact element 14 has

been arranged. It is made from an electrically conducting material, such as metal. This contact element 14 is a part of an electrical switch in the lever, i.e. in the knob 1, where the ring-shaped contact element 14 represents a movable contact element whereas the end part 10, that is its cylindrical surface 12, forms the second stationary contact element of the switch in which the lever part 2 as a whole forms the connecting lead to the stationary contact element through the fact that the lever is electrically conducting or at least made with an electrically conducting layer. A connecting lead through a closed circuit through the switch can hereby be connected anywhere and most suitably below the knob 1.

A suitably isolated connecting lead 15 is shown in Fig. 1 and is by one of its ends connected to the movable contact element 14 and by means of its second end to an electrical circuit for an electrically operating function. As an example of such a function electrical operation of a clutch can be mentioned, whereby manual clutching on a motor vehicle can be eliminated while still maintaining a traditional manual gear box. The movable contact element 14 is particularly attached by its outer periphery 16 through the inwardly turned surface 11 and has consequently the same diameter as this one so that it can be rigidly secured to the knob 1 with a good fit.

In the first example of the lever shown in Figures 1-5, the movable contact element 14 consists of one single uninterrupted electrically leading ring with the shape of a simple washer. The inner periphery 17 of the ring-shaped contact element 14 which, as its outer periphery, is cylinder-shaped or at least has a circular contour line, has on the contrary a clearly greater diameter than the diameter of the surface of the end part 10 of the

lever part, see Fig. 2. In the neutral position for the knob 1 shown in Figures 1 and 2, compared to the lever and thereby a neutral position of the switch, the movable contact element 14 is coaxial with the stationary contact element 10, that is the end part of the lever part 2. In the neutral position there will thereby exist a, around the end part positioned, ring-shaped contact space 18 which, in the first embodiment example has the same width along the whole distance, that is, is rotation symmetrical. The switch is then, consequently, open. The contact space 18 shall be sufficiently large to prevent contact in this neutral position and large enough so that vibrations in the lever shall not either lead to unintentional contact between the contact parts in the switch but shall nevertheless be as small as possible to bring about a quick and early contact function at operation movements, which will be better understood below.

The knob 1 is well centered in its neutral position and guided in relation to the lever part 2 but nevertheless somewhat movable to the sides, that means transversally to the length axis 3 of the lever part, and accordingly substantially radially through the connection of the lever with the lever part 2 via the centering element 13 and the bushing 5. Further, the knob includes a central shaft 19 with a hinge ball 20 at its lower end. The shaft and the hinge ball is inserted in the cylindrical, elongated space 21 in the lever part 2. The hinge ball 20 has such a diameter and such a fit in the cylindrical space 21 that the hinge ball 20 allows a small swinging movement of the shaft 19 having the hinge ball 20 as a lead centre. This ball has a somewhat resistant influence on the knob 1 through friction against the inwardly turned wall of the lever part in the space 21. The shaft has at its upper end a somewhat enlarged part 22, with a surface 23 which maintains a ring-shaped space 24, the

radial distance of which somewhat supersedes the radial distance of the contact space 18.

Further the inwardly turned surface 11 of the knob, a distance below the movable contact element, continues in a downwardly turned somewhat oblique step 25, which has such an angle that it coincides substantially with the direction of a circle arc having the hinge ball 20 as a centre. A corresponding upwardly turned step-like supporting surface has been made in the bushing 5 and these two step surfaces 25,26 form sliding and supporting surfaces so that the knob 1 here gets a stop against the bushing 5 and is allowed to make this desired small radial movement to the sides of the knob. Hereby a space 27 between the upwardly turned end surface of the lever part and the downwardly turned end surface of the space in the knob can be maintained so that the friction at the movement of the knob relative to the lever part is kept small in spite of the load exerted by the hand of the operating person on the knob 1.

From the Figures 3 and 4 it appears that the special shape of the bushing partly to constitute a snap by means of two snapping organs 28 to maintain axially the knob 1 against being lifting off from the lever part 2 and partly by means of a recess 29 to form a turning locker for the knob 1 so that it can not freely be turned around the lever part 2. Without disturbing the prime functions of the knob, some turning can be allowed per se, but a better operating feeling is obtained by experience if the knob is locked against turning. Further, the knob can on its upper surface have symbols, for instance gear positions, which should be used for a predetermined angular position. The snapping organs 28 are elastically deflectable radially inwardly which makes it possible to have a simple mounting of the knob 1 by simply putting it

on the end part 10 of the lever part 2. The snapping organs 28 will then, through cooperation with the inwardly protruding hook-formed parts 30 of the knob, be pushed aside and will go back elastically to, by cooperation
5 between stops 31 on the hook-shaped parts, prevent lifting off of the knob 1. The turn-locking is obtained through making the knob 1 with a radially inwardly protruding organ 32, which have stopping surfaces 33, which are so located that they ensure practically turn-
10 locking by cooperation with corresponding surfaces in the recesses 29. Radial movements, however, of the knob is allowed with low friction.

A further operating possibility exists with the embodiment shown in the figures, namely by means of an axially
15 movable sleeve 34, which is adapted to be displaced having the lever part 2 as a guide by gripping it between two of the fingers and having it lifted in an upper end position when operating the lever part with knob 1. This
20 sleeve 34 is usually used to release a barrier against unintentional introduction of a reverse gear. The sleeve 34 is normally held in a lower end position, as shown in Fig. 1, by means of a spring not shown. The lower end position is made by a notch 35 in the sleeve, which is
25 brought to abut against a stopping surface 36 in a groove 37 in the sleeve 34. It is, however, possible that by the upward displacement of the sleeve to bring about the radial displacement of the knob 1 to change the switch in the knob to a closed position. This is obtained by the
30 oblique guiding surface 3 of the sleeve, which by cooperation with a correspondingly oblique guiding surface 38 in the knob brings about this radial displacement.

The function of the lever with relation to activating the
35 switch should be evident from the above description of the construction of the lever. However, the function

shall here be summed up. Operating the lever always occurs by means of the knob 1, which is gripped by the hand of the operator and displaced sideways to a pre-elected activating position, for instance a gear position. The lever part 2 is, however, mounted in a mechanism that provides a resistance which supersedes the resistance of the centering ring 13 in the knob when striving at centering the knob relative to the lever part 2. In the position shown in Figures 1-4, the knob has a central, neutral position and by a radially directed hand movement of the knob 1 in any direction, the centering element 13 will be compressed at that side where the force is put, whereby the knob is allowed to be moved sideways to an eccentric position relative to the lever part 2 and more specifically its longitudinal axis 3. Already by a very small displacement contact will somewhere arise between the contact element 14, which is movable by the knob, and the stationary contact element, that is the end part 10 of the lever part, and, more specifically, its surface. Such an activated position is shown by means of an example in Fig. 5, which has been accomplished after moving the knob 1 seen in the section according to Fig. 5, in a direction obliquely upwards to the right. Thereby, the switch will be closed and the circuit connected to it, which in this case will give rise to a disengagement of a clutch before gearing occurs.

As soon as the grip around the knob 1 ceases, it will return to its centre position through the action of the centre ring 13 and resume its initial form and hence create a force against the wall 11. The centering ring 13 is located inside this wall and the contact element will again be centered and the contact space 18 will be maintained around its whole circle so that the switch will be open and the clutch function again will be resumed when

the gear position has been obtained. By having the centre ring 13 as well as the contact ring 14 in the same space between the end part of the lever part 2 and the inwardly turned surface 11 of the knob, it is assured that the contact ring 14 continually is centred independently of possible deviations due to tolerances during manufacture. It is evident that the parts besides the contact elements themselves are of electrically isolating material so that no other circuit is closed in any other way. The knob is made from a relatively strong, durable shape-stable plastics which is easy to grip and that can be somewhat deformable in the surface, whereas the bushing 5 may be made from a somewhat harder material, such as curable plastics. Also the sleeve 34 may be made from a plastic material.

The lever according to the second embodiment shown in Figures 6 and 7 coincides with the first embodiment with the exception of the construction of the movable contact element. This contact element, which has been denoted with 40, also consists of a substantially ring-shaped element but is not a closed ring. It is instead divided in two or more, in the example shown four electrically conducting sections 41-44, which here are electrically isolated from each other by being arranged with spaces 63 between each other. They can, by means of their own individual electrical connection, be a part in a separate circuit for each contact element section. Through the smaller, outer diameter in the surface of the stationary contact element 10, which in this example also is its contact surface, the contact point in the knob 1 which is moved to an eccentric position will also in this case be a point contact seen in the section according to Fig. 7 so that in principle contact is obtained with only one contact sector each time. This means, accordingly, that a predetermined circuit will be closed dependent on the

direction of the radial movement to an eccentric position of the knob 1. With this division of the movable contact element a switch with more positions is, consequently, obtained in which one of the contact parts is common and connectable to one or more contact parts. Hereby different electrical functions can be switched on dependent on the moving direction of the knob. When it is used as a gear lever, an electrically driven clutch can for instance be activated having variable time delay depending on which gear that shall be used, which means in which direction the knob is moved and, accordingly, what contact is activated.

The section divided element 40 according to Figures 6 and 7 is principally mounted in the same way as the contact element according to the first embodiment, that means maintained in position by means of an inwardly directed substantially rotation symmetrical surface, which continually has a stationary reference to the inwardly turned rotation symmetrical surface that holds the centering element 13 in position, which means in the examples shown the inwardly turned cylindrical surface 11, which is a common position maintaining guiding surface for both the centering element 13 and the contact element 40. At the embodiment according to Figures 6 and 7, the contact element 40 has also been provided with a ring-shaped holder 45 of an electrically insulating material in which the contact sections 41,42 are partly moulded in so that their inner periphery 47, that means their circular arc-shaped contact surface, can be brought into electrical contact with the contact surface 48 of the second contact element 10, which is the surface of the upper part of the lever part. The holder 45 is also mounted stationary against turning in the knob 1 so that the contact sections maintain a predetermined angle interval around the longitudinal axis 3 of the lever. In

this second embodiment the cylindrical guiding surface 11 is provided with a recess 49 into which the holder 45 protrudes having a corresponding protrusion 50. When operating by means of the lever according to Figures 6 and 7 from its neutral position that contact section 41-44 will be connected, which through the radial movement of the knob to an eccentric position is moved forward towards the stationary contact part. In this example the contact functions have been divided in four equally large angle sectors of circa 90°, whereas the sector borders are decided by the positions of the spaces 63.

The third embodiment of the lever which is shown in Figures 8 and 9, is an alternative to the second embodiment according to Figures 6 and 7 but gives in principal the same electrical function as this one, namely closing of different electrical circuits in dependence of the direction of the movement of the lever. In this third embodiment only two contact positions have been chosen for a closed circuit but even this solution can be adapted to more contact functions if wanted. At this third embodiment one has instead of a division of the ring-shaped contact element's periphery chosen to divide the contact element in element sections which are located at different levels along the upper part of the lever part 2. One can say that the contact element is sectioned in sections lying in different radial planes around said upper part, which represents the stationary contact element. In practice, the movable, ring-shaped contact element has been complemented by a further movable ring-shaped contact element for each contact position wanted. In the example shown, two contact positions are wanted where the switch is closed and hence two contact elements 51,52 represent the movable part of the switch together with the knob 1. To achieve a sector division of the contact surface of the movable contact

elements 51,52 similarly to the embodiment according to Figures 6 and 7, these have been arranged on different levels along the upper part of the lever part and also have been shaped with mutually, radially somewhat displaced inner peripheries 53,54. That means that they have mutually displaced arc centres whereby the inner peripheries over only a part of its circumference makes the actual contact surface of the switch. In the example shown, the contact elements 51,52 have been so formed that their outer peripheries 55,56 are concentric and, as in the examples above, maintained in position by the inwardly turned cylindrical guiding surface 11 in the knob 1. Between this guiding surface and the end part 10 of the lever part 2 is the elastic, centering element 13 located and located with regard to the height level between the movable contact element 1 of the switch and the end surface of the rotation symmetrical space, which is delimited inter alia by the guiding surface 11. The differences in centricity of the two contact elements 51,52 is in this example obtained simply by having these shaped with separate circular holes, which are mutually displaced with regard to their arc centres. To be able to maintain a substantially symmetrical contact space 57 in the neutral position shown in Fig. 9 with open switch, both contact elements 51 and 52 are in the example shown symmetrically eccentric relative to the common longitudinal axis 58 of the knob 1 and the lever part 2. The arc centres of the two inner peripheries 53,54 are preferably diametrically oppositely positioned at each side of said longitudinal axis 58 and located at equally large distances from this. To assure a predetermined angle interval of the contact functions, the contact elements 51,52 have been locked in a chosen turning position relative to the longitudinal axis 58. This has been solved in the example shown by providing them with a

protrusion 59 which protrudes into a corresponding recess 60 in the knob 1.

As appears from Figures 8 and 9 the eccentricity of the inner peripheries 53,54 of the contact elements 51,52 will result in that above a certain angle interval, in the example shown 180° , that is, to the right of the symmetry line 61, one contact element 51, in the example shown the upper contact element, will protrude and lie closer to the stationary contact surface of the stationary contact element, that is, its periphery 62. As both of the inner peripheries 53,54 are circular the lower contact element will in a corresponding way with its inner periphery protrude and be located closer to the stationary contact element than the inner periphery of the upper contact element above further 180° of the total periphery, which is to the left of the symmetry line 61.

When operating by means of the lever according to Figures 8 and 9 from the neutral position and in a direction above the angle interval 180° to the right of the symmetry line 61 the knob 1 will be moved radially so that contact between the stationary contact element 10 and the lower contact element 52 is obtained by means of the left half of its inner periphery whereby the switch and its connected electrical circuit is closed for actuating an electrically driven device activating an indication means or the like.

The invention is not limited to the above described embodiments which are also shown in the drawings, but can be varied in a number of different ways within the scope of the subsequent claims. For example it is thinkable that the centering element 13 is located between the upper part 22 of the shaft and the inner wall of the lever part 2. The contact ring 14 can then be maintained

outside, but it can also as an alternative be arranged around the upper part of the shaft 19 so that the inwardly turned surface 21 of the lever part 2 makes a contact surface for cooperation with the movable contact element 14. Instead of eccentrically displacing the inner periphery of the contact element as according to Figures 8 and 9, the contact elements can alternatively be given different arc radius over different sectors of their inner peri-phery. By the expression "stationary contact element" is meant that this element in the switch has been stationarily arranged in the lever part, whereas "the movable contact element" is movable together with the knob. With the expression "contact surface" is meant that surface of respective contact elements by which contact can be obtained between the movable and the stationary contact element with regard to the construction of the switch.

Claims:

5

1. Lever with a knob (1) and an elongated lever part (2) which in one end carries the knob and is at a distance from said end connected to a mechanism that is to be operated, the knob includes an electrical switch (14,12/40,48/51,52,62), c h a r a c t e r i z e d in that the knob (1) is movable in different directions radially relative to the longitudinal axis (3) of the lever part and includes a cavity (4) into which the lever part (2) protrudes with its one end part (10) and that said cavity (4) has a peripheral surface (11) which defines a space to the surface (12/48/62) of said end part of the lever part, that in said space an elastically ring-shaped centering element (13) is located which, by means of its one periphery abuts against said peripheral surface of the space and with its other periphery abuts against said end part of the lever part and partly at least one ring-shaped movable electrical contact element (14/40/51,52) being part of the switch and which is connected to the knob and arranged to follow it in its movements, that said centering element (13) strives at centering said contact element relative to said end part (10) of the lever part so that in a neutral position for the knob the movable contact element has a space to said end part of the lever part which end part forms a stationary contact element in the lever being part of the switch and that by manual, sideways movement of the knob relative to the lever part in any of said different directions, the ring-shaped contact element is moved radially to one of several different contact positions in contact with the other contact element.
- 10
- 15
- 20
- 25
- 30
- 35

2. Lever according to claim 1, c h a r a c t e -
r i z e d in that said ring-shaped contact element (14)
has an unbroken contact surface (17) in the shape of a
close periphery, which extends along said end part (10)
5 of the lever part (2) and is adapted at operation of the
knob to close a predetermined electrical circuit indepen-
dent of the chosen contact position.

3. Lever according to claim 1, c h a r a c t e -
10 r i z e d in that said movable contact element (40/51,
52) is arranged sectionwise to be brought into contact
with the stationary contact element (10) so that
different contact functions may be obtained in different
directions.

15 4. Lever according to claim 3, c h a r a c t e -
r i z e d in that the movable contact element (40) is so
divided that it consists of two or more sections (41-44)
electrically isolated from each other and having each one
20 its own contact surface which occupies a predetermined
sector around the longitudinal axis (3) of the knob.

5. Lever according to claim 3, c h a r a c t e -
r i z e d in that the movable contact element is so
25 divided that it consists of two or more closed ring
elements (51,52) extending around the stationary contact
element (10), the contact surface for each one of the
ring elements extending over one or more predetermined
sectors around the longitudinal axis (3) of the lever.

30 6. Lever according to claim 5, c h a r a c t e -
r i z e d in that the contact surface for each of the
ring elements (51,52) is made of a part of their inner
periphery (53,54) and that the ring elements' inner
35 peripheries are circular arcs with mutually displaced
centres.

7. Lever according to claim 1, characterized in that said peripheral surface (11) of the space (4) is limited by an inwardly turned envelope surface, which is a supporting surface for both the centering element (13) and the ring-shaped contact element (14).

8. Lever according to claim 1, characterized in that the lever part (2) is a pipe and includes a central shaft (19) connected to the knob and having a hinging ball (20) arranged to be a hinging centre for the radial movements of the knob.

9. Lever according to claim 1, characterized in that an axially, stationary bushing (5) made from an electrically isolating material is mounted on the lever part (2) and included in the space (4) of the knob (1) and has supporting sliding surfaces (26) which extend transversally to the longitudinal axis (3) of the lever part (2) and on which the knob is carried by means of corresponding supporting and sliding surfaces (25) on the knob so that a space (27) is maintained between the end part of the lever part in the space (4) and surfaces in the space turned towards the end surface.

10. Lever according to claim 9, characterized in that the knob (1) and the bushing (5) include snapping organs (28,30), which make a snap-locking adapted in a mounting moment for mounting of the knob (1) to allow axial input of the knob on the lever part (2) to abutment between said support and sliding surfaces (25,26) but to lock against axial movements of the knob in opposite axial direction.

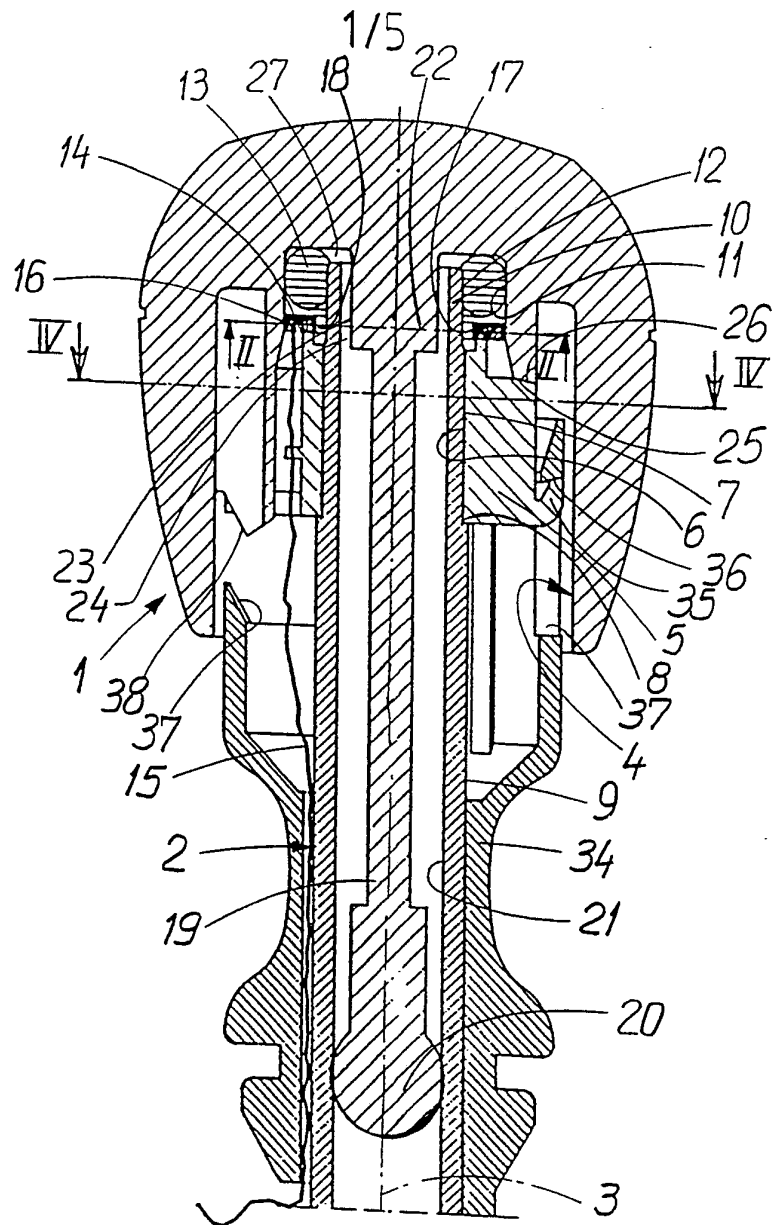
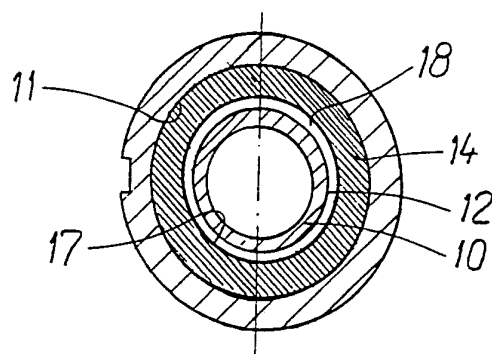
11. Lever according to claim 1, provided with an axially movable sleeve (34) which is adapted to be displaced along the lever part (2) characterized in that the sleeve (34) includes guiding organs (37) for cooperation with guiding organs (38) in the knob (1) adapted to bring about said radial movement of the knob at axial displacement of the sleeve.

12. Lever according to any of the preceding claims, characterized in that the lever is a gear lever for gearing between gear positions of a gear box in a motor vehicle and that said switch (12-14) is adapted to actuate an electrically driven clutch for release during gearing moments.

13. Lever according to claim 12, characterized in that said sleeve (34) is included in a barrier mechanism adapted to be released manually at changing of a reverse gear whereby the clutch is released.

14. Lever according to claim 1, characterized in that the knob (1) is nonturnably connected to the lever part (2), that is, locked against turning movements around its longitudinal shaft axis (3).

15. Lever according to claim 9 and 14, characterized in that the bushing (5) is nonturnably mounted on the lever part (2) and has locking organs (29) arranged to cooperate with corresponding locking organs (32) in the knob (1) for locking against turning thereof relative to the lever part.

FIG. 1FIG. 2

3/5

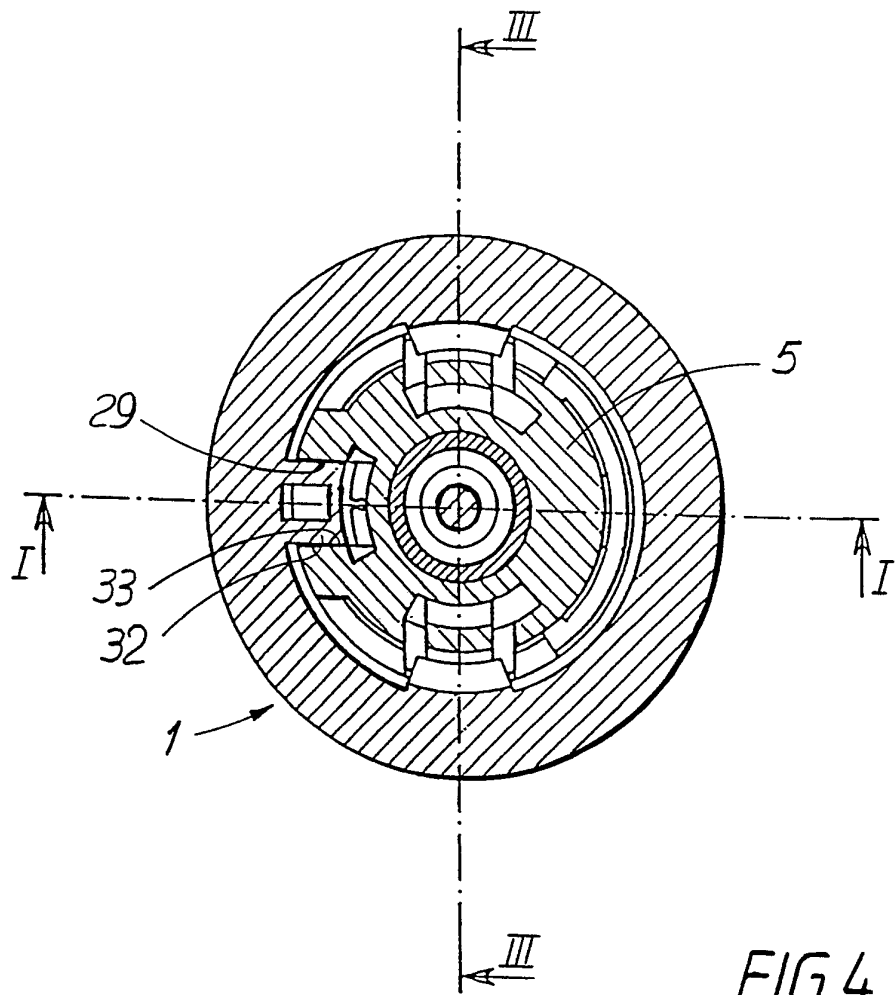


FIG. 4

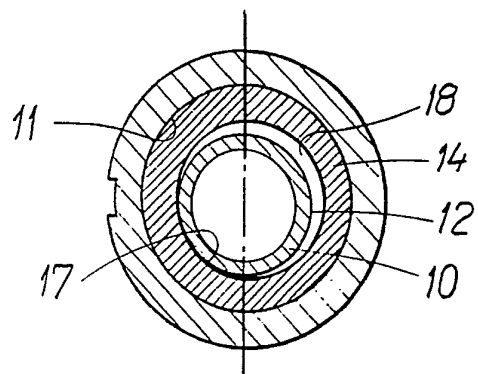
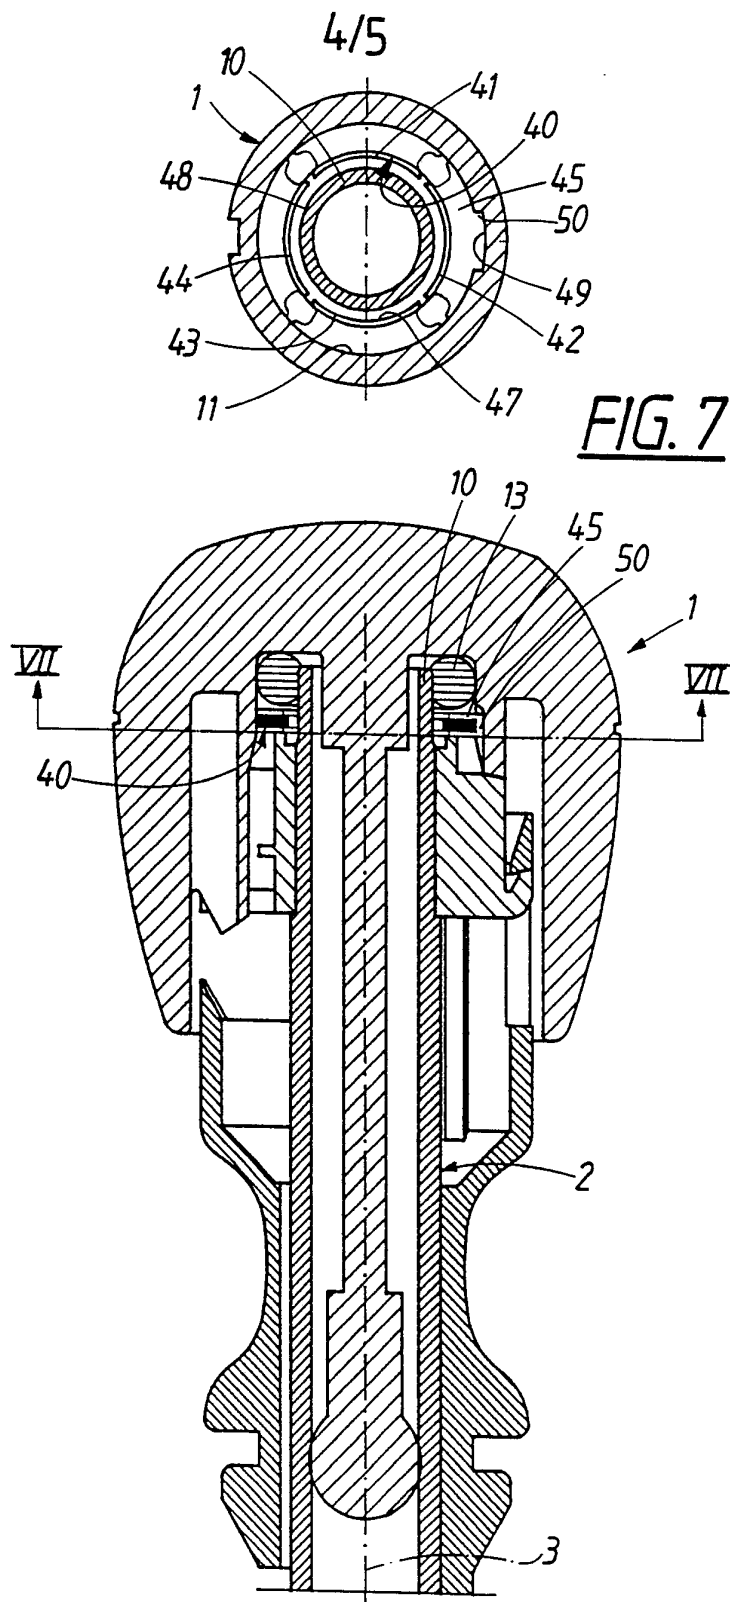
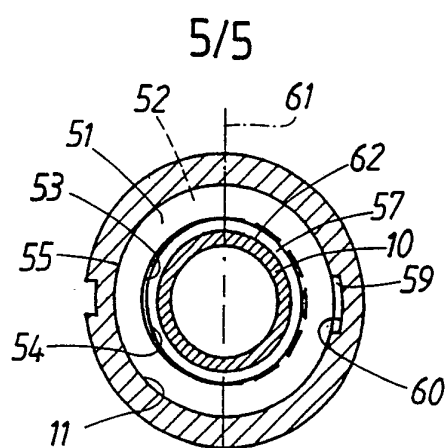
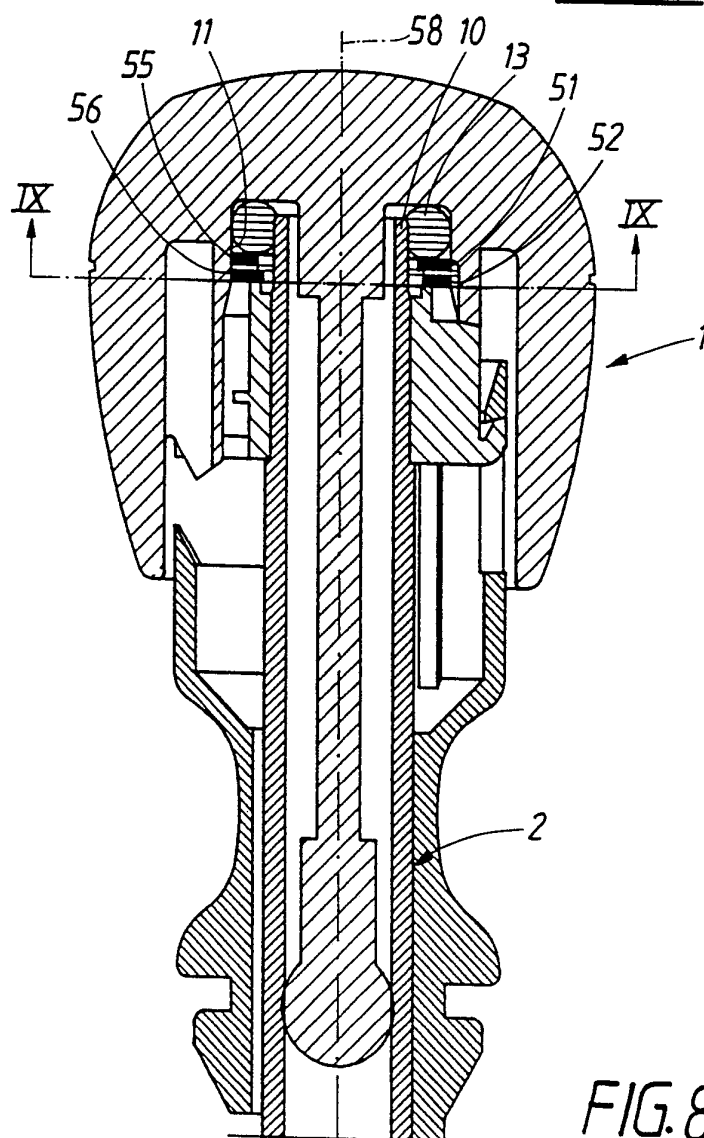



FIG. 5

FIG. 6FIG. 7

FIG. 9FIG. 8

INTERNATIONAL SEARCH REPORT

International Application No PCT/SE 90/00544

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC IPC5: F 16 H 59/04, B 60 K 20/02, 41/22		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC5	F 16 H; B 60 K	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in Fields Searched ⁸		
SE,DK,FI,NO classes as above		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	US, A, 4183424 (RUMYANTSEV ET AL) 15 January 1980, see the whole document --	
A	DE, C2, 2740750 (NISSAN MOTOR CO. LTD) 16 March 1978, see the whole document --	
A	DE, A, 2162457 (ZAHNRADFABRIK FRIEDRICHSHAFEN AG) 20 June 1973, see the whole document --	
A	FR, A1, 2347227 (NISSAN MOTOR COMPANY LIMITED) 4 November 1977, see the whole document -- -----	
* Special categories of cited documents:¹⁰ "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
13th November 1990	1990 -11- 20	
International Searching Authority	Signature of Authorized Officer	
SWEDISH PATENT OFFICE	 P-O Warnbo	

ANNEX TO THE INTERNATIONAL SEARCH REPORT **ON INTERNATIONAL PATENT APPLICATION NO.PCT/SE 90/00544**

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the Swedish Patent Office EDP file on 90-09-27
The Swedish Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US-A- 4183424	80-01-15	NONE		

DE-C2- 2740750	78-03-16	AU-B-	499867	79-05-03
		CA-A-	1077156	80-05-06
		FR-A-B-	2364135	78-04-07
		GB-A-	1558113	79-12-19
		JP-C-	1141586	83-04-13
		JP-A-	53034215	78-03-30
		JP-B-	57033174	82-07-15
		US-A-	4158404	79-06-19

DE-A- 2162457	73-06-20	FR-A-	2165474	73-08-03

FR-A1- 2347227	77-11-04	DE-A-	2715253	77-10-13
		GB-A-	1554613	79-10-24
		JP-A-	52124759	77-10-20
		US-A-	4144424	79-03-13