



(51) International Patent Classification:
A61B 17/322 (2006.01)

(21) International Application Number:
PCT/US2011/067578

(22) International Filing Date:
28 December 2011 (28.12.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/014,737 27 January 2011 (27.01.2011) US

(71) Applicant (for all designated States except US): **MO-MELAN TECHNOLOGIES, INC.** [US/US]; 101 Main Street, Cambridge, MA 02142 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SABIR, Sameer, Ahmed** [GB/US]; 34 Ash Street, Apt. 203, Cambridge, MA 02138 (US). **NEWKIRK, Brian** [US/GB]; 11 Prince of Wales Terrade, Flat 5, London (GB). **ZIEGLER, Andrew** [US/US]; 11 Cedar Avenue, Arlington, MA 02476 (US). **LABOMBARD, Denis** [US/US]; 7 Boardman Street, Georgetown, MA 01833 (US).

(74) Agents: **MEYERS, Thomas, C.** et al.; Brown Rudnick LLP, One Financial Center, Boston, MA 02111 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DEVICE FOR GENERATING AND TRANSFERRING MICROGRAFTS AND METHODS OF USE THEREOF

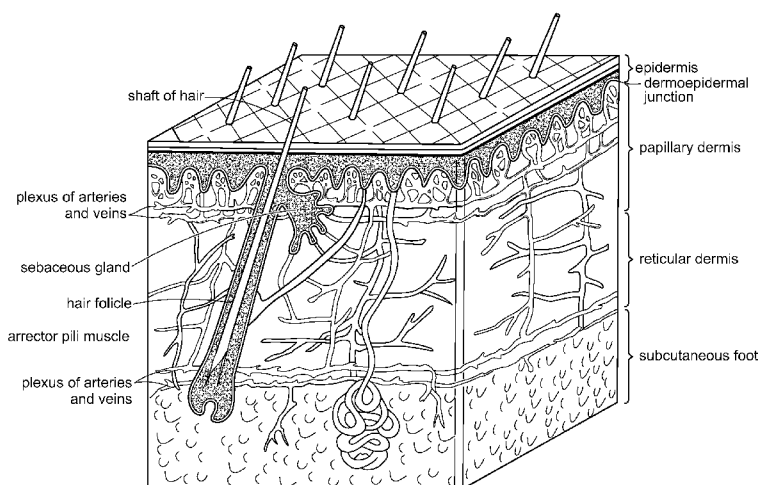


FIG. 1

(57) Abstract: The invention generally relates to devices for generating and transferring micrografts and methods of use thereof. In certain embodiments, devices of the invention include a housing having an open configuration and a closed configuration, a micrograft generating station, and a micrograft transferring station. The housing may include a bottom portion hingedly connected to a top portion. Generally, the top portion of the housing is movable in a vertical direction.

DEVICES FOR GENERATING AND TRANSFERRING MICROGRAFTS AND METHODS OF USE THEREOF

Related Application

5 The present application claims the benefit of and priority to U.S. non-provisional patent application serial number 13/014,737, filed January 27, 2011, the content of which is incorporated by reference herein in its entirety.

Field of the Invention

10 The invention generally relates to devices for generating and transferring micrografts and methods of use thereof.

Background

15 Skin is the largest organ of the human body, representing approximately 16% of a person's total body weight. Because it interfaces with the environment, skin has an important function in body defense, acting as an anatomical barrier from pathogens and other environmental substances. Skin also provides a semi-permeable barrier that prevents excessive fluid loss while ensuring that essential nutrients are not washed out of the body. Other functions of skin include insulation, temperature regulation, and sensation. Skin tissue may be subject to
20 many forms of damage, including burns, trauma, disease, and depigmentation (e.g., vitiligo).

 Skin grafts are often used to repair such skin damage. Skin grafting is a surgical procedure in which a section of skin is removed from one area of a person's body (autograft), removed from another human source (allograft), or removed from another animal (xenograft), and transplanted to a recipient site of a patient, such as a wound site. As with any surgical
25 procedure, skin grafting includes certain risks. Complications may include: graft failure; rejection of the skin graft; infections at donor or recipient sites; or autograft donor sites oozing fluid and blood as they heal. Certain of these complications (e.g., graft failure and rejection of the skin graft) may be mitigated by using an autograft instead of an allograft or a xenograft.

 A problem encountered when using an autograft is that skin is taken from another area of
30 a person's body to produce the graft, resulting in trauma and wound generation at the donor site. Generally, the size of the graft matches the size of the recipient site, and thus a large recipient

site requires removal of a large section of skin from a donor site. As the size of the section of skin removed from the donor site increases, so does the probability that the donor site will not heal properly, requiring additional treatment and intervention. Additionally, as the size of the section of skin removed from the donor site increases, so does the possibility of infection. There is also increased healing time associated with removal of larger sections of skin because a larger wound is produced.

To address those problems, techniques have been developed that allow for expansion of a skin graft so that a harvested graft can treat a recipient site that is larger than a donor site. Such methods involve cutting a skin graft into many smaller micrografts, transferring the micrografts onto a substrate, expanding the micrografts on the substrate, and applying the expanded substrate having the expanded micrografts to a recipient site. Producing micrografts and transferring micrografts is typically accomplished using two devices, one device to cut the skin graft into the many smaller micrografts, and a second device to transfer the micrografts from the cutting surface to a substrate for expansion. The need for two devices slows the grafting process and increases the risk of graft failure. Further, the need for separate devices has prevented development of an automated system for producing a skin graft.

Summary

The present invention provides a micrograft generating device integrated with a micrograft transferring device. The invention thus provides a single device that can generate a plurality of micrografts and transfer the micrografts to a substrate.

In certain embodiments, devices of the invention include a housing having an open configuration and a closed configuration, a micrograft generating station, and a micrograft transferring station. The housing may include a bottom portion hingedly connected to a top portion. Generally, the top portion of the housing is movable in a vertical direction.

In certain embodiments, the micrograft generating station includes a first member connected to the top portion of the housing, and a second member connected to the bottom portion of the housing, in which the first member is aligned with the second member. In certain embodiments, the micrograft transferring station includes a transfer pusher including a plurality of prongs, in which the pusher is connected to the top portion of the housing, and a transfer stage connected to the bottom portion of the housing, in which the pusher and the stage are aligned

with each other. The transfer stage may be made of any material that is softer than that of the transfer pusher. In certain embodiments, the transfer stage is composed of a compressible material. In other embodiments, the transfer stage includes a spring loaded base. The spring loaded base may further include a ball to focus the force on the center of the stage.

5 The housing may further include a cartridge receiving portion, in which the cartridge receiving portion is located between the top portion and the bottom portion of the housing. The cartridge receiving portion may include a first slot and a second slot, in which the first slot is aligned with the micrograft generating station and the second slot is aligned with the micrograft transferring station. Alternatively, the cartridge receiving portion may include a single slot and
10 components of the micrograft generating station and the micrograft transferring station are removable from the top and bottom portions of the housing, thereby providing for the micrograft generating station and the micrograft transferring station to be located at a same place in the device.

 Devices of the invention may further include a cartridge that is compatible with the first
15 slot and the second slot of the cartridge receiving portion. Further, the cartridge may be removable from the first and second slots of the cartridge receiving portion. The cartridge is configured to hold a skin graft. In certain embodiments, the cartridge includes a frame having a hollow inner portion, a removable first plate including a mesh grid, and a removable second plate including a mesh grid, in which, in an assembled configuration, the grid of the first plate and the
20 grid of the second plate are aligned with the hollow portion of the frame, and the grid of the first plate is aligned with the grid of the second plate. In certain embodiments, holes in the grids of the first and second plates are generally larger than the prongs of the transfer pusher.

 Another aspect of the invention provides methods for generating and transferring micrografts, including providing a device having a housing having an open configuration and a
25 closed configuration, a micrograft generating station, and a micrograft transferring station, inserting a skin graft into the device, engaging the micrograft generating station, thereby generating a plurality of micrografts, and engaging the micrograft transferring station, thereby transferring the plurality of micrografts to a substrate.

 In certain embodiments, inserting includes obtaining a cartridge having a frame including
30 a hollow inner portion, a removable first plate having a mesh grid, and a removable second plate having a mesh grid, in which in an assembled configuration, the grid of the first plate and the

grid of the second plate are aligned with the hollow portion of the frame, and the grid of the first plate is aligned with the grid of the second plate, and inserting the skin graft between the first and second plates such that the graft is aligned with the grids in the first and second plates.

5 In certain embodiments, engaging the micrograft generating station includes inserting the cartridge into the micrograft generating station of the device while the housing is in the open configuration, and transforming the housing from the open configuration to the closed configuration, thereby generating a plurality of micrografts. In certain embodiments, engaging the micrograft transferring station includes inserting the cartridge into the micrograft transferring station of the device while the housing is in the open configuration, inserting a substrate below
10 the cartridge, and transforming the housing from the open configuration to the closed configuration, thereby transferring the plurality of micrografts to the substrate. The substrate may be any biocompatible material. An exemplary substrate is a medical dressing.

Methods of the invention are used with any type of skin graft, such as an epidermal skin graft, a split thickness graft, or a full thickness graft. In particular embodiments, methods of the
15 invention are used with skin grafts including only or substantially only the epidermal layer of skin. Methods of the invention can be used with autografts, allografts, or xenografts. In preferred embodiments, the grafts are autografts.

Methods of the invention may also include harvesting the skin graft. Harvesting of skin grafts can occur by any method known in the art. In certain embodiments, harvesting involves
20 raising a blister, and cutting the blister to obtain the skin graft. In certain embodiments, raising involves contacting a device having a hole to skin, and applying heat and/or vacuum pressure, thereby raising the blister.

Methods of the invention may further include expanding the micrografts, and applying the expanded grafts to a patient recipient site. Methods of the invention are used to prepare skin
25 grafts for any recipient site of damaged skin. Exemplary types of skin damage include burns (e.g., thermal or chemical), infections, wounds, or depigmentation. In particular embodiments, the recipient site is an area of depigmented skin that has been prepared to receive a skin graft.

Brief Description of the Drawings

30 Figure 1 is a drawing showing the anatomy of skin.

Figure 2A shows an embodiment of devices of the invention. This figure shows the device in an open configuration. Figure 2B is an enlarged view of the transfer pusher. This figure shows the plurality of prongs of the pusher.

Figure 3 shows the device of Figure 2A in a closed configuration.

5 Figures 4A and 4B show a cartridge that is compatible with devices of the invention. Figure 4A shows an exploded view of the cartridge. Figure 4B shows a view of a fully assembled cartridge.

Figures 5A-5B show the process of generating the plurality of micrografts using devices of the invention.

10 Figures 6A-6B show the process of transferring the plurality of micrografts to a substrate using devices of the invention.

Figure 7 shows another embodiment of devices of the invention.

Figure 8 shows the spring loaded base member of devices of the invention.

15 Figure 9 shows a latch that links a top portion of a frame to a cartridge receiving portion of devices of the invention.

Detailed Description

The skin consists of 2 layers. The outer layer, or epidermis, is derived from ectoderm, and the thicker inner layer, or dermis, is derived from mesoderm. The epidermis constitutes about 5% of the skin, and the remaining 95% is dermis. Figure 1 provides a diagram showing the anatomy of skin. The skin varies in thickness depending on anatomic location, gender, and age of the individual. The epidermis, the more external of the two layers, is a stratified squamous epithelium consisting primarily of melanocytes and keratinocytes in progressive stages of differentiation from deeper to more superficial layers. The epidermis has no blood vessels; thus, it must receive nutrients by diffusion from the underlying dermis through the basement membrane, which separates the 2 layers.

20

25

The dermis is a more complex structure. It is composed of 2 layers, the more superficial papillary dermis and the deeper reticular dermis. The papillary dermis is thinner, including loose connective tissue that contains capillaries, elastic fibers, reticular fibers, and some collagen. The reticular dermis includes a thicker layer of dense connective tissue containing larger blood vessels, closely interlaced elastic fibers, and coarse, branching collagen fibers arranged in layers

30

parallel to the surface. The reticular layer also contains fibroblasts, mast cells, nerve endings, lymphatics, and some epidermal appendages. Surrounding the components of the dermis is the gel-like ground substance composed of mucopolysaccharides (primarily hyaluronic acid), chondroitin sulfates, and glycoproteins.

5 In a graft, the characteristics of the donor site are more likely to be maintained after grafting to a recipient site as a function of the thickness of the dermal component of the graft. However, thicker grafts require more favorable conditions for survival due to the requirement for increased revascularization. It has been discovered, however, that a substantially epidermal graft according to the invention is more likely to adapt to the characteristics of the recipient site.

10 The invention generally relates to devices for generating and transferring micrografts and methods of use thereof. Reference is now made to Figure 2A, which shows a device **100** of the invention. Device **100** includes a housing **101**. The housing has a top portion **101a** and a bottom portion **101b**. The top portion **101a** is hingedly connected to the bottom portion **101b**. The housing **101** has an open configuration and a closed configuration. Figure 2A shows the housing
15 **101** in the open configuration. Figure 3 shows the housing **101** in a closed configuration. The hinges are connected to device **100** by bolts **118**.

Device **100** further includes a micrograft generating station **104** and a micrograft transferring station **105**. The micrograft generating station **104** includes a first member **106** connected to the top portion **101a** of the housing **101**, and a second member **107** connected to the
20 bottom portion **101b** of the housing **101**. The first member **106** is aligned with the second member **107**. The second member may be a spring loaded base that includes a stage **401**, coupled to a spring **402** (Figure 8). The spring loaded base may further include a ball **403** to focus the force on the center of the stage **401**.

The micrograft transferring station **105** includes a transfer pusher **108** including a
25 plurality of prongs **109** (Figure 2B). The transfer pusher **108** is connected to the top portion **101a** of the housing **101** such that the prongs **109** are oriented downward toward the bottom portion **101b** of the housing **101**. The micrograft transferring station **105** further includes a transfer stage **110**, which is connected to the bottom portion **101b** of the housing **101**. The transfer pusher **108** and the transfer stage **110** are aligned with each other. The transfer stage **110**
30 may be made of any material that is softer than that of the transfer pusher **108**. In certain embodiments, the transfer stage **110** is composed of a compressible material. In other

embodiments, the second member **107** includes a spring loaded base (Figure 8). The spring loaded base includes a stage **401**, coupled to a spring **402**. The spring loaded base may further include a ball **403** to focus the force on the center of the stage **401**. The base is generally has a flat top and is made of a relatively hard material, i.e., not easily deformable or compressible.

5 Housing **101** further includes a cartridge receiving portion **111**. The cartridge receiving portion **111** is located between the top portion **101a** and the bottom portion **101b** of the housing **101**, and is also hingedly connected with the top portion **101a** and the bottom portion **101b** of the housing **101**. The cartridge receiving portion **111** includes a first slot **112** and a second slot **113**. The first slot **112** is aligned with the micrograft generating station **104** and the second slot **113** is
10 aligned with the micrograft transferring station **105**.

The housing **101** may further include members **102** and **103** that connect to the top portion **101a**, the cartridge receiving portion **111**, and the bottom portion **101b**. Members **102** and **103** are movable and help control the position of the cartridge receiving portion **111** as device **100** is transformed from the open configuration to the closed configuration.

15 Device **100** also includes a lever **114** and linkage arms **115** and **116**. The lever **114** is connected to the top portion **101a** of the housing **101**. The lever **114** may include a handle **117** that may be used to transform the device **100** from the open configuration to the closed configuration and back to the open configuration. Linkage arms **115** and **116** are connected to the lever **114**, the top portion **101a** of the housing **101**, and bottom portion **101b** of the housing
20 **101**. The linkage arms **115** and **116** act as force multipliers, such that upon engagement of the lever **114**, an exponential amount of force is transferred to the micrograft generating station **104** and the micrograft transferring station **105** as an operator transforms device **100** from the open configuration to the closed configuration. The exponential amount of force transferred may be varied by varying the length of the lever **114** or the length of the linkage arms **115** and **116**. In
25 certain embodiments, the device **100** is configured to provide for at least about a 50x, e.g. about 100x, increase in force transferred to the micrograft generating station **104** as compared to the amount of force applied to the lever **114** by an operator to transform the device from the open configuration to the closed configuration.

Reference is now made to figures 4A and 4B, which show a cartridge **119**. Figure 4A
30 shows an exploded view of the cartridge **119**. Figure 4B shows a fully assembled cartridge **119**. The cartridge **119** is compatible with the first slot **112** and second slot **113** of the cartridge

receiving portion **111** of the device **100**, and is removable from the first and second slots **112** and **113** of the cartridge receiving portion **111** of the device **100**. The cartridge **119** is configured to hold a skin graft **120**.

The cartridge **119** includes a frame **121**. It is noted that Figure 4B shows the frame **121** of the cartridge **119** in the orientation in which it is inserted into the device **100**. Figure 4A shows the frame upside down. The frame **121** includes a beveled edge **122**. The beveled edge **122** aligns with beveled edges of the first slot **112** and second slot **113** of the cartridge receiving portion **111** of the device **100**, ensuring that the cartridge **119** is inserted into first slot **112** and second slot **113** with the proper orientation. The frame **121** also includes a hollow portion **123**. Upon insertion of the cartridge **119** into the first and second slots **112** and **113**, the hollow portion **123** is aligned with the first and second members **106** and **107** of the micrograft generating station **104** and is also aligned with the transfer pusher **108** and the transfer stage **110** of the micrograft transferring station **105**.

Cartridge **119** further includes a first plate **126** and a second plate **127**. The first plate **126** includes a mesh grid **128**, and the second plate **127** includes a mesh grid **129**. Once assembled, the mesh grid **128** of the first plate **126** and the mesh grid **129** of the second plate **127** are aligned with the hollow portion **123** of the frame **121**, and holes of the mesh grid **128** of the first plate **126** are aligned with holes of the mesh grid **129** of the second plate **127**. The holes in the grids **128** and **129** of the first and second plates **126** and **127** are sized to provide an array of micrografts of a desired size, such as lateral sizes between about 100 microns and about 1000 microns or about 300 microns to about 500 microns.

For example, for repigmenting skin tissue, the micrografts used may have a presence of melanocytes. Accordingly, a lateral dimension of such micrografts can be between less than about 1 mm, e.g., 200 to 1000 microns. Other exemplary sizes are between 400 and 800 microns. The area of the micrografts can be between about 0.04 mm² and about 1 mm². The exemplary sizes can provide micrografts large enough such that each micrograft is likely to contain some melanocytes, yet small enough to provide a large number of micrografts from a particular piece of graft tissue, which can facilitate a significant degree of expansion on the graft site.

For treating burns or ulcers, where presence and proliferation of keratinocytes is important, the micrograft sizes may be smaller. For example, a lateral dimension of micrografts

containing keratinocytes can be between about 50 microns and about 1000 microns, or between 100 microns and about 800 microns. The area of such micrografts can be between about 0.0025 mm² and about 1 mm². The exemplary size ranges provide micrografts large enough to contain viable and undamaged keratinocytes, and small enough to facilitate repair of a larger area of damaged skin.

To ensure proper alignment, frame **121** includes plate retaining pins **124** and plate locating pins **125**. First plate **126** includes plate retaining holes **130** and plate locating holes **131**, and second plate **127** includes plate retaining holes **132** and plate locating holes **133**. The plate retaining holes **130** and plate locating holes **131** of the first plate **126** are aligned with plate retaining pins **124** and plate locating pins **125** of frame **121**. Similarly, plate retaining holes **132** and plate locating holes **133** of the second plate **127** are aligned with plate retaining pins **124** and plate locating pins **125** of frame **121**. The alignment of the plate retaining holes **130** and plate locating holes **131** of the first plate **126**, the plate retaining holes **132** and plate locating holes **133** of the second plate **127**, and the plate retaining pins **124** and plate locating pins **125** of frame **121** ensures that once assembled, the mesh grid **128** of the first plate **126** and the mesh grid **129** of the second plate **127** are aligned with the hollow portion **123** of the frame **121**, and the mesh grid **128** of the first plate **126** is aligned with the mesh grid **129** of the second plate **127**.

The first plate **126** and the second plate **127** are removable from the frame **121**. Removability allows for re-use of the frame **121**. The skin graft **120** is inserted such that at least a portion of the graft **120** is aligned with the mesh grid **128** of the first plate **126** and the mesh grid **129** of the second plate **127**.

In an alternative embodiment, cartridge retaining portion **111** of housing **101** includes only a single slot. In this embodiment, components of the micrograft generating station **104** (first and second members **105** and **106**) and components of the micrograft transferring station **105** (transfer pusher **108** and transfer stage **110**) are removable from housing **101**. Thus, instead of transferring the cartridge **119** between first and second slots **112** and **113** that are aligned with a dedicated micrograft generating station **104** and a dedicated micrograft transferring station **105**, the cartridge **119** remains in a single slot for the generating and transferring process, and it is the components of the micrograft generating station **104** and the micrograft transferring station **105** that are interchanged within the housing **101** depending on the whether an operator is generating micrografts or transferring micrografts.

Devices of the invention as described herein may be used to prepare skin grafts for any recipient site of damaged skin. Exemplary types of skin damage include burns (e.g., thermal or chemical), infections, wounds, or depigmentation. In particular embodiments, the recipient site is an area of depigmented skin that has been prepared to receive a skin graft.

5 General methods for preparing skin grafts are described in co-owned and co-pending U.S. patent application serial number 12/851,621, the content of which is incorporated by reference herein in its entirety. In certain embodiments, methods of the invention generally involve harvesting a skin graft from a donor site, such as an epidermal graft, generating an array of micrografts from the single graft, placing the graft on a first substrate, expanding a distance
10 between the micrografts on a first substrate, optionally transferring the micrografts from the first substrate to a second substrate, and applying the micrografts to a recipient site.

 Harvesting of the skin grafts may be accomplished by any technique known in the art, and the technique employed will depend on the type of graft required (e.g., epidermal graft, split thickness graft, or full thickness graft). An epidermal graft refers to a graft that consists of
15 substantially epidermal skin and does not include any substantial portion of the dermal layer. A split thickness graft refers to a graft that includes sheets of superficial (epithelial) and some deep layers (dermal) of skin. A full-thickness graft refers to a graft that includes all of the layers of the skin including blood vessels.

 In certain embodiments, harvesting a skin graft involves raising a blister and cutting the
20 blister. In certain embodiments, the blister may be a fluid-filled blister (e.g. a suction blister). In other embodiments, the blister is not fluid-filled. Any type of raised blister may be used with methods of the invention.

 In certain embodiments, suction blister grafting is used. Suction blister grafting involves raising a blister, and then cutting off the raised blister. An exemplary suction blister grafting
25 technique is shown in Awad, (Dermatol Surg, 34(9):1186-1193, 2008), the content of which is incorporated by reference herein in its entirety. This article also shows various devices used to form suction blisters. A suction blister device is also described in Kennedy et al. (U.S. 6,071,247), the content of which is incorporated by reference herein in its entirety. An exemplary device is commercially available from Electronic Diversities (Finksburg, MD).

30 A device for raising a suction blister typically operates by use of suction chambers that are attached to a patient's skin. An instrument typically contains a power source, a vacuum

pump, temperature controls and all related controls to operate multiple suction chambers. The suction chambers are connected to the console by a flexible connection. Each of the chambers is controlled by a preset temperature control to provide an optimal skin warming temperature. Both chambers share an adjustable common vacuum source that affects all chambers equally.

5 Blister formation is accomplished by attaching the suction blister device to a patient's skin. Typically hook & loop fastener straps are used to keep the device in place. The chamber heating system provides a slight warming of an orifice plate of the device, which is in direct contact with the patient's skin surface. The application of a moderate negative pressure from the instrument console, to the chamber interior, causes the patients skin to be gently drawn
10 through the opening(s) in the orifice plate. The results are typical suction blisters, approximately the size of the opening(s) in the orifice plate. The skin and blister area is generally not damaged and patient discomfort is minimal.

The negative pressure chamber is fabricated of mostly plastic components, with two removable threaded caps. The upper cap is fitted with a clear viewing lens so that the actual
15 blister formation can be observed. The opposite end of the chamber is fitted with a removable orifice plate that is placed on the patient's skin. Since this plate is simply threaded onto the chamber end, multiple plates with different opening patterns can be interchanged as desired.

The interior of the device is warmed and illuminated by an array of low voltage incandescent lamps. This lamp array is controlled from the instrument console temperature
20 controller, cycling as needed, to maintain the set point temperature. The heat from these lamps is radiated and conducted to the orifice plate, which then warms the patient's skin. The chamber is connected to the console via a composite vacuum and low voltage electrical system. Quick connections are used for the vacuum and electrical system to facilitate removal and storage.

The Negative Pressure Instrument console is a self-contained fan cooled unit which is
25 designed to operate on 120 VAC 60 Hz power. Vacuum is supplied by an industrial quality diaphragm type vacuum pump, capable of a typical vacuum of 20 in Hg (0-65 kpa) at 0 CFM. An analog controller that is preset to 40 °C provides the temperature control for each suction chamber. This provides accurate control of the orifice plate temperature. The instrument console has internal adjustments that allow the user to recalibrate the temperature setting if desired. Other
30 temperatures can be preset if desired. The front panel includes a vacuum gauge and vacuum

bleeder adjustment to regulate the vacuum to both chambers. The console front panel also contains the connections for the chamber assemblies.

Once the suction blister is raised, it is cut by methods known in the art (see e.g., Awad, *Dermatol Surg*, 34(9):1186-1193, 2008). The skin graft **120** is then inserted into cartridge **119**.

5 Frame **121** is turned upside down, as is shown in Figure 4A. First plate **126** is placed over frame **121**. The plate retaining holes **130** and plate locating holes **131** of the first plate **126** are aligned with the plate retaining pins **124** and the plate locating holes **125** of the frame **121**. Once aligned, the first plate **126** is placed onto the frame **121** such that the plate retaining pins **124** and the plate locating holes **125** of the frame **121** go through the plate retaining holes **130** and plate
10 locating holes **131** of the first plate **126**. Once placed on the frame **121**, the mesh grid **128** is aligned with the hollow portion **123** of the frame **121**.

The skin graft **120** is then placed on the mesh grid **128** of the first plate **126**. The graft should be roughly centered on the mesh grid **128** (Figure 4A). In certain embodiments, the graft **120** is placed on the grid such that a basal layer of the graft **120** is facing up. Epidermal skin
15 includes a stratum corneum layer and a basal layer. The stratum corneum refers to the outermost layer of the epidermis, composed of large, flat, polyhedral, plate-like envelopes filled with keratin, which is made up of dead cells that have migrated up from the stratum granulosum. This layer is composed mainly of dead cells that lack nuclei. The thickness of the stratum corneum varies according to the amount of protection and/or grip required by a region of the body. In
20 general, the stratum corneum contains 15 to 20 layers of dead cells, and has a thickness between 10 and 40 μm .

The basal layer (or stratum germinativum or stratum basale) refers to the deepest layer of the 5 layers of the epidermis. The basal layer is a continuous layer of live cells and can be considered the stem cells of the epidermis. These cells are undifferentiated and proliferative, i.e.,
25 they create daughter cells that migrate superficially, differentiating during migration. Keratinocytes and melanocytes are found in the basal layer.

For a graft to become integrated at a recipient site, the graft must be able to receive nutrients. Since the cells of the basal layer are live cells, orienting an epidermal graft such that the basal layer interacts with the recipient site allows the graft to receive nutrients, and thus
30 remain viable. In contrast, since the cells of the stratum corneum are dead cells, orienting an epidermal graft such that the stratum corneum layer interacts with the recipient site prevents the

graft from receiving nutrients, resulting in death of the graft tissue and graft failure. By placing the graft **120** on the cartridge **119** with the basal layer facing up, proper orientation of the graft **120** is maintained, ensuring that once applied to the skin, it is the basal layer of the graft **120** that interacts with the tissue of the recipient site. Thus, methods of the invention ensure that during the grafting process, the basal layer of a graft interacts with the recipient site of a patient, allowing for the graft to receive nutrients and thus remain viable.

Once the graft **120** has been placed on the first plate **126**, the second plate **127** is placed on top of the graft **120**, sandwiching the graft **120** between the first and second plates **126** and **127** (Figure 4A). Second plate **127** is placed over frame **121**. The plate retaining holes **132** and plate locating holes **133** of the second plate **127** are aligned with the plate retaining pins **124** and the plate locating holes **125** of the frame **121**. Once aligned, the second plate **127** is placed onto the frame **121** such that the plate retaining pins **124** and the plate locating holes **125** of the frame **121** go through the plate retaining holes **132** and plate locating holes **133** of the second plate **127**. Once placed on the frame **121**, the mesh grid **129** is aligned with the hollow portion **123** of the frame **121**, and the mesh grid **129** of the second plate **127** is aligned with the mesh grid **128** of the first plate **126**. Additionally, the skin graft **120** is now sandwiched between the first and second plates **126** and **127**. The mesh grid **128** of the first plate **126** and the mesh grid **129** of the second plate **127** are only separated by the thickness of the graft **120**.

Now loaded into the cartridge, a plurality of micrografts may be generated from the single skin graft **120**. To generate the micrografts, the cartridge **119** is flipped right side up and loaded into the micrograft generating station **104** of device **100**. Reference is now made to Figures 5A-5B which show the process of generating the plurality of micrografts. Cartridge **119** is oriented such that bevel **122** on frame **121** of cartridge **119** is aligned with a bevel in first slot **112** of cartridge receiving portion **111** of housing **101**. Once aligned, the cartridge **119** is slid into first slot **112**. Once in slot **112**, the hollow portion **123** of the frame **121** of the cartridge **119** is aligned with the first member **106** and the second member **107** of the micrograft generating station **104**.

The device **100** is then transformed from the open configuration to the closed configuration by engaging lever **114**, and moving the lever **114** from an open configuration to a closed configuration. Such movement causes the top portion **101a** and the cartridge receiving portion **111** of the housing **101** to move vertically downward toward the bottom portion **101b** of

the housing **101**. With such movement, the mesh grid **129** of the second plate **127** of the cartridge **119** come in contact with the second member **107** of the micrograft generating station **104**. Additionally, the first member **106** of the micrograft generating station **104** passes into the hollow portion **123** of the frame **121** of cartridge **119** and contacts the mesh grid **128** of first plate **126** of the cartridge **119**. The first and second members **106** and **107** compress the mesh grids **128** and **129** of first and second plates **126** and **127** of the cartridge **119**. The compressive force results in the mesh grids **128** and **129** cutting the skin graft **120** that is sandwiched between plates **126** and **127**, thereby generating the plurality of micrografts. The cuts may pass partially or completely through the graft tissue. The plurality of micrografts reside in the holes of the mesh grids **128** and **129**.

Once the micrografts are generated, the lever **114** is moved from the closed configuration to the open configuration, transforming device **100** from the closed configuration to the open configuration. Cartridge **119** is removed from first slot **112** of cartridge receiving portion **111** of housing **101**. The cartridge is now ready to be transferred to the micrograft transferring station **105**.

Reference is now made to Figures 6A-6D which show the process of transferring the plurality of micrografts to a substrate. The cartridge **119** is inserted into the second slot **113** of cartridge receiving portion **111** of housing **101**. Cartridge **119** is oriented such that bevel **122** on frame **121** of cartridge **119** is aligned with a bevel in second slot **113** of cartridge receiving portion **111** of housing **101**. Once aligned, the cartridge **119** is slid into second slot **113**. Once in slot **113**, the hollow portion **123** of the frame **121** of the cartridge **119** is aligned with the transfer pusher **108** and the transfer stage **110** of the micrograft transferring station **105**.

A substrate **134** is placed on top of transfer stage **110**. Generally, the substrate **134** will have an adhesive side and the substrate **134** should be placed onto the transfer stage **110** such that the adhesive side of the substrate **134** is facing up. The substrate may be made from any material that is biocompatible. In certain embodiments, the substrate is biocompatible and made from a material that is capable of being stretched upon application of a moderate tensile force. Exemplary materials include medical dressings, such as TEGADERM (medical dressing, commercially available from 3M, St. Paul, MN) or DUODERM (medical dressing, commercially available from 3M, St. Paul, MN). The substrate may also be gas permeable.

In certain embodiments, substrate **134** includes an adhesive on one side that facilitates attachment of the micrografts to the substrates. The substrate material may have intrinsic adhesive properties, or alternatively, a side of the substrate may be treated with an adhesive material, e.g., an adhesive spray such as LEUKOSPRAY (Beiersdoerf GmbH, Germany).

5 In certain embodiments, the material of the substrate **134** is a deformable non-resilient material. A deformable non-resilient material refers to a material that may be manipulated, e.g., stretched or expanded, from a first configuration to a second configuration, and once in the second configuration, there is no residual stress on the substrate. Such materials may be stretched to an expanded configuration without returning to their original size. Such deformable
10 non-resilient materials tend to be soft, stiff or both soft and stiff. Softness is measured on the durometer scale. An example of such a material is a soft polyurethane. A soft polyurethane is produced as follows. Polyurethanes in general usually have soft and hard segments. The hard segments are due to the presence of phenyl bridges. In a soft polyurethane, the phenyl bridge is switched out for an aliphatic, which is more flexible as its 6 carbon ring has no double bonds.
15 Therefore, all the segments are soft. On the Durometer Scale, a soft polyethylene is rated about Shore 80A. Other materials suitable for use with methods of the invention include low density polyethylene, linear low density polyethylene, polyester copolymers, polyamide copolymers, and certain silicones.

 The device **100** is then transformed from the open configuration to the closed
20 configuration by engaging lever **114**, and moving the lever **114** from an open configuration to a closed configuration. Such movement causes the top portion **101a** and the cartridge receiving portion **111** of the housing **101** to move vertically downward toward the bottom portion **101b** of the housing **101**. With such movement, the mesh grid **129** of the second plate **127** of the cartridge **119** come in contact with the substrate **134** that is on top of the transfer stage **110** of the
25 micrograft generating station **105**. Additionally, the plurality of prongs **109** of the transfer pusher **108** of the micrograft generating station **105** pass into the hollow portion **123** of the frame **121** of cartridge **119**. The prongs **109** are small than the holes of the mesh grids **128** and **129**. The prongs pass through the holes of the mesh grids **128** and **129** and push the micrografts **135** residing in the holes of the mesh grids **128** and **129** through the mesh grids **128** and **129** and onto
30 the substrate **134**.

Once the micrografts **135** are transferred to substrate **134**, the lever **114** is moved from the closed configuration to the open configuration, transforming device **100** from the closed configuration to the open configuration. Due to the adhesive layer of the substrate **134**, after contact with the substrate **134**, the plurality of micrografts **135** remain adhered to the substrate **134**.

Once the micrografts **135** have been transferred to the substrate **134**, the substrate is stretched or expanded, resulting in increased distance between the individual micrografts, moving them apart and resulting in production of a skin graft that can repair a recipient site that is larger than the donor site from which the grafts were obtained. In methods of the invention, the individual grafts themselves are not expanded, i.e., the graft tissue is not stretched; rather, stretching of the substrate increases the space or distance between each individual micrograft. Methods of the invention thus minimize tissue manipulation. Methods for expanding micrografts on a substrate are described for example in U.S. patent application serial number 12/851,621, the content of which is incorporated by reference herein in its entirety.

The purpose of such processing is to use tissue from a donor site to cover a wound area that is larger than the donor site. The stretching of the substrate may be done manually, i.e., by hand, or may be done with the help of a machine. The stretching may be substantially uniform in all directions or may be biased in a certain direction. In a particular embodiment, the stretching is substantially uniform in all directions. Stretching of the substrate may be performed mechanically or may be accomplished by application of a pressurized fluid or gas. In certain embodiments, air pressure is used to expand the first substrate. Exemplary devices and methods are described in Korman (U.S. 5,914,264), the content of which is incorporated by reference herein in its entirety.

Any minimum distance can be provided between micrografts after the first substrate is stretched. The amount of stretching can be large enough to provide a sufficiently large area of substrate containing micrografts to allow a larger area of damaged tissue to be repaired using a particular amount of graft tissue removed from the donor site, i.e., the area of the stretched first substrate containing the separated micrografts can be much larger than the total area of the donor site. For example, the distance between adjacent micrografts on the stretched first substrate can be greater than about 0.5 mm, although small separation distances may also be used. For repigmentation of skin tissue, an amount of stretching can be applied to the first substrate such

that the distance between adjacent micrografts is less than about 4 mm, because it is known that melanocytes, when grafted to a depigmented region, can migrate up to about 2 mm from each micrograft to repigment regions between the micrografts. This average distance can be larger if keratinocyte migration is involved with the tissue being treated because keratinocytes typically migrate greater distances compared to melanocytes.

The ratio of the wound area to the donor site area is referred to as the expansion ratio. A higher expansion ratio is desirable to minimize the trauma of the donor site, and to aid patients who have only a small amount of tissue available for grafting purposes. The amount of area expansion, e.g., the ratio of an area of damaged tissue that can be repaired compared to an area of graft tissue removed from a donor site, may be 500x or more. In particular embodiments, the area of expansion may be from about 10x to about 100x, which provides a more uniform coverage and/or repigmentation of the recipient site. For repairing burns or ulcerated tissue, the micrografts may be smaller than those used to repair other types of damaged tissue, and thus the distances between adjacent micrografts may be greater after stretching of the first substrate. In such an exemplary application, an area expansion of about 1000x or more may be used.

In other embodiments and depending on the material of the substrate **134**, maintaining the substrate **134** in a stretched configuration may result in stress on the substrate **134** that is not optimal. Additionally, the stretched substrate **134** may not retain the same properties as the unstretched configuration of the substrate **134**, i.e., technological characteristics, such as physical, environmental and performance characteristics could be affected by the stretching of the substrate **134**. Additionally, methods used to maintain the substrate **134** in its stretched condition may be physically cumbersome and prevent uniform application of the micrografts to uneven skin surfaces. Thus in certain embodiments, once the substrate **134** has been stretched, the spaced apart micrografts are transferred to a second substrate. By transferring the micrografts to a second substrate, methods of the invention minimize manipulation and stress of the substrate that holds the graft to the recipient site.

After stretching the substrate **134**, the second substrate is brought into contact with the grafts on the stretched substrate **134**. Transfer is facilitated by the second substrate having greater affinity or more adhesive force toward the micrografts than the substrate **134**. In certain embodiments, the second substrate is coated with a hydrocolloid gel. In other embodiments, the substrate **134** is wetted with a fluid such as water or a saline solution. Wetting the micrografts

and the substrate **134** provides lubrication between the grafts and the substrate **134** and allows for easy transfer of the grafts from the substrate **134** to the second substrate. After wetting the substrate **134**, the grafts have greater affinity for the second substrate than the substrate **134**. The wetted substrate **134** is then removed from the second substrate and the grafts remain attached to the second substrate. The distance between the micrografts is maintained after transfer of the micrografts from the stretched substrate **134** to the second substrate.

The second substrate may be made from any material known in the art that is compatible with biological tissue. The second substrate may also be capable of being stretched upon application of a moderate tensile force. Exemplary materials for the second substrates include medical dressings, such as TEGADERM (medical dressing, commercially available from 3M, St. Paul, MN) or DUODERM (medical dressing, commercially available from 3M, St. Paul, MN). The second substrate may also be gas permeable.

In certain embodiments, the second substrate includes an adhesive on one side that facilitates attachment of the grafts to the second substrate. The second substrate material may have intrinsic adhesive properties, or alternatively, a side of the second substrate may be treated with an adhesive material, e.g., an adhesive spray such as LEUKOSPRAY (Beiersdoerf GmbH, Germany). In certain embodiments, the substrate **134** and the second substrates are the same material. In other embodiments, the substrate **134** and second substrate are different materials. In certain embodiments, the materials of substrate **134** and the second substrate are chosen to facilitate transfer of the micrografts from the substrate **134** to the second substrate. For example, in certain embodiments, the material chosen for substrate **134** has a weaker adhesive than the material chosen for the second substrate.

In certain embodiments, the material of substrate **134** is a deformable non-resilient material as discussed above. Such materials may be stretched to an expanded configuration without returning to their original size, and thus in these embodiments it is not necessary to transfer the micrografts from substrate **134** to a second substrate. Instead, the substrate **134** including the micrografts is applied to a recipient site.

Ultimately, the grafts and substrate are applied to a recipient of site of a patient. Prior to applying the grafts to the recipient site, the site is prepared to receive the grafts using any technique known in the art. Necrotic, fibrotic or avascular tissue should be removed. The technique used to prepare the site will depend on damage to the recipient site. For example,

epidermal tissue, if present at the recipient site, can be removed to prepare the area for receiving the micrografts. Burned or ulcerated sites may not need removal of epidermal tissue, although some cleaning of the site or other preparation of the site may be performed. Wounds should be debrided and then allowed to granulate for several days prior to applying the graft. Most of the granulation tissue should be removed since it has a tendency to harbor bacteria. Applying silver sulfadiazine to the wound for 10 days prior to grafting reduces the bacterial count greatly.

The size of the area at the recipient site can be about the same size as the area of the stretched substrate **134** having micrografts **135** adhered thereto. This size generally will be greater than the area of the original graft tissue that was removed from the donor site to form the micrografts. The depigmented or damaged skin can be dermabraded with sandpaper or another rough material. Alternatively, the epidermal tissue can be removed from the recipient site by forming one or more blisters over the area to be treated, e.g., a suction blister or a freezing blister, and the raised epidermal blister tissue can then be removed by cutting or another procedure.

The substrate having the micrografts can be placed over the area to be treated to form a dressing. A portion of the substrate having the micrografts can be positioned over the area to be repaired, e.g., the area from which the epidermal tissue has been abraded or removed for repigmentation. The substrate can be fixed in place over the treatment area, e.g., using tape or the like. The substrate can be removed after sufficient time has elapsed to allow attachment and growth of the micrografts in the treatment area, e.g., several days to a few weeks.

Reference is now made to Figure 7, which shows a device **200** of the invention. Device **200** includes a base member **250**, a micrograft generating station **260** integrated with the base member **250**, and a micrograft transferring station **370** integrated with the base member **250**. Integration of the micrograft generating station and the micrograft transferring station with the base member can be as a single unitary device or can be such that the micrograft transferring station and the micrograft generating station are removably coupled to the base member. In certain embodiments, the micrograft generating station and the micrograft transferring station are removed from the base member and are used as individual stand-alone devices.

The micrograft generating station **260** comprises a frame **201**. The frame has a top portion **201a** and a bottom portion **201b**. The top portion **201a** is connected to the bottom portion **201b**. The frame **201** has an open configuration and a closed configuration. Figure 7

shows the frame **201** in the closed configuration. The micrograft generating station **260** further includes a first member **206** connected to the top portion **201a** of the frame **201**, and a second member **207** connected to the bottom portion **201b** of the frame **201**. The first member **206** is aligned with the second member **207**.

5 In certain embodiments, the second member **207** includes a spring loaded base (Figure 8). The spring loaded base includes a stage **401**, coupled to a spring **402**. The spring loaded base may further include a ball **403** to focus the force on the center of the stage **401**.

 Frame **201** further includes a cartridge receiving portion **211**. The cartridge receiving portion **211** is located between the top portion **201a** and the bottom portion **201b** of the frame
10 **201**, and is also connected with the top portion **201a** and the bottom portion **201b** of the frame **201**. The cartridge receiving portion **211** includes a slot **212**. The slot **212** is aligned with the first and second members of the micrograft generating station **260**. In this figure, slot **212** is shown with a the cartridge **119** loaded into the slot **212**.

 The micrograft generating station **260** also includes a lever **214**. The lever **214** is
15 connected to the top portion **201a** of the frame **201**. The lever **214** is used to transform the micrograft generating station **260** from the open configuration to the closed configuration and back to the open configuration. Linkage arms **215** and **216** are connected to the lever **214**, the top portion **201a** of the frame **201**, and bottom portion **201b** of the frame **201**. The linkage arms **215** and **216** act as force multipliers, such that upon engagement of the lever **214**, an exponential
20 amount of force is transferred to the micrograft generating station **260** as an operator transforms micrograft generating station **260** from the open configuration to the closed configuration. The exponential amount of force transferred may be varied by varying the length of the lever **214** or the length of the linkage arms **215** and **216**. In certain embodiments, the micrograft generating station **260** is configured to provide for at least about a 50x increase in force transferred to the
25 micrograft generating station **260** as compared to the amount of force applied to the lever **214** by an operator to transform the micrograft generating station **260** from the open configuration to the closed configuration.

 The micrograft transferring station **370** comprises a frame **301**. The frame has a top portion **301a** and a bottom portion **301b**. The top portion **301a** is connected to the bottom
30 portion **301b**. The frame **301** has an open configuration and a closed configuration. Figure 7 shows the frame **301** in the open configuration. The micrograft transferring station **370** further

includes a transfer pusher **308** including a plurality of prongs **309**. The prongs are similar to those shown in Figure 2B. The transfer pusher **308** is connected to the top portion **301a** of the frame **301** such that the prongs **309** are oriented downward toward the bottom portion **301b** of the frame **301**. The micrograft transferring station **370** further includes a transfer stage **310**,
5 which is connected to the bottom portion **301b** of the frame **301**. The transfer pusher **308** and the transfer stage **310** are aligned with each other. In certain embodiments, the transfer stage **310** may be made of any material that is softer than that of the transfer pusher **308**. In certain embodiments, the transfer stage **310** is composed of a compressible material. In other embodiments, the transfer stage **310** includes a spring loaded base (Figure 8). The spring loaded
10 base includes a stage **401**, coupled to a spring **402**. The spring loaded base may further include a ball **403** to focus the force on the center of the stage **401**.

Frame **301** further includes a cartridge receiving portion **311**. The cartridge receiving portion **311** is located between the top portion **301a** and the bottom portion **301b** of the frame **301**, and is also hingedly connected with the top portion **301a** and the bottom portion **301b** of the
15 frame **301**. The cartridge receiving portion **311** includes a slot **312**. The slot **312** is aligned with transfer pusher and the transfer stage of the micrograft transferring station **370**. In this figure, slot **312** is shown with a the cartridge **119** loaded into the slot **312**.

Frame **301** further includes a stripper plate **320**. The stripper plate **320** is located above the bottom portion **301b** of the frame **301** and below the cartridge receiving portion **311** and the
20 top portion **301a** of the frame **301**. The stripper plate **320** includes an inner hollow portion **321** such that the cartridge receiving portion **311**, the transfer pusher transfer pusher **308** and the transfer stage **310** fit within the inner hollow portion **321** of the stripper plate **320**. Such configuration is important for transfer of micrografts from the cartridge to the substrate, which is described in greater detail below.

The micrograft transferring station **370** also includes a lever **314**. The lever **314** runs through the center of frame **301** and is connected to the top portion **301a**, the cartridge receiving portion **311**, the stripper plate **320**, and the bottom portion **301b**. The lever **314** is used to transform the micrograft transferring station **370** from the open configuration to the closed configuration and back to the open configuration. The lever **314** acts as a force multiplier, such
25 that upon engagement of the lever **314**, an exponential amount of force is transferred to the micrograft transferring station **370** as an operator transforms micrograft transferring station **370**
30

from the open configuration to the closed configuration. The exponential amount of force transferred may be varied by varying the length of the lever **314**. In certain embodiments, the lever **314** is configured to provide for at least about a 50x increase in force transferred to the micrograft transferring station **370** as compared to the amount of force applied to the lever **314**

5 by an operator to transform the micrograft transferring station **370** from the open configuration to the closed configuration.

Cartridges that may be used with device **200** are the same as those described above in connection with device **100**.

Device **200** as described herein may be used to prepare skin grafts for any recipient site
10 of damaged skin. General methods for preparing skin grafts are described in co-owned and co-pending U.S. patent application serial number 12/851,621, the content of which is incorporated by reference herein in its entirety. In certain embodiments, methods of the invention generally involve harvesting a skin graft from a donor site, such as an epidermal graft, generating an array of micrografts from the single graft, placing the graft on a first substrate, expanding a distance
15 between the micrografts on a first substrate, optionally transferring the micrografts from the first substrate to a second substrate, and applying the micrografts to a recipient site. Harvesting of the skin grafts and placing of the harvested skin graft into a cartridge for use with device **200** is described above.

Now loaded into the cartridge, a plurality of micrografts may be generated using device
20 **200**. To generate the micrografts, the cartridge **119** is flipped right side up and loaded into the micrograft generating station **260** of device **200**. Cartridge **119** is oriented such that bevel **122** on frame **121** of cartridge **119** is aligned with a bevel in slot **212** of cartridge receiving portion **211** of frame **201**. Once aligned, the cartridge **119** is slid into slot **212**. Once in slot **212**, the hollow portion **123** of the frame **121** of the cartridge **119** is aligned with the first member **206**
25 and the second member **207** of the micrograft generating station **260**.

The micrograft generating station **260** is then transformed from the open configuration to the closed configuration by engaging lever **214**. Such movement causes the top portion **201a** and the cartridge receiving portion **211** of the frame **201** to move vertically downward toward the bottom portion **201b** of the frame **201**. With such movement, the mesh grid **129** of the second
30 plate **127** of the cartridge **119** come in contact with the second member **207** of the micrograft generating station **260**. Additionally, the first member **206** of the micrograft generating station

260 passes into the hollow portion **123** of the frame **121** of cartridge **119** and contacts the mesh grid **128** of first plate **126** of the cartridge **119**. The first and second members **206** and **207** compress the mesh grids **128** and **129** of first and second plates **126** and **127** of the cartridge **119**. The compressive force results in the mesh grids **128** and **129** cutting the skin graft **120** that is sandwiched between plates **126** and **127**, thereby generating the plurality of micrografts. The cuts may pass partially or completely through the graft tissue. The plurality of micrografts reside in the holes of the mesh grids **128** and **129**.

Once the micrografts are generated, the lever **214** is used to transform the micrograft generating station **260** back to the open configuration. Cartridge **119** is removed from slot **212** of cartridge receiving portion **211** of frame **201**. The cartridge is now ready to be transferred to the micrograft transferring station **370**.

Using micrograft transferring station **370**, the micrografts are transferred to a substrate, as described here. The cartridge **119** is inserted into the **312** of cartridge receiving portion **311** of frame **301**. Cartridge **119** is oriented such that bevel **122** on frame **121** of cartridge **119** is aligned with a bevel in slot **313** of cartridge receiving portion **311** of frame **301**. Once aligned, the cartridge **119** is slid into slot **313**. Once in slot **313**, the hollow portion **123** of the frame **121** of the cartridge **119** is aligned with the transfer pusher **308** and the transfer stage **310** of the micrograft transferring station **370**.

A substrate **134** is placed on top of transfer stage **310**. Generally, the substrate **134** will have an adhesive side and the substrate **134** should be placed onto the transfer stage **310** such that the adhesive side of the substrate **134** is facing up. Further description of types of substrates to be used with devices of the invention is provided above.

The micrograft transferring station **370** is then transformed from the open configuration to the closed configuration by engaging lever **314**. Engagement of the lever results in movement that causes the top portion **301a**, the cartridge receiving portion **311**, and the stripper plate **320** to move vertically downward toward the bottom portion **301b** of the frame **301**. With such movement, the stripper plate **320** moves downward and contacts the outer perimeter of the substrate **134**. The hollow inner portion **321** surrounds that transfer stage **310** and leaves the transfer stage **310** accessible to interact with the cartridge **119**. Then, the cartridge receiving portion **311** and the transfer pusher **308** move downward and into the hollow inner portion **321** of the stripper plate **320**, resulting in the mesh grid **129** of the second plate **127** of the cartridge **119**

coming in contact with the substrate **134** that is on top of the transfer stage **310** of the micrograft transferring station **370**.

As this is occurring, the plurality of prongs **309** of the transfer pusher **308** of the micrograft transferring station **370** pass into the hollow portion **123** of the frame **121** of cartridge **119**. The prongs **309** are small than the holes of the mesh grids **128** and **129**. The prongs pass through the holes of the mesh grids **128** and **129** and push the micrografts **135** residing in the holes of the mesh grids **128** and **129** through the mesh grids **128** and **129** and onto the substrate **134**. Once the micrografts **135** are transferred to substrate **134**, the lever **314** is used to transform micrograft transferring station **370** back to the open configuration.

In greater detail, the mesh grid **129** holding the tissue is the first component to contact the substrate **134** on the transfer stage **310**. The grid **129**, the pusher **308**, and the transfer stage move downward together a small amount before the cartridge receiving portion **311** that is holding the cartridge **119** holding the mesh grid **129** hits a stop. The prongs **309** of the pusher **308** continue pushing the tissue held in the grid **129** and the transfer stage **310** downward until the top portion **301a** of the frame **301** hits a second stop. At this point, the micrografts **135** have been pushed through the grid **129** and onto the substrate **134** and the micrografts **135** are no longer in contact with the grid **129**. Just prior to the pusher **310** hitting the second stop, a latch **340** on the top portion **301a** interacts with a hasp **341** on the cartridge receiving portion **311**, locking the top portion **301a** to the cartridge receiving portion **311** so that their upward movement is linked (Figures 7 and 9). The lever **314** is then reengaged to transform the micrograft transferring station **370** back to the open configuration. This results in the pusher top portion **301a** and linked cartridge receiving portion **311** to move upward until there is no longer contact with the substrate **134**, leaving the micrografts fully transferred to the substrate **134**. During this process, the stripper plate **320** also moves upward, releasing itself from the edges of the substrate **134**.

Once the micrografts **135** have been transferred to the substrate **134**, the substrate is stretched or expanded, the micrografts are optionally transferred to a second substrate, and the expanded micrografts are applied to a recipient site, all of which is described above.

Incorporation by Reference

References and citations to other documents, such as patents, patent applications, patent

publications, journals, books, papers, web contents, have been made throughout this disclosure. All such documents are hereby incorporated herein by reference in their entirety for all purposes.

Equivalents

5 The invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The foregoing embodiments are therefore to be considered in all respects illustrative rather than limiting on the invention described herein. Scope of the invention is thus indicated by the appended claims rather than by the foregoing description, and all changes which come within the meaning and range of equivalency of the claims are therefore
10 intended to be embraced therein.

What is claimed is:

1. A device for generating and transferring micrografts, the device comprising:
 - a housing comprising an open configuration and a closed configuration;
 - a micrograft generating station; and
 - a micrograft transferring station.
2. The device according to claim 1, wherein the housing comprises a bottom portion hingedly connected to a top portion.
3. The device according to claim 2, wherein the top portion of the housing is movable in a vertical direction.
4. The device according to claim 3, wherein the micrograft generating station comprises:
 - an first member connected to the top portion of the housing; and
 - a second member connected to the bottom portion of the housing, wherein the first member is aligned with the second member.
5. The device according to claim 4, wherein the second member comprises a spring loaded base.
6. The device according to claim 3, wherein the micrograft transferring station comprises:
 - a transfer pusher comprising a plurality of prongs, wherein the pusher is connected to the top portion of the housing; and
 - a transfer stage connected to the bottom portion of the housing, wherein the pusher and the stage are aligned with each other.
7. The device according to claim 6, wherein the transfer stage comprises a compressible material.

8. The device according to claim 6, wherein the transfer stage comprises a spring loaded base.
9. The device according to claim 3, wherein the housing further comprises a cartridge receiving portion that is located between the top portion and the bottom portion of the housing.
10. The device according to claim 9, wherein the cartridge receiving portion comprises a first slot and a second slot, wherein the first slot is aligned with the micrograft generating station and the second slot is aligned with the micrograft transferring station.
11. The device according to claim 9, wherein the cartridge receiving portion comprises a single slot and components of the micrograft generating station and the micrograft transferring station are removable from the top and bottom portions of the housing, thereby providing for the micrograft generating station and the micrograft transferring station to be located at a same place in the device.
12. The device according to claim 10, further comprising a cartridge that is compatible with the first slot and second slots of the cartridge receiving portion and is removable from the first and second slots of the cartridge receiving portion.
13. The device according to claim 12, wherein the cartridge is configured to hold a skin graft.
14. The device according to claim 12, wherein the cartridge comprises:
 - a frame comprising a hollow inner portion;
 - a removable first plate comprising a mesh grid;
 - a removable second plate comprising a mesh grid;
 - wherein in an assembled configuration, the mesh grid of the first plate and the mesh grid of the second plate are aligned with the hollow portion of the frame, and the grid of the first plate is aligned with the grid of the second plate.

15. The device according to claim 14, wherein holes of the grids of the first and second plates are larger than prongs of the transfer pusher.

16. A method for generating and transferring micrografts, the method comprising:

providing a device comprising a housing having an open configuration and a closed configuration; a micrograft generating station; and a micrograft transferring station;

inserting a skin graft into the device,

engaging the micrograft generating station, thereby generating a plurality of micrografts; and

engaging the micrograft transferring station, thereby transferring the plurality of micrografts to a substrate.

17. The method according to claim 16, wherein inserting comprises:

obtaining a cartridge comprising: a frame comprising a hollow inner portion; a removable first plate comprising a mesh grid; a removable second plate comprising a mesh grid; wherein in an assembled configuration, the grid of the first plate and the grid of the second plate are aligned with the hollow portion of the frame, and the grid of the first plate is aligned with the grid of the second plate; and

inserting the skin graft between the first and second plates such that the graft is aligned with the grids in the first and second plates.

18. The method according to claim 17, wherein engaging the micrograft generating station comprises:

inserting the cartridge into the micrograft generating station of the device while the housing is in the open configuration; and

transforming the housing from the open configuration to the closed configuration, thereby generating a plurality of micrograft.

19. The method according to claim 17, wherein engaging the micrograft transferring station comprises:

inserting the cartridge into the micrograft transferring station of the device while the housing is in the open configuration;
inserting a substrate below the cartridge; and
transforming the housing from the open configuration to the closed configuration, thereby transferring the plurality of micrografts to the substrate.

20. The method according to claim 19, wherein the substrate is a medical dressing.

21. The method according to claim 16, wherein the graft is an autograft.

22. The method according to claim 16, further comprising prior to the providing step: harvesting the skin graft.

23. The method according to claim 22, wherein harvesting comprises:
raising a blister; and
cutting the blister to obtain the skin graft.

24. The method according to claim 22, wherein raising comprises:
contacting a device having a hole to skin; and
applying heat and/or vacuum pressure, thereby raising the blister.

25. The method according to claim 16, wherein the skin graft is selected from the group consisting of: an epidermal skin graft, a split thickness graft, and a full thickness graft.

26. The method according to claim 16, further comprising:
expanding the micrografts; and
applying the expanded grafts to a patient recipient site.

27. The method according to claim 26, wherein the recipient site is an area of depigmented skin that has been prepared to receive a skin graft.

28. A device for generating and transferring micrografts, the device comprising:
- a base member;
 - a micrograft generating station integrated with the base member; and
 - a micrograft transferring station integrated with the base member.
29. The device according to claim 28, wherein the micrograft generating station comprises:
- a frame comprising an open configuration and a closed configuration;
 - a first member connected to a top portion of the frame; and
 - a second member connected to a bottom portion of the frame, wherein the first member is aligned with the second member.
30. The device according to claim 29, wherein the second member comprises a spring loaded base.
31. The device according to claim 29, wherein the frame further comprises a cartridge receiving portion that is located between the top portion and the bottom portion of the frame.
32. The device according to claim 31, wherein the cartridge receiving portion comprises a slot that is aligned with the first and second members of the micrograft generating station.
33. The device according to claim 28, wherein the micrograft transferring station comprises:
- a frame comprising an open configuration and a closed configuration;
 - a transfer pusher comprising a plurality of prongs, wherein the pusher is connected to a top portion of the frame; and
 - a transfer stage connected to a bottom portion of the frame, wherein the pusher and the stage are aligned with each other.
34. The device according to claim 33, wherein the transfer stage comprises a compressible material.

35. The device according to claim 33, wherein the transfer stage comprises a spring loaded base.

36. The device according to claim 33, wherein the frame further comprises a cartridge receiving portion that is located between the top portion and the bottom portion of the frame.

37. The device according to claim 36, wherein the cartridge receiving portion comprises a slot that is aligned with the pusher and the stage of the micrograft generating station.

38. The device according to claim 37, wherein the top portion of the frame further comprises a latch that allows for the top portion of the frame to lock with the cartridge receiving portion.

39. The device according to claim 36, wherein the frame further comprises a stripper plate that comprises a hollow inner portion such that the cartridge receiving portion, the pusher, and the stage can fit within the hollow inner portion of the stripper plate.

40. The device according to claim 28, further comprising a cartridge that is compatible with the cartridge receiving portions of the micrograft generating station and the micrograft transferring station.

41. The device according to claim 40, wherein the cartridge is configured to hold a skin graft.

42. The device according to claim 40, wherein the cartridge comprises:

- a frame comprising a hollow inner portion;

- a removable first plate comprising a mesh grid;

- a removable second plate comprising a mesh grid;

- wherein in an assembled configuration, the mesh grid of the first plate and the mesh grid of the second plate are aligned with the hollow portion of the frame, and the grid of the first plate is aligned with the grid of the second plate.

43. The device according to claim 42, wherein holes of the grids of the first and second plates are larger than prongs of the transfer pusher.

44. A method for generating and transferring micrografts, the method comprising:

providing a device comprising a base member; a micrograft generating station integrated with the base member; and a micrograft transferring station integrated with the base member;

inserting a skin graft into the device,

engaging the micrograft generating station, thereby generating a plurality of micrografts; and

engaging the micrograft transferring station, thereby transferring the plurality of micrografts to a substrate.

45. The method according to claim 44, wherein inserting comprises:

obtaining a cartridge comprising: a frame comprising a hollow inner portion; a removable first plate comprising a mesh grid; a removable second plate comprising a mesh grid; wherein in an assembled configuration, the grid of the first plate and the grid of the second plate are aligned with the hollow portion of the frame, and the grid of the first plate is aligned with the grid of the second plate; and

inserting the skin graft between the first and second plates such that the graft is aligned with the grids in the first and second plates.

46. The method according to claim 45, wherein engaging the micrograft generating station comprises:

inserting the cartridge into the micrograft generating station while a frame of the station is in an open configuration; and

transforming the frame from the open configuration to a closed configuration, thereby generating a plurality of micrograft.

47. The method according to claim 44, wherein engaging the micrograft transferring station comprises:

inserting the cartridge into the micrograft transferring station while a frame is in an open configuration;

inserting a substrate below the cartridge; and

transforming the frame from the open configuration to a closed configuration, thereby transferring the plurality of micrografts to the substrate.

48. The method according to claim 47, wherein the substrate is a medical dressing.

49. The method according to claim 44, wherein the graft is an autograft.

50. The method according to claim 44, further comprising prior to the providing step: harvesting the skin graft.

51. The method according to claim 50, wherein harvesting comprises:
raising a blister; and
cutting the blister to obtain the skin graft.

52. The method according to claim 51, wherein raising comprises:
contacting a device having a hole to skin; and
applying heat and/or vacuum pressure, thereby raising the blister.

53. The method according to claim 45, wherein the skin graft is selected from the group consisting of: an epidermal skin graft, a split thickness graft, and a full thickness graft.

54. The method according to claim 44, further comprising:
expanding the micrografts; and
applying the expanded grafts to a patient recipient site.

55. The method according to claim 54, wherein the recipient site is an area of depigmented skin that has been prepared to receive a skin graft.

56. A device for generating and transferring micrografts, the device comprising:
- a base member;
 - a micrograft generating station integrated with the base member;
 - a micrograft transferring station integrated with the base member; and
 - a micrograft expansion station integrated with the base member.

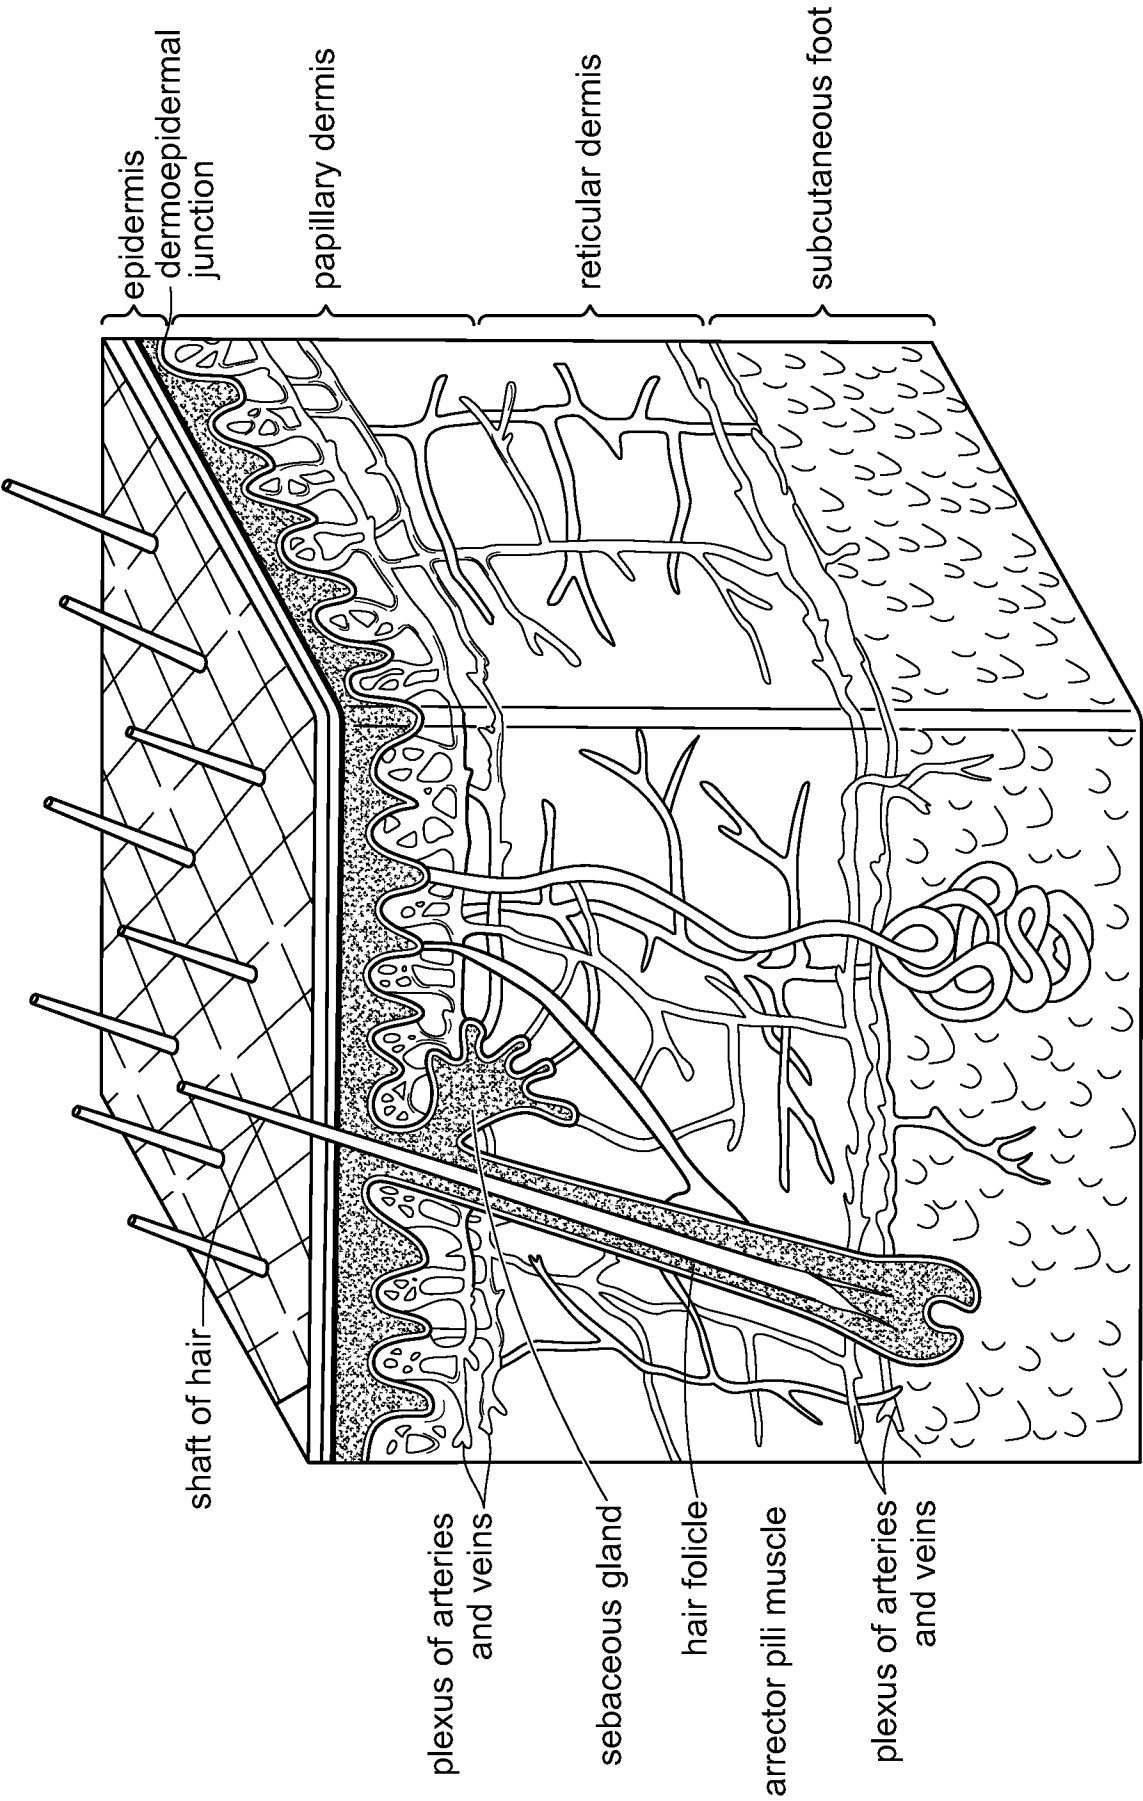


FIG. 1

2/10

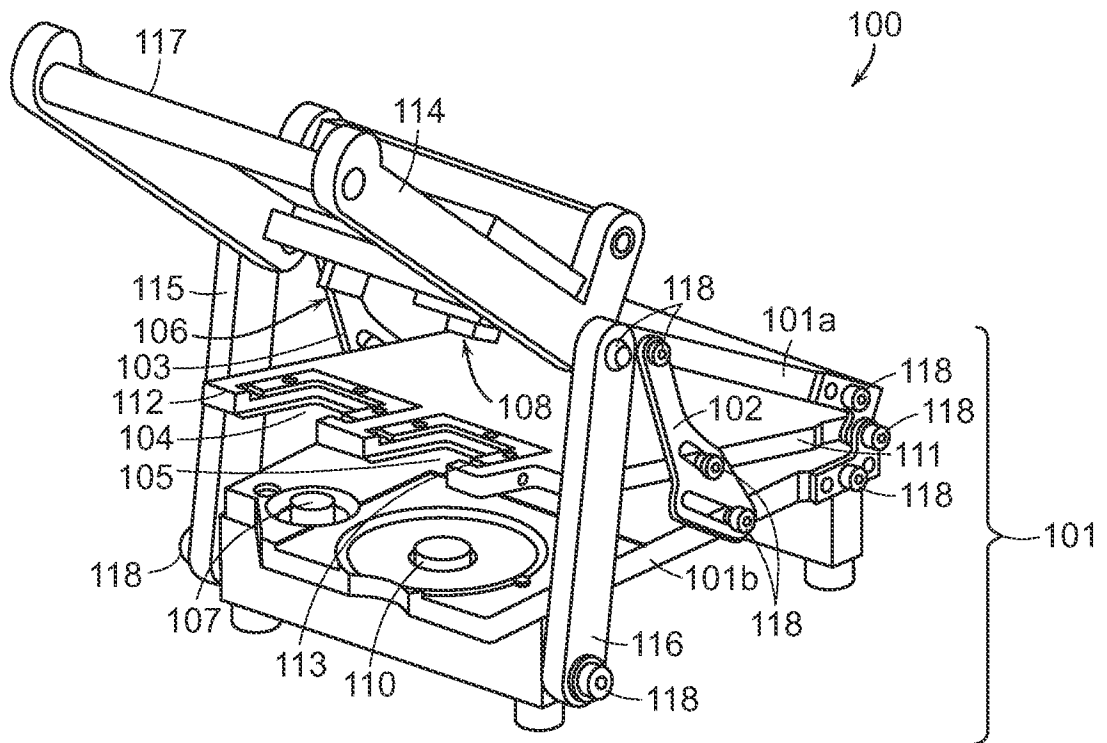


FIG. 2A

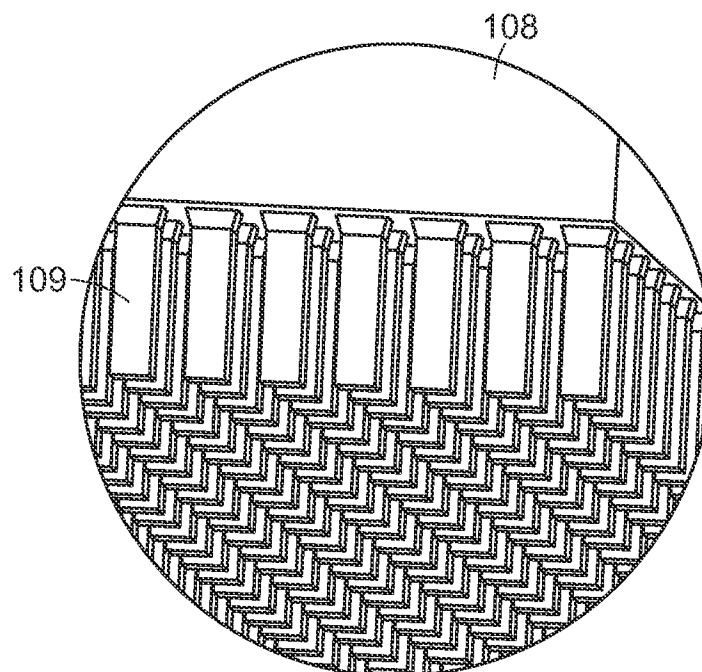


FIG. 2B

3/10

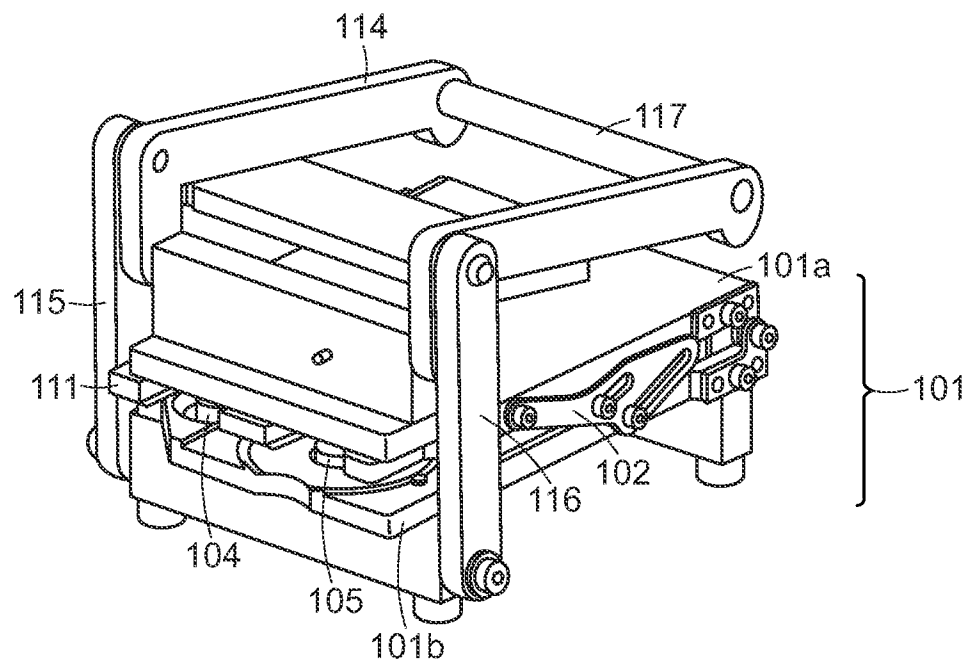


FIG. 3

4/10

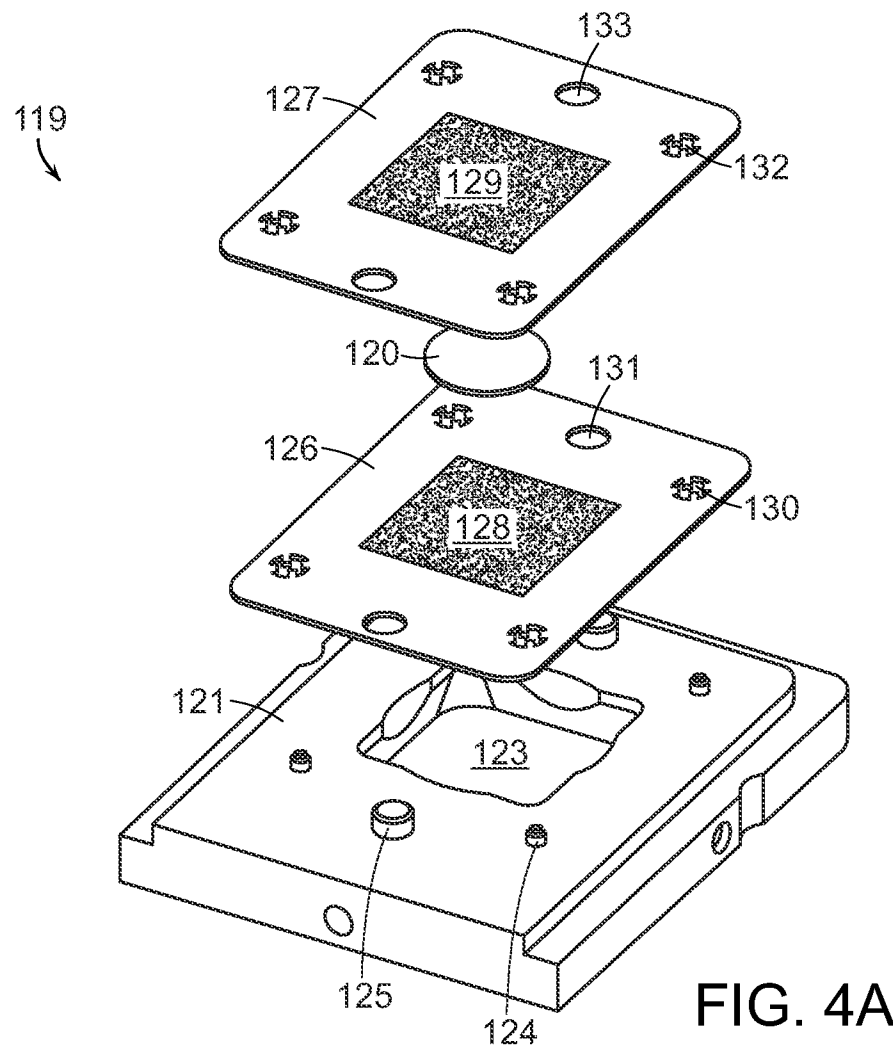


FIG. 4A

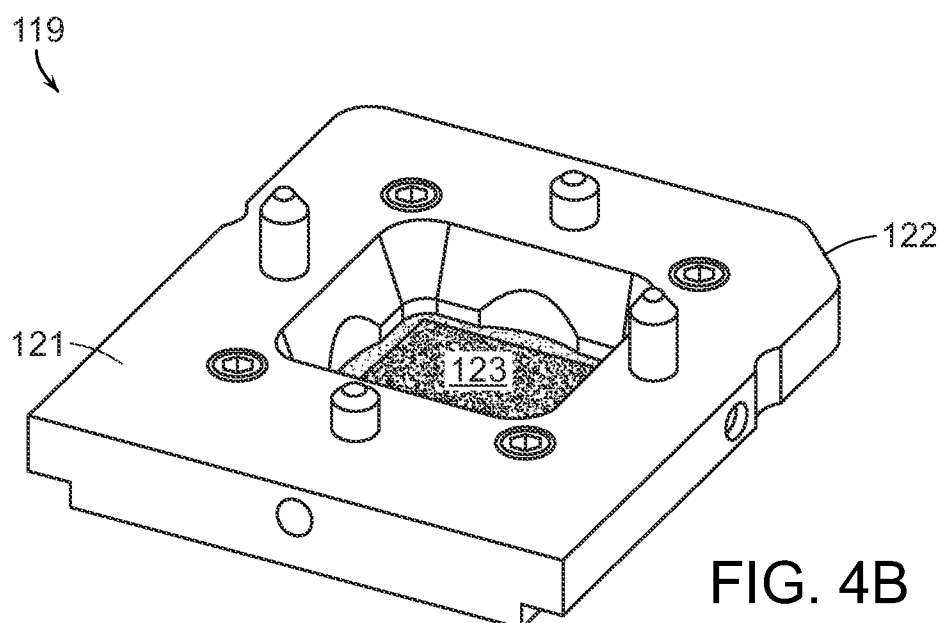


FIG. 4B

5/10

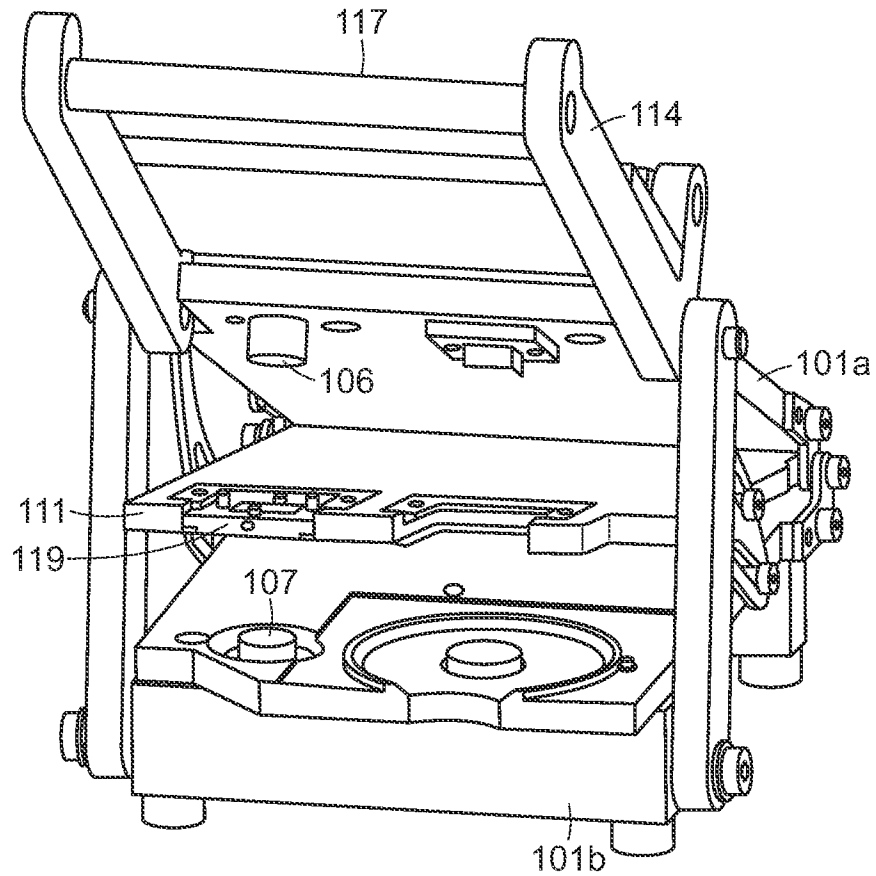


FIG. 5A

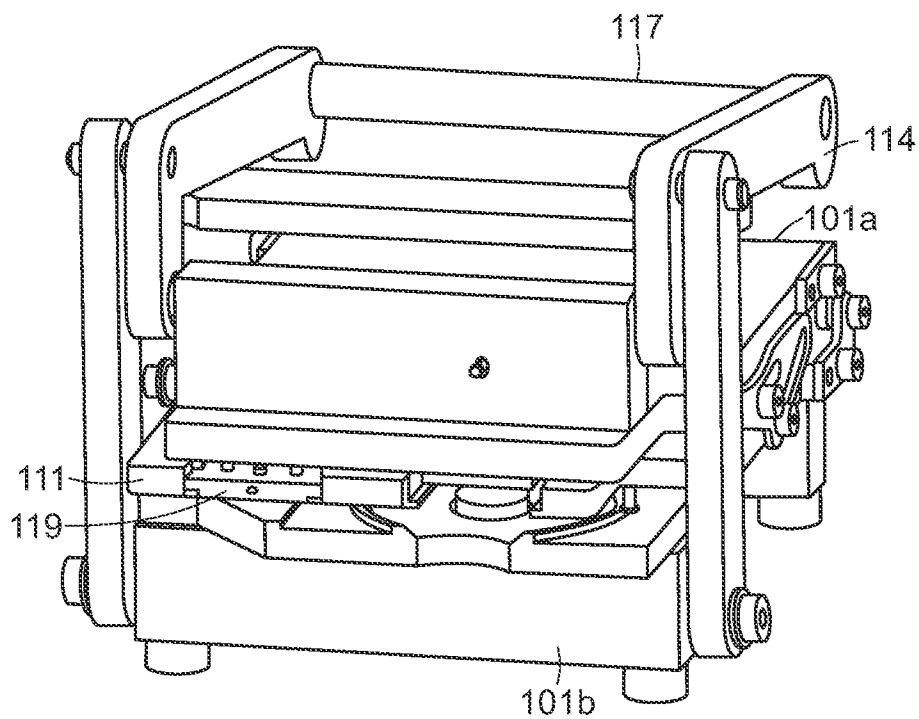


FIG. 5B

6/10

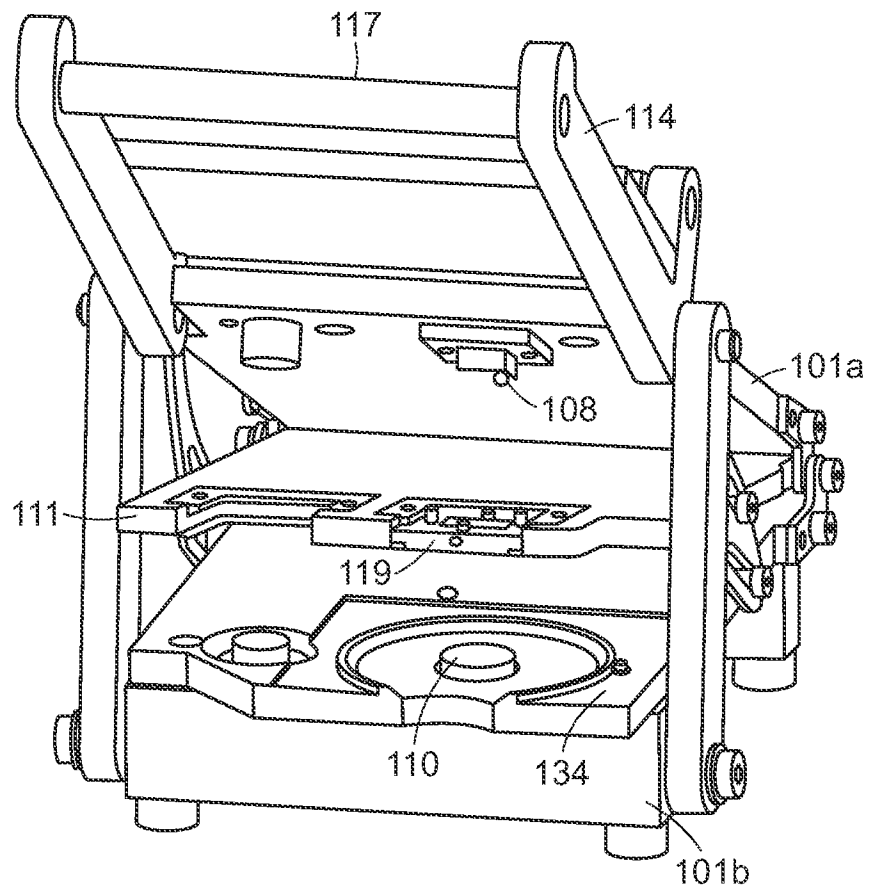


FIG. 6A

7/10

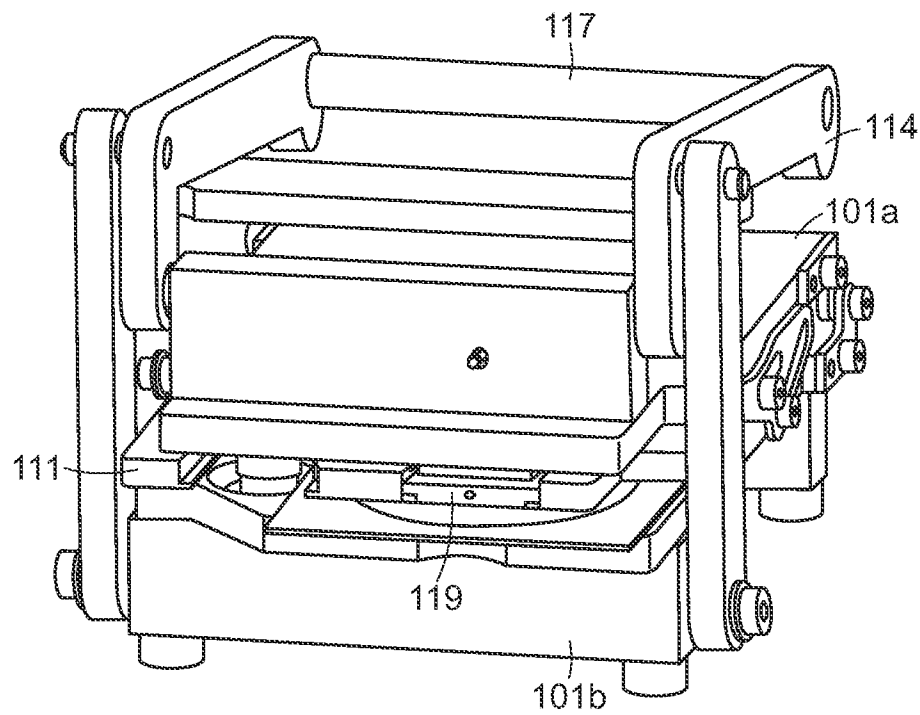


FIG. 6B

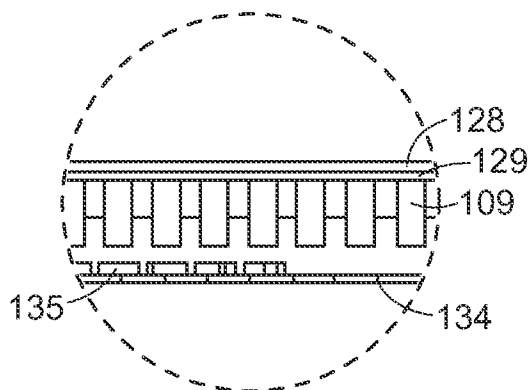


FIG. 6C

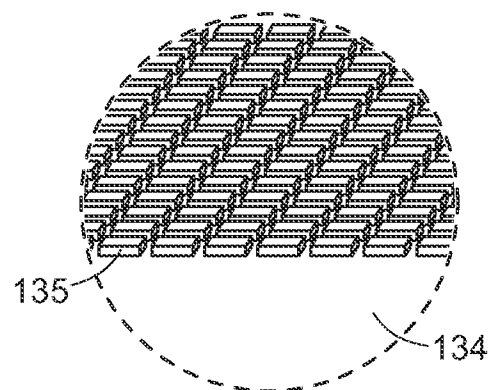


FIG. 6D

8/10

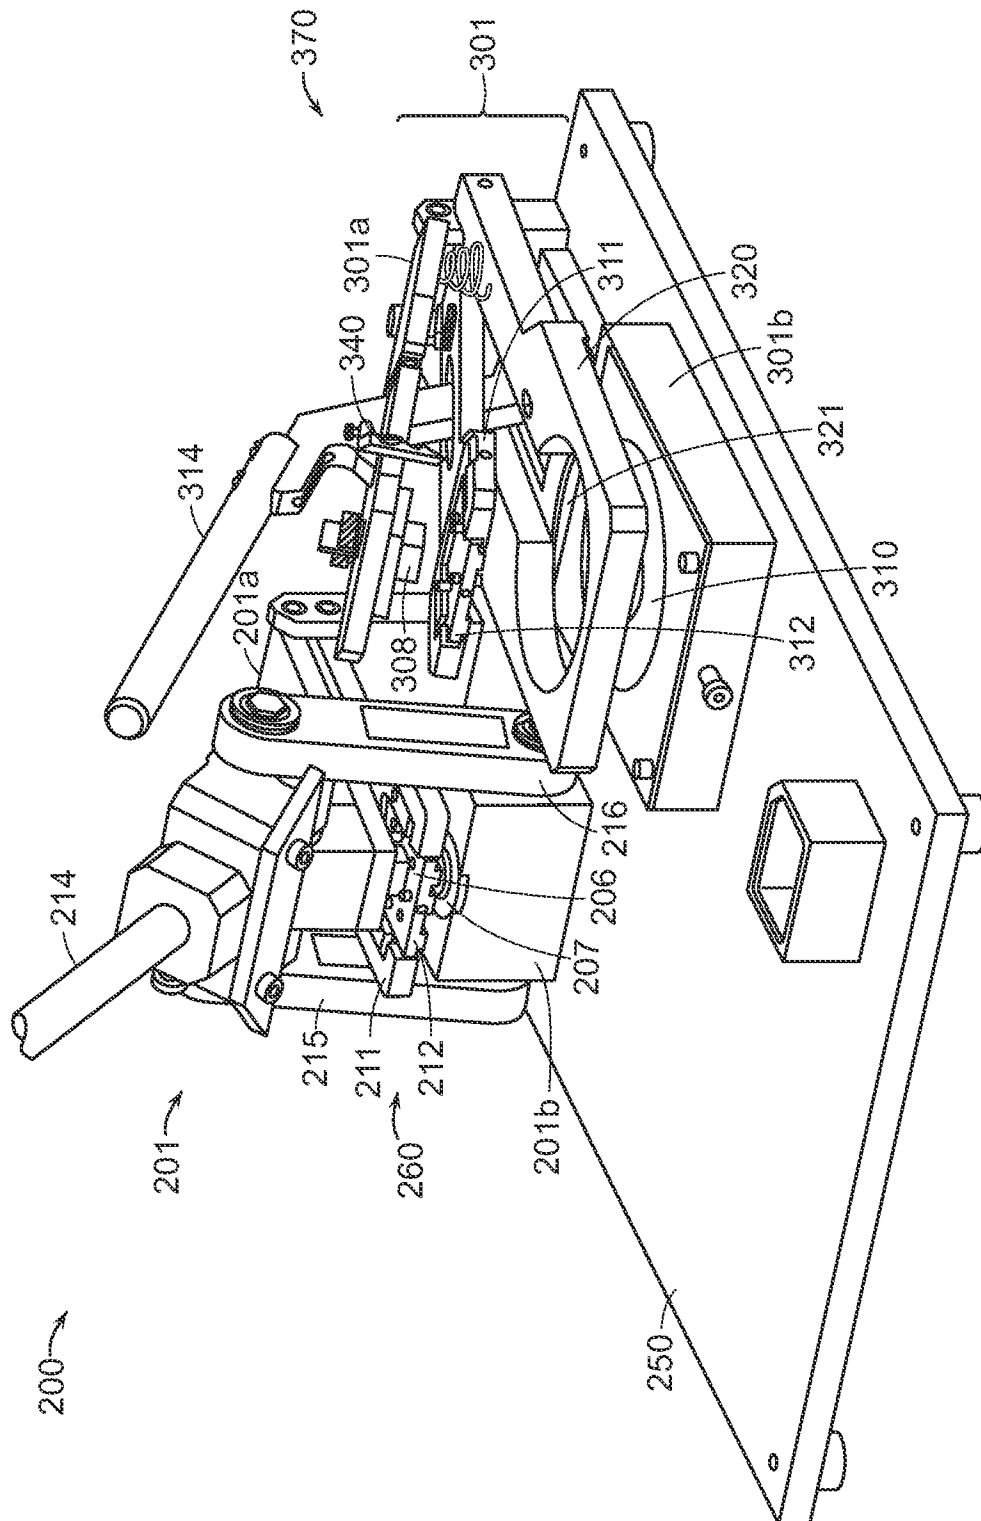


FIG. 7

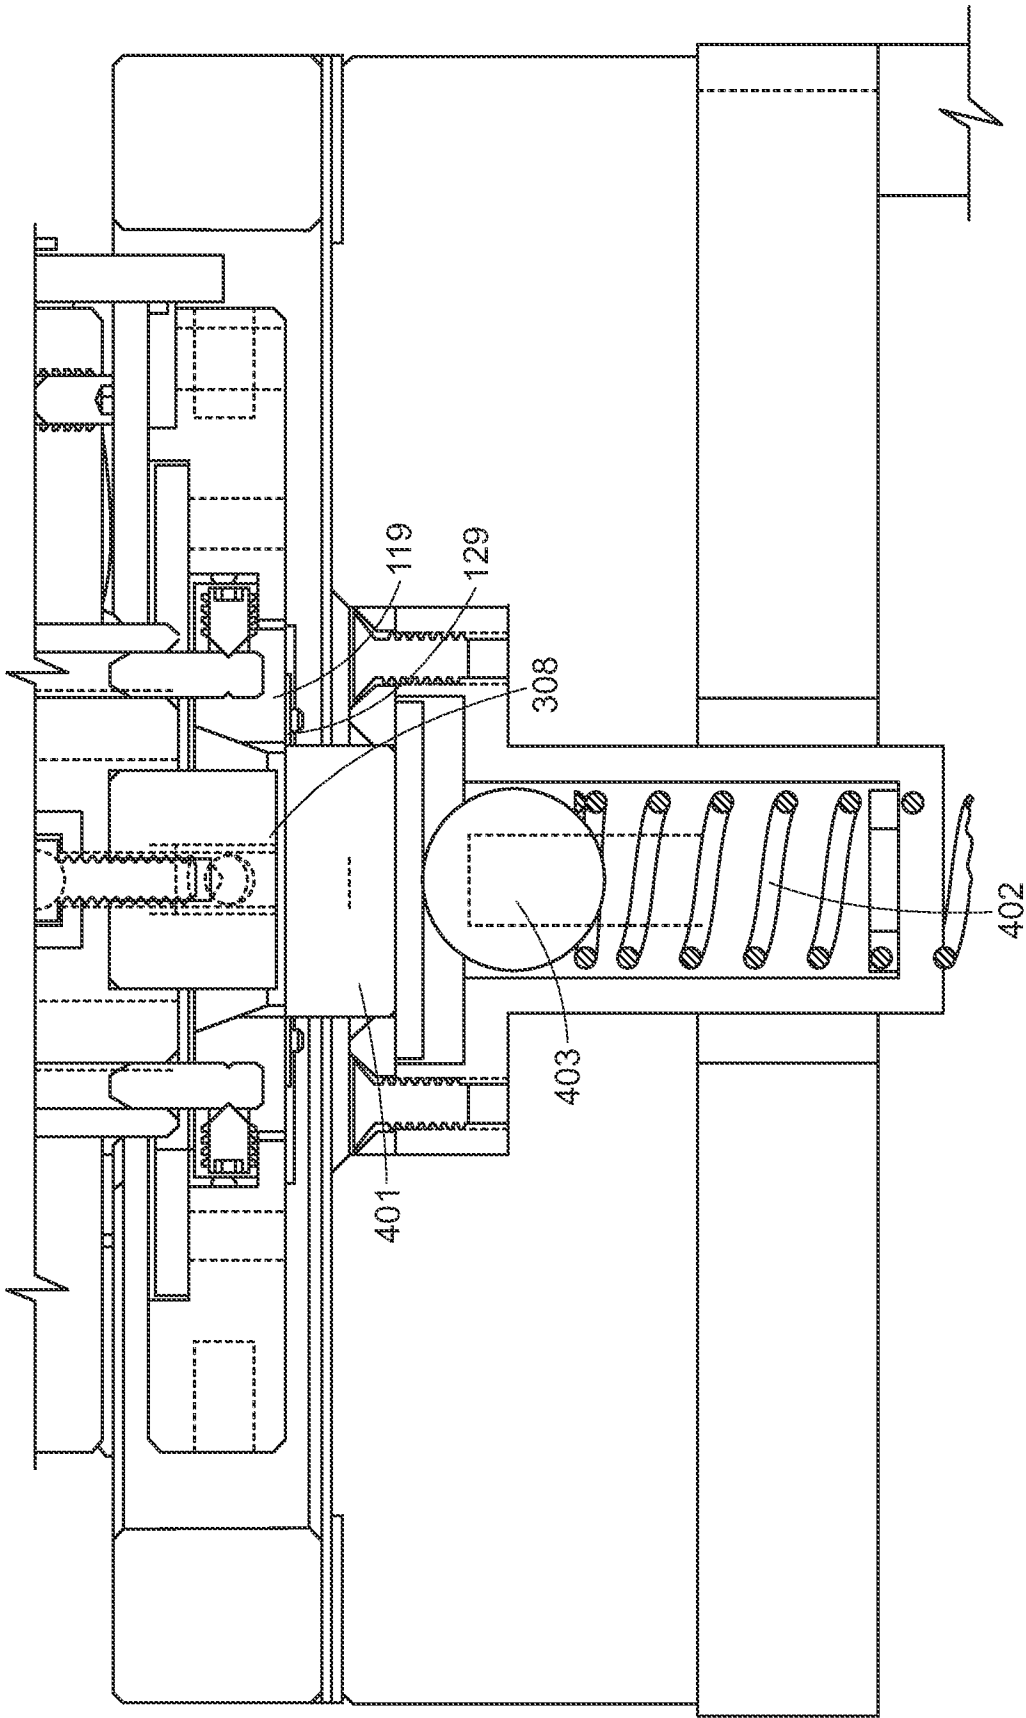


FIG. 8

10/10

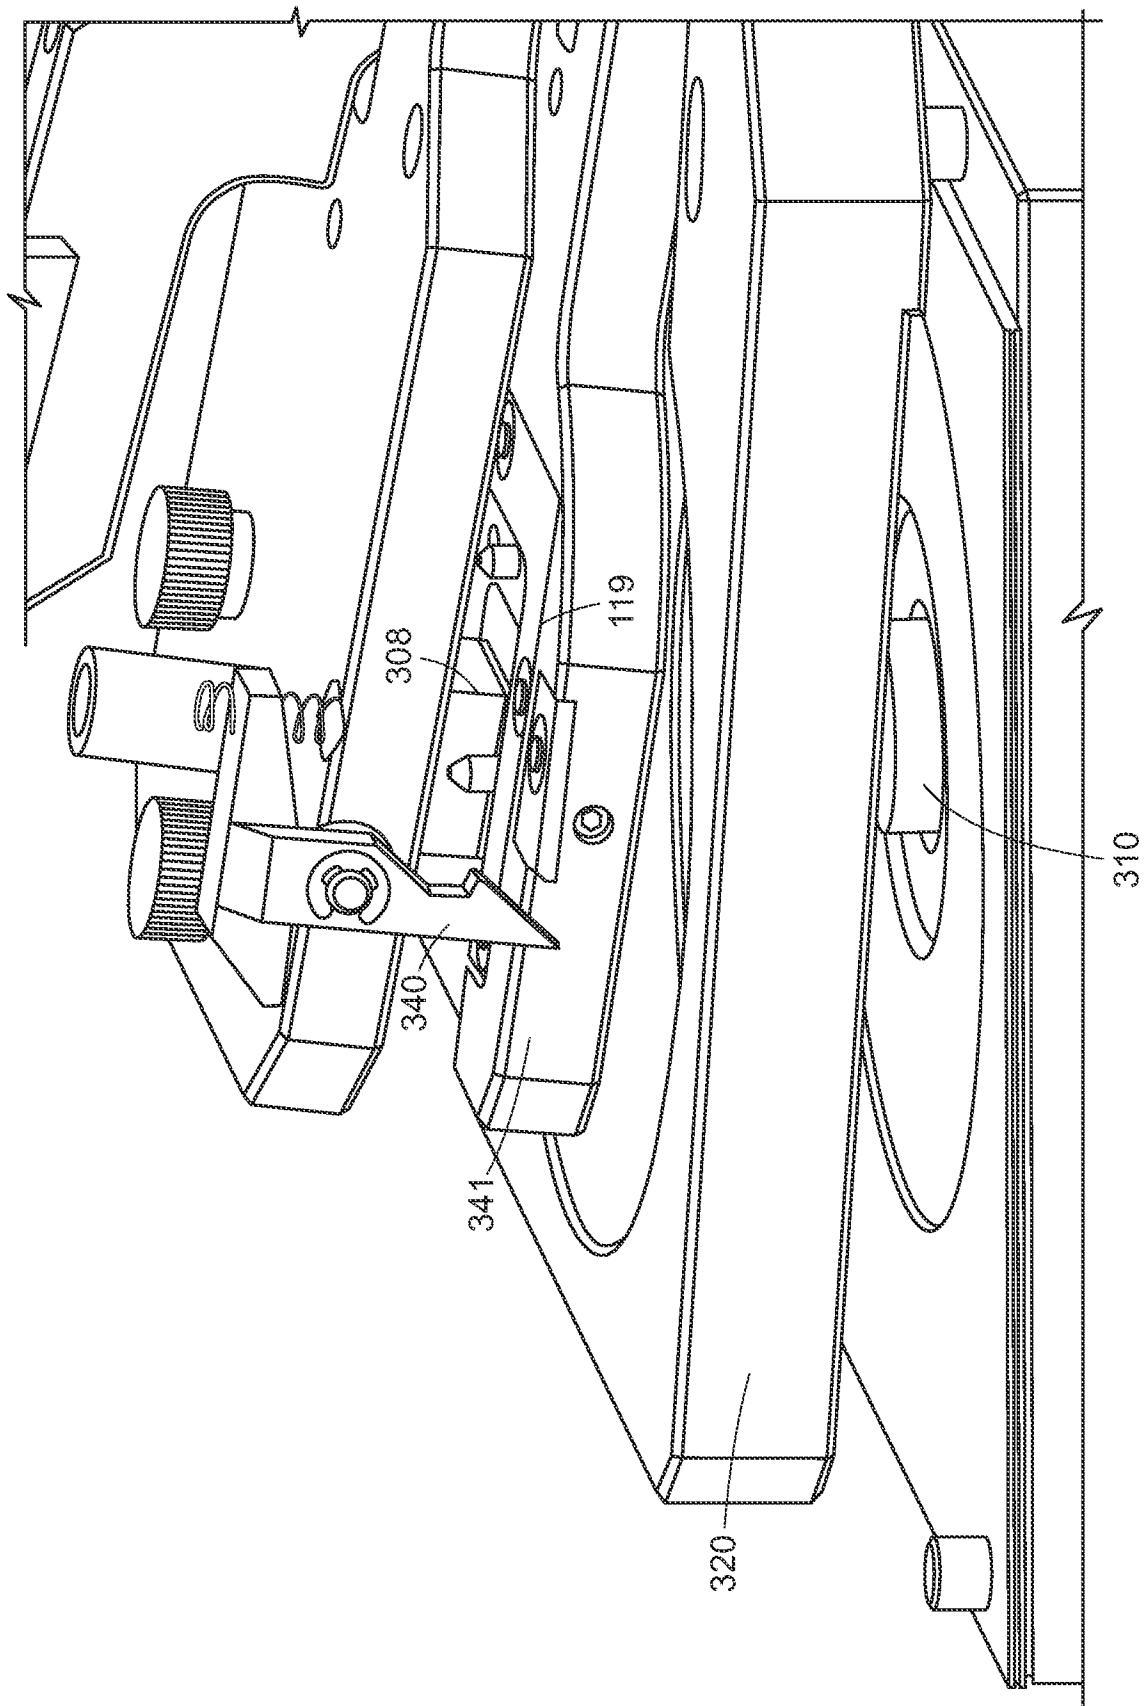


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2011/067578

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61B 17/322 (2012.01)

USPC - 606/132

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - A61B 17/00, 17/32, 17/322; A61F 2/10 (2012.01)

USPC - 269/287, 288; 600/36; 606/131, 132; 623/909

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

ECLA: A61F 2/10B; K61B1 17/00T, 17/322A (2012.01)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase and Google Patents

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6,248,114 B1 (YSEBAERT) 19 June 2001 (19.06.2001) entire document	1-4, 6-7, 9, 16-18, 21-29, 31-34, 36, 44-46, 49-56
Y	US 4,773,418 A (HETTICH) 27 September 1988 (27.09.1988) entire document	1-4, 6-7, 9, 16-18, 21-29, 31-34, 36, 44-46, 49-56
Y	WO 2010/036788 A2 (ASRANI et al) 01 April 2010 (01.04.2010) entire document	22-27, 50-56
A	US 3,472,228 A (TANNER JR) 14 October 1969 (14.10.1969) entire document	1-56
A	US 7,708,746 B2 (ERIKSSON et al) 04 May 2010 (04.05.2010) entire document	1-56
A	US 2005/0101972 A1 (BHATAVADEKAR et al) 12 May 2005 (12.05.2005) entire document	1-56

☐ Further documents are listed in the continuation of Box C.


* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
13 April 2012

Date of mailing of the international search report

01 MAY 2012

Name and mailing address of the ISA/US
Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450
Facsimile No. 571-273-3201

Authorized officer:
Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774