

12

EUROPEAN PATENT APPLICATION

21 Application number: 84103117.2

51 Int. Cl.³: **E 04 F 15/024**

22 Date of filing: 21.03.84

30 Priority: 30.03.83 US 480577

71 Applicant: **ROBERTSON BAUELEMENTE GmbH**,
Friedrich-Ebert-Strasse 27, D-4052 Korschenbroich (DE)

43 Date of publication of application: 07.11.84
Bulletin 84/45


72 Inventor: **Albrecht, Raymond E.**, 331 Woodland Road
Edgeworth, Sewickley Pennsylvania 15143 (US)
Inventor: **Lindner, Robert G.**, Witherow Road, Sewickley
Pennsylvania 15143 (US)

84 Designated Contracting States: **AT BE CH DE FR LI LU**
NL SE

74 Representative: **Patentanwälte Grünecker, Dr.**
Kinkeldey, Dr. Stockmair, Dr. Schumann, Jakob, Dr.
Bezold, Meister, Hilgers, Dr. Meyer-Plath,
Maximilianstrasse 58, D-8000 München 22 (DE)

54 **Adjustable pedestal for elevated floors.**

57 An adjustable pedestal adapted to support individually removable panel members in accurate, edge-aligned relation and in a common horizontal, that is level plane. The pedestal includes a head assembly supported on an upper end of a support. The head assembly includes a head member having a generally flat upper surface which is adjustable vertically, rotationally and laterally of the support rod. Abutment means adjustable along the support rod, is engaged by the head member and establishes a position of the head member wherein the upper surface resides in the horizontal plane. Clamping means clamps the head member to the support rod. Radially extending lugs extend above the upper surface of the head member. The arrangement is such that an adjacent pair of lugs of one pedestal cooperates with adjacent pairs of lugs from adjacent pedestals to define a panel supporting surface which is horizontal and which coincides with said horizontal plane.

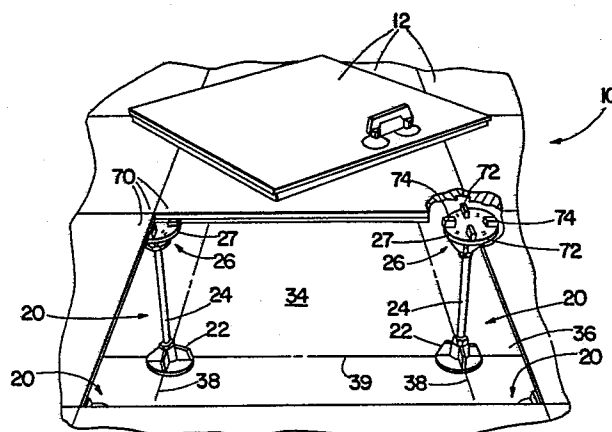

(A) TITLE OF THE INVENTIONS - Adjustable Pedestal for
Elevated Floors

(B) CROSS-REFERENCES TO RELATED APPLICATIONS (IF ANY) - None

(C) BACKGROUND OF THE INVENTION

5 1. Field of the Invention: This invention relates to
elevated floors, and more particularly to an improved adjustable
pedestal for use in supporting panel members forming the elevated
floor.

10 2. Description of the Prior Art: Elevated floors, also
known as pedestal floors, provide a large unobstructed chamber
through which the electrical wiring of various electrical
services is distributed, and within which feed conduits for
conditioned air extend. The chamber may also serve as a return
air plenum. Elevated flooring incorporates plural pedestals
15 which are uniformly distributed over a subfloor, such as a
concrete floor of multi-story buildings. The pedestals
cooperate in supporting the floor panels such that they are
individually removable to gain access to the chamber there
beneath. The panel members, as a group, provide a relatively,
20 flat, high-strength floor which sustains walking and standing of
personnel, supports apparatus and furnishings of the room, and
supports moving loads as the apparatus and furnishings are
introduced into the room or are altered and replaced.

25 It is highly desirable that the pedestals be capable of
supporting the panel members in a level condition. However,
since it is virtually impossible to construct a subfloor having
a dead flat and level upper surface, vertically adjustable
pedestals have been provided which are capable of compensating
for the high and low areas normally exhibited by the subfloor.
30 Typical examples of such vertically adjustable pedestals will

be found in U. S. Pat. Nos. 3,025,934 (SPISELMAN et al),
3,084,991 (SPISELMAN), 3,279,134 (DONOVAN), 3,398,933
(HAROLDSON), and 3,681,882 (BETTINGER). In addition to vertical
adjustability, other pedestals have incorporated leveling means
5 by which the head member or the support rod may be tilted to
position the panel supporting surfaces of the pedestals in a
common horizontal, that is level plane. The leveling means is
intended to compensate for any surface irregularities of the
subfloor. Typical examples of such pedestals will be found in
10 U. S. Pat. Nos. 3,100,624 (SPISELMAN), 3,318,057 (NORSWORTHY),
and 3,470,663 (TATE).

In all elevated floor structures, each panel member is
intended to fit within an opening defined by the contiguous
sides of adjacent panel members. To accomplish the required
15 fit, it is necessary that each pedestal be secured to the
subfloor precisely at a predetermined location. Out-of-position
pedestals cannot be tolerated. Anticipating the possibility of
out-of-position pedestals, the NORSWORTHY '057 pedestal utilizes
a head member and a levelling pad presenting complementary
20 spherical surfaces which cooperate to accommodate any divergence
of the support rod from true vertical. An oversize cap member
is provided presenting linear beads at its upper surface. The
cap member is slideable laterally over the levelling pad to
compensate for any deviations of the pedestal from its required
25 location and to allow the linear beads thereof to be aligned
with similar linear beads of adjacent pedestals. An adhesive
is disclosed for securing the levelling pad to the head member
and to the cap member. A slow-setting adhesive is preferred
to allow sufficient time for levelling the levelling pad and for
30 orienting the cap member prior to the development of a permanent

bond. The NORSWORTHY '057 patent provides one arrangement capable of compensating for out-of-position pedestals. However, the arrangement has at least two distinct disadvantages both arising from the use of a slow-setting adhesive. First, the time required to complete the floor structure is extended. The panel members cannot be installed until after the adhesives have developed permanent bonds. Secondly, a misaligned and/or non-levelled support is produced if either the cap member and/or the levelling pad are inadvertently moved prior to the development of permanent adhesive bonds and such movement goes unnoticed. Since the adhesively secured head member, levelling pad and cap member constitutes an integral structure, the misaligned and/or non-levelled integral head assembly must be removed and the installation procedure repeated using newly provided head member, levelling pad and cap member.

(D) SUMMARY OF THE INVENTION

The principal object of this invention is to provide an adjustable pedestal which overcomes the deficiencies of prior art pedestals.

Another object of this invention is to provide an adjustable pedestal which facilitates precise erection of an elevated floor structure.

Still another object of this invention is to provide an adjustable pedestal having a base member secured to a subfloor and a head member adjustably connected to the support rod and which may be precisely located and then mechanically locked into the required panel member supporting position relative to the head members of adjacent pedestals.

A further object of this invention is to provide an adjustable pedestal having a head assembly including a head

member and cooperating components by which the head member can be adjusted vertically to the required height, can be rotated about and displaced laterally in all directions relative to the support rod to align directional indicators presented by the head member in the required direction, and then clamped in the required adjusted position.

In accordance with the present invention, an adjustable pedestal is provided which is adapted to support panel members of an elevated floor structure. The adjustable pedestal comprises a base member adapted to be secured to a subfloor; a substantially vertical support rod extending upwardly from the base member and having a threaded upper end; and a head assembly adjustably connected to the threaded upper end. The head assembly includes a head member having an upper surface adapted to support the panel members and which is adjustable vertically, rotationally and laterally of the upper end. Abutment means engageable by the head member, is adjustable along the threaded upper end to establish a position of the head member along the support rod wherein the upper surface of the head member resides in a horizontal plane. Clamping means is provided which clamps the head member to the upper end at the desired height above the subfloor as determined by the abutment means and at the desired orientation.

Thus, in accordance with this invention, a plurality of the pedestals may be secured to the upper surface of the subfloor in substantially vertical orientation. Each pedestal is substantially precisely located at the intersection of grid lines provided on the subfloor. To facilitate positioning of the base member, sets of mutually perpendicular indicia are provided at the periphery of the base member, each set being aligned with one

of the grid lines. Thereafter, the abutment means is elevated to the desired height, that is into horizontal coplanar relationship with the other abutment means. When the head members are engaged with abutment means they are automatically positioned at the correct height and in a common horizontal plane.

Each head member is provided with sets of mutually perpendicular, upstanding lugs, each set of lugs being provided with directional indicia at upper surfaces thereof. Utilizing a sighting device, such as a laser transit or the like and the directional indicia presented by the lugs, the head members of all of the pedestals may be accurately positioned. It should be remembered that in accordance with the present invention, each head member is capable of rotation about the support rod and is capable of displacement laterally in all directions relative to the support rod. The rotational and lateral displacement capabilities of the head member assure accurate positioning of the upstanding lug of each head member in alignment with the previously provided grid lines. The displacement capability of the head member is particularly useful in accommodating any misalignments between the base member and the grid lines. Once oriented, the head member is rigidly affixed to the support rod by the clamping means. Should the head member be inadvertently knocked out of position, one need only release the clamping means, align the head member and then tighten the clamping means.

(E) BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a fragmentary perspective view of an elevated floor structure with a panel member removed to expose the pedestals of this invention;

FIGURE 2 is a fragmentary plan view, partly in cross-section, illustrating an array of rows and columns of base members and head members aligned with grid lines;

FIGURE 3 is a cross-sectional view taken along the line
5 3-3 of FIGURE 4 illustrating cooperating components of the pedestal of this invention;

FIGURE 4 is a plan view of the pedestal of FIGURE 3;

FIGURE 5 is a cross-sectional view taken along the line
5-5 of FIGURE 4;

10 FIGURE 6 is a cross-sectional view taken along the line 6-6 of FIGURE 3, further illustrating a base member;

FIGURE 7 is an enlarged fragmentary plan view illustrating the directional indicium provided on the periphery of the base member;

15 FIGURE 8 is an enlarged fragmentary plan view illustrating an alternative directional indicium;

FIGURE 9 is a cross-sectional view taken along the line 9-9 of FIGURE 2;

FIGURE 10 is a fragmentary cross-sectional view taken along
20 the line 10-10 of FIGURE 11, illustrating lateral offsetting of a head member relative to a support rod;

FIGURE 11 is a plan view of the pedestal of FIGURE 10;

FIGURE 12 is a plan view of a cushioning pad;

FIGURE 13 is a cross-sectional view taken along the line
25 13-13 of FIGURE 12, further illustrating the cushioning pad;

FIGURE 14 is a cross-sectional view taken along the line 14-14 of FIGURE 12, illustrating grounding means; and

FIGURE 15 is a fragmentary perspective view of a pedestal supporting two adjacent panels.

(F) DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

Reference is now directed to FIGURE 1 wherein there is illustrated a fragmentary perspective view of an elevated floor structure identified generally by the numeral 10. The floor structure 10 comprises plural panel members 12. One of the panel members 12 is shown removed to expose pedestals 20 of this invention, which support the panel member 12 above a subfloor 36. Each of the pedestals 20 includes a base member 22 secured to the upper surface 34 of the subfloor 36. As will be described, each of the base members 22 is positioned at a location defined by mutually perpendicular grid lines 38, 39 provided on the upper surface 34.

Each pedestal 20 also includes a support rod 24 extending upwardly from the base member 22. The support rod carries a head assembly 26 including a head member 27 having sets of mutually perpendicular, radially extending, upstanding lugs 72, 74 -- adjacent lugs 72, 74 receiving and retaining a corner 70 of the panel members 12. Also as will be described, abutment means (not visible) is provided to establish the required height of the head member 27 above the upper surface 34. The head member 27 can, during installation, be rotated about the support rod 24 and can be displaced laterally in all directions relative to the support rod 24 to align the lugs 72, 74 with the grid lines 38, 39. The ability of the head member 27 to be displaced laterally in all directions relative to the rod 24, accommodate any misalignments between the base member 22 and the grid lines 38, 39. Clamping means (not visible) is provided for clamping the head member 27 in fixed orientation relative to the grid lines 38, 39.

FIGURE 2 illustrates a typical arrangement wherein the

grid lines 38, 39 provided on the upper surface 34, are
equidistantly spaced-apart as indicated by the dimension lines
L. Base members 22 are shown having directional indicia I (to be
hereinafter described and illustrated) which facilitate positioning
5 each base member 22 at one intersection of the grid lines 38, 39.
Head members 27A, 27B, 27C and 27D also are shown, aligned with
grid lines 38, 39. As will become apparent, the rotational and
lateral adjustments provided by the pedestal construction allows
precise alignment of the lugs 72, 74 of each head member 27 with
10 grid lines 38, 39. Such adjustments compensate for any
inadvertent misalignments of the base member 22 with the grid
lines 38, 39.

It will be observed that each pair of adjacent pedestals
27A, 27B and 27D, 27C have the lugs 74 thereof aligned with
15 each other. Similarly, each pair of adjacent pedestals 27A,
27D and 27B, 27C have the lugs 72 thereof aligned with each
other. The arrangement is such that each pair of adjacent lugs
72, 74 define surfaces S and such that the surfaces S cooperate
to define a panel supporting surface which is horizontal.

20 Reference is now directed to FIGURE 3 which illustrates the
pedestal of this invention. The pedestal 20 comprises, in
general, the base member 22, the support rod 24, and the head
assembly 26 which includes the head member 27, abutment means 28
and clamping means 30.

25 Referring to FIGURES 3 and 6, the base member 22 comprises
a base plate 32 adapted to be secured by any suitable means to
the upper surface 34 of a subfloor 36. In the preferred
arrangement, the base plate 32 is secured to the upper surface 34
by suitable adhesives, such as an epoxy adhesive. If needed,
30 shims (not shown) may be inserted between the base plate 22 and

the upper surface 34 to render the support rod 24 truly vertical. Alternatively, the base member 22 may be provided with three levelling screws (not shown) extending downwardly through threaded openings in the base plate 32 and adjacent to the periphery thereof. The levelling screws would be equiangularly spaced about the hub 40 and positioned at the apices of an equilateral triangle. By vertically adjusting one or more of the levelling screws, the support rod 24 would be rendered truly vertical.

10 An internally threaded central hub 40 extends upwardly from the base plate 32 and receives a threaded lower end 42 of the support rod 24. A jamb nut 44 (FIGURE 3) secures the support rod 24 to the base member 22. Plural stiffening ribs 46 reinforce the hub 40 against lateral loads transferred from the panel members to the base member 22.

15 The base member 22 is adapted to be secured to the subfloor 36 at a selected location defined by the intersection of mutually perpendicular grid lines 38, 39 (FIGURE 2). To this end, the base plate 32 (FIGURE 6) is provided with sets of mutually perpendicular, directional indicia which are alignable with the grid lines 38, 39. In the preferred arrangement, the directional indicia take the form of first diametrically opposite pointed projections 48 for alignment with the grid lines 38(or 39) and second diametrically opposite, pointed projections 50 for alignment with the grid lines 39(or 38). As best seen in FIGURE 7, each projection 48(50) is provided with a V-shaped groove 52 to assist in aligning the projection 48(50) with the grid lines 38(39). Alternatively and as shown in FIGURE 8, the directional indicium may take the form of a V-shaped notch 51.

Reverting to FIGURE 3, the head member 27 includes a tubular portion 54 having a central bore 56, a radially extending upper end 58 presenting a generally flat upper surface 60 adapted to support the floor panels (not illustrated), and an annular lower end 62. Plural stiffening ribs 63 are provided. The head member 27 also presents an annular recess 64 (FIGURES 3 and 4) in the upper surface 60 thereof, which provides an annular shoulder 66 positioned to be engaged by the abutment means 28.

The upper surface 60 of the head member 27 provides a support for the corners of four adjacent panel members schematically illustrated by the dash-dot lines 70 in FIGURE 4. The first and second diametrically opposite positioning lugs 72, 74, extending upwardly (see FIGURE 3) from the upper surface 60, assure proper seating and preclude lateral shifting of the panel members. The upper surface of each of the lugs 72, 74 is provided with directional indicia such as a V-shaped groove 76 (FIGURE 5) which facilitates alignment of the lugs 72, 74 with the grid lines 38, 39.

Referring to FIGURE 3, the abutment means 28 serves to establish the height H of the upper surface 60 of the head member 27, above the subfloor 36. The abutment means 28 comprises a tubular member 78 having a radial flange 80.

The tubular member 78 is threadedly engaged with the upper end 82 of the support rod 24 and therefore is vertically adjustable. The tubular member 78 presents an upper surface 83, used as a reference surface during vertical adjustments to place the upper surface 60 of the head member 27 at the required height H. The radial flange 80 is received within

the annular recess 64 and abuts the annular shoulder 66.

In the preferred arrangement, the upper surface 60 and the upper surface 83 lie in a common plane represented by the dash-dot line P. Thus, when the head member 27 abuts the radial flange 80, the upper surface 60 is automatically positioned at the required height H.

The clamping means 30 serves to clamp the head member 27 to the threaded upper end 82 of the support rod 24 at the required height H and with the lugs 72, 74 aligned with the grid lines 38, 39. The clamping means 30 comprises a nut 84 threadedly engaged with the threaded upper end 82 of the support rod 24, and an annular plate 86 supported by the nut 84 and engaged with the annular end 62 of the tubular portion 54. The arrangement is such that when the nut 84 is tightened down, the head member 27 is immovably clamped between the annular plate 86 and the radial flange 80 of the tubular member 78. Thus in the illustrated arrangement, the abutment means 28 forms part of the clamping means 30.

It will be observed in FIGURE 9 that the central bore 56 has an inner diameter 88 which is greater than the outer diameter 90 of the tubular member 78. In addition, the annular recess 64 has an inner diameter 92 which is greater than the outer diameter 94 of the radial flange 80 which is represented by the dash-dot-dot line. The inner and outer diameters 92, 94 differ by an amount which is at least equal to the difference between the inner diameter 88 of the central bore 56 and the outer diameter 90 of the tubular member 78. Because of these dimensional relationships, the head member 27 -- prior to tightening the

clamping means 30 -- is rotatable about the support rod 24 and is displaceable laterally in all directions relative to the support rod 24 thereby to align the lug 72, 74 with the grid lines 38, 39 and hence with the corresponding lug 72, 74 of adjacent pedestals as illustrated in FIGURE 2. The rotation and laterally adjustability of the head member 27 also accommodates misalignments in the positions of the base members 22 of adjacent pedestals from the required positions. For the purpose of illustration, FIGURE 11 shows an out-of-position base member 22. That is, the base member 22 has the pointed projections 50 aligned with the grid line 39 but has the pointed projections 48 displaced laterally to the right of the grid line 38. To compensate for this misalignment, the head member 27 is displaced laterally to the right to align the directional indicia (V-shaped groove 76) with the grid line 38. FIGURE 10 further illustrates the lateral displacement of the head member 27 relative to the support rod 24.

FIGURES 12 and 13 illustrate a cushioning pad 96 comprising a pad base 98 and hoods 100 which, as shown in FIGURE 13, are open at the periphery of the pad base 98. When the cushioning pad 96 is installed on a head member 27, each of the hoods 100 receives one of the lugs 72 or 74, as can be seen in FIGURE 15. The lower face of the pad 98 may be provided with a layer 102 of adhesive preferably of the self-adhering type, and a peel-off protective coating 104. The cushioning pad 96 may be formed from a non-conductive resilient material, such as rubber. Plural grounding staples 106 provided in each quadrant of the cushioning pad 96, may be configured as shown in FIGURE 14.

(G) CLAIMS

1. An adjustable pedestal adapted to support panel
members of an elevated floor structure comprising:
a base member adapted to be supported on a subfloor;
a support rod extending upwardly from said base member
and having a threaded upper end; and
a head assembly adjustably connected to said threaded
upper end, said head assembly including:
a head member receiving said upper end and having a
generally flat upper surface which is adjustable vertically,
rotationally and laterally of said upper end;
abutment means adjustable along said upper end and
engageable by said head member, establishing a position of
said head member wherein said upper surface resides in a
horizontal plane; and
clamping means clamping said head member to said upper
end.
2. The adjustable pedestal as defined in Claim 1
wherein said head member includes radially extending lugs
extending above said upper surface, each of said lugs being
alignable with similar lugs of adjacent pedestals by
rotational and lateral adjustment of said head member.
3. The adjustable pedestal as defined in Claim 2
wherein each of said lugs includes directional indicium
provided on an upper surface thereof to assist in aligning
said lugs with similar lugs of adjacent pedestals.
4. The adjustable pedestal as defined in Claim 1
wherein said head member presents an upper end and a lower
end, and said abutment means and said clamping means each
engage one said end.

5. The adjustable pedestal as defined in Claim 1
2 wherein said abutment means forms part of said clamping means.

6. An adjustable pedestal adapted to support panel
2 members of an elevated floor structure comprising:
a base member adapted to be supported on a subfloor;
4 a support rod extending upwardly from said base member
and having a threaded upper end; and

6 a head assembly adjustable connected to said threaded
upper end, said head assembly including:

8 a head member having an upper surface adapted to
supporting said panel members, and a tubular portion having
10 a central bore receiving said upper end, said central bore
having an inner diameter which is larger than the outer
12 diameter of said upper end, whereby said head member is
movable in all directions laterally of said upper end and is
14 freely rotatable thereabout into a desired orientation;

abutment means adjustable along said threaded upper end
16 and engageable by said head member establishing the
desired height of said upper surface above said subfloor;
18 and

clamping means clamping said head member to said
20 upper end at said desired height and at said desired
orientation.

7. The adjustable pedestal as defined in Claim 6
2 wherein said abutment means forms part of said clamping means.

8. The adjustable pedestal as defined in Claim 6 wherein
2 said abutment means comprises a tubular member threaded onto
said upper end and having a radial flange overlying said head
4 member, said tubular member having an outer diameter which is
less than said inner diameter of said central bore.

9. The adjustable pedestal as defined in Claim 8 wherein
2 said head member includes an annular recess in said
upper surface which presents an annular shoulder engaged by
4 said radial flange, said annular recess having an inner diameter
which is greater than the outer diameter of said radial flange
6 by an amount at least equal to the difference between the outer
diameter of said tubular member and said inner diameter of
8 said central bore.

10. The adjustable pedestal as defined in Claim 9 wherein
2 an upper surface of said radial flange and said upper
surface of said head member lie in a common plane.

11. The adjustable pedestal as defined in Claim 7 wherein
2 said clamping means includes:

a nut threaded onto said upper end beneath said head
4 member; and

an annular plate supported by said nut and engaged with
6 an annular end of said tubular portion.

12. An elevated floor structure comprising:

2 a plurality of individual pedestals supported on a
generally horizontal subfloor and a plurality of panel members,
4 said pedestals being disposed in a uniform geometric pattern
over said subfloor, each of said pedestals including a base
6 member presenting an upstanding support rod having an upper end,
and a head assembly supported by said upper end, each said
8 head assembly comprising a head member receiving said upper end
and having a generally flat upper surface which is adjustable
10 vertically, rotationally and laterally of said upper end,
abutment means adjustable along said upper end and engageable
12 by said head member, establishing a position of said head member
wherein said upper surface resides in a horizontal plane

14 vertically spaced from said subfloor, and clamping means
clamping said head member to said upper end;

16 each said head member including radially extending lugs
extending above said upper surface, each of said lugs being
18 aligned with a similar lug of an adjacent one of said pedestals,
whereby an adjacent pair of said lugs of one pedestal cooperates
20 with adjacent pairs of said lugs from adjacent pedestals to
define a panel member supporting surface which is horizontal
22 and coincides with said horizontal plane.

13. The elevated floor structure as defined in Claim 12
2 wherein said head member presents an upper end and a lower end,
said abutment means and said clamping means each engage one said
4 end, and said abutment means comprises part of said clamping
means.

14. The elevated floor structure as defined in Claim 13
2 wherein said abutment means engages said upper end.

15. The elevated floor structure as defined in Claim 12
2 wherein said abutment means presents a generally flat reference
surface used to position said abutment means along said upper
4 end.

16. The elevated floor structure as defined in Claim 15
2 wherein said reference surface and said upper surface are
coplanar.

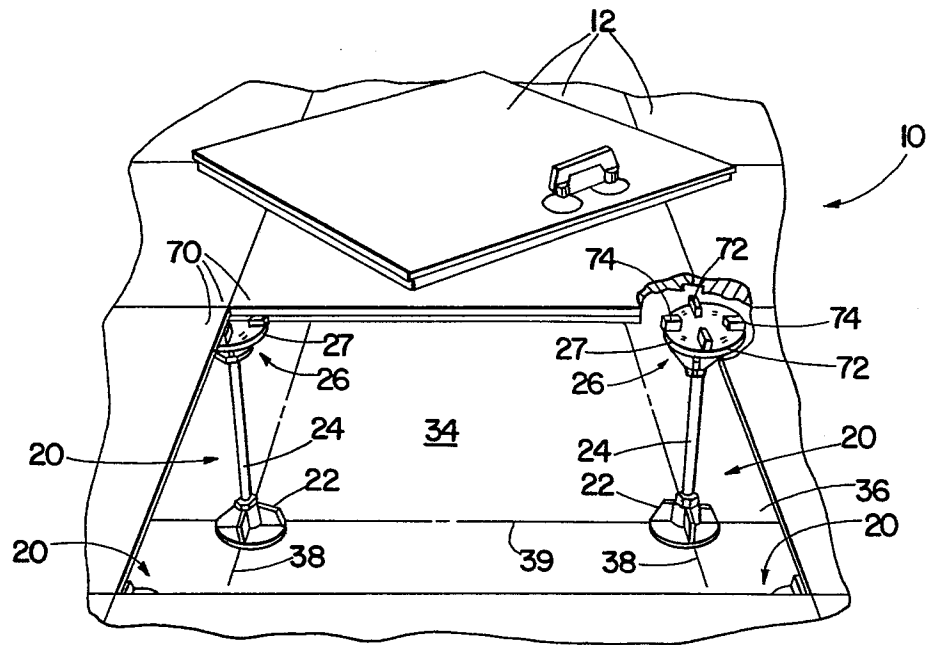


Fig. 1

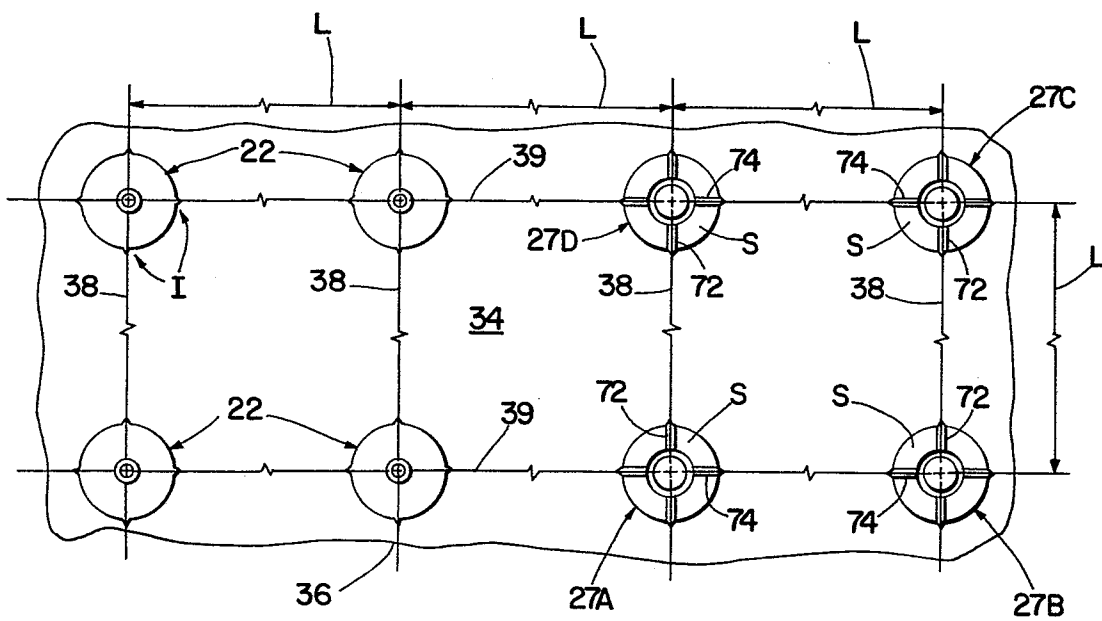


Fig. 2




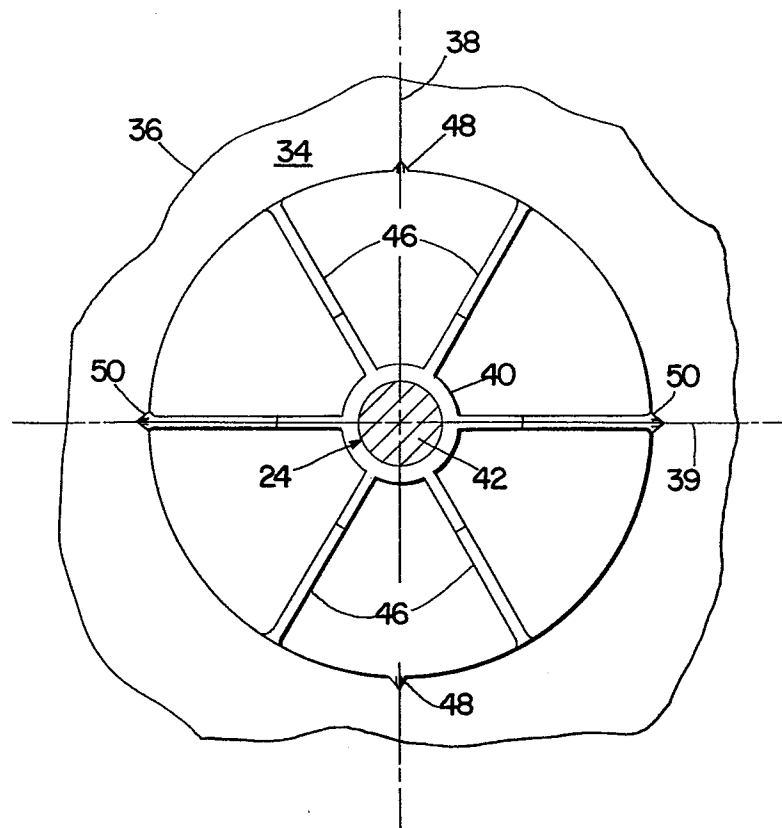
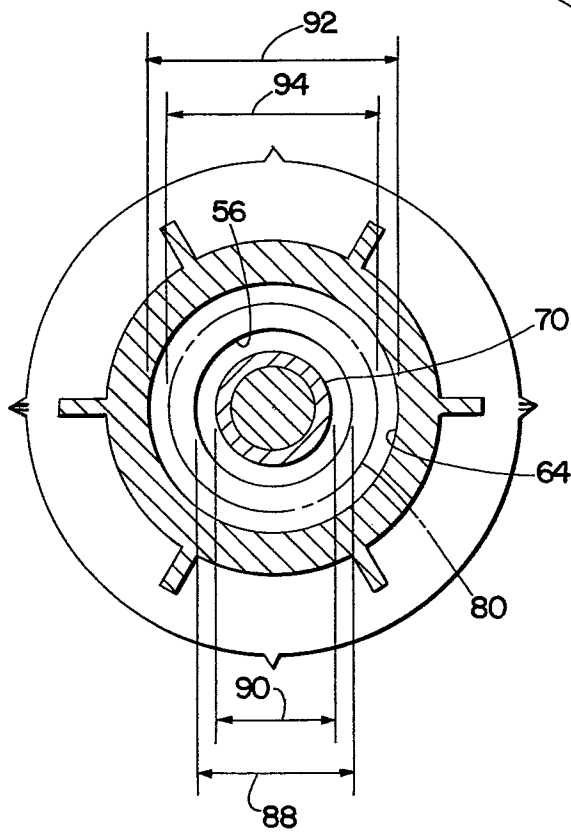
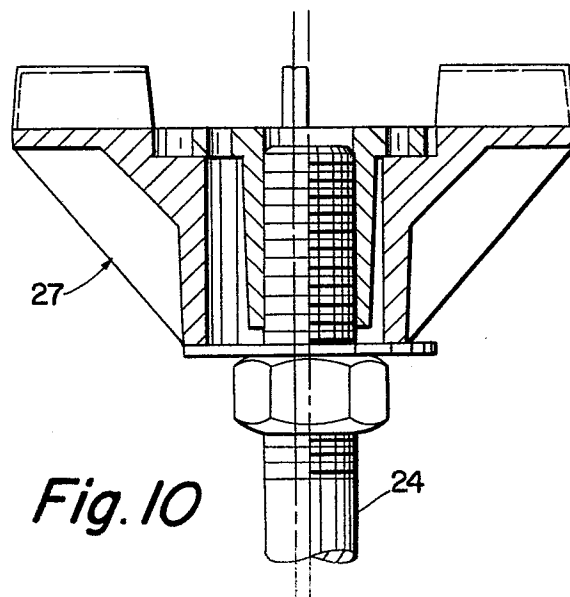


Fig. 5



**Fig. 7****Fig. 8****Fig. 6****Fig. 9****Fig. 10**

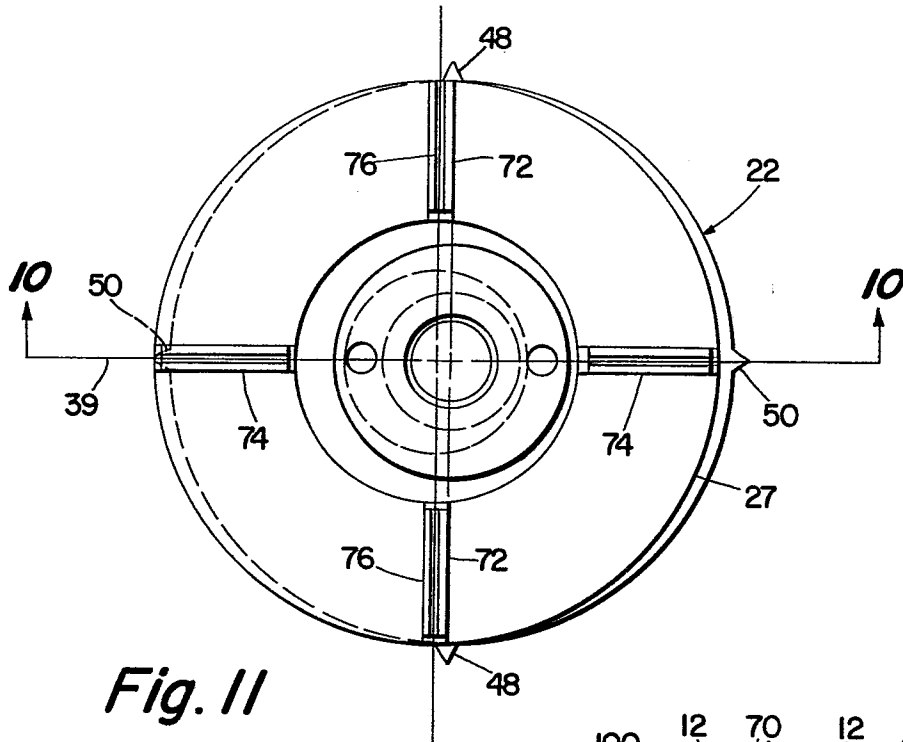


Fig. 11

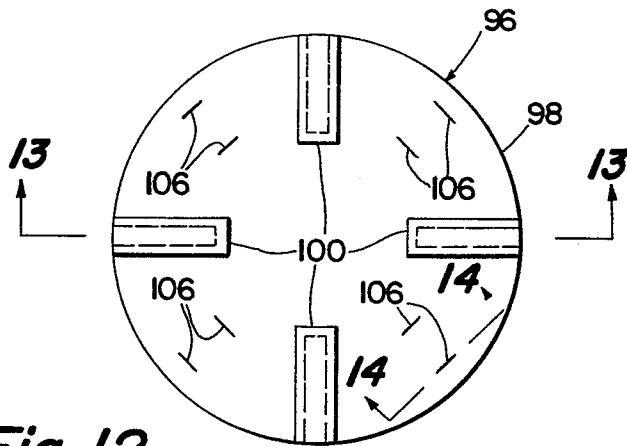


Fig. 12

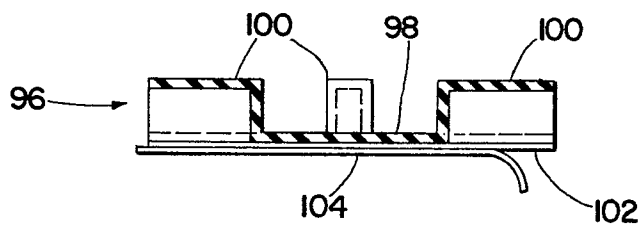


Fig. 13

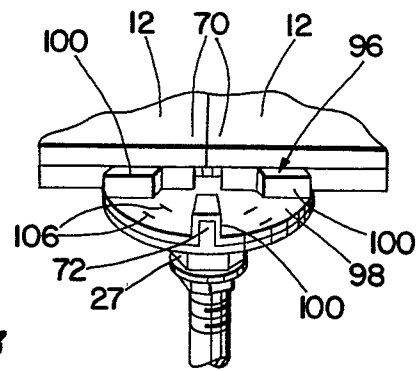


Fig. 15




Fig. 14