

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 December 2007 (21.12.2007)

PCT

(10) International Publication Number
WO 2007/146473 A2

(51) International Patent Classification:
G06F 17/30 (2006.01)

(21) International Application Number:
PCT/US2007/064877

(22) International Filing Date: 26 March 2007 (26.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/424,392 15 June 2006 (15.06.2006) US

(71) Applicant (for all designated States except US): **MOTOROLA, INC.** [US/US]; 1303 East Algonquin Road, Schaumburg, Illinois 60196 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GROSS, Joel, L.** [US/US]; 1841 East Washington Avenue, Gilbert, Arizona 85234 (US). **RAGHURAM, Vasanthi** [IN/US]; 1249 Wellington Drive, Palatine, Illinois 60067 (US).

(74) Agents: **WILLS, Kevin** et al.; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEM FOR DISTRIBUTING DATA PROCESSING UNITS IN A COMMUNICATION NETWORK

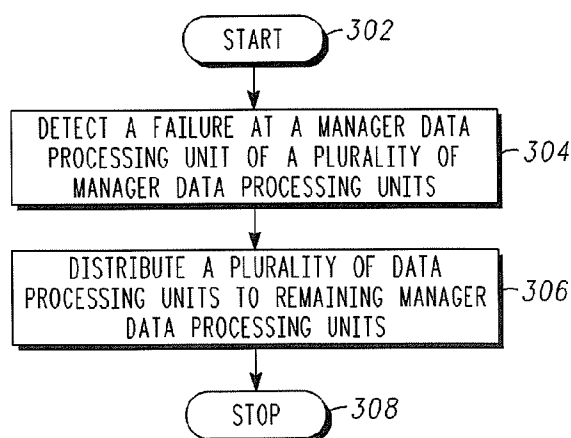

(57) Abstract: A method and system for distributing a plurality of data processing units (116, 118, 120, 122, 124, 126, 128, 130 and 132) in a communication network (100) is provided. The communication network comprises a plurality of manager data processing units (104, 106 and 108) for serving the plurality of data processing units. The method includes detecting (304) a failure at a manager data processing unit of the plurality of manager data processing units. Further, the method includes distributing (306) the plurality of data processing units to remaining manager data processing units of the plurality of manager data processing units.

WO 2007/146473 A2

METHOD AND SYSTEM FOR DISTRIBUTING DATA PROCESSING UNITS IN A COMMUNICATION NETWORK

FIELD OF INVENTION

5 The present invention generally relates to a communication network, and more specifically, to a method for managing plurality of data processing units in the communication network.

BACKGROUND

 In a communication network, two or more data processing units (DPU) are
10 interconnected to each other. This network of DPUs can be used to exchange resources among different data processing units. For example, the user of a first DPU can share an application, a database, or a peripheral device that is stored at a second DPU. Examples of communication networks that facilitate the functionalities mentioned above may include a local area network (LAN), a wide area network
15 (WAN), a wireless local area network (WLAN), a general packet radio service (GPRS) network, and the Internet. The DPU can be a computer, a cellular phone, a walkie-talkie, a satellite phone, a personal digital assistant (PDA), a radio transmitter, a microprocessor or any other computational device that needs one or more resources to function.

20 In the communication network, the various DPUs can be classified broadly into three categories, based on the functionalities offered by them. These three categories include a core data processing unit, a manager data processing unit, and a data processing unit. The core data processing unit monitors the functioning of the manager data processing units. The manager data processing unit provides various

network services to one or more data processing units. The network services provided by the manager data processing units may be Operations, Administration, Maintenance, and Provisioning (OAMP) services and other services that needed by the DPUs to function efficiently.

5 A failure at a manager data processing unit can cause disruption of OAMP services to the one or more data processing units. In order to provide uninterrupted OAMP services to the one or more data processing units, these one or more data processing units should be allocated to at least one active manager data processing unit. Various methods are known in the art for allocating the data processing units to
10 the active manager data processing units. One such method involves the use of a redundant manager data processing unit or a redundant server. According to this method, a main manager data processing unit provides OAMP services to all data processing units. A redundant manager data processing unit is also deployed, in addition to the main manager data processing unit. The redundant manager data
15 processing unit acts as a backup to the main manager data processing unit. In the event of a failure at the main manager data processing unit, the redundant manager data processing unit provides OAMP services to the data processing units. This method produces reasonably good results for small communication networks, but results in overloading of the main manager data processing units in the case of large
20 communication networks. Hence, it is not feasible to deploy this method in relatively large communication networks. Further, if the redundant manager data processing unit has a breakdown while the main manager data processing unit is under maintenance, OAMP services to all the data processing units remain disrupted until the time when at least one of the main manager data processing units, or the redundant

manager data processing unit, recovers. This results in a complete breakdown of the communication network.

- Another method for managing the data processing units in the communication network is by the manual allocation of the data processing units in the event of a
- 5 breakdown of a manager data processing unit. According to this method, in the event of the failure of the manager data processing unit, the data processing units are manually allocated by a network operator to the remaining active manager data processing units. This method involves significant manual intervention and often results in long delays in OAMP services being provided to the data processing units.

BRIEF DESCRIPTION OF FIGURES

Various embodiments of the invention will hereinafter be described in conjunction with the appended drawings, provided to illustrate and not to limit the invention, wherein like designations denote like elements, and in which:

FIG. 1 is a functional diagram illustrating a communication network of data processing units, in accordance with some embodiments of the present invention;

FIG. 2 illustrates a functional diagram of a core data processing unit, in accordance with some embodiments of the present invention;

FIG. 3 illustrates a flow diagram of a method for distributing a plurality of data processing units in a communication network, in accordance with some embodiments of the present invention;

FIG. 4 is a functional diagram illustrating the association of a plurality of manager data processing units with the plurality of data processing units after failure of a manager data processing unit, in accordance with an embodiment of the present invention;

FIG. 5 illustrates a flow diagram of a method for distributing the plurality of data processing units in the communication network, in accordance with an embodiment of the present invention;

FIG. 6 is a functional diagram illustrating the association of the plurality of manager data processing units with the plurality of data processing units when a

manager data processing unit is restored in the communication network, in accordance with another embodiment of the present invention;

FIG. 7 is a functional diagram illustrating flow messages between the core data processing unit, the manager data processing units, and the data processing units for various embodiments of the invention; and

FIG. 8 illustrates a flow diagram of a method for distributing the plurality of data processing units in the communication network, in accordance with another embodiment of the inventive arrangements of the present invention.

Skilled artisans will appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements, to help to improve an understanding of embodiments of the present invention.

DESCRIPTION OF PREFERRED EMBODIMENTS

Before describing in detail the particular method and system for distributing data processing units in the communication network, in accordance with the present invention, it should be observed that the present invention resides primarily in combinations of the method and system for distributing data processing units in the communication network. Accordingly, the system components and method steps have been represented, where appropriate, by conventional symbols in the drawings, showing only those specific details that are pertinent for understanding the present

invention, so as not to obscure the disclosure with details that will be readily apparent to those of ordinary skill in the art, having the benefit of the description herein.

In this document, relational terms such as first and second, and the like, may be used solely to distinguish one entity or action from another entity or action, without necessarily requiring or implying any actual such relationship or order between such entities or actions. The terms "comprises," "comprising," or any other variation thereof, are intended to cover a non-exclusive inclusion, such that a process, method, article, or apparatus that comprises a list of elements does not include only those elements but may include other elements not expressly listed or inherent to such a process, method, article, or apparatus. An element preceded by "comprises ... a" does not, without more constraints, preclude the existence of additional identical elements in the process, method, article, or apparatus that comprises the element.

A "set" as used in this document, means a non-empty set (i.e., comprising at least one member). The term "another", as used herein, is defined as at least a second or more. The term "including" as used herein, is defined as comprising.

A method for distributing a plurality of data processing units in a communication network is provided. The communication network includes a plurality of manager data processing units for serving the plurality of data processing units. The method includes detecting a failure at a manager data processing unit of the plurality of manager data processing units. The method further includes distributing the plurality of data processing units to remaining manager data processing units of the plurality of manager data processing units.

A method for distributing a plurality of data processing units in a communication network is provided. The communication network includes a plurality of manager data processing units for serving the plurality of data processing units. The method includes detecting a failure at a manager data processing unit of the plurality of manager data processing units. Further the method includes distributing the plurality of data processing units to remaining manager data processing units of the plurality of manager data processing units. Moreover, the method includes redistributing the plurality of data processing units to the plurality of manager data processing units, when a core data processing unit receives a restore heartbeat signal from the manager data processing unit.

A core data processing unit for monitoring a plurality of manager data processing units in a communication network is provided. The communication network includes a plurality of manager data processing units for serving the plurality of data processing units. The core data processing unit includes a monitoring module for detecting a heartbeat signal sent by each of the plurality of manager data processing units. Further the core data processing unit includes a distributing module for distributing the plurality of data processing units to remaining manager data processing units of the plurality of manager data processing units, when a failure of a manager data processing unit is indicated by the heartbeat signal.

FIG. 1 is a functional diagram illustrating a communication network **100** of data processing units, in accordance with some embodiments of the present invention. The communication network **100** can be used for exchanging resources among different data processing units. For example a user of a first data processing unit can access an application, a database or a peripheral device stored at a second data

processing unit. Examples of the communication network **100** include a local area network (LAN), a wide area network (WAN), a wireless local area network (WLAN), a general packet radio service (GPRS) network, and the Internet. The communication network **100** includes a core data processing unit **102** for monitoring the functioning of a plurality of manager data processing units. Further, **FIG. 1** shows manager data processing units **104**, **106** and **108**. The manager data processing units **104**, **106**, and **108** provide Operational, Administration, Maintenance and Provisioning (OAMP) services to pools of data processing units **110**, **112**, and **114**, respectively. Examples of a data processing unit may include a cellular phone, a walkie-talkie, a satellite phone, an Internet Protocol Router, and a personal digital assistant (PDA). The manager data processing unit **104** serves the pool of data processing unit **110**. The pool of data processing unit **110** contains data processing units **116**, **118** and **120**. Similarly, the manager data processing unit **106** serves the pool of data processing units **112**, which contains data processing units **122**, **124** and **126**. Further, the manager data processing unit **108** serves the pool of data processing units **114**, which includes data processing units **128**, **130** and **132**. Example of a manager data processing unit includes telecom Operations and Maintenance Centers (OMC).

For an embodiment of the present invention, the data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130**, and **132** can be logically connected to the manager data processing units **104**, **106** and **108**, and subsequently connected to the core data processing unit **102**. The logical connections can be wireless or wired. The data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130** and **132** require OAMP services to function properly. Examples of OAMP services can include performance management peg transfers, log transfers, data transfers, data integrity, network

maintenance, network addresses, etc. These OAMP services are provided by the manager data processing units **104**, **106** and **108** to the data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130** and **132**.

The core data processing unit **102** sends a heartbeat signal to each of the data
5 processing units **104**, **106** and **108** for monitoring the functioning of the data
processing units **104**, **106** and **108**. This process of the heartbeat signal being sent
from the core data processing unit **102** is known as heartbeating. The core data
processing unit **102** heartbeats the manager data processing units **104**, **106** and **108** at
regular intervals. The manager data processing units **104**, **106** and **108** relay back the
10 heartbeat signal to the core data processing unit **102**, confirming their active state.
Further, the manager data processing units **104**, **106** and **108** transfer a record of
performance parameters and the load of the data processing units **116**, **118**, **120**, **122**,
124, **126**, **128**, **130** and **132** to the core data processing unit **102** at predefined
intervals. Examples of performance parameters can be the rate of the traps at a data
15 processing unit, the loading characteristics of the data processing unit, number of
packets transferred, bytes transferred, event logs, alarm log files, etc. Hence, the core
data processing unit **102** is capable of managing the data processing units **116**, **118**,
120, **122**, **124**, **126**, **128**, **130** and **132**. For an embodiment of the present invention,
the data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130** and **132** may be
20 located at various geographical locations.

For another embodiment of the present invention, the heartbeat signal can be
generated at the manger data processing units **104**, **106**, and **108**. The manager data
processing units **104**, **106**, and **108** periodically send the heartbeat signal to the core
data processing unit **102** confirming their active state.

FIG. 2 illustrates a functional diagram of a core data processing unit **102**, in accordance with some embodiments of the present invention. The core data processing unit **102** monitors manager data processing units **104**, **106** and **108**. The manager data processing units **104**, **106** and **108** serve pools of data processing units **110**, **112** and **114** with OAMP services. The core data processing unit **102** includes a monitoring module **202** and a distributing module **204**. The monitoring module **202** monitors the manager data processing units **104**, **106** and **108** by sending a heartbeat signal to each of the manager data processing units **104**, **106** and **108**. The heartbeat signal is sent by a transreceiving module at predefined intervals. Each of the manager data processing units **104**, **106** and **108** relay back the heartbeat signal to the core data processing unit **102**, confirming their active state. Each of the manager data processing units **104**, **106** and **108** further send a record of the performance parameters and the load of each of the data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130** and **132** to the core data processing unit **102**. Examples of performance parameters can be the rate of the traps at a data processing unit, the loading characteristics of the data processing unit, etc. The relayed heartbeat signal and the record are received at the transreceiving module of the core data processing unit **102**. Further, the monitoring module **202** processes the record sent by the manager data processing units **104**, **106** and **108**, to enable the core data processing unit **102** to manage the communication network **100**. Further, the monitoring module **202** stores information related to the manager data processing units. This information may include information such as the load on each manager data processing unit, the number of data processing units served by each of the manager data processing units, and other information pertaining to the manager data processing units. Further, the

monitoring module **202** stores information related to the number of managed objects managed by each of the data processing units.

The distributing module **204** distributes the data processing units **116, 118, 120, 122, 124, 126, 128, 130** and **132** when a failure occurs at the manager data processing unit **106** of the manager data processing units **104, 106** and **108**, and is detected by the monitoring module **202**. The monitoring module **202** detects the failure when the manager data processing unit **106** skips one or more heartbeats at the core data processing unit **102**. The distributing module **204** allocates the data processing units **116, 118, 120, 122, 124, 126, 128, 130** and **132** to the manager data processing units **104** and **108**. When the manager data processing unit **106** is restored, the manager data processing unit **106** starts sending the heartbeat signal back to the core data processing unit **102**. Thereafter, the distributing module **204** redistributes the data processing units **116, 118, 120, 122, 124, 126, 128, 130** and **132** after receiving the heartbeat signal at the transreceiving module. The distributing module **204** may provide the addresses of the data processing units **116, 118, 120, 122, 124, 126, 128, 130** and **132** to the manager data processing units **104, 106** and **108** by using a memory module. The memory module stores and updates the addresses of the data processing units **116, 118, 120, 122, 124, 126, 128, 130** and **132** and the manager data processing units **104, 106** and **108**. It should be appreciated that a failure at the manager data processing unit **106** is shown only for exemplary purposes and is applicable to all the manager data processing units.

For another embodiment of the present invention, the data processing units **116, 118, 120, 122, 124, 126, 128, 130** and **132** may be allocated, based on predefined criteria. These predefined criteria may include detecting the failure at a manager data

processing unit. After detecting the failure of a manager data processing unit of the manager data processing units **104**, **106** and **108**, the distributing module **204** compares the record of the parameters and the load of the manager data processing units **104**, **106** and **108**. The distributing module **204** can further assign a pool of data
5 processing units, served by the manager data processing unit, to remaining active manager data processing units.

FIG.3 illustrates a flow diagram for a method for distributing the data processing units in the communication network **100**, in accordance with some embodiments of the present invention. The communication network **100** includes a
10 core data processing unit **102** for monitoring manager data processing units **104**, **106** and **108**. The manager data processing units **104**, **106** and **108** serve pools of data processing units **110**, **112** and **114**. The pools of data processing units **110**, **112** and **114** include the data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130** and **132**. The manager data processing units **104**, **106** and **108** provide the pools of data
15 processing units **110**, **112** and **114** with OAMP services. For an embodiment of the present invention, a failure at a manager data processing unit **106** results in the disruption of OAMP services to a pool of data processing units **112**. To provide uninterrupted OAMP services to the pool of data processing units **112**, the data processing units **122**, **124** and **126** of the pool of data processing units **112** are
20 distributed among the remaining active manager data processing units **104** and **108**. The method starts at step **302**. At step **304**, the core data processing unit **102** detects the failure at the manager data processing unit **106**. The core data processing unit **102** sends a heartbeat signal at a predefined interval to each of the manager data processing unit **104**, **106** and **108**. Each of the manager data processing units **104**,

106 and **108** relays the heartbeat signal back to the core data processing unit **102**. If the core data processing unit **102** does not receive the heartbeat signal from the manager data processing unit **106**, the core data processing unit **102** becomes aware of the failure at the manager data processing unit **106**. At step **306**, the core data
5 processing unit **102** distributes the plurality of data processing units served by the manager data processing units **106** to the remaining manager data processing units **104** and **108**.

For an embodiment of the present invention, the heartbeat signal can be generated at the manger data processing units **104**, **106**, and **108**. The manager data
10 processing units **104**, **106**, and **108** periodically send the heartbeat signal to the core data processing unit **102** confirming their active state. For another embodiment of the present invention, the core data processing unit **102** can detect the failure at the manager data processing unit **106** when a faulty heartbeat signal is received at the core data processing unit **102**. For another embodiment of the present invention, the
15 core data processing unit **102** can detect the failure at the manager data processing unit **106** when the core data processing unit **102** detects a deviation in the heartbeat signal sent by the manager data processing unit **106**.

For an embodiment of the present invention, the core data processing unit **102** distributes the plurality of data processing units served by the manager data
20 processing unit **106** to the remaining data processing units, based on an equitable algorithm. The equitable algorithm includes comparing the load on each of the manager data processing units **104**, **106** and **108**. Examples of the load can be the rate of the traps at the manager data processing units **104**, **106** and **108**, the network load, the computational load, the exchange of resources, etc. Exchange of resources can be

by the exchange of performance management peg transfers, log file transfers, etc. For an embodiment of the present invention the equitable algorithm includes distributing the data processing units **122**, **124**, and **126** from the pool of data processing units **112** to the remaining manager data processing units **104** and **108**, maintaining an equal

5 load on the remaining manager data processing units **104** and **108**. For another embodiment of the present invention, the equitable algorithm may include comparing the number of data processing units served by the remaining manager data processing units **104** and **108**. Further, the equitable algorithm may include distributing the data processing units of the pool of data processing units **112** to the remaining manager

10 data processing units **104** and **108**, maintaining an equal number of data processing units served by the remaining manager data processing units **104** and **108**. For another embodiment of the present invention, the equitable algorithm may include comparing a number of managed objects managed by or contained within the data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130** and **132**. Further, the

15 equitable algorithm may include distributing the data processing units of the pool of data processing units **112** to the remaining manager data processing units **104** and **108**, maintaining an equal number of managed objects of the remaining manager data processing units **104** and **108**. Examples of managed objects can be short messaging services modules and GPRS modules in cellular phones, etc. The method terminates

20 at step **308**.

FIG.4 is a functional diagram illustrating an association of a plurality of manager data processing units with a plurality of data processing units after a failure at a manager data processing unit **106**, in accordance with various embodiments of the present invention. The communication network **100** includes a core data processing

unit **102** for monitoring manager data processing units **104**, **106** and **108**. The manager data processing units **104**, **106**, and **108** serve pools of data processing units **110**, **112** and **114**. The pools of data processing units **110**, **112** and **114** include data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130** and **132**. The manager data processing units **104**, **106** and **108** provide the data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130** and **132** with OAMP services. The core data processing unit **102** sends a heartbeat signal to each of the manager data processing units **104**, **106** and **108** at a predefined interval. Each of the manager data processing unit **104**, **106** and **108** relays back the heartbeat signal to the core data processing unit **102**.

The core data processing unit **102** detects a failure at the manager data processing unit **106**. The core data processing unit **102** detects the failure when the core data processing unit **102** does not receive the one or more heartbeat signal relayed by the manager data processing unit **106**. For an embodiment of the present invention, the core data processing unit **102** detects the failure at the manager data processing unit **106** when a fault is indicated by the heartbeat signal relayed by the manager data processing unit **106**. The core data processing unit **102** distributes the data processing units **122**, **124** and **126**, served by the manager data processing unit **106**, to the remaining data processing units **104** and **108**, based on an equitable algorithm.

The core data processing unit **102** distributes the pool of data processing units **112**, comprising data processing units **122**, **124** and **126**, between the manager data processing units **104** and **108**. The core data processing unit **102** distributes the data processing units **122** and **124** to the manager data processing unit **104** and instructs the manager data processing unit **104** to serve the data processing units **122** and **124**

with OAMP services. Further, the core data processing unit **102** distributes the data processing unit **126** to the manager data processing unit **108**. Moreover, the core data processing unit **102** instructs the manager data processing unit **108** to serve the data processing unit **126**. Furthermore, the manager data processing units **104** and **108**
5 keep a record of the performance parameters and the load of the data processing units **122**, **126** and **124**, respectively. The manager data processing units **104** and **108** both periodically transfer the record of data processing units **122**, **124** and **126** to the core data processing unit **102**. The core data processing unit **102** processes the record received for managing the data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**,
10 **130** and **132**. The manager data processing unit **106** is shown to fail only for exemplary purposes, and it should be appreciated that the invention can be practiced in the event of the failure of any manager data processing unit of the plurality of manager data processing units.

FIG.5 illustrates an alternative method for distributing a plurality of data
15 processing units in the communication network **100**, in accordance with an embodiment of the present invention. The communication network **100** includes a core data processing unit **102** for monitoring manager data processing units **104**, **106** and **108**. The manager data processing units **104**, **106** and **108** serve pools **110**, **112** and **114** of data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130** and **132** with
20 OAMP services. In an event of a failure at a manager data processing unit **106**, the OAMP services to a pool of data processing units **112** get disrupted. To provide uninterrupted OAMP services to the pool of data processing units **112**, the pool of data processing units **112** is distributed among remaining active manager data processing units **104** and **108**. The method for distributing the plurality of data

processing units starts at step 502. At step 504, the core data processing unit 102 detects the failure at the manager data processing unit 106 when the manager data processing unit 106 skips one or more heartbeats. At step 506, the core data processing unit 102 distributes the data processing units 122, 124 and 126 served by
5 the manager data processing unit 106 to the remaining data processing units 104 and 108.

At step 508, the core data processing unit 102 redistributes the data processing units 116, 118, 120, 122, 124, 126, 128, 130 and 132 to the manager data processing units 104, 106 and 108, after receiving the regular heartbeat signal from the manager
10 data processing unit 106. The regular heartbeat signal from the manager data processing unit 106 indicates that the manager data processing unit 106 is now able to serve the data processing units with OAMP services. The core data processing unit 102 redistributes the data processing units 116, 118, 120, 122, 124, 126, 128, 130 and 132. The method terminates at step 510.

15 For another embodiment of the present invention, the core data processing unit 102 distributes and redistributes the data processing units 116, 118, 120, 122, 124, 126, 128, 130 and 132, based on an equitable algorithm. For another embodiment of the present invention, the core data processing unit 102 receives a regular heartbeat signal when the manager data processing unit 106 is re-established. For another
20 embodiment of the present invention, the core data processing unit 102 receives a restore signal when the manager data processing unit 106 is restored.

FIG. 6 is a functional diagram illustrating an association of a plurality of manager data processing units with a plurality of data processing units, after the re-establishment of a manager data processing unit, in accordance with some

embodiments of the present invention. When the manager data processing unit **106** suffers a failure, it is unable to provide OAMP services to the plurality of data processing units **122**, **124** and **126**. The data processing units **122**, **124** and **126** are distributed to manager data processing units **104** and **108**. When the core data processing unit **102** starts receiving the heartbeat signal from the manager data processing unit **106**, indicating that the manager data processing unit **106** has been restored, a redistribution of data processing units should take place. When the manager data processing unit **106** is restored, the manager data processing unit **106** starts relaying back the heartbeat signal sent by the core data processing unit **102**.

When the core data processing unit **102** starts receiving the heartbeat signal, the distributing module **204** of the core data processing unit **102** redistributes the data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130** and **132**. The distributing module **204** redistributes the data processing units **116**, **118**, **120**, **122**, **124**, **126**, **128**, **130** and **132** on the basis of the equitable algorithm. For an embodiment of the present invention, the core data processing unit **102** may receive a restore signal, indicating that the manager data processing unit **106** has been restored.

The core data processing unit **102** assigns the manager data processing unit **106** to serve data processing units **116**, **118**, and **126**, based on the equitable algorithm. Further, the core data processing unit **102** instructs the manager data processing unit **104** to serve the data processing units **120**, **122** and **124**. Furthermore, the core data processing unit **102** instructs the manager data processing unit **108** to serve the data processing units **128**, **130** and **132**. Moreover, the manager data processing unit **104** serves a pool of data processing units **602**, including the data processing units **120**, **122** and **124**. The manager data processing unit **106** serves a

pool of data processing units **604**, including data processing units **116**, **118** and **126**. The manager data processing unit **108** serves the pool of data processing units **114**, including the data processing units **128**, **130** and **132**. Further the manager data processing units **104**, **106** and **108** start transferring the records to the core data processing unit **102**.

FIG. 7 is a functional diagram illustrating flow messages between the core data processing unit **102**, the manager data processing units **104** and **106**, and the data processing units **116** and **122** for various embodiments of the invention. The core data processing unit **102** sends a heartbeat to each of the manager data processing units **104** and **106**. The manager data processing units **104** and **106** relay back the heartbeat to the core data processing unit **102**, confirming their active state. Therefore, the manager data processing units **104** and **106** serve data processing units **116** and **122**, respectively, with OAMP services. Further, the manager data processing units **104** and **106** store a record of performance parameters and their load periodically. Moreover, the manager data processing units **104** and **106** send back a record of their performance parameters and load to the core data processing unit **102**. When there is a failure at the manager data processing unit **106**, the manager data processing unit **106** stops relaying back the heartbeat. The core data processing unit **102** detects the failure at the manager data processing unit **106** when there is a break in the heartbeat sent by manager data processing unit **106**. After detecting the failure, the core data processing unit **102** assigns the data processing unit **122** to the manager data processing unit **104**, based on an equitable algorithm. The core data processing unit **102** instructs the manager data processing unit **104** to serve data processing unit **122** with OAMP services. Further, the core data processing unit **102** distributes the

data processing unit **122** to the manager data processing unit **104**, to avail of OAMP services. Further, the manager data processing unit **104** keeps a record of the performance parameters and load of the data processing unit **122**. Moreover, the manager data processing unit **104** also starts relaying back the record of the activities
5 of data processing unit **122** to the core data processing unit **102** at a predefined interval.

FIG. 8 illustrates a flow diagram of a method for distributing a plurality of data processing units in a communication network, in accordance with another embodiment of the present invention. With reference to **FIG. 7**, the core data
10 processing unit **102** monitors the manager data processing units **104** and **106**. The manager data processing unit **104** serves the data processing unit **116**, and the manager data processing unit **106** serves the data processing unit **122** with OAMP services.

The core data processing unit **102** sends a heartbeat to each of the manager
15 data processing units **104** and manager data processing units **106** at a predefined interval. The manager data processing units **104** and **106** relay back the heartbeat to the core data processing unit **102**. Further, the manager data processing units **104** and **106** transfer the records of their performance parameters and load to the core data processing unit **102** at the predefined interval. The core data processing unit **102**
20 detects the failure when there is a break in the heartbeat signal relayed by manager data processing unit **106**. The method for distributing the plurality of data processing units starts at step **802**. At step **804**, the core data processing unit **102** discovers a new or recovered data processing unit **122**, which is to be served with OAMP services. At step **806**, the core data processing unit **102** compares the load of manager data

processing units **104** and **106**. The load can be a network load, a computational load or resource transfers. Records of the load can include periodic performance management peg transfers, log transfers, etc.

At step **808**, the core data processing unit **102** assigns the data processing unit **122** to the manager data processing unit **104**, based on an equality algorithm. At step **810**, the core data processing unit **102** instructs the manager data processing unit **104** to add the data processing unit **122** to its list of data processing units to be served. The manager data processing unit **104** serves the data processing unit **122** with the OAMP services. At step **812**, core data processing unit **102** instructs the data processing unit **122** to consider manager data processing unit **104** as its parent service provider. The data processing unit **122** will now receive the OAMP services from the manager data processing unit **104**. The data processing unit **122** will start resource exchange with the manager data processing unit **104**. At step **814**, the manager data processing unit **104** starts managing the activities of the data processing unit **122**. At step **816**, the manager data processing unit **104** starts keeping a record of the performance parameters and load of the data processing unit **122**. The manager data processing unit **104** updates the record of the data processing unit **122** periodically. At step **818**, the manager data processing unit **104** transfers the record of data processing unit **122** to the core data processing unit at the predefined interval. The core data processing unit **102** uses this record of the data processing unit **122** to manage the plurality of data processing units. The method terminates at step **820**.

For another embodiment of the present invention, a communication network includes a plurality of network elements, a plurality of mediation servers, and an element manager core server. The plurality of network elements is logically linked to

the plurality of mediation servers, and the plurality of mediation servers to the element manager core server subsequently. The element manager core server monitors the functioning of each of the plurality of mediation servers by periodically checking their parameters. The plurality of mediation servers serves the plurality of
5 network elements with OAMP services.

For another embodiment of the present invention, a redundant manager data processing unit can be added to the communication network **100**, to provide OAMP services. The redundant manager data processing unit makes the communication network **100** scalable. After the addition of the redundant manager data processing
10 unit, the data processing units **116, 118, 120, 122, 124, 126, 128, 130** and **132** can be distributed, so as to balance the load on the manager data processing units **104, 106** and **108**. The distribution of the data processing units **116, 118, 120, 122, 124, 126, 128, 130** and **132** can be based on the equitable algorithm. For another embodiment of the present invention, a new plurality of data processing units can be added to the
15 communication network **100**. When the new plurality of data processing units is added, the data processing units **116, 118, 120, 122, 124, 126, 128, 130** and **132** are allocated to one or more of the manager data processing units **104, 106** and **108**, based on an equitable algorithm. For an embodiment of the present invention, the equitable algorithm includes comparing the load on each of the manager data processing units
20 of the manager data processing units **104, 106** and **108**. Further, the new plurality of data processing units are assigned to at least one manager data processing unit of the manager data processing units **104, 106** and **108**, such that at least one manager data processing unit of the manager data processing units **104, 106** and **108** is least loaded. For another embodiment of the present invention, the equitable algorithm assigns the

new plurality of data processing units, such that each manager data processing unit of the manager data processing units **104**, **106** and **108** is loaded with the least number of data processing units. For another embodiment of the present invention, the equitable algorithm assigns the new plurality of data processing units, such that each manager
5 data processing unit of the manager data processing units **104**, **106** and **108** manages the least number of objects.

The present invention aims to distribute a plurality of data processing units in a communication network. The communication network includes a core data processing unit, which monitors a plurality of manager data processing units. Further,
10 the plurality of manager data processing units is capable of serving a plurality of data processing units with OAMP services. The present invention ensures uninterrupted OAMP services to the plurality of data processing units in the event of a failure at a manager data processing unit. Further, the present invention enables the communication network to dynamically add a data processing unit, maintaining equal
15 load distribution in the communication network. Moreover, the present invention distributes the plurality of data processing units on the basis of an equitable algorithm, which ensures an equal load on each of the plurality of manager data processing units. For another embodiment of the present invention, the equitable algorithm also ensures an equal number of data processing units, served by each of the manager data
20 processing units. For another embodiment, the equitable algorithm ensures an equal number of managed objects in each of the plurality of manager data processing units. The present invention also ensures minimal manual intervention and consequently provides enhanced reliability in the communication network.

It will be appreciated the method and system for distributing data processing units in the communication network described herein may be comprised of one or more conventional processors and unique stored program instructions that control the one or more processors to implement some, most, or all of the functions described
5 herein. Alternatively, the same functions could be implemented by a state machine that has no stored program instructions, in which each function or some combinations of certain portions of the functions are implemented as custom logic. A combination of the two approaches could be used. Thus, methods and means for performing these functions have been described herein.

10 It is expected that one of ordinary skill, notwithstanding possibly significant effort and many design choices motivated by, for example, available time, current technology, and economic considerations, when guided by the concepts and principles disclosed herein will be readily capable of generating such software instructions and programs and ICs with minimal experimentation.

15 In the foregoing specification, the present invention and its benefits and advantages have been described with reference to specific embodiments. However, one of ordinary skill in the art appreciates that various modifications and changes can be made without departing from the scope of the present invention as set forth in the claims below. Accordingly, the specification and figures are to be regarded in an
20 illustrative rather than a restrictive sense, and all such modifications are intended to be included within the scope of present invention. The benefits, advantages, solutions to problems, and any element(s) that may cause any benefit, advantage, or solution to

occur or become more pronounced are not to be construed as a critical, required, or essential features or elements of any or all the claims.

The terms “including” and/or “having”, as used herein, are defined as comprising. The term “program”, as used herein, is defined as a sequence of
5 instructions designed for execution on a computer system. A “program”, or “computer program”, may include a subroutine, a function, a procedure, an object method, an object implementation, an executable application, an applet, a servlet, a source code, an object code, a shared library/dynamic load library and/or other sequence of instructions designed for execution on a computer system. It is further
10 understood that the use of relational terms, if any, such as first and second, top and bottom, and the like are used solely to distinguish one entity or action from another entity or action without necessarily requiring or implying any actual such relationship or order between such entities or actions.

CLAIMS

What is claimed is:

1. A method for distributing a plurality of data processing units in a communication network, wherein the communication network comprises a plurality of manager data processing units for serving the plurality of data processing units, the method comprising:
 - detecting a failure at a manager data processing unit of the plurality of manager data processing units; and
 - distributing the plurality of data processing units to remaining manager data processing units of the plurality of manager data processing units.
2. The method as recited in claim 1 further comprising a prior step of receiving a signal at a core data processing unit at a regular time interval, wherein the signal is being sent by each of the plurality of manager data processing units.
3. The method as recited in claim 1, wherein detecting the failure comprises receiving a fault signal at a core data processing unit, the fault signal being sent by the manager data processing unit of the plurality of manager data processing units.
4. The method as recited in claim 1 further comprising assigning a plurality of new data processing units to at least one manager data processing unit of the plurality of manager data processing units, wherein the at least one manager data processing unit is least loaded.

5. A method for distributing a plurality of data processing units in a communication network, wherein the communication network comprises a plurality of manager data processing units for serving the plurality of data processing units, the method comprising:

- 5 detecting a failure at a manager data processing unit of the plurality of manager data processing units;
- distributing the plurality of data processing units to remaining manager data processing units of the plurality of manager data processing units; and
- redistributing the plurality of data processing units to the plurality of manager
- 10 data processing units, when a core data processing unit receives a restore signal from the manager data processing unit.

6. The method as recited in claim 5, wherein the plurality of data processing units is distributed equitably to the remaining manager data processing units.

15

7. The method as recited in claim 6, wherein distributing the plurality of data processing units equitably further comprises maintaining an equal load for the remaining manager data processing units.

- 20 8. The method as recited in claim 6, wherein the distributing the plurality of data processing units equitably comprises maintaining an equal number of data processing units for the remaining manager data processing units.

9. The method as recited in claim 6, wherein the distributing the plurality of data processing units equitably comprises maintaining an equal number of managed objects for the remaining manager data processing units.

5 10. A core data processing unit for monitoring a plurality of manager data processing units in a communication network, wherein the communication network comprises the plurality of manager data processing units for serving a plurality of data processing units, the core data processing unit comprising:

10 a monitoring module for detecting a signal sent by each of the plurality of manager data processing units; and
a distributing module for distributing the plurality of data processing units to remaining manager data processing units of the plurality of manager data processing units, when a failure of a manager data processing unit is indicated by the signal.

15

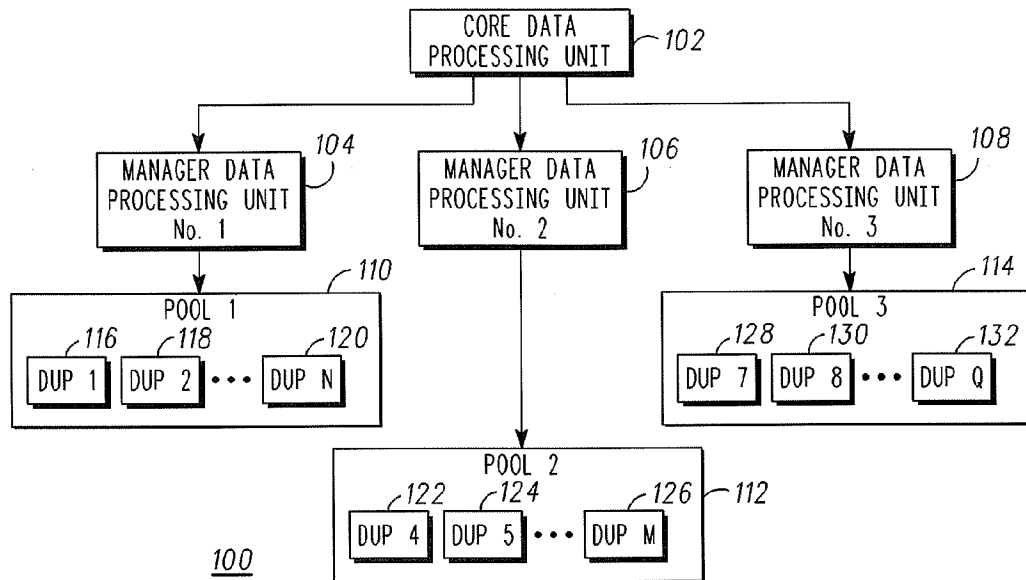


FIG. 1

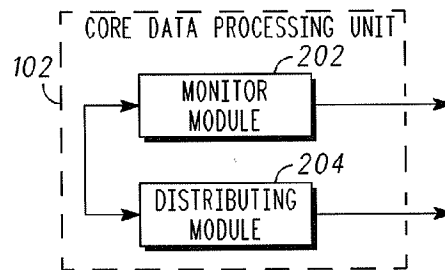


FIG. 2

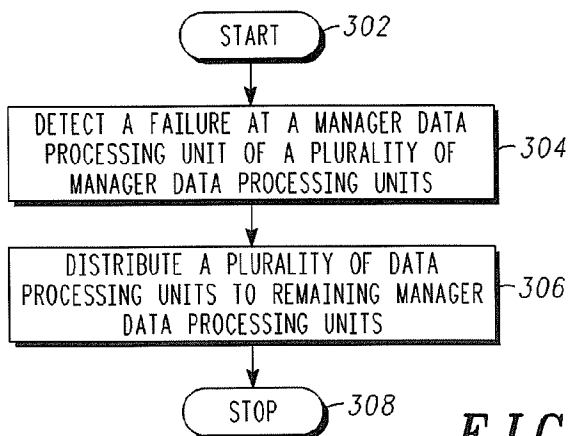


FIG. 3

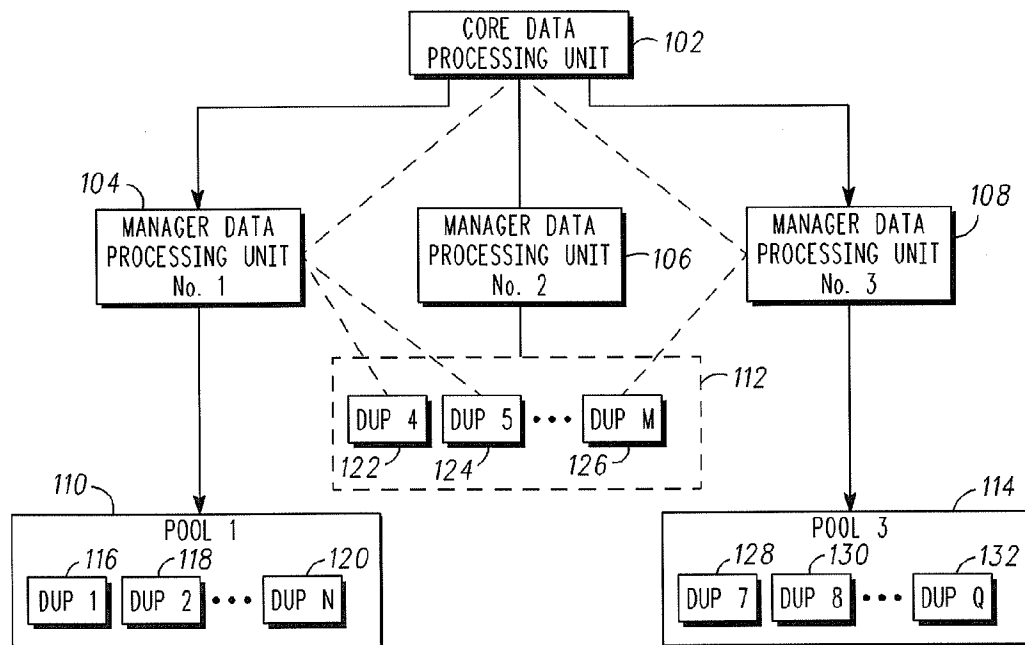


FIG. 4

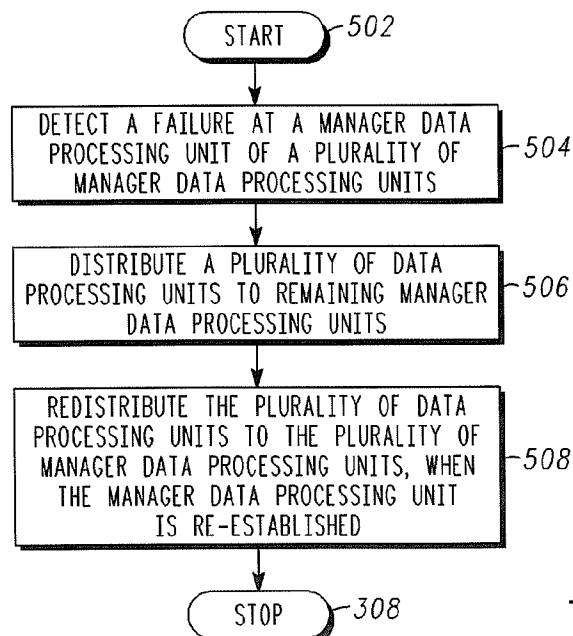


FIG. 5

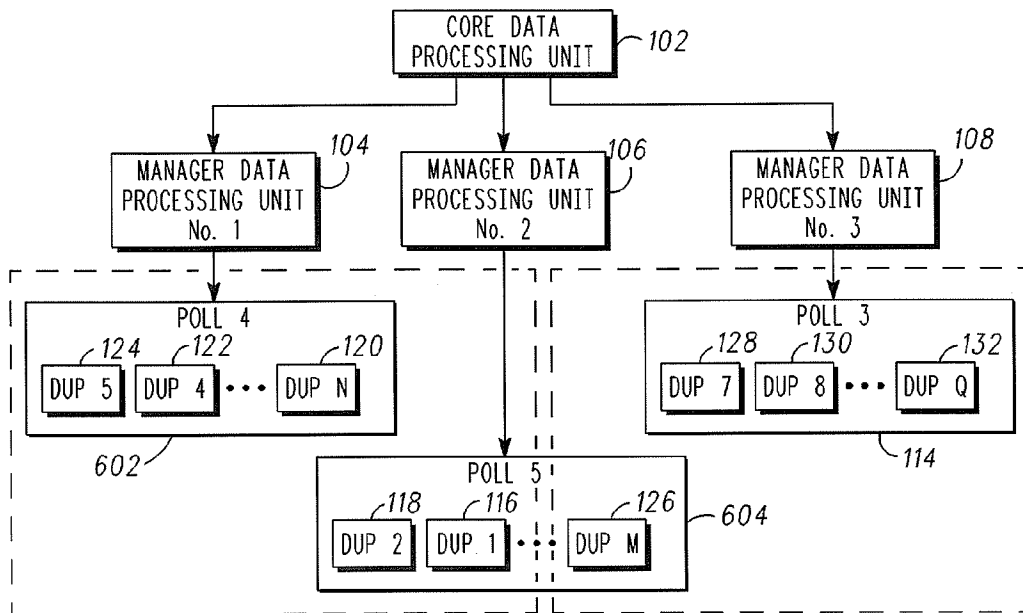


FIG. 6

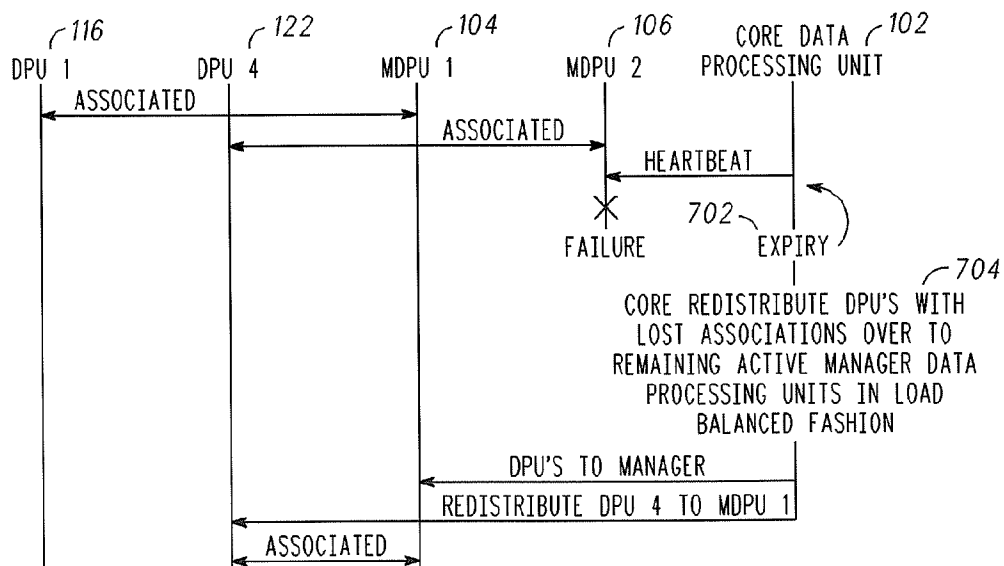


FIG. 7

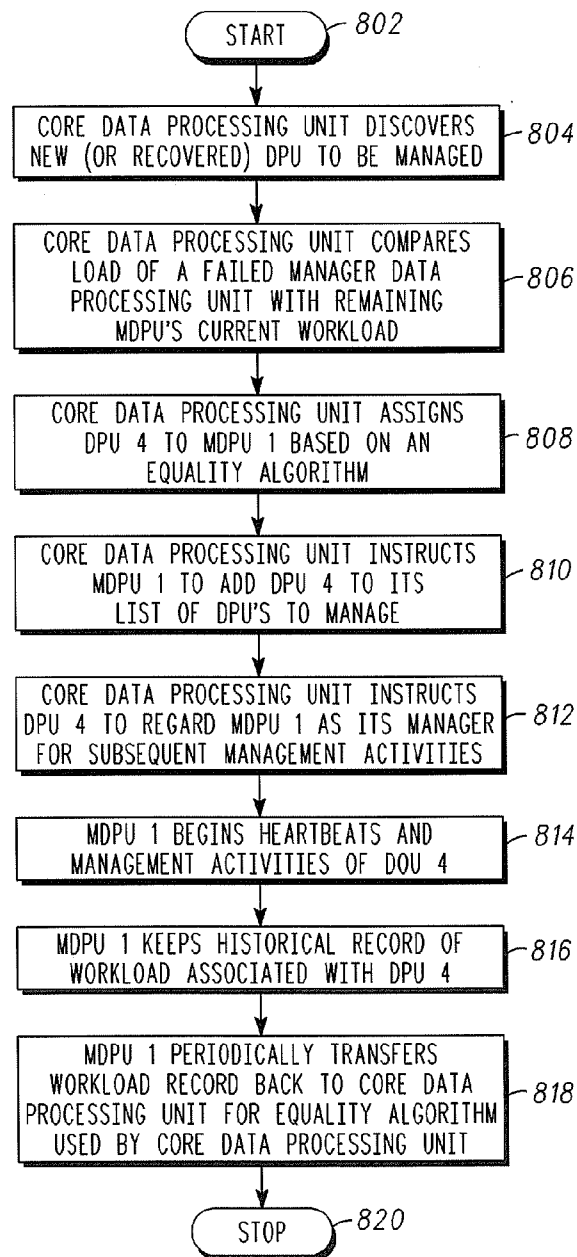


FIG. 8