



- (51) International Patent Classification:  
E21B 43/24 (2006.01)
- (21) International Application Number:  
PCT/US2009/053540
- (22) International Filing Date:  
12 August 2009 (12.08.2009)
- (25) Filing Language:  
English
- (26) Publication Language:  
English
- (30) Priority Data:  
61/088,038 12 August 2008 (12.08.2008) US  
12/538,967 11 August 2009 (11.08.2009) US
- (71) Applicant (for all designated States except US): LINDE AKTIENGESELLSCHAFT [DE/DE]; Klosterhofstr. 1, 80331 Munich (DE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SACHELL, Donald, Prentice, Jr. [US/US]; 835 River Road, Chatham, NJ 07928 (US). JOVANOVIC, Stevan [US/US]; 1275 Rock Avenue, North Plainfield, NJ 07060 (US).
- (74) Agent: VON NEIDA, Philip, H.; Linde LLC, 575 Mountain Avenue, Murray Hill, NJ 07974 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

(54) Title: BITUMEN PRODUCTION METHOD

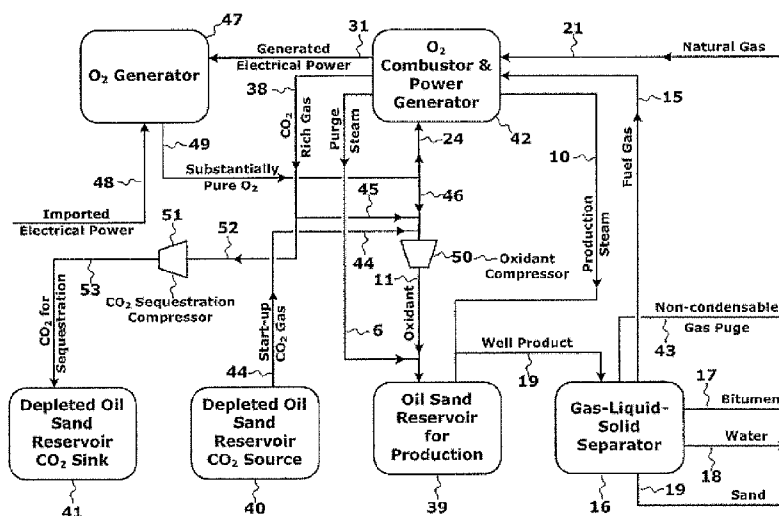


Figure 4

(57) Abstract: A method for the production of a CO<sub>2</sub> rich stream for sequestration in depleted oil sand reservoirs and the production and use of a CO<sub>2</sub> rich oxidant for in situ bitumen production from oil sand reservoirs.

WO 2010/019657 A1

## BITUMEN PRODUCTION METHOD

**[0001]** This application claims priority from US provisional patent application Serial Number 61/088,038 filed August 12, 2008.

### BACKGROUND OF THE INVENTION

**[0002]** The general field of this invention is the production of heavy oil and bitumen from underground deposits, particularly tar sands deposits. More specifically, this invention relates to a method for bitumen or heavy oil recovery by in situ combustion that substantially decreases carbon dioxide emissions.

**[0003]** There are extensive oil sand reserves in many areas of the world, e.g. Alberta in Canada, Utah, Wyoming, and Colorado in the United States, and Venezuela. However, the very high viscosity of bitumen makes economically viable and environmentally responsible exploitation of these abundant resources very challenging. Conventional oils can be efficiently recovered without any need for heating to reduce their viscosity. Carbon dioxide injection can be used to reduce the viscosity of conventional oil and increase the quantity of oil recovered. However, substantial energy inputs are required to lower the viscosity of very heavy oil or bitumen in order to achieve reasonable production rates. This high energy input requirement increases the bitumen production cost and associated carbon dioxide emissions relative to conventional oil. As a result of the dwindling reserves of conventional oil, there has been a long-standing effort to develop methods to more economically exploit these reserves in an environmentally responsible manner.

**[0004]** Bitumen was initially produced by mining using the 'hot water' method (CA2004352) to extract the hydrocarbons from the mineral gangue. This method has four problems. First, mining requires disturbance of the land. Second, most bitumen reserves are too deep to be economically recovered by mining. Third, this

method requires large quantities of scarce water. Fourth, this method has a high energy input requirement, which substantially decreases the net energy production and increases CO<sub>2</sub> emissions relative to conventional oil production.

**[0005]** The steam assisted and gravity drainage (SAGD) in situ bitumen production method (US 4,344,485) is currently the most commercially successful method to exploit deeper bitumen reserves. This method uses a horizontal upper steam injection well and lower parallel bitumen production well. Although this method can economically produce bitumen at greater depths than mining, it also requires large quantities of water and energy for steam production. Boilers (US 2007/0266962) with indirect heating are typically used for SAGD steam production, which generally require a premium natural gas fuel and results in significant CO<sub>2</sub> emissions. US 4,224,991 teaches an oxygen-fuel combustion method with water injected into the combustion region to control its temperature to produce steam for heavy oil production. In addition, direct contact steam generators can also advantageously use water to control flammability of the premixed O<sub>2</sub>-fuel feed (US 6,206,684) or to cool the combustion chamber walls (US 2,359,108).

**[0006]** It has long been recognized that in situ combustion bitumen production processes have the potential to solve many of the SAGD process problems by [1] producing, rather than consuming water, [2] using lower value bitumen components as an energy source, rather than an external premium fuel, [3] in situ upgrading of the bitumen, and [4] simplifying the recovery of CO<sub>2</sub>. In situ combustion processes typically have vertical oxidant injection wells and vertical (US 4,722,395) or horizontal (US 5,456,315) production wells. A wide variety of oxidants have been proposed for in situ production processes: air (US 5,456,315), air-O<sub>2</sub> (US 4,557,329), O<sub>2</sub>-water (US 5,027,896), O<sub>2</sub>-steam (US 4,133,382), O<sub>2</sub>-CO<sub>2</sub> (US 4,410,042), and O<sub>2</sub>-CO<sub>2</sub>-steam (US 4,217,956). Hydrotreating catalyst may be advantageously added to the production well for in situ bitumen upgrading using in situ produced hydrogen (US 6,412,557). There have been modest efforts to utilize the off-gas from in situ combustion bitumen production processes. For example, US 4,454,916 teaches the

use of a highly enriched air oxidant ( $\geq 50$  volume percent  $O_2$ ) separating carbon dioxide from the off-gas from an in situ heavy oil production process to produce a low heating value fuel gas.

**[0007]** A number of factors make carbon dioxide capture and sequestration from conventional bitumen production processes impractical. First, the gaseous emissions from bitumen production processes invariably have very low carbon dioxide concentrations, typically about 15 molar percent. Second, bitumen production facilities typically have a large number of gaseous emission points. Third, bitumen production facilities have a much shorter economic life than most other large carbon dioxide emission sources like coal fired electrical power generation facilities. Unfortunately, bitumen production processes have high carbon dioxide emission rates. For example, mining and SAGD bitumen production processes have typical carbon dioxide emission rates of about 90 and 60 kilograms per petroleum barrel (kg/bbl) bitumen produced. As a result, carbon dioxide emissions from bitumen production will likely become a significant source of carbon dioxide emissions and have a significant impact on global warming. For example, bitumen production from Canadian oil sands is expected to increase from 1.3 million barrels per day in 2008 to about 4 million barrels per day by 2030. If conventional technology were used to meet this expected increase in market demand, then the associated carbon dioxide emissions should increase by about 60 million metric tons per year by 2030, or about 10% of Canada's 2006 total carbon dioxide emissions. Therefore, there is a clear need for a practical bitumen production method with much lower carbon dioxide emissions that is not met by the prior art.

#### SUMMARY OF THE INVENTION

**[0008]** The invention is a continuous bitumen in situ production method which comprises the following steps:

- a) purging non-condensable gases from the an oil sand reservoir with

- steam;
- b) contacting a gaseous oxidant stream comprising oxygen, carbon dioxide, and steam with bitumen in an oil sand reservoir;
  - c) separating the production well product from the oil sand reservoir into bitumen, water, sand, and fuel gas streams;
  - d) producing a carbon dioxide rich gas by combustion of the said fuel gas with substantially pure oxygen;
  - e) utilizing substantially pure oxygen and a portion of said carbon dioxide rich gas as constituents of said gaseous oxidant stream; and
  - f) sequestering a supermajority of the balance of the said carbon dioxide rich gas into a depleted oil sand reservoir.

#### BRIEF DESCRIPTION OF DRAWINGS

**[0009]** Figure 1 is a simplified sketch of a well pair in an underground oil sand reservoir.

**[0010]** Figure 2 is a plot of the effect of the oxidant oxygen content on the petroleum coke gasification temperature and the bitumen production thermal energy input requirement.

**[0011]** Figure 3 illustrates a typical oxygen combustor and electrical power generation system.

**[0012]** Figure 4 is a block flow diagram that illustrates the in situ bitumen production method with carbon dioxide capture and sequestration.

**[0013]** Figure 5 summarizes the oil sand reservoir CO<sub>2</sub> production and sequestration capacity as a function of reservoir operating conditions properties.

## DETAILED DESCRIPTION OF THE INVENTION

**[0014]** Figure 1 is a simplified sketch of an underground oil sand reservoir. These oil sand reservoirs contain bitumen that is a hydrocarbon fuel with a high density (typically greater than 1 kilogram per liter), a high residua content (typically about 50 wt% yield of components with normal boiling points greater than 525°C), and a high viscosity (typically about 27,000 cPs at 40°C). The bitumen in the underground oil sand reservoir is generally intimately associated with sand or clay in a bitumen bearing zone 1. The bitumen bearing zone 1 typically occurs below between 50 and 500 meters of over burden 2 and has a thickness between 5 and 50 meters. The gaseous contents of the bitumen bearing zone 1 are typically delimited by an upper barrier layer 3 somewhere in the over burden 2 and a lower barrier layer 4 somewhere in the underlying zones 5.

**[0015]** Figure 1 will also be used to illustrate the key features of this continuous bitumen production method. Typically, purge steam 6 is injected into the bitumen bearing zone 1, via an injection well 7, to preheat and purge non-condensable gases, primarily nitrogen, from the bitumen bearing zone 1. This steam flows from the injection well 7, through the bitumen bearing zone 1 to the production well 8 and exits via the well product 9 line. The production well 8 may be a vertical pipe, or preferably, a vertical pipe with a horizontal segment underlying the bitumen production zone 1 as shown in Figure 1. Production steam 10 may advantageously be used to heat the production well 8 and the region in the vicinity of the production well 8.

**[0016]** For simplicity, Figure 1 considers the most straightforward case of a single injection well 7 and a single production well 8 pair for the oil sand reservoir. However, typically many injection and production well pairs are utilized in a matrix configuration to increase the rate and amount of bitumen produced from an underground oil sand reservoir. Once the purge steam 6 has displaced the non-

condensable gases from the bitumen bearing zone **1**, an oxygen containing oxidant **11** is continuously injected into the bitumen bearing zone **1** via the injection well **7**. This method is applicable for bitumen production from an underground oil sand reservoir using the continuous flow of an oxidant **11** with any configuration of oxidant injection **7** and production **8** wells. The alternative 'huff and puff' type in situ combustion processes, that alternatively feed the oxidant and collect the product using a single well, is outside the scope of this invention.

**[0017]** This continuous in situ combustion bitumen production method can be envisioned in terms of three regions within the bitumen bearing zone **1**: the bitumen depleted zone **12**, the petroleum coke zone **13**, and the bitumen production zone **14**. The continuous in situ bitumen production process will be described in terms of these zones.

**[0018]** The bitumen depleted zone **12** can be visualized as a substantially hydrocarbon free region. The oxygen containing oxidant **11** is fed to the bitumen bearing zone **1** via the injection well **7**. The oxidant **11** flows from the injection well **7**, permeates through the depleted zone **12** substantially uneventfully until it encounters the high temperature petroleum coke zone **13**. The oxygen in the oxidant **11** rapidly reacts with excess hot petroleum coke **13** to produce primarily carbon monoxide and hydrogen. The resulting high temperature gas stream permeates the petroleum coke zone **13** and encounters bitumen in the leading edge of the bitumen production zone **14**, which initiates endothermic coking reactions that maintain a well defined petroleum coke zone **13** that progressively moves from the oxidant injection well **7** to the vertical leg of the production well **8**. The endothermic coking reactions temper the gas, thus providing an appropriate medium to heat the bitumen within the bitumen production zone **14**, decreasing its viscosity, and facilitating bitumen flow to the underlying production well **8**. Then, the fuel gas **15**, that was produced in the bitumen production zone **14**, serves as the motive flue for a gas lift within the vertical leg of the production well **8** to transport the well product **9** to a conventional gas-

solid-liquid separator **16** that segregates the well product **9** stream into the fuel gas **15**, bitumen **17**, water **18**, and sand **19** product streams.

**[0019]** For convenience, safety, and process reasons, nitrogen is typically used as the primary diluent in the oxidant **11**. Figure 2 shows the effects of oxygen concentration and diluent type on the petroleum coke gasification temperature (left ordinate axis). The carbon dioxide diluent substantially reduces the temperature rise associated with higher oxygen concentrations via the endothermic reverse Boudouard reaction:  $\text{CO}_2(\text{g}) + \text{C}(\text{s}) \rightleftharpoons 2\text{CO}(\text{g}) \quad \Delta H = -172 \text{KJ/M}$ . Additional petroleum coke is formed when the high temperature and CO-rich gas from the petroleum coke zone **13** first contacts bitumen in the bitumen production zone **14**. The carbon dioxide diluent is more effective than nitrogen in the bitumen production zone **14** for three reasons. First, carbon dioxide can heat the bitumen production zone **14** more effectively because it has a higher heat capacity than nitrogen. Second, essentially all the chemical energy stored in the CO product from petroleum coke gasification is released as thermal energy into the bitumen production zone **14** via the exothermic Boudouard reaction:  $2\text{CO}(\text{g}) \rightleftharpoons \text{CO}_2(\text{g}) + \text{C}(\text{s}) \quad \Delta H = 172 \text{KJ/M}$ . Third, and most importantly, carbon dioxide miscibility in bitumen substantially decreases the bitumen viscosity, which dramatically decreases the energy required for bitumen production.

**[0020]** Figure 2 also summarizes the thermal energy input requirement (right ordinate axis) for bitumen production using the leading bitumen production processes. The first point to be made is that mining has a much higher energy input requirement than any of the in situ bitumen production processes. The SAGD bitumen production process only uses steam heating to enhance bitumen production. The air in situ bitumen production process uses the combination of the heat of combustion and modest carbon dioxide partial pressure to reduce the energy input requirement by about 15% relative to the SAGD process. The carbon dioxide-oxygen combustion in situ bitumen process decreases the required thermal energy



input by 65% to 82% relative to SAGD, depending on the oxidant oxygen concentration, by increasing the carbon dioxide partial pressure. Clearly, the preferred oxidant diluent is carbon dioxide. The preferred oxidant pressure and O<sub>2</sub> concentration ranges are 10 to 50 bar and 10 to 40 molar percent, more preferably 20 to 40 bar and 15 to 30 molar percent.

**[0021]** Figure 3 illustrates a typical oxygen combustor and electrical power generation system that can be used to produce a CO<sub>2</sub> rich gas stream **38** that serves as a key constituent for an oxidant **11** with the preferred CO<sub>2</sub> diluent. Since a substantial portion of the carbon monoxide and hydrogen that were produced by the petroleum coke gasification reactions in the bitumen bearing zone **1** are converted to carbon dioxide and water in the bitumen production zone **14**, the gaseous hydrocarbon products, primarily methane, from the bitumen coking reactions are the primary fuel components in the fuel gas **15**. The fuel gas **15** calorific value increases from about 1.6 to about 6 MJ/Nm<sup>3</sup> as the oxygen content of the oxidant **11** is increased from 10 to 40 molar percent. For reference, natural gas typically has a heating value of about 40 MJ/Nm<sup>3</sup>. The fuel gas **15** is preheated in the O<sub>2</sub>-fuel steam boiler **20**. Natural gas **21** may be advantageously added to the preheated fuel gas **22** to maintain a reasonable combustion temperature when the fuel gas **15** heating value is less than about 3 MJ/Nm<sup>3</sup>. Recycle CO<sub>2</sub> rich gas **23** may be used to limit the combustion flame temperature when the fuel gas heating value is substantially greater than 3 MJ/Nm<sup>2</sup>.

**[0022]** The substantially pure oxygen feed **24** feed rate is set such that the oxygen content in the O<sub>2</sub>-fuel steam boiler **20** off-gas **25** is greater than about 1 molar percent. Substantially pure O<sub>2</sub> preferably has an O<sub>2</sub> content greater than 70 molar percent, more preferably greater than 90 molar percent, most preferably greater than 95 molar percent. The O<sub>2</sub>-fuel steam boiler **20** produces high pressure steam **27** (typically about 60 bar) using recycle condensate water **28** from the conventional electrical power generator **29** and boiler feed water **30**. The high

pressure steam is used to produce electrical power **31** in the electrical power generator **29**, purge steam **6** to remove non-condensable gases from the bitumen bearing zone **1**, and production steam **10** to heat the production well **8** and the bitumen production zone **14** in the vicinity of the production well **8**. Typically an aqueous scrubber **32** is used to temper and remove SO<sub>2</sub> from the O<sub>2</sub>-fuel stream boiler **20** off-gas **25**. Typically an aqueous limestone slurry **33** is used as the base to remove SO<sub>2</sub> from the O<sub>2</sub>-fuel stream boiler **20** off-gas **25**, which produces an aqueous CaSO<sub>3</sub> slurry by-product **34**. Typically an air cooler **35** would be used to control the water content of the scrubber **32** off-gas **36**. A blower **37** provides the motive force for the CO<sub>2</sub> rich gas recycle **23** feed to the O<sub>2</sub>-fuel steam boiler **20** and the export CO<sub>2</sub> rich gas **38**.

**[0023]** Figure 4 is a block flow diagram that will be used to illustrate the description of this in situ bitumen production method with carbon dioxide capture and sequestration. Block **39** represents an oil sand reservoir that is ready for bitumen production. Blocks **40** and **41** represent depleted oil sand reservoirs that are used as a CO<sub>2</sub> source and sink, respectively. These depleted oil sand reservoirs are used for both long-term underground CO<sub>2</sub> sequestration and short-term underground CO<sub>2</sub> storage to meet the periodic high CO<sub>2</sub> demand for well pair start-up. Figure 4 illustrates the general features of Block **39**, **40**, and **41** with the understanding that the bitumen production zone **14** extends from the injection well **7** to the vertical member of the production well **8** in Block **39** and the bitumen depleted zone **12** extends from the injection well **7** to the vertical member of the production well **8** for the depleted oil sand reservoirs represented by Blocks **40** and **41**.

**[0024]** The initial oil sand reservoir **39** start-up step is to use purge steam **6** to remove the non-condensable gases. The purge steam is produced by the O<sub>2</sub> combustor & power generator **42**. Figure 4 illustrates a typical configuration for the O<sub>2</sub> combustor & power generator **42**. The non-condensable gases, primarily nitrogen, are purged from the oil sand reservoir for bitumen production **39** via the

well product **19**, gas-liquid-solid separator **16**, and the non-condensable gas purge stream **43**. Then, the oxidant **11** feed to the oil sand reservoir for production **39** is initially produced by blending start-up CO<sub>2</sub> gas **44** from depleted oil sand reservoir CO<sub>2</sub> source **40** and any excess CO<sub>2</sub> rich gas **45** from the O<sub>2</sub> combustor and power generator **42** with substantially pure O<sub>2</sub> **46** from a conventional cryogenic or pressure swing adsorption O<sub>2</sub> generator **47** to achieve the desired oxidant flow rate and O<sub>2</sub> content, typically in the 10 to 40 molar percent oxygen range. The oxidant flow rate is generally in the range of 1000 to 6500 Nm<sup>3</sup>/hr depending on the design of the well pair. Generally, some imported electrical energy **48** is required to meet the total substantially pure O<sub>2</sub> feed requirement **49**. The oxidant compressor **50** increases the oxidant feed **11** to the desired pressure, typically in the range of 10 to 50 bar, preferably in the 20 to 40 bar range. The oxidant **11** is injected into the bitumen bearing zone **1**, which produces the fuel gas **15**, bitumen **17**, water **18**, and sand **19** products as described previously and illustrated in Figure 1. The fuel gas **15** is fed to the O<sub>2</sub>-fuel combustor and power generator **42** to produce electrical power **31**, purge steam **6**, production steam **10**, and CO<sub>2</sub> rich gas **38** as described previously and illustrated in Figure 3.

[0025] The CO<sub>2</sub> sequestration compressor **51** compresses any excess CO<sub>2</sub> rich gas production **52** to produce a high pressure CO<sub>2</sub> **53** for sequestration in a depleted oil sand reservoir CO<sub>2</sub> sink **41** at a pressure between 30 and 70 bar, depending on the quantity of CO<sub>2</sub> produced and the nature of the oil sand reservoir. Figure 5 illustrates a method to estimate the oil sand reservoir CO<sub>2</sub> capacity (Nm<sup>3</sup>/bbl bitumen produced) as a function of the oil sand reservoir sand to bitumen ratio (MT/bbl) with parameters of sequestration pressure and the CO<sub>2</sub> for sequestration **53** (Nm<sup>3</sup>/bbl bitumen produced) as a function of bitumen production operating conditions outlined in the Example. The reservoir CO<sub>2</sub> capacity must be a supermajority of the CO<sub>2</sub> produced for sequestration, preferably greater than 66%, more preferably greater than 80%, most preferably greater than or equal to 100%. If the CO<sub>2</sub> produced for

sequestration is greater than the oil sand reservoir capacity, then the excess CO<sub>2</sub> produced can be sequestered in a supplemental CO<sub>2</sub> sequestration reservoir.

#### Example

**[0026]** The example will summarize the key operating conditions and performance indicators for the system in Figure 4 with oxidants **11** containing 21 molar percent O<sub>2</sub> with CO<sub>2</sub> and N<sub>2</sub> diluents and a 10 molar percent O<sub>2</sub> oxidant with a CO<sub>2</sub> diluent. A conventional cryogenic O<sub>2</sub> generator **47** produced a 95 molar percent molar oxygen substantially pure oxygen **49** feed stream with argon as the major impurity. The O<sub>2</sub>-fuel steam boiler **20** was operated with a 1500°C flame temperature and produced high pressure steam at 482°C and 61.7 bar for all cases. The natural gas **21** lower heating value was 37 MJ/Nm<sup>3</sup> for all cases. The production steam **10** flow rate was 200 kilograms per hour per well pair for all cases. The oxidant **11** pressure was 35 bar and flow rate was 2500 Nm<sup>3</sup> per hour per well pair for all cases. A number of parameters can be used to evaluate the performance of the 21% O<sub>2</sub> in CO<sub>2</sub>, 21% O<sub>2</sub> in N<sub>2</sub>, and 10% O<sub>2</sub> in CO<sub>2</sub> oxidants. For example, oxidant feed rates were 82.3, 220, and 87.5 Nm<sup>3</sup>/bbl, respectively, which indicates that the CO<sub>2</sub> diluent very effectively increases the bitumen production. The fuel gas **15** lower heating values were 3.1, 3.0, and 1.9 MJ/Nm<sup>3</sup>, which indicates that fuel gas heating value increases with oxidant O<sub>2</sub> concentration and is a weak function of the diluent type. The fuel gas **15** energy contents were 255, 660, and 140 MJ/bbl, respectively. The natural gas feed energy contents were 2, 690, and 145 MJ/bbl, respectively. The net electrical energy requirements were 6.7, -0.2, and 4.0 KW-hr/bbl, respectively. Most importantly, the CO<sub>2</sub> rich gas for sequestration **53** specific flow rates were 19, 380, and 12.5 Nm<sup>3</sup>/bbl, which indicates, based in Figure 5, that sand to bitumen ratios of about 1.75 and 2.5 MT/bbl would be required to sequester all the CO<sub>2</sub> rich gas for sequestration **53** with the sequestration pressure equal to the operating pressure of 35 bar for the 10% and 21% O<sub>2</sub> in CO<sub>2</sub> oxidants. This sand to bitumen ratio range is within the normal range found in oil sand reservoirs. Clearly, the CO<sub>2</sub> rich gas for sequestration **53** specific

flow rate of 380 Nm<sup>3</sup>/bbl for the air based in situ bitumen production process is well outside of the practical range.

**[0027]** While this invention has been described with respect to particular embodiments thereof, it is apparent that numerous other forms and modifications of the invention will be obvious to those skilled in the art. The appended claims in this invention should be construed to cover all such obvious forms and modifications which are within the true spirit and scope of the invention.

Having thus described the invention, what we claim is:

1. A method of in situ bitumen or heavy oil production comprising
  - a) purging non-condensable gases from an oil sand reservoir with steam;
  - b) contacting a gaseous oxidant stream with bitumen in an oil sand reservoir;
  - c) separating the production well product from the oil sand reservoir into bitumen, water, sand, and fuel gas streams;
  - d) producing a carbon dioxide rich gas by combustion of said fuel gas with substantially pure oxygen;
  - e) utilizing substantially pure oxygen and a portion of said carbon dioxide rich gas as constituents of said gaseous oxidant stream; and
  - f) sequestering a supermajority of the balance of the said carbon dioxide rich gas into a depleted oil sand reservoir.
2. The method as claimed in claim 1 wherein said production is continuous.
3. The method as claimed in claim 1 wherein said gaseous oxidant stream comprises oxygen, carbon dioxide and steam.
4. The method as claimed in claim 1 wherein said purge steam is produced by an oxygen combustor.
5. The method as claimed in claim 1 wherein said supermajority of the balance of the said carbon dioxide rich gas for sequestration in a depleted oil sand reservoir is greater than 66%.
6. The method as claimed in claim 1 wherein said contact in step a) is by

injection.

7. The method as claimed in claim 1 wherein said gaseous oxidant stream contains from 10 to 40 molar percent oxygen.

8. The method as claimed in claim 1 wherein said gaseous oxidant stream is at a flow rate of 1000 to 5400 Nm<sup>3</sup>/hour.

9. The method as claimed in claim 1 wherein said gaseous oxidant stream is at a pressure in the range of 10 to 50 bar.

10. The method as claimed in claim 1 wherein said contacting in step b) is by injection.

## AMENDED CLAIMS

received by the International Bureau on 19 November 2009 (19.11.2009)

1. A method for in situ bitumen or heavy oil production comprising
  - a) purging non-condensable gases from oil sand reservoirs with steam;
  - b) production of a process derived carbon dioxide rich gas by combustion of a process derived carbon dioxide rich fuel gas with substantially pure oxygen;
  - c) production of a carbon dioxide rich oxidant by the addition of substantially pure oxygen to at least a portion of the said process derived carbon dioxide rich gas and sequestering the balance of the process derived carbon dioxide rich gas in oil sand reservoirs;
  - d) contacting said carbon dioxide rich oxidant with bitumen within an oil sand reservoir;
  - e) separating the production well product into bitumen, water, sand, and carbon dioxide rich fuel gas streams; and
  - f) sequestering a supermajority of the process derived carbon dioxide rich gas in depleted oil sand reservoirs.
2. The method as claimed in claim 1 wherein said production is continuous.
3. The method as claimed in claim 1 wherein said carbon oxide rich oxidant comprises oxygen, carbon dioxide and steam.
4. The method as claimed in claim 1 wherein said purge steam is produced by an oxygen combustor.



5. The method as claimed in claim 1 wherein said supermajority of the balance of the said carbon dioxide rich gas for sequestration in a depleted oil sand reservoir is greater than 66%.
6. The method as claimed in claim 1 wherein said contact in step a) is by injection.
7. The method as claimed in claim 1 wherein said carbon dioxide rich oxidant stream contains from 10 to 40 molar percent oxygen.
8. The method as claimed in claim 1 wherein said carbon dioxide rich oxidant stream is at a flow rate of 1000 to 5400 Nm<sup>3</sup>/hour.
9. The method as claimed in claim 1 wherein said carbon dioxide rich oxidant stream is at a pressure in the range of 10 to 50 bar.
10. The method as claimed in claim 1 wherein said contacting in step d) is by injection.

Figure 1

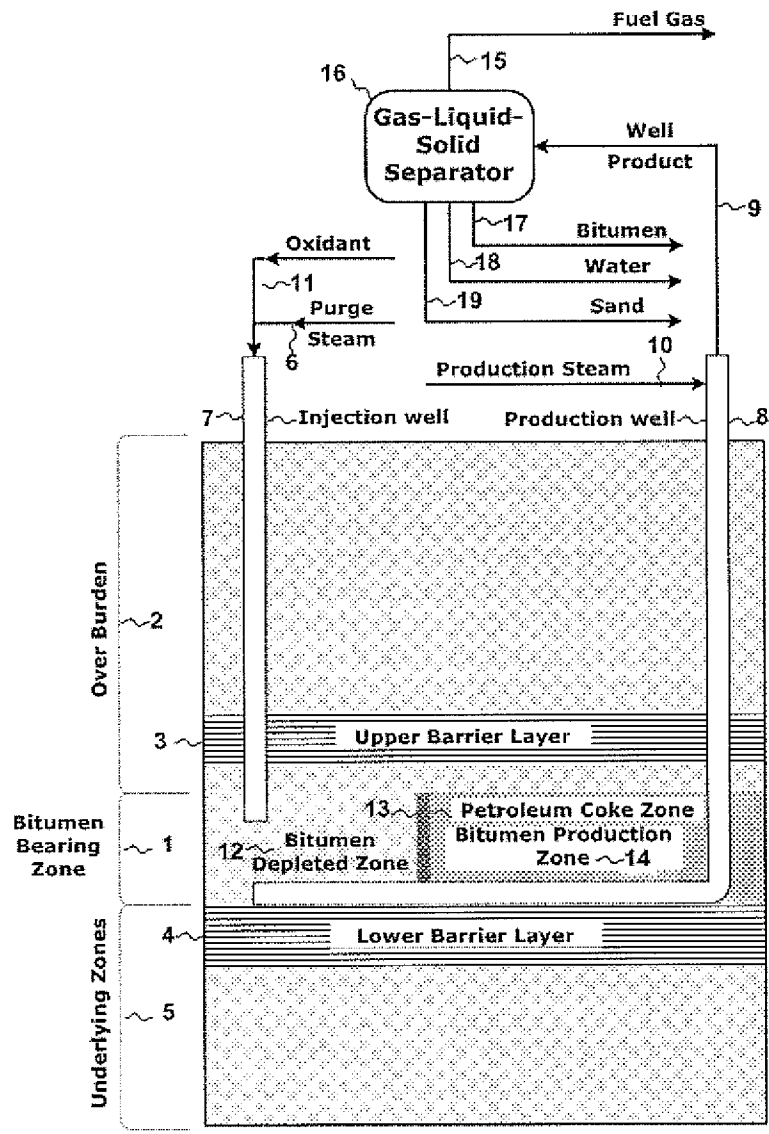


Figure 2

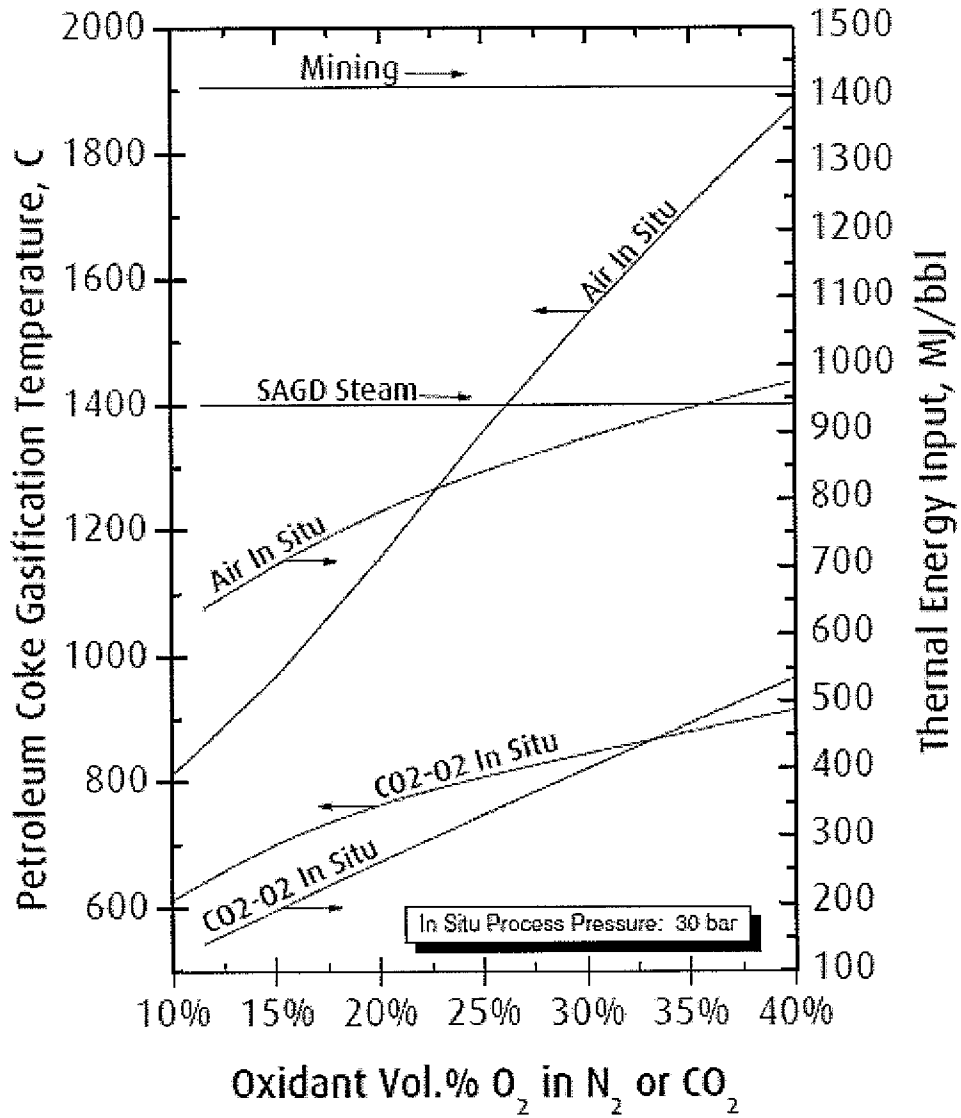


Figure 3

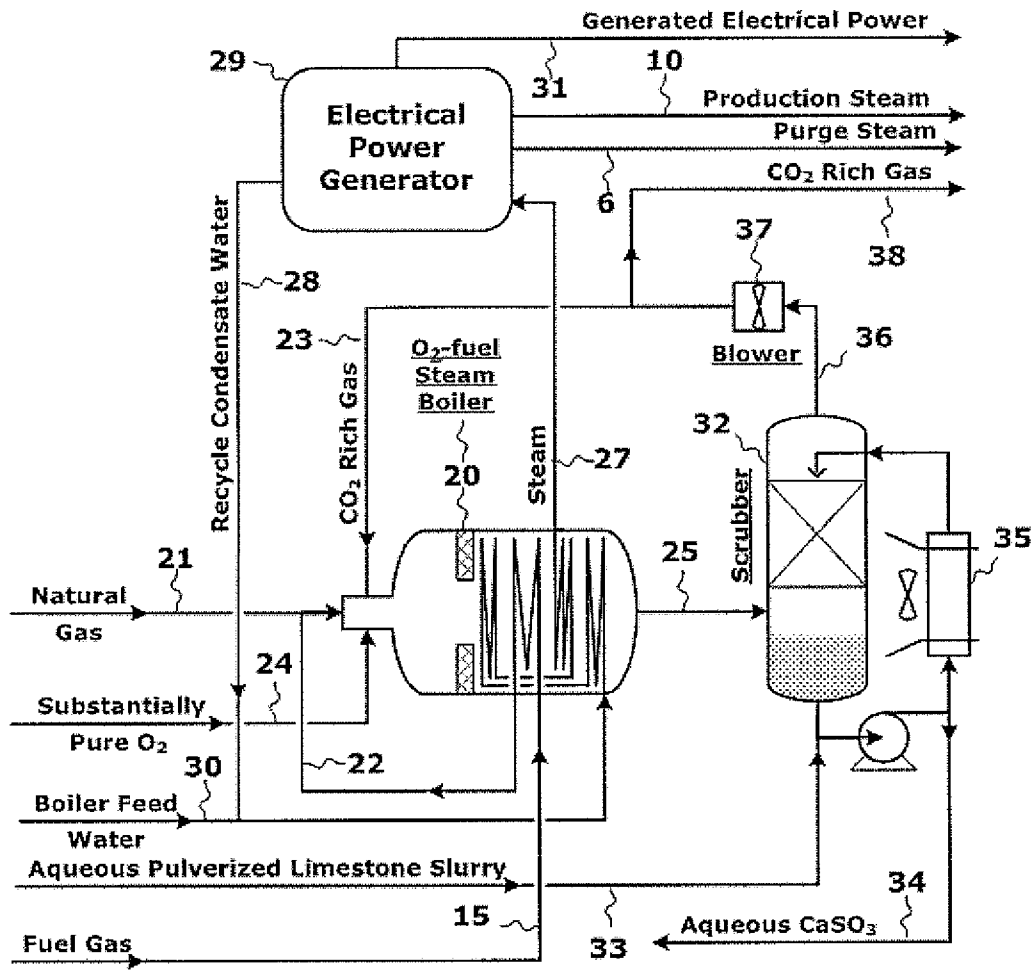


Figure 4


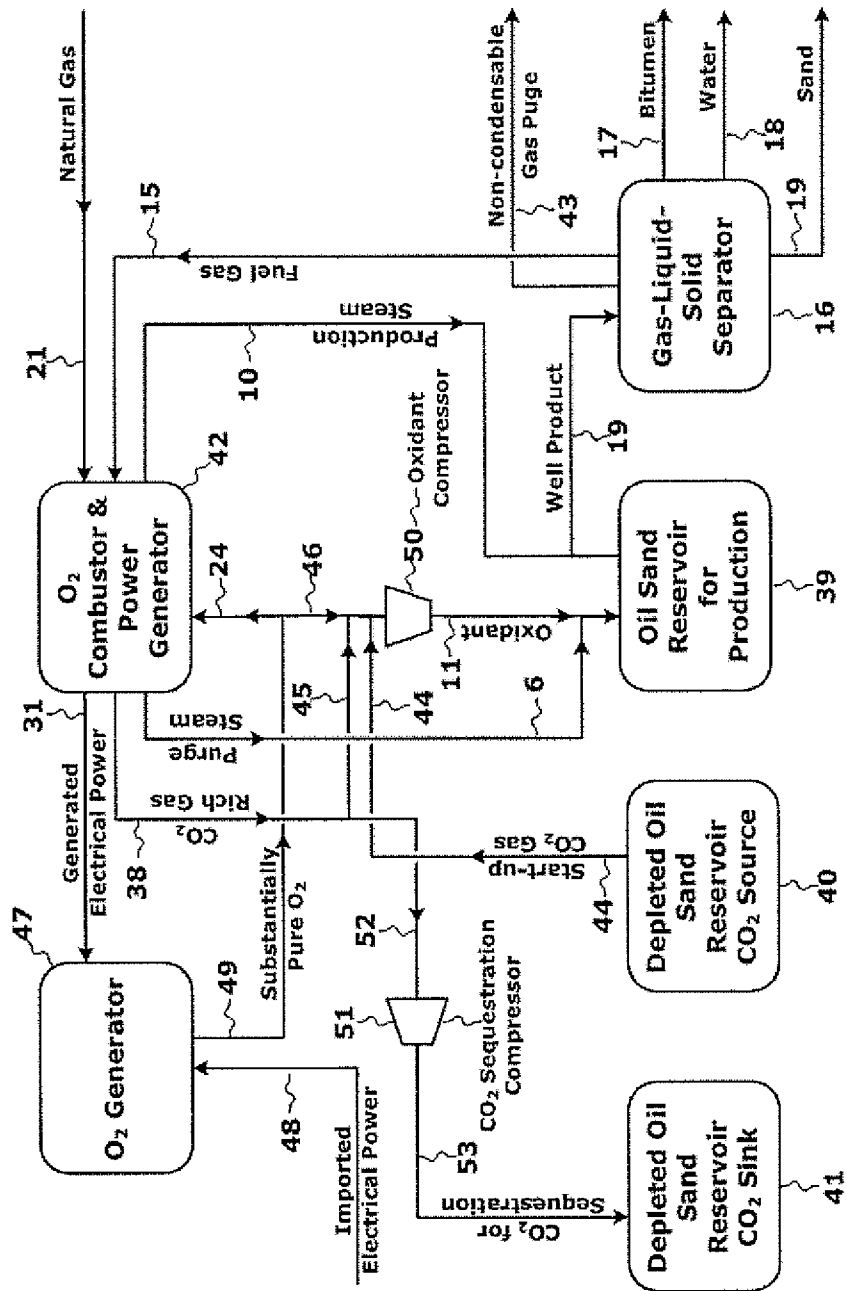


Figure 5

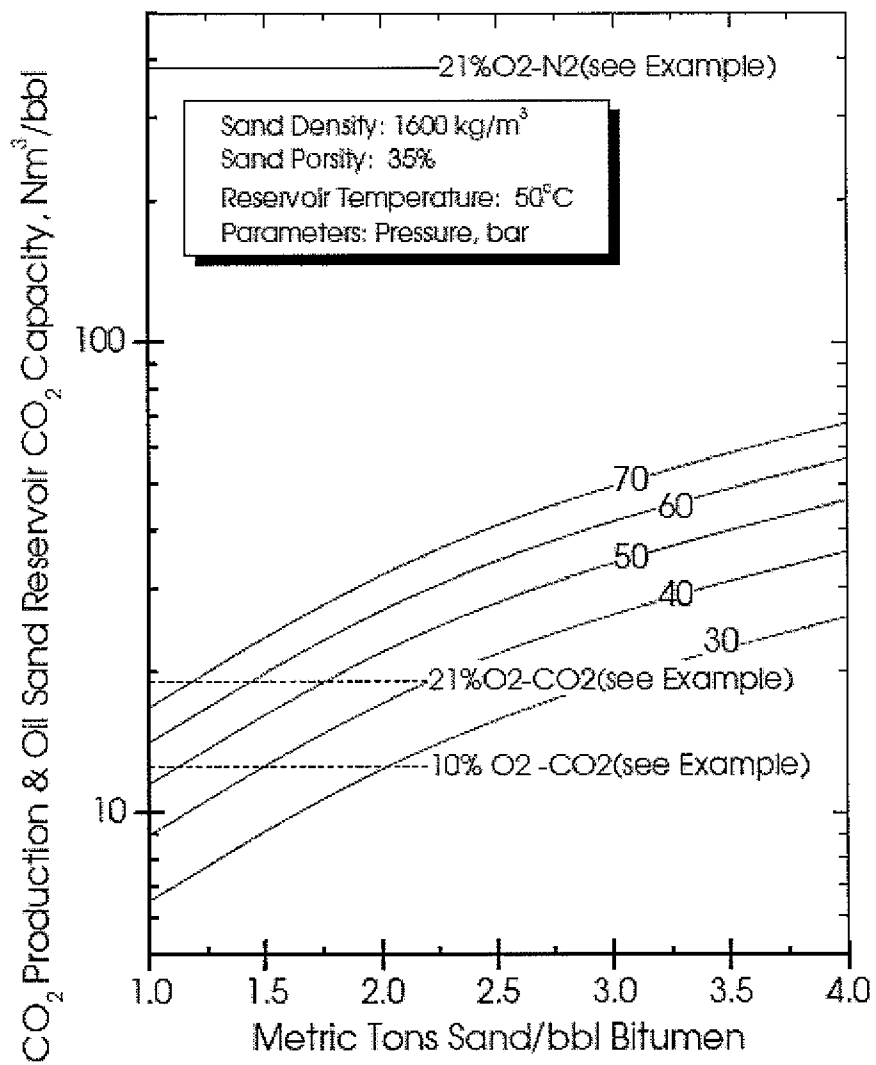

**INTERNATIONAL SEARCH REPORT**

International application No.  
PCT/US2009/053540

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC(8) - E21B 43/24 (2009.01)  
USPC - 166/57  
According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC(8) - E21B 43/24 (2009.01)  
USPC - 166/57

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
MicroPatent

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2007/050189 A2 (PFEFFERLE) 03 May 2007 (03.05.2007) entire document	1-10
Y	US 4,344,485 A (BUTLER) 17 August 1982 (17.08.1982) entire document	1-10
Y	WO 2007/100733 A2 (O'BRIEN) 07 September 2007 (07.09.2007) entire document	1-10
Y	US RE30,019 E (LINDQUIST) 05 June 1979 (05.06.1979) entire document	7
Y	US 4,149,597 A (REDFORD) 17 April 1979 (17.04.1979) entire document	8-9

Further documents are listed in the continuation of Box C.

\* Special categories of cited documents:  
 "A" document defining the general state of the art which is not considered to be of particular relevance  
 "E" earlier application or patent but published on or after the international filing date  
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
 "O" document referring to an oral disclosure, use, exhibition or other means  
 "P" document published prior to the international filing date but later than the priority date claimed  
 "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art  
 "&" document member of the same patent family

Date of the actual completion of the international search 17 September 2009	Date of mailing of the international search report <b>24 SEP 2009</b>
--	--

Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201	Authorized officer: Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774
---	---