

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2017/108060 A1

(43) International Publication Date

29 June 2017 (29.06.2017)

(51) International Patent Classification:

G02B 6/36 (2006.01)

(21) International Application Number:

PCT/DK2016/050459

(22) International Filing Date:

22 December 2016 (22.12.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PA 2015 70876 23 December 2015 (23.12.2015) DK

(71) Applicant: NKT PHOTONICS A/S [DK/DK]; Blokken 84, DK-3460 Birkerød (DK).

(72) Inventors: ALKESKJOLD, Thomas Tanggaard; Rugvej 1, DK-4040 Jyllinge (DK). LYNGSØE, Jens Kristian; Per Bjørns Vej 5, DK-3100 Hornbæk (DK). JAKOBSEN, Christian; Virumgade 37a, DK-2830 Virum (DK). MAACK, Martin Dybendal; S. Willumsensvej 9, DK-2800 Lyngby (DK). MICHIELETTI, Mattia; Gråspurvevej 57, st., DK-2400 Copenhagen NV (DK). PA-PIOR, Sidsel Rübner; Mosevej 6, st., DK-2800 Lyngby (DK).

(74) Agent: HEGNER & PARTNERS A/S; Symbion Science Park, Fruebjergvej 3, 2100 Copenhagen Ø (DK).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PHOTONIC CRYSTAL FIBER ASSEMBLY

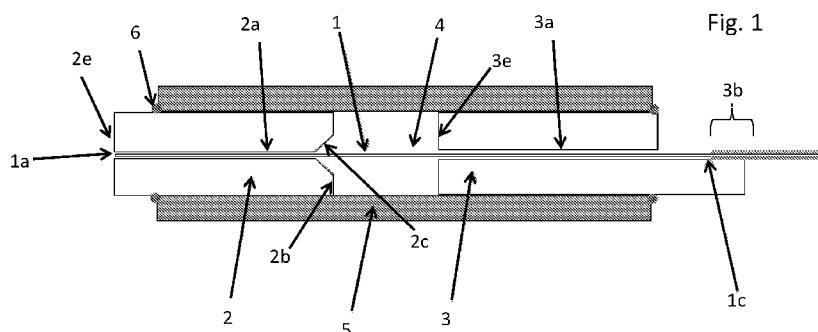

(57) Abstract: The invention comprises a photonic crystal fiber (PCF) assembly comprising a PCF and at least one ferrule structure. The PCF has a center axis and comprises a core region and a cladding region and a first fiber end section with a first fiber end. The ferrule structure has a center axis and is mounted to the first fiber end section. The ferrule structure comprises an inner ferrule arrangement and an outer ferrule arrangement surrounding the first fiber end section. The inner ferrule arrangement comprises an inner ferrule front section proximally to the first fiber end and an inner ferrule rear section distally to the first fiber end, and each of the inner ferrule sections have an inner diameter and in at least a length thereof fully surrounds the PCF. The inner ferrule rear section is anchored in an anchor length section to the first fiber end section and the inner ferrule front section supports the first fiber end section proximally to the first fiber end.

WO 2017/108060 A1

PHOTONIC CRYSTAL FIBER ASSEMBLY

TECHNICAL FIELD

The invention relates to a photonic crystal fiber (PCF) assembly comprising a PCF and at least one ferrule structure. The invention also comprises a laser system and an apparatus comprising such laser system. Further the invention 5 comprises a set of correlated ferrule elements.

BACKGROUND ART

Photonic crystal fibers, herein referred to as PCF, belong to a class of fibers comprising optical nano or micro structures that affect the motion photons.

10 PCF (sometimes called holey fiber, hole-assisted fiber, microstructure fiber, or microstructured fiber) at least partly obtains its waveguide properties by an arrangement of microstructures e.g. in the form of air (or gas) holes or solid microstructures with a refractive index differing from the surrounding background material. There is a great variety of hole/microstructure 15 arrangements, leading to PCFs with very different properties.

Examples of PCFs include the PCFs described in US 6,985,661, US 8,938,146 or US 7,792,408.

The termination of such PCFs is often rather difficult in particular due to the microstructures and optionally hollow microstructures and/or a hollow core.

20 Terminal structures for traditional step-index fibers, i.e. optical fibers with a core having a uniform refractive index and a surrounding cladding having a lower refractive index providing a sharp decrease in refractive index at the core-cladding interface, are well known. US 4,737,011 discloses a connector for a large core step-index fiber designed such that high power light pumped 25 into the end of the fiber has low risk in burning or melting the connector material. The connector comprises a holder with a metallic plug body and a radially inwardly arranged sleeve having a support portion adapted to support the optical fiber at a distance from the end-facet of the optical fiber and

wherein the support portion employs a transparent or a translucent heat resistant inorganic substance e.g. ceramic material or sapphire having a melting point of 1500 °C or more and having a refractive index higher than that of the cladding of the optical fiber. It is not described how the fiber is
5 mounted in the connector.

Generally it is desired to terminate an optical fiber such that it is simple to handle and is sufficiently protected against dust, moisture and heat.

The small diameter and core diameter of the PCF and its typically high flexibility require that a termination of the PCF is held in a mechanically rigid
10 structure – normally called a ferrule or a ferrule structure -at termination points in order to be practically useful in precise beam delivery systems.

US 7,242,835 discloses a fiber termination combination which includes an optical fiber having a fiber core for transmitting a highly energetic optical signal that can damage the fiber, and a structured region around the core for
15 directing the optical signal into the core, the structured region being characterized by multiple channels of smaller internal diameter than the core defined by thin walls disposed around the core; a ferrule, with an opening therein for locating the fiber, at the end of the fiber enveloping the fiber extremity which cooperates with the blocking structure to block the optical
20 signal from impinging on the microstructured region of the fiber; and a blocking structure disposed over the end of the fiber with an opening mating with the fiber core, the blocking structure blocking the optical signal from impinging on the microstructured region of the fiber.

US 7,373,062 discloses an optical fiber which comprises a hollow fiber core,
25 wherein the front faces of both fiber ends of the hollow fiber core are open and each fiber end is surrounded by a protection element in a dustproof fashion. The protection element includes a window at its front face in front of the fiber end to couple and decouple light to and from the hollow fiber core.

US 7,306,376 discloses a monolithic optical ferrule wherein a fiber is terminated bonded by fusion to form a monolithic unit which minimizes optical loss and is typically capable of transmitting high power laser radiation, preferably in the order of 500 W and higher, without damage to the fiber and ferrule. The end cap, fiber and fusible powder are composed of material of substantially the same physical characteristics such that, when all are fused together, the structure so formed is monolithic and the optical path is transparent.

The prior art fiber terminations disclosed above are generally difficult to mount to the fiber and often result in damaging of the fiber or result in a poor alignment in the z-direction (the axial direction of the fiber) and/or a poor anchoring of the optical fiber which result in a poor coupling of the fiber to another element.

DESCRIPTION OF THE INVENTION

15 The object of the invention is to provide an end termination structure of a PCF which alleviates at least one of the drawbacks described above.

In an embodiment it is an object to provide an end termination structure of a PCF which provides a good alignment of the PCF and the ferrule in the z-direction and which is relatively simple to assemble.

20 In an embodiment it is an object to provide an end termination structure of a PCF which provides a safe protection of the PCF, at its terminated end, in particular against dust, moisture and/or heat.

In an embodiment it is an object to provide an end termination structure of a PCF which provides new options for stripping off cladding modes.

25 In an embodiment it is an object to provide an end termination structure of a PCF which has a long lifetime even where the PCF is operating at relatively high power, such as power above 5 KW.

These and other objects have been solved by the invention or embodiments thereof as defined in the claims and as described herein below.

It has been found that the invention or embodiments thereof have a number of additional advantages which will be clear to the skilled person from the

5 following description.

The term "z-direction" means the axial direction and the term "axially" means along the axis.

The phrase "radial distance" means distance determined in radial direction from the center axis of the structure in question, such as the PCF, the ferrule

10 structure or an element thereof. The phrase "radial direction" is a direction from the center axis and radially outwards and "radially" in a radial orientation relative to the axis.

The term "substantially" should herein be taken to mean that ordinary product variances and tolerances are comprised within the scope of the term.

15 The term "about" is generally used to include what is within measurement uncertainties. The term "about" when used in ranges, should herein be taken to mean that what is within measurement uncertainties is included in the range.

It should be emphasized that the term "comprises/comprising" when used 20 herein is to be interpreted as an open term, i.e. it should be taken to specify the presence of specifically stated feature(s), such as element(s), unit(s), integer(s), step(s) component(s) and combination(s) thereof, but does not preclude the presence or addition of one or more other stated features.

Throughout the description or claims, the singular encompasses the plural 25 unless otherwise specified or required by the context.

All diameters are cross sectional diameters unless otherwise specified.

According to the invention an end termination structure has been provided in the form of a PCF assembly.

The PCF assembly of the invention comprises a PCF and at least one ferrule structure. The PCF has a center axis and comprises a core region and a

5 cladding region and a first fiber end section with a first fiber end.

The ferrule structure has a center axis and is mounted to the first fiber end

section. The ferrule structure comprises an inner ferrule arrangement and an

outer ferrule arrangement surrounding the first fiber end section. In

accordance with the invention it has been found that by providing the ferrule

10 structure with an inner ferrule arrangement and an outer ferrule arrangement

a new type of the ferrule structure is provided which provides a much simpler

assembling of the fiber and the ferrule structure. In particular it has been

found that by shaping the inner ferrule arrangement such that it comprise an

inner ferrule front section and an inner ferrule rear section, a much simpler

15 assembling is provided.

In an embodiment the inner ferrule arrangement comprises the inner ferrule

front section proximally to the first fiber end and the inner ferrule rear section

distally to the first fiber end. Each of the inner ferrule sections has an inner

cross sectional diameter and in at least a length thereof fully surrounds the

20 PCF. The inner ferrule rear section is anchored in an anchor length section to

the first fiber end section and the inner ferrule front section supports the first

fiber end section proximally to the first fiber end. Advantageously the inner

ferrule front section is not fixed or anchored to the first fiber end section, but

merely supports the first fiber end section to ensure a correct radial alignment.

25 In an embodiment the phrase "proximally to the first fiber end" mean close to the first fiber end, preferably adjacent to the first fiber end

The PCF center axis at the first fiber end section and the ferrule structure

center axis are preferably substantially parallel. The PCF may in principle be

arranged at a distance from the ferrule structure center axis, however for most applications it is desired that the PCF center axis at the first fiber end section and the ferrule structure center axis are coincident, thereby making the assembling simpler.

- 5 In the assembling the first fiber end section is mounted and anchored in the inner ferrule rear section. Subsequently, prior to or simultaneously the first fiber end section is mounted in the inner ferrule front section and the first fiber end is aligned to a desired position in the z-direction. Thereafter the outer ferrule arrangement is mounted to hold the inner ferrule front section
- 10 and the inner ferrule rear section in position relative to each other and thereby to fix the first fiber end alignment relative to the ferrule structure. By providing the direct anchoring of the fiber exclusively to the inner ferrule rear section a much simpler alignment of the fiber end facet may be obtained since the distance between the inner ferrule front section and the inner
- 15 ferrule rear section may be adapted to position the fiber end facet at a desired position in z-direction before fixing the distance between the inner ferrule front section and the inner ferrule rear section by mounting the inner ferrule front section and the inner ferrule rear section to the outer ferrule arrangement.
- 20 In an embodiment the inner ferrule front section and the inner ferrule rear section are not directly fixed to each other, but they are merely coupled and held in position by the outer ferrule arrangement. Preferably the inner ferrule front section and the inner ferrule rear section are arranged to have an intermediate gab in the axial direction. The gab advantageously provides a
- 25 distance in the axial direction between the inner ferrule front section and the inner ferrule rear section. The distance is preferably in the range from about 1 mm to about 10 cm, such as from about 5 mm to about 2 cm.

In an embodiment the intermediate gab between the inner ferrule front section and the inner ferrule rear section extends partly around the PCF, for

example to form a semi-annular gab. In an embodiment the gab extends fully around the PCF to form an annular gab and thereby a distance between the inner ferrule front section and the inner ferrule rear section. In both instances a part of the first fiber end section is not covered by the inner 5 ferrule arrangement.

In an embodiment the assembly further comprises an alignment sleeve arranged between the inner ferrule front section and the first fiber end section. Thereby the inner ferrule front section supports the first fiber end section proximally to the first fiber end via the alignment sleeve. The 10 alignment sleeve is preferably arranged to surround and support the first fiber end section at the first fiber end.

In the assembling the alignment sleeve is mounted to the first fiber end section in a desired position in z-direction relative to the first fiber end and thereafter the inner ferrule front section is mounted.

15 The alignment sleeve and the use thereof has been found to be very beneficial because PCFs generally differ much in outer diameter and therefore without an alignment sleeve would require individual sizes of inner ferrule front sections. Further –as explained below – the alignment sleeve may be provided to fit to PCFs with different outer diameters e.g. by crimping the 20 alignment sleeve around the fiber to provide sufficient support.

Advantageously the alignment sleeve supports the first fiber end section, by being collapsed onto the first fiber end section in its whole length or in the support section thereof. Suitable material for the alignment sleeve therefore includes material which may be crimped or collapsed onto the first fiber end 25 section e.g. by application of heat. The alignment sleeve is advantageously not fixed or anchored to the first fiber end section but is preferably held mechanically in position to provide a desired axial support to the fluorophores.

In an embodiment the alignment sleeve is fused to the PCF.

Advantageously the alignment sleeve is of glass, preferably silica glass, such as fused silica glass, fused quartz and/or doped silica, and/or borosilicate glass, such as a borosilicate glass comprising approximately 96% silica and 4% boron trioxide e.g. such as the glass sold under the tradename VycorTM.

5 The doped glass may for example include fluoride doped silica, boron doped silica and/or germanium doped silica. By doping the glass, the glass may become more malleable and simpler to collapse.

It has been found to be advantageous that the said alignment sleeve is of silica with refractive index of up to 1.45 for light at 1 μm , such as for light in

10 the range 1-2 μm .

In an embodiment the alignment sleeve is of down doped silica, such as silica doped with fluorine and/or boron.

In an embodiment the alignment sleeve has a refractive index which is less than an effective refractive index of the cladding region.

15 Advantageously the alignment sleeve is substantially fully transparent for the wavelengths of light transmitted or transmittable in the PCF, thereby the risk of excessive heating due to absorbing light is reduced or even avoided.

The alignment sleeve is preferably a capillary tube which has been applied to surround the PCF and collapsed by heat in at least the support section thereof

20 such as a mid-section thereof to thereby being arranged to support the PCF first fiber end section. This construction is very simple and effective and thereby economically feasible.

By only collapsing a section of the alignment sleeve, the non-collapsed length parts of the alignment sleeve may be shaped to have an outer cross sectional

25 diameter which fits to the cross sectional inner diameter of the inner ferrule front section. Thereby, the inner diameter of the inner ferrule front section is correlated to the outer diameter of the non-collapsed alignment sleeve and

PCFs with different outer diameters can be mounted in the alignment sleeve by collapsing of a support length section of the alignment sleeve.

Advantageously the alignment sleeve is held within said inner ferrule front section without any intermediate material between the alignment sleeve and

5 the inner ferrule front section. In an embodiment the alignment sleeve is mechanically held and/or fused to said inner ferrule front section.

Advantageously the inner ferrule front section surrounds and holds the alignment sleeve in a preselected axial position. The inner diameter of the inner ferrule front section is advantageously correlated to the alignment

10 sleeve by being slightly larger than a maximal outer diameter of the alignment sleeve, such as slightly larger to allow the alignment sleeve to be inserted into the bore of the hollow through hole of the inner ferrule front section e.g. from about 0.1 μ m larger to about 2 mm larger, such as from about 1 μ m larger to about 1 mm larger, such as from about 0.1 mm larger to 15 about 0.01 mm larger in diameter.

Advantageously the alignment sleeve surrounds the PCF proximally to the first fiber end. Preferably the first fiber end and an end of the alignment sleeve are aligned in a plane perpendicular to the PCF center axis.

20 The alignment sleeve may in principle have any length (determined in axial direction), such as up to the length of the inner ferrule front section. In practice it is desired that the alignment sleeve is relatively short, but sufficiently long to ensure a support of the electromagnetic force.

Advantageously, the alignment sleeve has a length in the axial direction which is least about 1 mm, such as from about 2 mm to about 5 cm, such as from 25 about 5 mm to about 2 cm. It has been found that for most PCF assemblies the optimal length of the alignment sleeve is about 10 mm.

In an embodiment the alignment sleeve supports the first fiber end section by having an inner diameter at least along a support section thereof which is

adapted to the outer diameter of the first fiber end section. In this embodiment it is desired that the inner diameter of the support section of the alignment sleeve is up to about 0.5 mm larger than the inner diameter, such as up to about 0.1 mm, such as up to about 0.01 mm. Where the alignment

5 sleeve is crimped or collapsed onto the first fiber end section, the inner diameter of the alignment sleeve in non-collapsed or non-crimped state may be larger, such as up to about 5 mm larger than the PCF diameter, such as up to about 3 mm larger, such as up to about 1 mm larger than the PCF diameter.

10 In an embodiment the inner ferrule front section supports the first fiber end section via the alignment sleeve and by mechanically holding the alignment sleeve in axial position, and an end of the alignment sleeve and an end of the inner ferrule front section are aligned in a plane perpendicular to the ferrule structure center axis. Preferably the first fiber end, the end of the alignment

15 sleeve and the end of the inner ferrule front section are aligned in a plane perpendicular to the PCF center axis.

In the assembling of the ferrule the alignment sleeve is moved in the z-direction to achieve the desired position of the fiber facet in the z-direction, e.g. relative to an outer ferrule reference point. Hereby you ensure that the

20 desired optical focal point in the ferrule is achieved. Subsequently, prior to or simultaneously the fiber is anchored on the rear inner ferrule section.

In an embodiment the inner ferrule front section supports the first fiber end section proximally to the first fiber end directly – with an alignment sleeve – and preferably by mechanically holding the first fiber end section proximally

25 to the first fiber end in axial position. Preferably an end of the inner ferrule front section and the first fiber end are aligned in a plane perpendicular to the PCF center axis. Advantageously is desired that the inner diameter of the inner ferrule front section is up to about 0.5 mm larger than the inner diameter, such as up to about 0.1 mm, such as up to about 0.01 mm.

In practical usage, some fraction of light at a light exiting end of the PCF may be guided in the cladding as cladding modes e.g. due to reflected and/or incident radiation further at the input end of the PCF some fraction of light focused into and transmitted in a PCF fiber may not be guided by the core but

5 may be guided as cladding modes e.g. due to mismatch of beam parameters into the fiber, focusing lens imperfections and dust/imperfections on optical surfaces and similar. These cladding modes may result in a very high temperature when used for high power transmission. And in particular the temperature at the termination end of the PCF enclosed within the ferrule

10 structure may become excessively high, which may damage a polymer coating of the PCF and thereby damage the whole termination and the fixation between the ferrule structure and the PCF.

The component of the incident radiation that is not coupled into the core will propagate within the cladding until it diverges to the protective polymer

15 coating where it is removed ("stripped"). If the source of laser radiation input into the fiber is a high power laser, the intensity of radiation within these cladding modes is readily capable of burning the protective polymer coating and destroying the fiber. An example is laser radiation onto industrial workpiece targets (particularly metallic targets) that is reflected with

20 substantial power back toward the fiber such that radiation couples into the cladding circumference rather than into the core of the fiber. For this reason it is necessary to remove any cladding mode radiation at all fiber terminations before it can possibly diverge to and destroy the protective polymer coating. "Mode stripping" is the name given to the numerous techniques used to

25 remove such cladding modes.

This problem has been solved by an embodiment of the invention wherein the PCF is free of polymer from its anchoring length section to the inner ferrule rear section and to its first fiber end. In an embodiment the ferrule structure comprises a hermetic solder element arranged to surround the first fiber end

30 section to form an annular hermetic seal between the first fiber end section and the inner ferrule rear section. The hermetic solder element is arranged

closer to the front annular section than the anchor length section of the inner ferrule rear section. Further the anchoring length section of the inner ferrule rear section is preferably not fully annular, thereby allowing heat to dissipate from the PCF at the anchoring length section and preferably to the hermetic solder element. The anchoring length section of the inner ferrule rear section is preferably extending from about 20 degrees to about 350 degrees, such as about 180 degrees (semi-annular) around the PCF.

The hermetic solder element additionally serves to protect the first fiber end from dust and other undesired contamination. Where the PCF assembly

10 comprises an end cap, the hermetic solder element ensures a hermetic seal of the first fiber end section from the first fiber end and to the position in z-direction of the hermetic solder element. Any polymer coating of the PCF is advantageously stripped off the first fiber end section from the first fiber end and to the position in z-direction of the hermetic solder element.

15 In an embodiment the first fiber end section is mounted in said ferrule structure substantially without application of pressure to the PCF. The application of pressure to the PCF may generate stress in the fiber, which for many applications is highly undesired because the beam quality may be of low quality or the stress may even damage the PCF or lower the lifetime of
20 the PCF.

In an embodiment the first fiber end section is mounted in said ferrule structure without any direct bonds to the fiber beyond one or more bonds to the inner ferrule rear section including the anchoring.

25 In an embodiment the PCF is free of polymer coating in the first fiber end section from the anchoring section of the inner ferrule rear section to the first fiber end.

Advantageously the inner ferrule front section is of an at least partly transparent material at a wavelength between about 200 nm and about 4 μ m,

e.g. fused or crystallized quartz, and the inner ferrule rear section is of fused or crystallized quartz or of a metal or alloy. In an embodiment the inner ferrule front section is of substantially undoped silica having a refractive index of up to 1.45 for light at 1 μm .

5 Generally it is desired that the inner ferrule rear section is of a material with a high conductivity and low thermal expansion in order to ensure a high heat dissipation. It is therefore particularly desired that the inner ferrule rear section is of a metal or metal alloy, such as Colsibro® which is a high copper alloy with small additions of nickel and silicon, which serves to increase the
10 strength, hardness and wear resistance of the material.

The outer ferrule arrangement primarily has the function of holding the inner ferrule arrangement section in position relative to each other, but advantageously the outer ferrule arrangement also aids in the heat dissipation from the ferrule structure.

15 Advantageously the outer ferrule arrangement is of metal, ceramic or glass e.g. silica.

In an embodiment the outer ferrule arrangement is at least partly transparent to allow light to escape to an optional outer alignment jacket where it may be absorbed. In particular light from cladding modes are allowed to escape via
20 the outer ferrule arrangement, optionally cladding mode light stripped off as explained further below is allowed to escape via the outer ferrule arrangement.

In an embodiment the outer ferrule arrangement is fixed to each of the inner ferrule front section and the inner ferrule rear section of the inner ferrule
25 arrangement to hold them in a fixed position relative to each other, such that the first fiber end section of the PCF is preferably supported to be substantially straight within the ferrule structure. The outer ferrule

arrangement is preferably fixed to the inner ferrule arrangement by glue, by solder and/or by being fused or laser welded.

The PCF assembly may advantageously comprise an end cap arrangement e.g. for protecting the first fiber end against dust, moisture and similar

5 contaminations. In an embodiment the ferrule structure comprises an end cap arranged in front of the first fiber end. The end cap may be mounted with a distance or without a distance to the inner ferrule front section depending on the structure and the intended use of the PCF. The end cap is preferably fixed directly to the inner ferrule front section or to an outer ferrule front section of
10 the outer ferrule arrangement as described further below.

In an embodiment the end cap is fixed to the outer ferrule front section of the outer ferrule arrangement. In this embodiment the outer ferrule arrangement preferably comprises the outer ferrule front section and outer ferrule rear section, wherein the outer ferrule rear section is fixed to both the inner
15 ferrule rear section and the inner ferrule front section to hold these inner ferrule arrangement sections in relative positions and the outer ferrule front section is fixed to the inner ferrule front section and the end cap, thereby holding the end cap in position relative to the first fiber end.

The end cap may be as prior art end caps e.g. with or without focusing

20 elements. Advantageously the end cap is an anti-reflection coated silica end cap. Where the end-cap is mounted with a distance to the first fiber end it is desired that the end cap comprises an anti-reflection coating on both sides. This is in particular desired where the PCF is a hollow core PCF.

In an embodiment the end cap is a lens. Preferably the lens comprises an

25 antireflective coating on both of its sides i.e. its side facing the first fiber end and its opposite side.

The PCF may in principle be any kind of PCF, such as the PCFs discussed in the introduction above. In an embodiment the PCF is selected from a hollow

core fiber, such as a bandgap fiber, a kagome fiber, or an anti-resonant-reflection (ARS) fiber, or a solid core fiber.

In an embodiment the PCF has a core diameter of less than 100 μm , preferably of about 50 μm or less, such as from about 5 μm to about 40 μm .

- 5 In an embodiment the PCF at its first fiber end section comprises a terminal section of a hollow capillary fiber for protecting the end of the PCF from back reflections. This is achieved by positioning a piece of hollow capillary fiber in front of the PCF, e.g. in the alignment sleeve or in the inner ferrule front section.
- 10 In an embodiment the first fiber end (facet) has a metallic or anti-reflex coating.

In an embodiment the PCF is a hollow core fiber and the end cap is fixed to the outer ferrule front section of the outer ferrule arrangement to provide an end cap space between the end cap and the inner ferrule front section. The

- 15 cap space may in principle be very small determined in the z-direction, such a 1 mm and up to e.g. 5 cm. In practice the cap space is kept below about 1 cm for practical reasons.

In an embodiment the hollow core has a collapsed end part (such as up to 2 mm in length, preferably up to 1 mm in length) and a metallic or anti-reflex

- 20 coating on the fiber facet.
- In an embodiment the inner ferrule arrangement comprises a passage into the end cap space for injecting and/or withdrawing fluids, and in particular gas. The passage is preferably provided by at least one additional through hole in each of the inner ferrule front section and the inner ferrule rear section. The additional through holes are preferably
- 25 substantially parallel to the axis of the ferrule structure. Preferably the additional through hole comprises a valve arrangement at an exit from the inner ferrule rear section.

The passage into the end cap space for injecting and/or withdrawing fluids may advantageously be applied for injecting or flushing with suitable gasses e.g. to ensure a moisture free hollow core. Suitable gasses include air, argon, nitrogen or mixtures comprising any of the mentioned gasses. Optionally, the 5 cap space for injecting and/or withdrawing fluids are arranged for generating a hollow core pressure of about 1 mbar or less, such as to a pressure of about 0.1 mbar or less, such as to a pressure of about 0.01 mbar or less at standard temperature.

10 Optionally the cap space for injecting and/or withdrawing fluids are arranged for generate a hollow core pressure of up to 2 bars, such as up to about 1.5 bars at standard temperature.

15 In an embodiment the inner ferrule arrangement comprises at least one passage into the gap between the inner ferrule front section and the inner ferrule rear section. The passage is advantageously a passage through the inner ferrule rear section, preferably in the form of a through hole e.g. parallel to the center axis of the ferrule structure. The injecting and/or withdrawing of fluids, such as injecting and/or withdrawing of the gasses mentioned above. In an embodiment the inner ferrule arrangement comprises at least two passages into the gap between the inner ferrule front section and 20 the inner ferrule rear section for flushing the gab e.g. for drying out the gap and/or for heat dissipation.

25 In an embodiment the inner ferrule front section has a rear end where at least an in radial direction outer part of the rear end is angled relative to the center axis of the ferrule structure to out-couple light, such as light propagating in the inner ferrule arrangement. In an embodiment the inner ferrule front section has a rear end where at least an in radial direction outer semi annular or annular in radial direction outer part of the rear end is angled relative to the center axis of the ferrule structure to out-couple light. The light

may advantageously be out-coupled to pass through the outer ferrule arrangement.

In an embodiment the inner ferrule front section has a rear end where at least an in radial direction inner part of the rear end is angled relative to the center axis to form a funnel shape. Thereby the PCF may be simpler to mount in the inner ferrule front section. The rear end of the inner ferrule front section may be angled in a part of its extension around the fiber or in its whole annular extension around the PCF.

The rear end of the inner ferrule front section may advantageously be coated with a reflective coating to back-reflect light, such as light which is incidentally radiated from the first fiber end and/or light that is propagating in the inner ferrule arrangement.

In an embodiment the inner ferrule front section has a front end and the front end is coated with a reflective coating to protect the ferrule structure against incident and/or back reflected light.

In an embodiment the inner ferrule rear section has a front end, the front end is angled relative to the center axis of the ferrule structure and/or the front end is coated with a reflective coating to protect against incident and/or back reflected light. The front end of the inner ferrule rear section may be angled in a part of its extension around the fiber or in its whole annular extension around the PCF.

As explained above the ferrule structure of the PCF assembly of the invention allows for several functions of stripping off undesired cladding modes by reflecting and directly stripping off such cladding modes. As explained in the following the invention allow for even further functions of stripping off undesired light.

In an embodiment the first fiber end section has at least one mode stripper length section. The mode stripper length section comprises a mode stripping

high index material and/or a scattering layer applied in contact with the optical fiber at the mode stripper length section and/or the fiber in the mode stripper length section has a roughness Ra value of at least about 0.1 µm.

The high roughness Ra value may e.g. be provided by etching (e.g. laser

5 etching or chemical etching) or mechanical grinding. The Ra-value may be measured in accordance with the ISO 4287, DIN 4762 and/or DIN 4768 standards.

The mode stripper length section reduces or fully prevents forward propagating cladding light. The mode stripping high index material may for

10 example be glue with silica particles e.g. doped to increase the refractive index and/or chemical glass.

In an embodiment the mode stripper length section of the PCF is positioned between the inner ferrule front section and the inner ferrule rear section.

In an embodiment at least one of the inner ferrule front section and the inner

15 ferrule rear section has a carving exposing the PCF the mode stripper length section of the PCF.

Advantageously the carving preferably partly surrounds the fiber preferably such that it extends at least about 20 degrees and e.g. up to about 350 degrees, preferably from about 20 degrees to about 90 degrees in the

20 direction around the PCF.

In an embodiment the ferrule structure comprises a mode stripper coating arranged in direct contact with an outer surface of the inner ferrule front section, the mode stripper coating is preferably contained between the inner ferrule front section and the outer ferrule arrangement.

25 In an embodiment the ferrule structure comprises an outer alignment jacket surrounding the outer ferrule arrangement, the outer alignment jacket

preferably comprises means for alignment, preferably for alignment in axial direction (z-direction) and/or for rotational alignment.

The main purpose of the outer alignment jacket is to ensure a rigid and mechanical strength of the ferrule structure and simpler alignment of the PCF

5 with respect to an emitted beam or in-coupled beam of light. Further for axial and rotational alignment the outer alignment jacket is very beneficial.

In an embodiment the means for alignment comprises means for alignment in the axial direction (z-direction), for alignment in the radial directions (x,y-directions) and/or for rotational alignment.

10 Advantageously the means for alignment comprises one or more flanges, one or more protrusions, one or more depressions and/or one or more markings.

Preferably the means for alignment comprises a flange for mounting with positioning control.

15 In an embodiment the means for alignment comprises a marker for rotational fiber orientation e.g. for PM orientation.

Generally it is desirable to be able to rotate the fiber in the ferrule so that the PM axis is aligned with respect to the means for alignment on the outside of the ferrule). This may e.g. be provided by having a corresponding marking on the inner ferrule rear section immediately adjacent to the anchor length

20 section.

In an embodiment the ferrule structure is configured for cooling by a cooling fluid the outer ferrule arrangement and/or the outer alignment jacket comprises passages with at least one inlet and at least one exit for the cooling fluid, such as water. The passages in the outer ferrule arrangement and/or 25 the outer alignment jacket are advantageously arranged to helically surround the underlying element(s) to provide good heat dissipation. By ensuring that the outer ferrule arrangement is transparent to light stripped off and/or out-

coupled via the inner ferrule arrangement, this light may escape via the outer ferrule arrangement and be absorbed by outer alignment jacket. Thereby the outer alignment jacket will be heated, but due to the cooling of the outer alignment jacket by a cooling fluid, the temperature may be held at an acceptable level even when the PCF is transporting light at high power.

5 In an embodiment the assembly further comprises one or more sensors, such as one or more optical sensors and/or electrical sensors and/or chemical sensors for monitoring temperature, for monitoring connector performance and/or for monitoring fiber damage. The sensors are advantageously arranged in the ferrule structure, such as the outer ferrule arrangement and/or the outer alignment jacket. Advantageously the sensors are fiber sensors, but in principle also non-fiber sensors are applicable.

10 In an embodiment the assembly comprises a second ferrule structure connected to a second end section of the PCF comprising a second fiber end.

15 The second ferrule structure preferably is as the ferrule structure as described above and is mounted to the second end section of the PCF in a corresponding way as described above. In an embodiment the second end of the PCF is a fiber spliced end and/or it is coupled comprising free space coupling.

20 The invention also comprises a laser system comprising a PCF assembly as described above.

25 The laser system advantageously comprises a laser light source and the PCF assembly is optically connected to the laser light source for receiving light from the laser light source. The laser light source may in an embodiment be arranged for directly feed the light to the PCF e.g. by being fused to the PCF. In an embodiment the laser light source is arranged for feeding the light to the PCF via one or more optical elements and/or via free space.

Preferably the PCF assembly is adapted for delivering the light to a light employing station of an apparatus. Preferably the first fiber end with the ferrule structure is adapted for being connected to the user apparatus.

The apparatus is for example a microscope, surgical apparatus, measuring

5 apparatus (metrology), materials processing apparatus, an illumination apparatus, any combinations thereof and/or an apparatus as described further below.

The laser light source may in principle be any kind of laser light source, such as a CW laser light source or a pulsed laser light source. Such laser light

10 sources are well known in the art and will not be described in further details herein.

In an embodiment the laser light source is configured for generating laser light pulses, preferably the laser light source is a femtosecond laser source or a picosecond laser light source or a nanosecond laser light source.

15 In an embodiment the laser light source has a pump duration of from about 30 fs to about 30 ps, such as from about 100 fs to about 10 ps.

In an embodiment the laser light source has a peak power determined at the exit of the laser light source which is at least about 5 kW, such as at least about 10 kW, such as at least about 30 kW, such as at least about 50 kW.

20

The laser light source is advantageously a mode-locked laser light source. In an embodiment laser light source is an actively mode locked laser. In an embodiment the laser light source is a passively mode locked laser. The mode locked laser preferably comprises one or more amplifiers.

25

In an embodiment the laser system is configured for supercontinuum generation and the laser light source is a mode-locked pump pulse light source arranged for feeding the PCF to generate supercontinuum. The PCF is preferably a solid core PCF suitable for supercontinuum generation such as a

5 PCF described in WO15144181, WO15003715, WO15003714, US2015192732 and/or US2011013652.

In an embodiment where the PCF is a solid core PCF, it is desired that the PCF is a microstructured solid core PCF comprising a plurality of non-solid and/or solid cladding inclusions. The solid core PCF is preferably configured

10 for guiding light – preferably single mode light - comprising at least one wavelength in the range from about 200 nm to about 4.5 μ m, preferably at least one wavelength in the range from 1000 nm to about 1100 nm.

In an embodiment the PCF is a hollow core PCF, preferably the hollow core PCF is configured for guiding light – preferably single mode light -comprising

15 at least one wavelength in the range from about 200 nm to about 4.5 μ m, preferably at least one wavelength in the range from 1000 nm to about 1100 nm.

In an embodiment the PCF is configured for guiding a continuum of light wavelengths, preferably spanning over at least about 0.1 μ m, such as at least

20 about 0.3 μ m, such as at least about 0.5 μ m.

In an embodiment the hollow core PCF comprises an outer cladding region and a number N of hollow tubes surrounded by the outer cladding region, wherein each of the hollow tubes is fused to the outer cladding to form a ring defining an inner cladding region and the hollow core region surrounded by

25 the inner cladding region, preferably N is from 6 to 12, more preferably N is 7. Advantageously the hollow tubes are not touching each other, preferably the hollow tubes are arranged with a substantially equal distance to adjacent hollow tubes.

The hollow core PCF is advantageously as described in the co-pending application PA 2015 70877 DK by the same applicant and with the title "HOLLOW CORE OPTICAL FIBER AND A LASER SYSTEM".

5 The PCF of the laser system advantageously has a core region diameter of from about 3 μm to about 100 μm , such as from about 10 μm to about 50 μm , such as from about 10 μm to about 30 μm .

The invention also comprises a set of correlated ferrule elements suitable for a PCF assembly as described above.

10 The set of correlated ferrule element comprises the required elements for providing a ferrule structure for a PCF to generate a PCF assembly as described above.

The set of correlated ferrule elements comprises

15 • an inner ferrule front section and an inner ferrule rear section for forming an inner ferrule arrangement; and

• an outer ferrule arrangement,

wherein each of the inner ferrule front section, inner ferrule rear section and outer ferrule arrangement has a length and a center axis and comprises a main hollow through hole parallel with or coincident to the respective center axes, the set of correlated ferrule elements preferably further comprises an 20 alignment sleeve having a length and a center axis and comprises a main hollow through hole parallel with or coincident to the center axis.

Advantageously the elements are correlated such that the alignment sleeve can be positioned in the main hollow through hole of the inner ferrule front section and the inner ferrule front section and the inner ferrule rear section 25 can be mounted in the main hollow through hole of the outer ferrule arrangement for forming the inner ferrule arrangement. Thereby the set of correlated ferrule elements may be assembled with a PCF to a PCF assembly.

The alignment sleeve is advantageously a capillary tube wherein the main hollow through hole of the alignment sleeve has an inner diameter which is about 2 mm or less, such as about 1 mm or less such as about 0.5 mm or less, the alignment sleeve is preferably collapsible in at least a part of its 5 length as described above.

The alignment sleeve may advantageously be as described above and of a material as described above.

In an embodiment the alignment sleeve has a length in axial direction which is preferably at least about 1 mm, such as from about 2 mm to about 5 cm.

10 The inner ferrule front section and the inner ferrule rear section as well as the outer ferrule arrangement are advantageously as described above and of materials as described above.

In an embodiment the set further comprises an end cap which is configured for being arranged in front of the inner ferrule front section by being mounted 15 to the inner ferrule front section or by being mounted to an outer ferrule front section of the outer ferrule arrangement. The end cap is preferably an anti-reflection coated silica end cap e.g. as described above.

In an embodiment each of the inner ferrule front section and the inner ferrule rear section comprises one or more additional through holes for providing a 20 fluid passage, the additional through holes are preferably substantially parallel to the axis of the respective inner ferrule sections and optionally the additional through hole at an exit from the inner ferrule rear section comprises a valve arrangement e.g. as described above.

In an embodiment the inner ferrule front section has a rear end, at least an in 25 radial direction outer part of the rear end is angled relative to the center axis of the inner ferrule front section and/or the rear end is coated with a reflective coating in order to out-couple light preferably as described above.

In an embodiment the inner ferrule front section has a rear end, at least an in radial direction inner part of the rear end is angled relative to the center axis to form a funnel shape to thereby make it simpler to insert the PCF into the inner ferrule front section e.g. as described above.

5 Advantageously the inner ferrule front section has a front end, the front end is coated with a reflective coating.

In an embodiment the inner ferrule rear section has a front end and the front end is angled relative to the center axis of the inner ferrule rear section and/or the front end is coated with a reflective coating, preferably as

10 described above.

In an embodiment at least one of the inner ferrule front section and the inner ferrule rear section has a carving into its main hollow through hole, the carving preferably has an extension in an annular direction which extends at least about 20 degrees such as up to about 350 degrees, such as up to about

15 90 degrees.

In an embodiment the set further comprises an outer alignment jacket correlated to the outer ferrule arrangement such that it can be arranged to surround the outer ferrule arrangement e.g. as described above. The outer alignment jacket preferably comprises means for alignment e.g. as described
20 above.

Advantageously the outer ferrule arrangement and/or the outer alignment jacket comprises passages with at least one inlet and at least one exit for a cooling fluid e.g. as described above.

The invention also comprises an apparatus comprising a laser system as
25 described above, wherein the PCF assembly is configured for delivering light to a light receiving station of the apparatus.

The apparatus may in principle be any kind of apparatus, which uses laser light in its operation. In an embodiment the apparatus is an illumination apparatus configured for illuminating a target, the illumination apparatus is preferably selected from a microscope, a spectroscope or an endoscope.

- 5 In an embodiment the illumination source is adapted for fluorescence Imaging; Fluorescence Lifetime Imaging (FLIM); Total Internal Reflection Fluorescence (TIRF) Microscopy; fluorescence resonance energy transfer (FRET); pulse interleave excitation foster resonance energy transfer (PIE-FRET); broadband Spectroscopy; nanophotonics; flow cytometry; industrial
- 10 inspection, such as metrology; ringdown spectroscopy, such as gas sensing; analytical spectroscopy, such as hyperspectral spectroscopy, crop analysis e.g. of fruits and time of flight spectroscopy (TCSPC); single Molecule Imaging and/or combinations thereof.
- 15 In an embodiment the apparatus is a microprocessing apparatus, preferably for material processing, such as drilling, marking, cutting and/or scribing.

In an embodiment the apparatus is a surgery apparatus, such as an apparatus for eye surgery (ophthamology).

- 20 All features of the inventions and embodiments of the invention as described above including ranges and preferred ranges can be combined in various ways within the scope of the invention, unless there are specific reasons not to combine such features.

Brief description of the drawings

25

The above and/or additional objects, features and advantages of the present invention, will be further elucidated by the following illustrative and non-limiting detailed description of embodiments of the present invention, with reference to the appended drawings.

Fig. 1 is a cross sectional view of a first embodiment of a PCF assembly according to the invention, where in radial direction inner part of said rear end is angled relative to the center axis to form a funnel shape.

Fig. 2 is a cross sectional view of a second embodiment of a PCF assembly
5 according to the invention, where the inner ferrule rear section has a passage into the gap between the inner ferrule front section and the inner ferrule rear section.

Fig. 3 is a cross sectional view of a third embodiment of a PCF assembly according to the invention, where the PCF at its first fiber end section has a
10 mode stripper section and the inner ferrule front section has a carving exposing the PCF said mode stripper length section.

Fig. 4 is a cross sectional view of a fourth embodiment of a PCF assembly according to the invention, where the PCF at its first fiber end section has a mode stripper section and the inner ferrule rear section has a carving
15 exposing the PCF said mode stripper length section.

Fig. 5 is a cross sectional view of a fifth embodiment of a PCF assembly according to the invention, where a part of the rear end of the inner ferrule front section is angled relative to the center axis of the ferrule structure to out-couple light propagating in the inner ferrule arrangement.

20 Fig. 6 is a cross view of a sixth embodiment of a PCF assembly according to the invention, where the rear end of the inner ferrule rear section in its entire annular extension is angled relative to the center axis of the ferrule structure to out-couple light propagating in the inner ferrule arrangement.

Fig. 7 is a cross sectional view of a seventh embodiment of a PCF assembly
25 according to the invention, where the PCF at its first fiber end section has a mode stripper section in the gap between the inner ferrule front section and the inner ferrule rear section.

Fig. 8 is a cross sectional view of an eighth embodiment of a PCF assembly according to the invention, where the PCF assembly comprises an end cap mounted to the inner ferrule front section.

5 Fig. 9 is a cross sectional view of a ninth embodiment of a PCF assembly according to the invention, where the PCF assembly comprises an end cap mounted to the outer ferrule front section.

Fig. 9c is a cross sectional view of a PCF assembly which is a variation of the ninth embodiment shown in Fig. 9.

10 Fig. 10 is a cross sectional view of a tenth embodiment of a PCF assembly according to the invention, where the PCF assembly comprises an outer alignment jacket.

Fig. 11 is a cross sectional view of an eleventh embodiment of a PCF assembly according to the invention, where the PCF assembly comprises an alignment sleeve.

15 Fig. 12 is a cross sectional view of a twelfth embodiment of a PCF assembly according to the invention, where the PCF assembly comprises an alignment sleeve and the PCF comprises a section of hollow core capillary.

Fig. 12a is a cross sectional view is an enlarged cross sectional view of the alignment sleeve and supported first fiber end section of the PCF assembly of
20 Fig. 12.

Fig. 13 is a cross sectional view of a thirteenth embodiment of a PCF assembly according to the invention, where the PCF assembly comprises an alignment sleeve with a collapsed supporting section.

Fig. 13a is a cross sectional view is an enlarged cross sectional view of the alignment sleeve and supported first fiber end section of the PCF assembly of
25 Fig. 13.

Figs. 14a, 14b, 14c and 14d show schematic cross sectional views of PCF fiber end sections.

Fig. 15 is a schematic drawing of a laser system of an embodiment of the invention and a user apparatus.

5 Fig. 16 is a schematic drawing of an apparatus of an embodiment of the invention and a user apparatus.

Figs. 17a and 17b are schematic drawings of an apparatus of an embodiment of the invention and a user apparatus where the laser system is a supercontinuum laser system.

10 The figures are schematic and may be simplified for clarity. Throughout, the same reference numerals are used for identical or corresponding parts.

The PCF assembly of Fig. 1 comprises a photonic crystal fiber (PCF) assembly PCF with a first fiber end section 1 with a first fiber end 1a and a ferrule structure. The ferrule structure comprises an inner ferrule arrangement

15 comprising an inner ferrule front section 2 proximally to the first fiber end and 1a an inner ferrule rear section 3 distally to first fiber end 1a. The inner ferrule front section 2 and the inner ferrule rear section 3 respectively comprises hollow through holes 2a, 3a coincident with center axes of the inner ferrule front section 2 and inner ferrule rear section. The PCF first fiber
20 end section is mounted in said hollow through holes 2a, 3a, such that the inner ferrule arrangement surrounds the first fiber end section.

The inner ferrule rear section 3 is anchored in an anchor length section 3b to said first fiber end section 1, and from a point 1c of the PCF and to the first fiber end the PCF is free of polymer coating. The inner ferrule front section 2

25 supports the first fiber end section 1 proximally to the first fiber end 1a by mechanically holding said first fiber end section proximally to the first fiber end in axial position. As it can be seen the front of the inner ferrule front

section and the first fiber end are aligned in a plan perpendicular to the PCF center axis.

The ferrule structure further comprises an outer ferrule arrangement 5 arranged to surround the inner ferrule arrangement. The outer ferrule

5 arrangement 5 is fixed to each of the inner ferrule front section 2 and the inner ferrule rear section 3 to hold them in a fixed position relative to each other and to form a gap 4 there between. The outer ferrule arrangement 5 is fixed by solder 6 at each of its ends to the respective sections 2, 3 of the inner ferrule arrangement.

10 The PCF first fiber end section is advantageously held relatively straight in the gap 4 between the inner ferrule front section 2 and the inner ferrule rear section 3. In an alternative not shown embodiment the PCF has a surplus length between the inner ferrule front section 2 and the inner ferrule rear section 3.

15 The in radial direction inner part 2c of the rear end of the inner ferrule front section 2 is angled relative to the center axis to form a funnel shape, which makes it simpler to feed the PCF 1 into the inner ferrule front section during assembling. The in radial direction outer part 2d of the rear end of the inner ferrule front section 2 is advantageously coated with angled reflective coating

20 to back-reflect light propagating in the inner ferrule arrangement.

Further the front end 2e of the inner ferrule front section 2 is preferably coated with a reflective coating to protect the ferrule structure against incident and/or back-reflected light and the front end 3e of the inner ferrule rear section is preferably coated with a reflective coating to protect against

25 incident and/or back-reflected light.

The PCF assembly of Fig. 2 comprises a photonic crystal fiber (PCF) assembly PCF with a first fiber end section 11 with a first fiber end 11a and a ferrule structure. The ferrule structure comprises an inner ferrule arrangement

comprising an inner ferrule front section 12 proximally to the first fiber end and 11a an inner ferrule rear section 13 distally to first fiber end 11a. The inner ferrule rear section 13 is anchored in an anchor length section 13b to the first fiber end section 11, and from a point 11c of the PCF and to the first 5 fiber end the PCF is free of polymer coating. The ferrule structure further comprises an outer ferrule arrangement 15 arranged fixed to each of the inner ferrule front section 12 and the inner ferrule rear section 13 to hold them in a fixed position relative to each other. The front end 3e of the inner ferrule rear section is preferably coated with a reflective coating to protect 10 against incident and/or back-reflected light.

The front end 13e of the inner ferrule rear section 13 is angled relative to the center axis of the ferrule structure to form an outwards facing facet for out-coupling ferrule light. The outer ferrule arrangement 15 is preferably substantially transparent to the out-coupled light. The inner ferrule rear 15 section 13 further comprises a passage 13f into the gap 14 between the inner ferrule front section 12 and the inner ferrule rear section 15. The passage may be used to fill in or withdraw fluids from the gap 14 as described above.

The PCF assembly of Fig. 3 comprises a photonic crystal fiber (PCF) assembly 20 PCF with a first fiber end section 21 with a first fiber end 21a and a ferrule structure. The ferrule structure comprises an inner ferrule arrangement comprising an inner ferrule front section 22 proximally to the first fiber end 21a and an inner ferrule rear section 23 distally to first fiber end 21a and surrounding the first fiber end section 21.

The inner ferrule rear section 23 is anchored in an anchor length section 23b 25 to said first fiber end section 21, and from a point 21c of the PCF and to the first fiber end the PCF is free of polymer coating. The inner ferrule front section 22 supports the first fiber end section 21 proximally to the first fiber end 21a by mechanically holding said first fiber end section proximally to the first fiber end in axial position.

The ferrule structure further comprises an outer ferrule arrangement 25 fixed to each of the inner ferrule front section 22 and the inner ferrule rear section 23 to hold them in a fixed position relative to each other and to form a gap 24 there between. The outer ferrule arrangement 25 is fixed by solder 26 at each 5 of its ends to the respective sections 22, 23 of the inner ferrule arrangement.

The front end 23e of the inner ferrule rear section 23 is angled relative to the center axis of the ferrule structure to form an outwards facing facet for out-coupling light propagating in the inner ferrule arrangement and reduce back reflections. The inner ferrule rear section 23 further comprises a passage 23f 10 into the gap 24 between the inner ferrule front section 22 and the inner ferrule rear section 25. The passage may be used to fill in or withdraw fluids from the gap 24 as described above. The PCF at its first fiber end section 21 has a mode stripper section 27 and the inner ferrule front section 22 has a carving 27a exposing the PCF mode stripper length section 27.

15 A sensor 28 is mounted to the outer ferrule arrangement 25 above the carving 27a exposing the PCF mode stripper length section for monitoring the out-coupling efficiency of the mode stripper 27.

The PCF assembly of Fig.3 comprises a photonic crystal fiber (PCF) assembly PCF with a first fiber end section 31 assembled with a ferrule structure 20 comprising an inner ferrule arrangement comprising an inner ferrule front section 32 proximally to the first fiber end and an inner ferrule rear section 33 distally to first fiber end and surrounding the first fiber end section 31.

The inner ferrule rear section 33 is anchored to the first fiber end section 31, and from a point 31c of the PCF and to the first fiber end the PCF is free of 25 polymer coating. The inner ferrule front section 32 supports the first fiber end section 31 proximally to the first fiber end 31a by mechanically holding said first fiber end section proximally to the first fiber end in axial position.

The ferrule structure further comprises an outer ferrule arrangement 35 fixed to each of the inner ferrule front section 32 and the inner ferrule rear section 33 to hold them in a fixed position relative to each other and to form a gap 34 there between. The outer ferrule arrangement 35 is fixed by solder 36 at each 5 of its ends to the respective sections 32, 33 of the inner ferrule arrangement.

The PCF at its first fiber end section 31 has a mode stripper section 37 and the inner ferrule rear section 33 has a carving 37a exposing the PCF mode stripper length section 37.

A sensor 38 is mounted to the outer ferrule arrangement 35 above the 10 inner ferrule rear section 33 and has a probe 39 extending into the carving 37a exposing the PCF mode stripper length section for monitoring the out-coupling efficiency of the mode stripper 37.

The PCF assembly of Fig. 5 comprises a photonic crystal fiber (PCF) assembly PCF with a first fiber end section 41 assembled with a ferrule structure comprising an inner ferrule arrangement comprising an inner ferrule front 15 section 42 proximally to the first fiber end and an inner ferrule rear section 43 distally to first fiber end and surrounding the first fiber end section 41.

The inner ferrule rear section 43 is anchored to the first fiber end section 41, and from a point 41c of the PCF and to the first fiber end the PCF is free of 20 polymer coating. The inner ferrule front section 42 supports the first fiber end section 41 proximally to the first fiber end 41a by mechanically holding said first fiber end section proximally to the first fiber end in axial position.

The ferrule structure further comprises an outer ferrule arrangement 45 fixed to each of the inner ferrule front section 42 and the inner ferrule rear section 43 to hold them in a fixed position relative to each other and to form a gap 44 there between. The outer ferrule arrangement 45 is fixed by solder 46 at each 25 of its ends to the respective sections 42, 43 of the inner ferrule arrangement.

The PCF at its first fiber end section 41 has a mode stripper section 47 and the inner ferrule rear section 43 has a carving 47a exposing the PCF mode stripper length section 47.

5 The front end 43e of the inner ferrule rear section 43 is angled relative to the center axis of the ferrule structure to form an outwards facing facet for out-coupling light propagating in the inner ferrule arrangement and reduce back-reflection of light. A part 42b - for example a semi-annular part of the rear end of the inner ferrule front section - is angled relative to the center axis of the ferrule structure to out-couple light propagating in the inner ferrule arrangement and reduce back-reflections of light. The remaining part 42c is not angled but has a facet which is substantially perpendicular to the center axis. The not angled part 42c of the rear end of the inner ferrule front section is advantageously coated with a reflective coating for reducing back-reflection of light.

10 15 Two sensors 48a, 48b are mounted to the outer ferrule arrangement 45 above respectively the rear end of the inner ferrule front section and the carving 47a exposing the PCF mode stripper length section for monitoring the out-coupling efficiency of respectively the angled part 42b of the inner ferrule front section and the mode stripper 47.

20 25 The PCF assembly of Fig. 6 is a variation of the PCF assembly of Fig. 5 with the modification that the entire rear end 42b of the rear end of the inner ferrule front section is angled relative to the center axis of the ferrule structure to out-couple light propagating in the inner ferrule arrangement and reduce back-reflections of light.

The PCF assembly of Fig.7 comprises a photonic crystal fiber (PCF) assembly PCF with a first fiber end section 51 assembled with a ferrule structure comprising an inner ferrule arrangement comprising an inner ferrule front section 52 proximally to the first fiber end and an inner ferrule rear section 53 distally to first fiber end and surrounding the first fiber end section 51.

The inner ferrule rear section 53 is anchored to the first fiber end section 51, and from a point 51c of the PCF and to the first fiber end 51a, the PCF is free of polymer coating. The inner ferrule front section 52 supports the first fiber end section 51 proximally to the first fiber end 51a by mechanically holding 5 said first fiber end section proximally to the first fiber end in axial position.

The ferrule structure further comprises an outer ferrule arrangement 55 fixed to each of the inner ferrule front section 52 and the inner ferrule rear section 53 to hold them in a fixed position relative to each other and to form a gap 54 there between. The outer ferrule arrangement 55 is fixed by solder 56 at each 10 of its ends to the respective sections 52, 53 of the inner ferrule arrangement.

The PCF at its first fiber end section 51 has a mode stripper section 57 positioned between the inner ferrule front section 52 and the inner ferrule rear section 53.

The PCF assembly of Fig. 8 comprises a photonic crystal fiber (PCF) assembly 15 PCF with a first fiber end section 61 assembled with a ferrule structure comprising an inner ferrule arrangement comprising an inner ferrule front section 62 proximally to the first fiber end and an inner ferrule rear section 63 distally to first fiber end and surrounding the first fiber end section 61.

The inner ferrule rear section 63 is anchored to the first fiber end section 61 20 in an anchor length section 63b, and from a point 61c of the PCF and to the first fiber end 61a, the PCF is free of polymer coating.

The ferrule structure comprises a hermetic solder element 66a arranged to surround the first fiber end section 61 to form an annular hermetic seal 66a between the first fiber end section 61 and the inner ferrule rear section 63, 25 the hermetic solder element 66a is arranged closer to the front annular section 62 than the anchor length section 63b of the inner ferrule rear section. As seen in the drawing the anchoring length section 63b of the inner ferrule rear section 63 is not fully annular, the anchoring length section 63 of the

inner ferrule rear section is preferably extending from about 20 degrees to about 350 degrees, such as about 180 degrees around the PCF.

The ferrule structure further comprises an outer ferrule arrangement 65 fixed

to each of the inner ferrule front section 62 and the inner ferrule rear section

5 63 to hold them in a fixed position relative to each other and to form a gap 64 there between. The outer ferrule arrangement 65 is fixed by solder 66 at each of its ends to the respective sections 62, 63 of the inner ferrule arrangement.

The ferrule structure further comprises an end cap 67 arranged in front of the first fiber end 61c and preferably in direct contact with the first fiber end 61c.

10 The end cap 67 is fixed directly to the inner ferrule front section. As explained above this embodiment is particularly beneficial where the PCF is a solid core PCF.

The PCF assembly of Fig. 9 comprises a photonic crystal fiber (PCF) assembly

PCF with a first fiber end section 71 assembled with a ferrule structure

15 comprising an inner ferrule arrangement comprising an inner ferrule front section 72 proximally to the first fiber end and an inner ferrule rear section 73 distally to first fiber end and surrounding the first fiber end section 71.

The inner ferrule rear section 73 is anchored to the first fiber end section 71 in an anchor length section 73b, and from a point 71c of the PCF and to the

20 first fiber end 71a, the PCF is free of polymer coating.

The ferrule structure comprises a hermetic solder element 76a arranged to surround the first fiber end section 71 to form an annular hermetic seal 76a between the first fiber end section 71 and the inner ferrule rear section 73, the hermetic solder element 76a is arranged closer to the front annular

25 section 72 than the anchor length section 73b of the inner ferrule rear section.

The hermetic solder element ensures a hermetic seal of the first fiber end section 71 from the first fiber end 71c and to the position in z-direction of the hermetic solder element 76a.

The ferrule structure further comprises an outer ferrule arrangement 75, 75a comprising an outer ferrule front section 75a and an outer ferrule rear section 75. The outer ferrule rear section 75 is fixed to each of the inner ferrule front section 72 and the inner ferrule rear section 73 to hold them in a fixed

5 position relative to each other and to form a gap 74 there between. The outer ferrule rear section 75 is fixed by solder 76 at each of its ends to the respective sections 72, 73 of the inner ferrule arrangement and the outer ferrule front section 75a is fixed by solder 76 to the inner ferrule front section 72.

10 The ferrule structure further comprises an end cap 77 arranged in front of the first fiber end 71c. The end cap 77 is mounted with a distance to the inner ferrule front section 72, thereby forming an end cap space 78 between the end cap 77 and the inner ferrule front section 72. The end cap is fixed to the outer ferrule front section 75a of the outer ferrule arrangement. Thereby the
15 outer ferrule front section 75a of the outer ferrule arrangement holds the end cap 77 in a desired position relative to the inner ferrule front section 72 and the first fiber end section 71c. As explained above this embodiment is particularly beneficial where the PCF is a hollow core PCF.

20 The inner ferrule arrangement 72, 73 comprises a passage into the end cap space 78 for injecting and/or withdrawing fluids. The passage is provided by additional through holes 72f, 73f in each of the inner ferrule front section 72 and the inner ferrule rear section 73. Advantageously a not shown valve arrangement is arranged to ensure a desired open/closing function into the through holes 72f, 73f and the end cap space 78.

25 The PCF assembly shown in Fig. 9 a, differs from the PCF assembly of Fig. 9 in that the end cap is a lens 77a, preferably the lens 77a comprises an antireflective coating on both of its sides.

The PCF assembly of Fig. 10 comprises a photonic crystal fiber (PCF) assembly PCF with a first fiber end section 81 assembled with a ferrule

structure comprising an inner ferrule arrangement comprising an inner ferrule front section 82 proximally to the first fiber end and an inner ferrule rear section 83 distally to first fiber end and surrounding the first fiber end section 81.

5 The inner ferrule rear section 83 is anchored to the first fiber end section 81 in an anchor length section 83b, and from a point 81c of the PCF and to the first fiber end 81a, the PCF is free of polymer coating.

The ferrule structure comprises a hermetic solder element 86a arranged to surround the first fiber end section 81 to form an annular hermetic seal 86a

10 between the first fiber end section 81 and the inner ferrule rear section 83.

The hermetic solder element 86a ensures a hermetic seal of the first fiber end section 81 from the first fiber end 81c and to the position in z-direction of the hermetic solder element 86a.

The outer ferrule rear section 85 is fixed to each of the inner ferrule front

15 section 82 and the inner ferrule rear section 83 to hold them in a fixed position relative to each other and to form a gap there between. The outer ferrule rear section 85 is fixed by solder 86 at each of its ends to the respective sections 82, 83 of the inner ferrule arrangement and the outer ferrule front section 85a is fixed by solder 86 to the inner ferrule front section 82.

The ferrule structure further comprises an end cap 87 arranged in front of the first fiber end 81c. The end cap 87 is mounted with a distance to the inner ferrule front section 82, thereby forming an end cap space 88 between the end cap 87 and the inner ferrule front section 82. The end cap is fixed to the outer ferrule front section 85a of the outer ferrule arrangement.

The ferrule structure comprises an outer alignment jacket 89 surrounding the outer ferrule arrangement 85, 85a, the outer alignment jacket preferably comprises means 89a, 89b for alignment, including in the shown embodiment

a flange 89a for alignment and a protrusion 89b for rotational alignment e.g. for rotational fiber orientation.

The PCF assembly of Fig.11 comprises a photonic crystal fiber (PCF) assembly PCF with a first fiber end section 91 assembled with a ferrule structure

- 5 comprising an inner ferrule arrangement comprising an inner ferrule front section 92 proximally to the first fiber end and an inner ferrule rear section 93 distally to first fiber end and surrounding the first fiber end section 91.

The assembly further comprises an alignment sleeve 90 arranged between the inner ferrule front section 92 and the first fiber 91 end section to fully

- 10 surround the first fiber end section 91, such that the inner ferrule front section 92 supports the first fiber end section 91 proximally to the first fiber end 91a via the alignment sleeve 90. In the shown embodiment of Fig.11 the alignment sleeve 90 is a short section of a capillary tube.

The front end of the alignment sleeve 90, the front end of the inner ferrule

- 15 front section 92 are and the first fiber end 91a are aligned in a plane perpendicular to the ferrule structure center axis.

The inner ferrule rear section 93 is anchored to the first fiber end section 91 in an anchor length section 93b, and from a point 91c of the PCF and to the first fiber end 91a, the PCF is free of polymer coating.

- 20 The ferrule structure comprises a hermetic solder element 96a arranged to surround the first fiber end section 91 to form an annular hermetic seal 96a between the first fiber end section 91 and the inner ferrule rear section 93.

The outer ferrule rear section 95 is fixed to each of the inner ferrule front section 92 and the inner ferrule rear section 93 to hold them in a fixed

- 25 position relative to each other and to form a gap there between. The outer ferrule rear section 95 is fixed by solder 96 at each of its ends to the respective sections 92, 93 of the inner ferrule arrangement and the outer

ferrule front section 95a is fixed by solder 96 to the inner ferrule front section 92.

The ferrule structure further comprises an end cap 97 arranged in front of the first fiber end 91c. The end cap 97 is mounted with a distance to the inner

5 ferrule front section 92. The end cap is fixed to the outer ferrule front section 85a of the outer ferrule arrangement.

The ferrule structure comprises an outer alignment jacket 99 surrounding the outer ferrule arrangement 95, 95a, the outer alignment jacket preferably comprises means 99a, 99b for alignment.

10 A sensor 98 is mounted to the outer alignment jacket 99 for monitoring the connector performance and/or for monitoring fiber damage.

The PCF assembly of Fig. 12 and Fig. 12a comprises a photonic crystal fiber (PCF) assembly PCF with a first fiber end section 101 assembled with a ferrule structure comprising an inner ferrule arrangement comprising an inner ferrule front section 102 proximally to the first fiber end and an inner ferrule rear section 103 distally to first fiber end and surrounding the first fiber end section 101.

15 The assembly further comprises an alignment sleeve 100 arranged between the inner ferrule front section 102 and the first fiber 101 end section to fully surround the first fiber end section 101, such that the inner ferrule front section 102 supports the first fiber end section 101 proximally to the first fiber end 101a via the alignment sleeve 100. In the shown embodiment of Fig. 11 the alignment sleeve 100 is a short section of a capillary tube. The alignment sleeve 100 and the supported first fiber end section 101 are enlarged in Fig. 20 12a and it can be seen that the PCF comprises a short section of another fiber 101b, which is advantageously a section of hollow core capillary 101b.

The front end of the alignment sleeve 100, the front end of the inner ferrule front section 102 are and the first fiber end 101a are aligned in a plan perpendicular to the ferrule structure center axis.

The inner ferrule rear section 103 is anchored to the first fiber end section

5 101 in an anchor length section 103b, and from a point 101c of the PCF and to the first fiber end 101a, the PCF is free of polymer coating.

The ferrule structure comprises a hermetic solder element 86a arranged to surround the first fiber end section 101 to form an annular hermetic seal 106a between the first fiber end section 101 and the inner ferrule rear section 103.

10 The outer ferrule rear section 105 is fixed to each of the inner ferrule front section 102 and the inner ferrule rear section 103 to hold them in a fixed position relative to each other and to form a gap there between. The outer ferrule rear section 105 is fixed by solder 106 at each of its ends to the respective sections 102, 103 of the inner ferrule arrangement and the outer 15 ferrule front section 105a is fixed by solder 106 to the inner ferrule front section 102.

The ferrule structure further comprises an end cap 107 arranged in front of the first fiber end 101c. The end cap 107 is mounted with a distance to the inner ferrule front section 102. The end cap is fixed to the outer ferrule front 20 section 105a of the outer ferrule arrangement.

The ferrule structure comprises an outer alignment jacket 109 surrounding the outer ferrule arrangement 105, 105a, the outer alignment jacket preferably comprises means 109a, 109b for alignment.

A sensor 108 is mounted to the outer alignment jacket 109 for monitoring the 25 connector performance and/or for monitoring fiber damage.

The PCF assembly of Fig.13 and Fig 13a comprises a photonic crystal fiber (PCF) assembly PCF with a first fiber end section 111 assembled with a ferrule

structure comprising an inner ferrule arrangement comprising an inner ferrule front section 112 proximally to the first fiber end and an inner ferrule rear section 113 distally to first fiber end and surrounding the first fiber end section 111.

- 5 The assembly further comprises an alignment sleeve 110 arranged between the inner ferrule front section 112 and the first fiber 111 end section to fully surround the first fiber end section 111, such that the inner ferrule front section 112 supports the first fiber end section 111 proximally to the first fiber end 111a via the alignment sleeve 110. The alignment sleeve 100
- 10 supports the first fiber end section 111, by being collapsed in a supporting length section 110b onto the first fiber end section 111. In the not collapsed part 110a of the alignment sleeve 110 the alignment sleeve 110 has an outer diameter correlated to the inner diameter of the inner ferrule front section 112.
- 15 The inner ferrule rear section 113 is anchored to the first fiber end section 111 in an anchor length section 113b, and from a point 111c of the PCF and to the first fiber end 111a, the PCF is free of polymer coating.

The ferrule structure comprises a hermetic solder element 86a arranged to surround the first fiber end section 111 to form an annular hermetic seal 116a between the first fiber end section 111 and the inner ferrule rear section 113.

The outer ferrule rear section 115 is fixed to each of the inner ferrule front section 112 and the inner ferrule rear section 113 to hold them in a fixed position relative to each other and to form a gap there between. The outer ferrule rear section 115 is fixed by solder 116 at each of its ends to the respective sections 112, 113 of the inner ferrule arrangement and the outer ferrule front section 115a is fixed by solder 116 to the inner ferrule front section 112.

The ferrule structure further comprises an end cap 117 mounted with a distance to the inner ferrule front section 112. The end cap is fixed to the outer ferrule front section 115a of the outer ferrule arrangement.

The ferrule structure comprises an outer alignment jacket 119 surrounding

5 the outer ferrule arrangement 115, 115a, the outer alignment jacket preferably comprises means 119a, 119b for alignment.

The PCF end section shown in Fig. 14a is a hollow core PCF and comprises a hollow core 121 and a surrounding cladding with a plurality of cladding holes 122. At the first fiber end 123 the PCF has a metallic or anti-reflex coating on

10 fiber facet (fiber end), for protecting against incident light and/or back reflections.

The PCF end section shown in Fig. 14b is a hollow core PCF and comprises a hollow core 131 and a surrounding cladding with a plurality of cladding holes 132. At a short end part adjacent to the first fiber end 133 – e.g. an end part

15 with a length l of up to about 2 mm in length – the PCF cladding holes have been collapsed or sealed in other ways. The hollow core 131 is not sealed.

Fig. 14c shows another view of the hollow core PCF shown in Fig. 14b. Due to the sealed cladding holes 133 it can be seen that the light transmitted in the PCF is not fully confined in the end part with the length l and the light is

20 spreading out in a cone shape 144. To alleviate this, a lens may e.g. be arranged in front of the first fiber end 133.

In Fig. 14e the hollow core PCF shown in Fig. 14c has further been provided with a metallic coating 133a for protecting against incident light and/or back reflections.

25 The laser system shown in Fig. 15 comprises a laser light source 141 and a fiber delivery cable 142 for delivering light from the laser light source 141 to a user apparatus 144. The fiber delivery cable 142 comprises as its waveguide a hollow core PCF as described above with one or more low loss transmission

bands correlated to the user apparatus. As indicated the fiber delivery cable 142 may be rather long while still being able to deliver single mode light with high efficiency and low loss in the fundamental mode to the user apparatus 144. The fiber delivery cable 142 has a first end 143a and a second end 143b.

5 In the shown embodiment each of the first end 143a and a second end 143b are mounted in a ferrule structure as described above for connecting respectively to the user apparatus 144 and the laser light source 141.

The apparatus of Fig. 16 comprises the laser system of Fig. 15 connected to the user apparatus 114.

10 The apparatus of Figs. 17a and 17b comprises a laser light source 151 delivering pulsed light and a cable 152 of a supercontinuum generating PCF arranged for generating and delivering supercontinuum light to a user apparatus 154. The fiber delivery cable 152 comprises as its waveguide a solid core PCF as shown in Fig. 17b comprising a plurality of microstructures 15 166 surrounding the solid core 155.

PATENT CLAIMS

1. A photonic crystal fiber (PCF) assembly comprising a PCF and at least one ferrule structure, said PCF has a center axis and comprises a core region and a cladding region and a first fiber end section with a first fiber end, said

5 ferrule structure has a center axis and is mounted to said first fiber end section, said ferrule structure comprises an inner ferrule arrangement and an outer ferrule arrangement surrounding the first fiber end section, said inner ferrule arrangement comprises an inner ferrule front section proximally to said first fiber end and an inner ferrule rear section distally to said first fiber end, 10 each of said inner ferrule sections have an inner diameter and in at least a length thereof fully surrounds the PCF, said inner ferrule rear section is anchored in an anchor length section to said first fiber end section and said inner ferrule front section supports said first fiber end section proximally to said first fiber end, said PCF center axis at the first fiber end section and said 15 ferrule structure center axis are preferably substantially parallel, more preferably said PCF center axis at the first fiber end section and said ferrule structure center axis are coincident.

2. The PCF assembly of claim 1, wherein said assembly further comprises an alignment sleeve arranged between the inner ferrule front section and the

20 first fiber end section, such that the inner ferrule front section supports said first fiber end section proximally to said first fiber end via said alignment sleeve, said alignment sleeve preferably being arranged to surround and support said first fiber end section at said first fiber end.

3. The PCF assembly of claim 2, wherein said inner ferrule front section

25 surrounds and holds said alignment sleeve in a preselected axial position, said inner diameter of said inner ferrule front section is slightly larger than a maximal outer diameter of said alignment sleeve, such as from about 0.1 μm larger to about 2 mm larger, such as from about 1 μm larger to about 1 mm

larger, such as from about 0.1 mm larger to about 0.01 mm larger in diameter.

4. The PCF assembly of any one of the preceding claims 2-3, wherein said inner ferrule front section supports said first fiber end section via said

5 alignment sleeve and by mechanically holding said alignment sleeve in axial position, preferably an end of the alignment sleeve and an end of said inner ferrule front section are aligned in a plane perpendicular to the ferrule structure center axis, more preferably said first fiber end, said end of the alignment sleeve and said end of the inner ferrule front section are aligned in
10 a plane perpendicular to the PCF center axis.

5. The PCF assembly of the preceding claims 2-4, wherein said alignment sleeve surrounds said PCF proximally to the first fiber end, preferably said first fiber end and an end of the alignment sleeve are aligned in a plane perpendicular to the PCF center axis, said alignment sleeve has a length in

15 the axial direction which is preferably at least about 1 mm, such as from about 2 mm to about 5 cm, such as from about 5 mm to about 2 cm.

6. The PCF assembly of any one of the preceding claims 2-5, wherein said alignment sleeve supports said first fiber end section, by having an inner diameter at least along a support section thereof which is adapted to the

20 outer diameter of the first fiber end section, preferably the inner diameter of the support section of the alignment sleeve is up to about 0.5 mm larger than the inner diameter, such as up to about 0.1 mm, such as up to about 0.01 mm.

7. The PCF assembly of any one of the preceding claims 2-6, wherein said

25 alignment sleeve supports said first fiber end section by being collapsed onto the first fiber end section in its whole length or in said support section, said alignment sleeve is preferably a capillary tube which has been applied to surround the PCF and collapsed by heat in at least said support section thereof such as a mid-section thereof to thereby being arranged to support

the PCF first fiber end section, said alignment sleeve preferably being fused to said optical fiber preferably without any intermediate material.

8. The PCF assembly of any one of the preceding claims 2-7, wherein said alignment sleeve is of glass, preferably silica glass, such as fused silica glass,

5 fused quartz and/or doped silica, and/or borosilicate glass, such as a borosilicate glass comprising approximately 96% silica and 4% boron trioxide.

9. The PCF assembly of any one of the preceding claims 2-8, wherein said alignment sleeve has a refractive index of up to 1.45 for light at 1 μm , such as for light in the range 1-2 μm .

10 10. The PCF assembly of any one of the preceding claims 2-9, wherein said alignment sleeve is of down doped silica, such as silica doped with fluorine and/or boron.

11. The PCF assembly of any one of the preceding claims 2-10, wherein said alignment sleeve has a refractive index which is less than an effective refractive index of the cladding region.

12. The PCF assembly of any one of the preceding claims 2-11, wherein said alignment sleeve is hold within said inner ferrule front section without any intermediate material between the alignment sleeve and the inner ferrule front section, preferably said alignment sleeve is mechanically hold and/or fused to said inner ferrule front section.

13. The PCF assembly of any one of the preceding claims, wherein said inner ferrule front section and said inner ferrule rear section are not directly fixed to each other, preferably said inner ferrule front section and said inner ferrule rear section are arranged to have an intermediate gab in axial direction, preferably said gap provides a distance in axial direction between the inner ferrule front section and the inner ferrule rear section, said distance is preferably in the range from about 1 mm to about 10 cm, such as from about 5 mm to about 2 cm.

14. The PCF assembly of any one of the preceding claims, wherein said inner ferrule front section supports said first fiber end section proximally to the first fiber end directly, preferably by mechanically holding said first fiber end section proximally to the first fiber end in axial position, preferably an end 5 of said inner ferrule front section and said first fiber end are aligned in a plane perpendicular to the PCF center axis.

15. The PCF assembly of any one of the preceding claims, wherein said ferrule structure comprises a hermetic solder element arranged to surround said first fiber end section to form an annular hermetic seal between the first 10 fiber end section and said inner ferrule rear section, said hermetic solder element is arranged closer to the front annular section than the anchor length section of the inner ferrule rear section, preferably said anchoring length section of the inner ferrule rear section is not fully annular, said anchoring length section of the inner ferrule rear section is preferably extending from 15 about 20 degrees to about 350 degrees, such as about 180 degrees around the PCF.

16. The PCF assembly of any one of the preceding claims, wherein said PCF is free of polymer coating in the first fiber end section from the anchoring section of the inner ferrule rear section to the first fiber end.

20 17. The PCF assembly of any one of the preceding claims, wherein said inner ferrule front section is of an at least partly transparent material at a wavelength between about 200 nm and about 4 μ m, said inner ferrule front section is e.g. of fused or crystallized quartz, such as of substantially undoped silica having a refractive index of 1.45 for light at 1 μ m.

25 18. The PCF assembly of any one of the preceding claims, wherein said inner ferrule rear section is of fused or crystallized quartz or of a metal or alloy.

19. The PCF assembly of any one of the preceding claims, wherein said outer ferrule arrangement is of metal, ceramic or glass such as silica.

20. The PCF assembly of any one of the preceding claims, wherein said outer ferrule arrangement is fixed to each of said inner ferrule front section

5 and said inner ferrule rear section of said inner ferrule arrangement to hold them in a fixed position relative to each other, such that the first fiber end section of the PCF is preferably supported to be substantially straight within said ferrule structure, said outer ferrule arrangement is preferably fixed to said inner ferrule arrangement by glue, by solder and/or by being fused or

10 laser welded.

21. The PCF assembly of any one of the preceding claims, wherein said first fiber end section is mounted in said ferrule structure substantially without application of stress generating pressure being applied to the fiber.

22. The PCF assembly of any one of the preceding claims, wherein said

15 first fiber end section is mounted in said ferrule structure without any direct bonds to the fiber beyond one or more bonds to the inner ferrule rear section including the anchoring.

23. The PCF assembly of any one of the preceding claims, wherein said

ferrule structure comprises an end cap arranged in front of said first fiber end,

20 said end cap being mounted with a distance or without a distance to the inner ferrule front section, said end cap preferably being fixed directly to the inner ferrule front section or to an outer ferrule front section of the outer ferrule arrangement.

24. The PCF assembly of claim 23, wherein said end cap is fixed to said

25 outer ferrule front section of the outer ferrule arrangement, said outer ferrule arrangement preferably comprises said outer ferrule front section and outer ferrule rear section, wherein said outer ferrule rear section is fixed to both the

inner ferrule rear section and the inner ferrule front section and said outer ferrule front section is fixed to said inner ferrule front section.

25. The PCF assembly of claim 23 or claim 24, wherein said end cap is an anti-reflection coated silica end cap, said end cap preferably is or comprises a

5 lens.

26. The PCF assembly of any one of the preceding claims, wherein said PCF is a hollow core fiber or a solid core fiber, preferably said first fiber end (facet) has a metallic or anti-reflex coating.

27. The PCF assembly of any one of the preceding claims, wherein said

10 PCF has a core diameter of less than 100 μm , preferably of about 50 μm or less, such as from about 5 μm to about 40 μm .

28. The PCF assembly of any one of claims 23 and 25-27, wherein the PCF is a hollow core fiber and said end cap is fixed to said outer ferrule front section of the outer ferrule arrangement to provide an end cap space

15 between said end cap and said inner ferrule front section, optionally said hollow core has a collapsed end part and a metallic or anti-reflex coating on the fiber facet.

29. The PCF assembly of claim 28, wherein the inner ferrule arrangement comprises a passage into said end cap space for injecting and/or withdrawing

20 fluids, said passage is preferably provided by at least one additional through hole in each of said inner ferrule front section and said inner ferrule rear section, said additional through holes are preferably substantially parallel to the axis of the ferrule structure, more preferably the additional through hole comprises a valve arrangement at an exit from the inner ferrule rear section.

25 30. The PCF assembly of any one of the preceding claims, wherein said inner ferrule front section has a rear end, at least an in radial direction outer part of said rear end is angled relative to the center axis of the ferrule structure to out-couple light propagating in the inner ferrule arrangement,

such as an in radial direction semi annular or annular outer part of said rear end is angled relative to the center axis of the ferrule structure to out-couple light propagating in the inner ferrule arrangement.

31. The PCF assembly of any one of the preceding claims, wherein said

5 inner ferrule front section has a rear end, at least an in radial direction inner part of said rear end is angled relative to the center axis to form a funnel shape.

32. The PCF assembly of any one of the preceding claims, wherein said

inner ferrule front section has a rear end, said rear end is coated with a

10 reflective coating to back-reflect light, such as light propagating in the ferrule.

33. The PCF assembly of any one of the preceding claims, wherein said

inner ferrule front section has a front end, said front end is coated with a

reflective coating to protect the ferrule structure against incident and/or back- reflected light.

15 34. The PCF assembly of any one of the preceding claims, wherein said inner ferrule rear section has a front end, said front end is angled relative to the center axis of the ferrule structure and/or said front end is coated with a reflective coating to protect against incident and/or back-reflected light.

35. The PCF assembly of any one of the preceding claims, wherein said

20 first fiber end section has at least one mode stripper length section, said mode stripper length section comprises a mode stripping high index material and or/a scattering layer applied in contact with the optical fiber at said mode stripper length section and/or said fiber in said mode stripper length section has a roughness Ra value of at least about 0.1 μm .

25 36. The PCF assembly of claim 35, wherein said mode stripper length section of said PCF is positioned between said inner ferrule front section and said inner ferrule rear section.

37. The PCF assembly of claim 35, wherein at least one of said inner ferrule front section and said inner ferrule rear section has a carving exposing said PCF said mode stripper length section of said PCF, said carving preferably partly surrounds the fiber preferably such that it extends at least about 20
5 degrees.

38. The PCF assembly of any one of the preceding claims, wherein the ferrule structure comprises a mode stripper coating arranged in direct contact with an outer surface of the inner ferrule front section, the mode stripper coating is preferably contained between the inner ferrule front section and the
10 outer ferrule arrangement.

39. The PCF assembly of any one of the preceding claims, wherein the ferrule structure comprises an outer alignment jacket surrounding the outer ferrule arrangement, said outer alignment jacket preferably comprises means for alignment, preferably for alignment in the axial direction (z-direction), for
15 alignment in the radial directions (x,y-directions) and/or for rotational alignment.

40. The PCF assembly of claim 39, wherein said means for alignment comprises one or more flanges, such as flanges for mounting with positioning control.

20 41. The PCF assembly of claim 39 or claim 40, wherein said means for alignment comprises a marker for rotational fiber orientation e.g. for PM orientation.

42. The PCF assembly of any one of the preceding claims, wherein the ferrule structure is configured for cooling by a cooling fluid said outer ferrule
25 arrangement and/or said outer alignment jacket comprising passages with at least one inlet and at least one exit for said cooling fluid.

43. The PCF assembly of any one of the preceding claims, wherein said assembly further comprises one or more sensors, such as one or more optical

sensors and/or electrical sensors and/or chemical sensors for monitoring temperature, for monitoring connector performance and/or for monitoring fiber damage.

44. The PCF assembly of any one of the preceding claims, wherein said

5 assembly comprises a second ferrule structure connected to a second end section of the PCF, said second ferrule structure preferably is as the ferrule structure according to any one of the preceding claims.

45. A laser system comprising a PCF assembly according to any one of the preceding claims.

10 46. The laser system of claim 45, wherein said laser system comprises a laser light source, said PCF assembly being optically connected to said laser light source for receiving light from said laser light source and being adapted for delivering said light to a light employing station of an apparatus, preferably said first fiber end with said ferrule structure being adapted for
15 being connected to said user apparatus.

47. The laser system of claim 45 or claim 46, wherein said laser light source is configured for generating laser light pulses, preferably said laser light source is a femtosecond laser source.

20 48. The laser system of claim 47, wherein said laser light source has a pump duration of from about 30 fs to about 30 ps, such as from about 100 fs to about 10 ps.

49. The laser system of claim 47 or claim 48, wherein said laser light source has a peak power determined at the exit of the laser light source which is at least about 5 kW, such as at least about 10 kW, such as at least
25 about 30 kW, such as at least about 50 kW.

50. The laser system of any one of claims 47-49, wherein said laser light source is a mode locked laser, such as an actively mode locked laser or a

passively mode locked laser , said mode locked laser preferably comprises one or more amplifiers.

51. The laser system of any one of claims 45-50, wherein said PCF is a hollow core PCF, preferably said hollow core PCF is configured for guiding

5 light comprising at least one wavelength in the range from about 200 nm to about 4.5 μ m, preferably at least one wavelength in the range from 1000 nm to about 1100 nm.

52. The laser system of claim 51, wherein said PCF is configured for guiding a continuum of light wavelengths, preferably spanning over at least

10 about 0.1 μ m, such as at least about 0.3 μ m, such as at least about 0.5 μ m.

53. The laser system of claim 51 or claim 52, wherein said hollow core PCF comprises an outer cladding region and a number N of hollow tubes

surrounded by said outer cladding region, wherein each of said hollow tubes

is fused to said outer cladding to form a ring defining an inner cladding region

15 and said hollow core region surrounded by said inner cladding region,

preferably N is from 6 to 12, more preferably N is 7.

54. The laser system of claim 453, wherein said hollow tubes are not touching each other, preferably said hollow tubes are arranged with a substantially equal distance to adjacent hollow tubes.

20 55. The laser system of any one of claims 45-50, wherein said PCF is a solid core PCF, preferably said solid core PCF is a microstructured solid core PCF comprising a plurality of non-solid and/or solid cladding inclusions, said solid core PCF is preferably configured for guiding light comprising at least one wavelength in the range from about 200 nm to about 4.5 μ m, preferably 25 at least one wavelength in the range from 1000 nm to about 1100 nm.

56. The laser system of any one of claims 45-55, wherein PCF has a core region diameter of from about 3 μ m to about 100 μ m, such as from about 10 μ m to about 50 μ m, such as from about 10 μ m to about 30 μ m.

57. A set of correlated ferrule elements suitable for a PCF assembly according to any one of claims 1-44, said set of ferrule elements comprises

- an inner ferrule front section and an inner ferrule rear section for forming an inner ferrule arrangement; and
- 5 • an outer ferrule arrangement,

wherein each of said inner ferrule front section, inner ferrule rear section and outer ferrule arrangement has a length and a center axis and comprises a main hollow through hole parallel with or coincident to said respective center axes, said set of correlated ferrule elements preferably further comprises an

10 alignment sleeve having a length and a center axis and comprises a main hollow through hole parallel with or coincident to said center axis.

58. The set of correlated ferrule elements of claim 45, wherein the elements are correlated such that the alignment sleeve can be positioned in the main hollow through hole of the inner ferrule front section and the inner 15 ferrule front section and the inner ferrule rear section can be mounted in the main hollow through hole of the outer ferrule arrangement for forming said inner ferrule arrangement.

59. The set of correlated ferrule elements of claim 57 or claim 58, wherein said alignment sleeve is a capillary tube and wherein said main hollow 20 through hole of the alignment sleeve has an inner diameter which is about 2 mm or less, such as about 1 mm or less such as about 0.5 mm or less, said alignment sleeve is preferably collapsible in at least a part of its length.

60. The set of correlated ferrule elements of any one of claims 57-59, wherein said alignment sleeve has a length in axial direction which is 25 preferably at least about 1 mm, such as from about 2 mm to about 5 cm.

61. The set of correlated ferrule elements of any one of claims 57-60, wherein said set further comprises an end cap which is configured for being arranged in front of said inner ferrule front section by being mounted to said

inner ferrule front section or by being mounted to an outer ferrule front section of the outer ferrule arrangement, said end cap is preferably an anti-reflection coated silica end cap.

62. The set of correlated ferrule elements of any one of claims 57-61,

5 wherein each of said inner ferrule front section and said inner ferrule rear section comprises one or more additional through holes for providing a fluid passage, said additional through holes are preferably substantially parallel to the axis of the respective inner ferrule sections, more preferably the additional through hole at an exit from the inner ferrule rear section
10 comprises a valve arrangement.

63. The set of correlated ferrule elements of any one of claims 57-62,

wherein said inner ferrule front section has a rear end, at least an in radial direction outer part of said rear end is angled relative to the center axis of the inner ferrule front section and/or said rear end is coated with a reflective
15 coating.

64. The set of correlated ferrule elements of any one of claims 57-63,

wherein said inner ferrule front section has a front end, said front end is coated with a reflective coating.

65. The set of correlated ferrule elements of any one of claims 57-64,

20 wherein said inner ferrule rear section has a front end, said front end is angled relative to the center axis of the inner ferrule rear section and/or said front end is coated with a reflective coating.

66. The set of correlated ferrule elements of any one of claims 57-65,

wherein at least one of said inner ferrule front section and said inner ferrule
25 rear section has a carving into its main hollow through hole, said carving preferably has an extension in an annular direction which extends at least about 20 degrees.

67. The set of correlated ferrule elements of any one of claims 57-66, wherein the set further comprises an outer alignment jacket correlated to the outer ferrule arrangement such that it can be arranged to surround the outer ferrule arrangement, said outer alignment jacket preferably comprises means for alignment.

68. An apparatus comprising a laser system according to any one of claim 45-56, wherein said PCF assembly is configured for delivering light to a light receiving station of said apparatus.

69. The apparatus of claim 68, wherein the apparatus is an illumination

10 apparatus configured for illuminating a target, said illumination apparatus is preferably selected from a microscope, a spectroscope or an endoscope.

70. The apparatus of claim 69 wherein the illumination source is adapted for fluorescence Imaging; Fluorescence Lifetime Imaging (FLIM); Total

15 Internal Reflection Fluorescence (TIRF) Microscopy; fluorescence resonance energy transfer (FRET); pulse interleave excitation foster resonance energy transfer (PIE-FRET); broadband Spectroscopy; nanophotonics; flow cytometry; industrial inspection, such as metrology; ringdown spectroscopy, such as gas sensing; analytical spectroscopy, such as hyperspectral spectroscopy, crop analysis e.g. of fruits and time of flight spectroscopy (TCSPC); single Molecule Imaging and/or combinations thereof.

71. The apparatus of claim 68, wherein the apparatus is a microprocessing apparatus, preferably for material processing, such as drilling, marking, cutting

25 and/or scribing.

72. The apparatus of claim 68, wherein the apparatus is a surgery apparatus, such as an apparatus for eye surgery (ophthamology).

Fig. 1

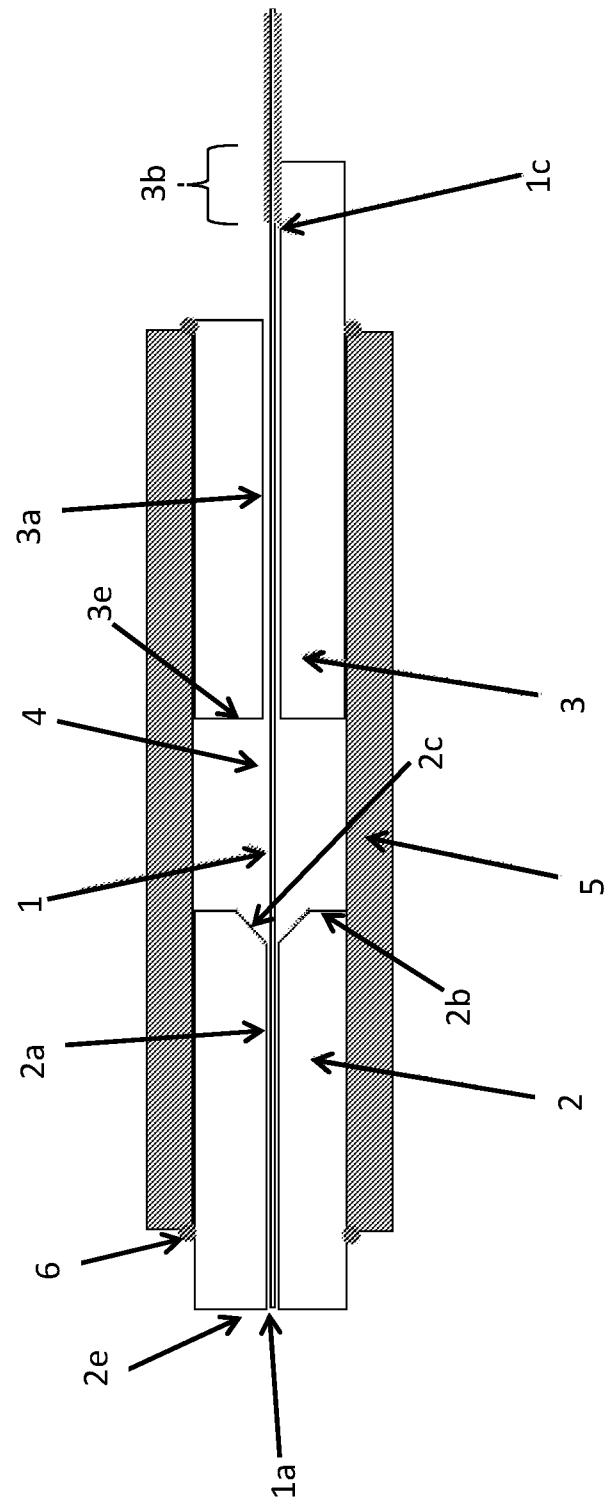


Fig. 2

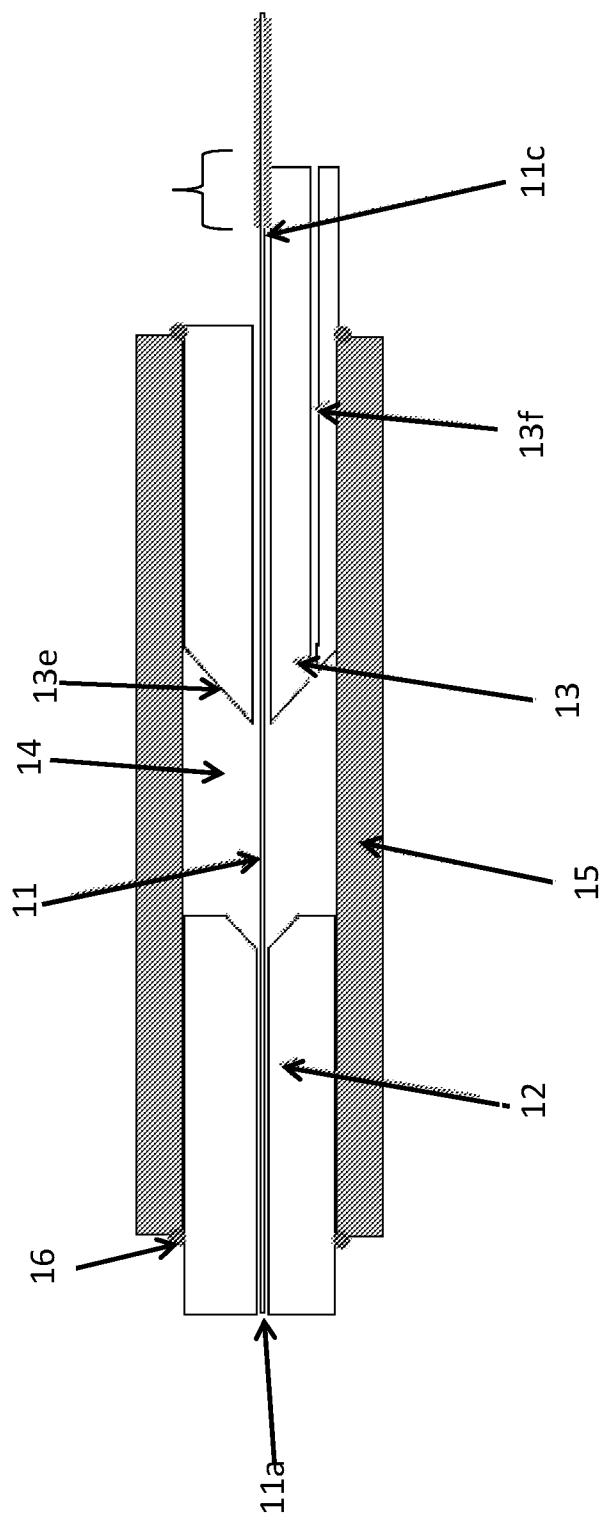


Fig. 3


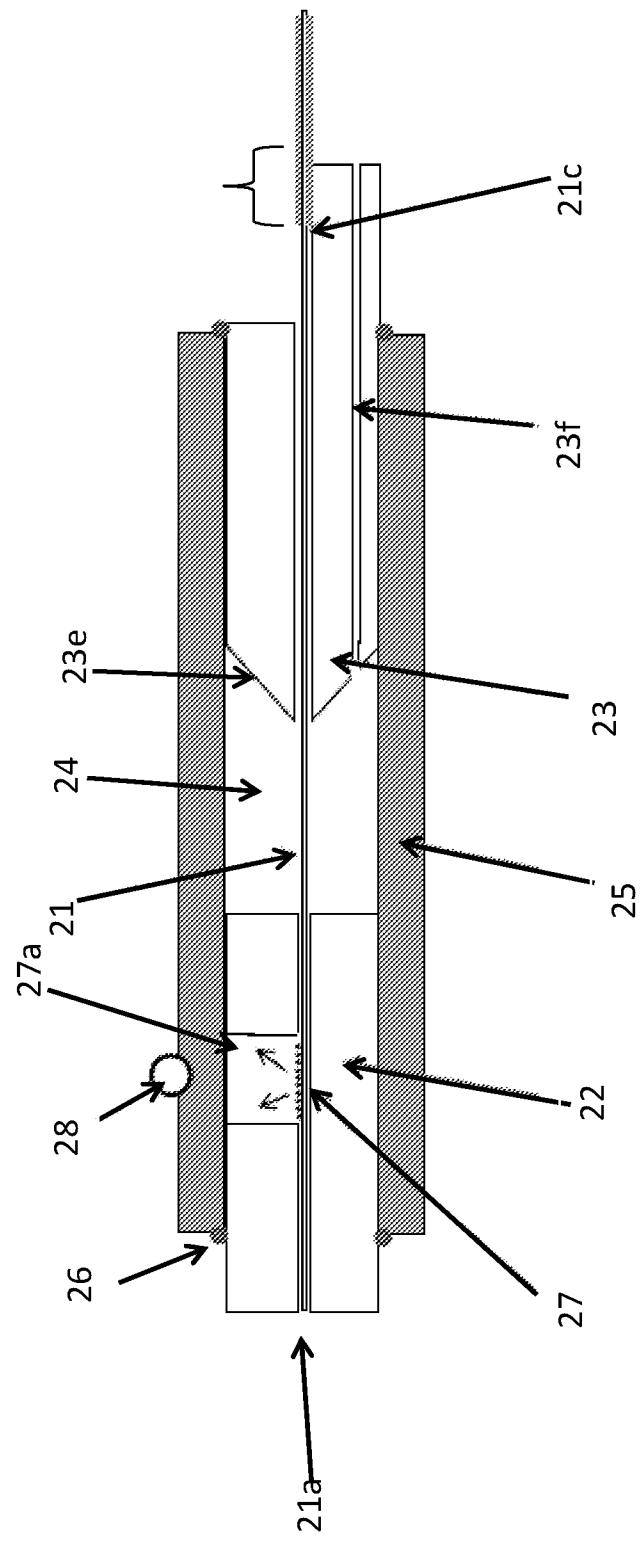


Fig. 4

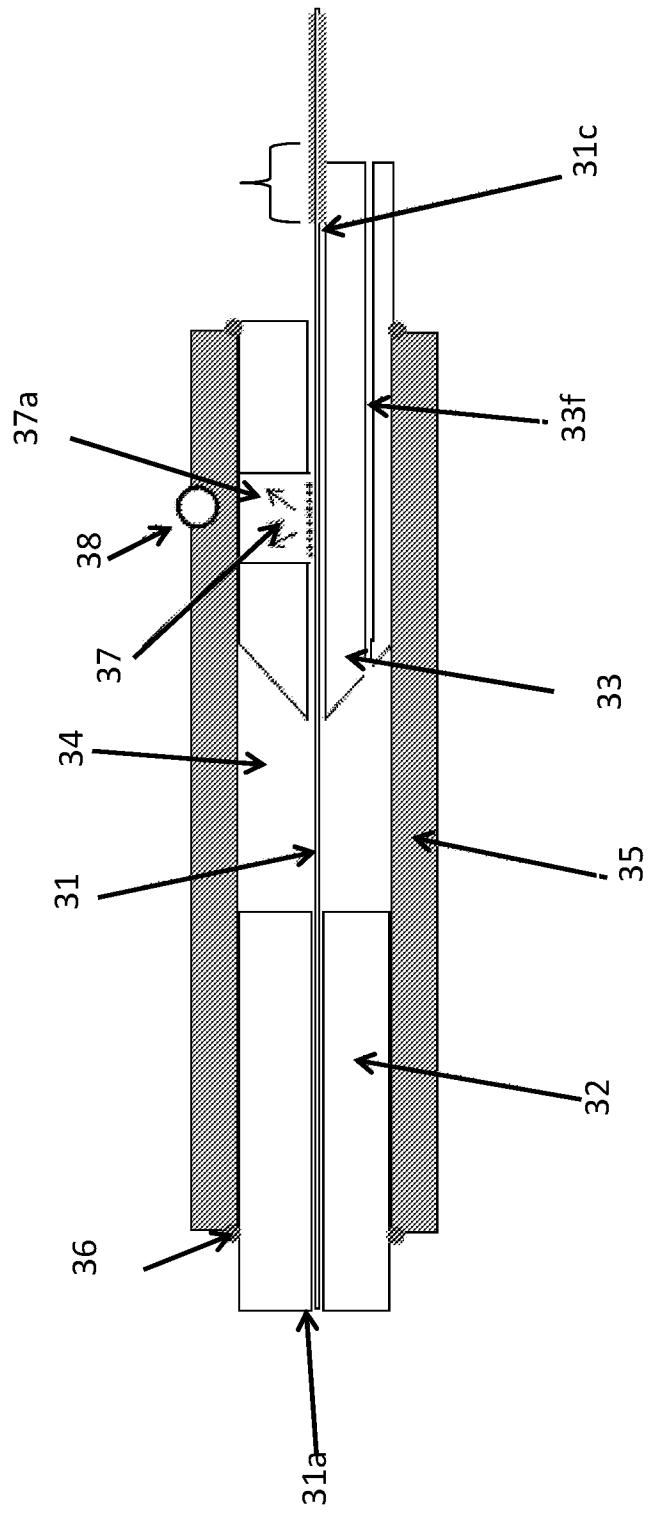

5
b6
F1

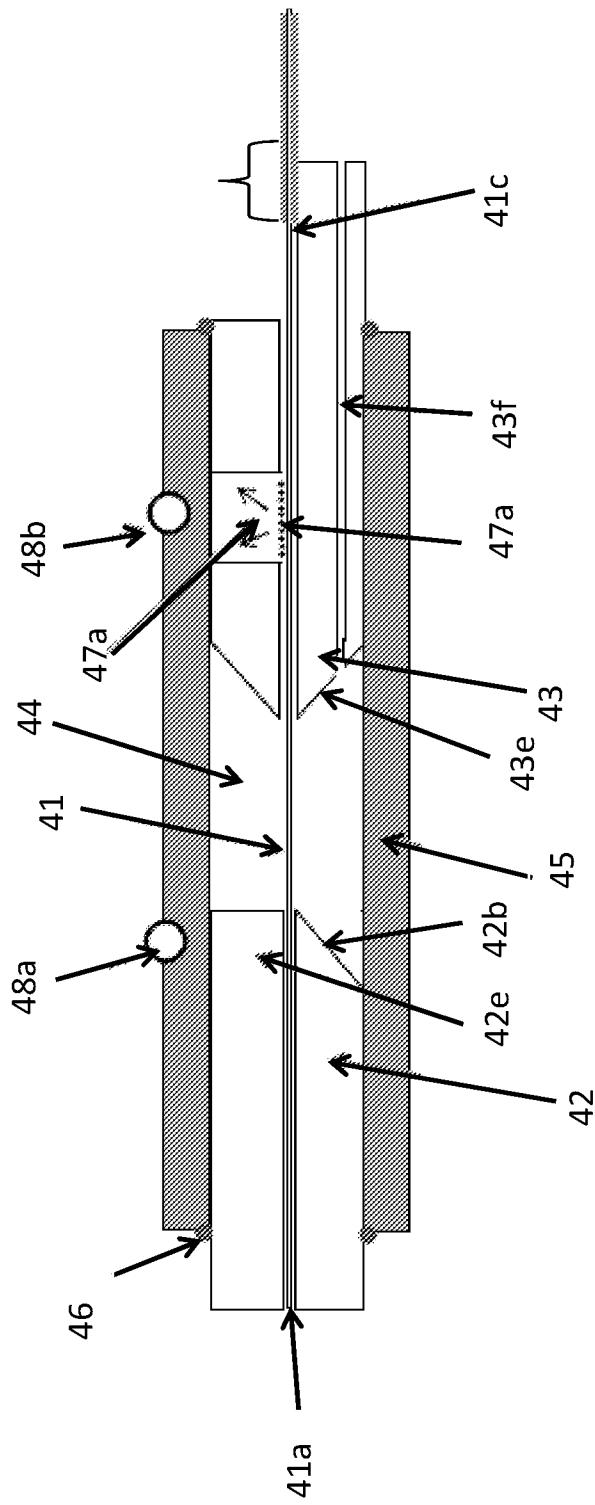


Fig. 6

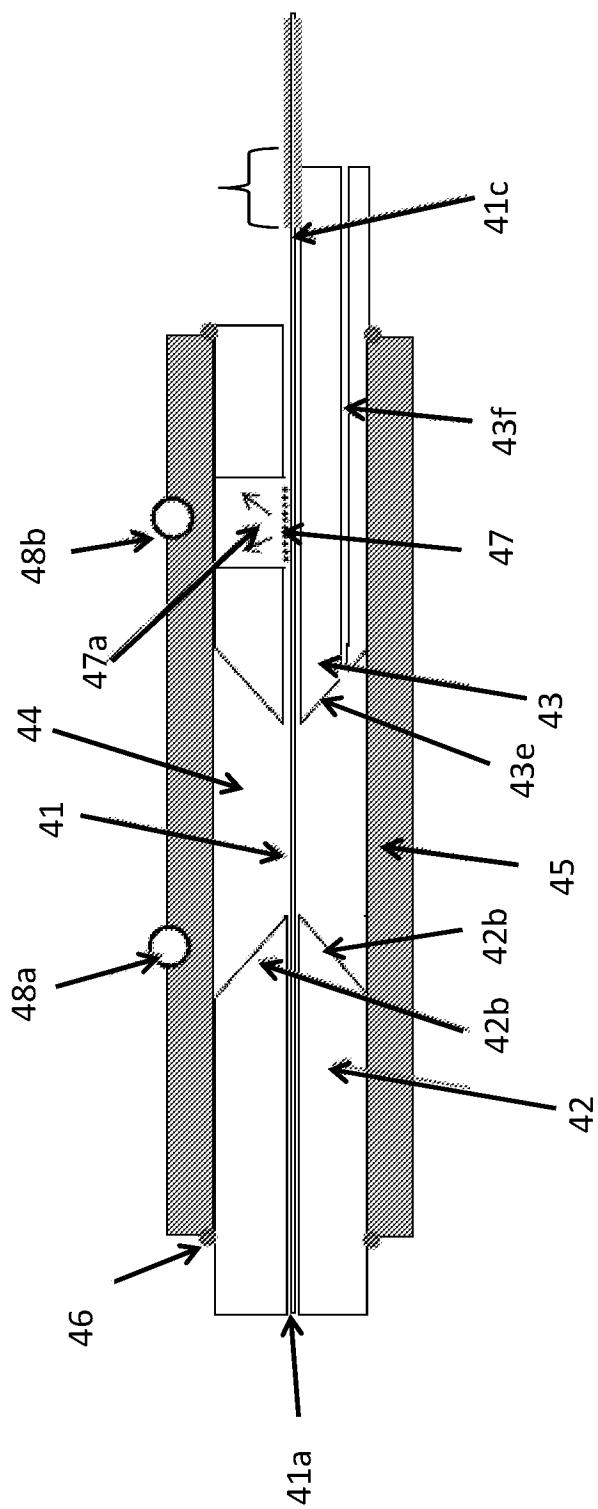


Fig. 7

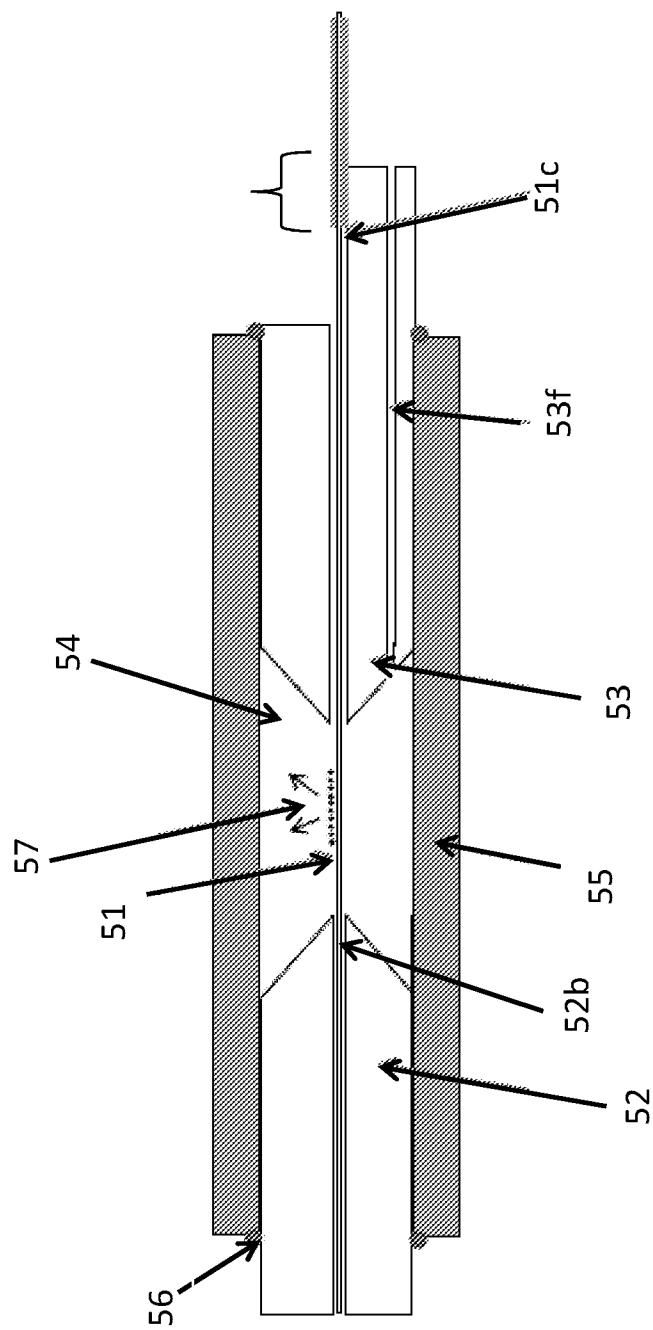


Fig. 8

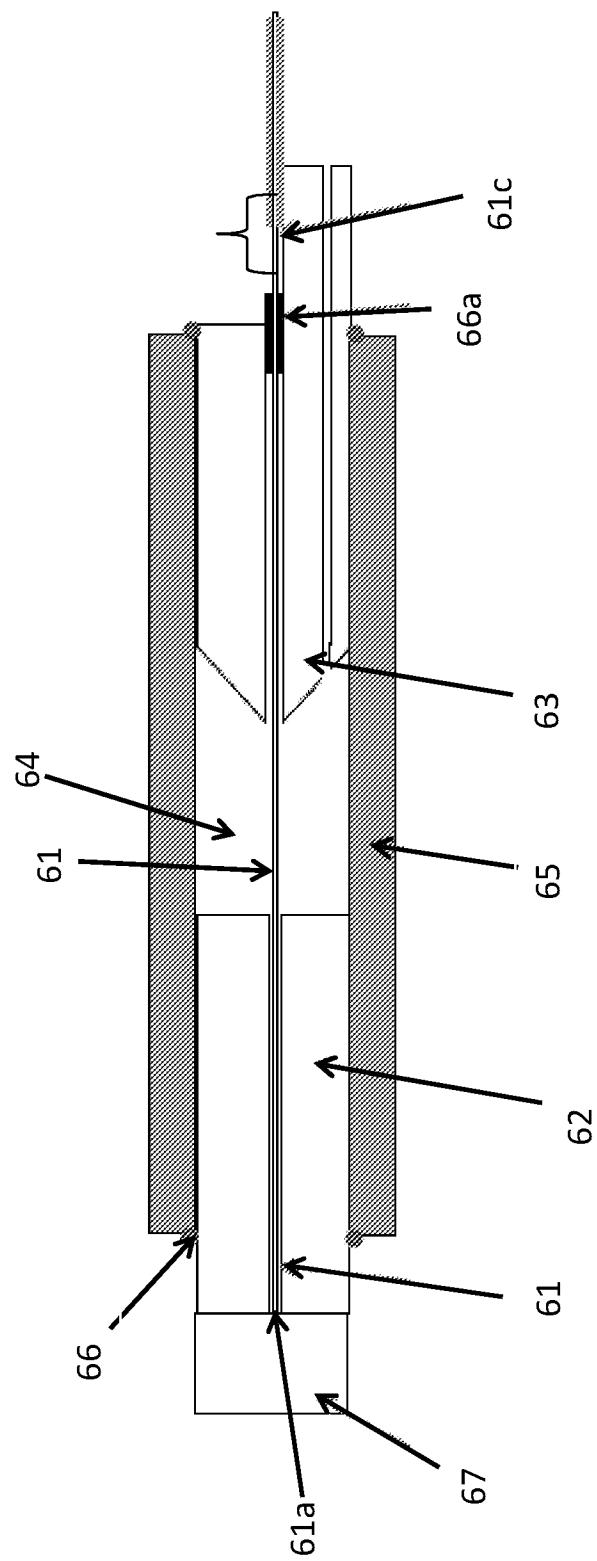


Fig. 9

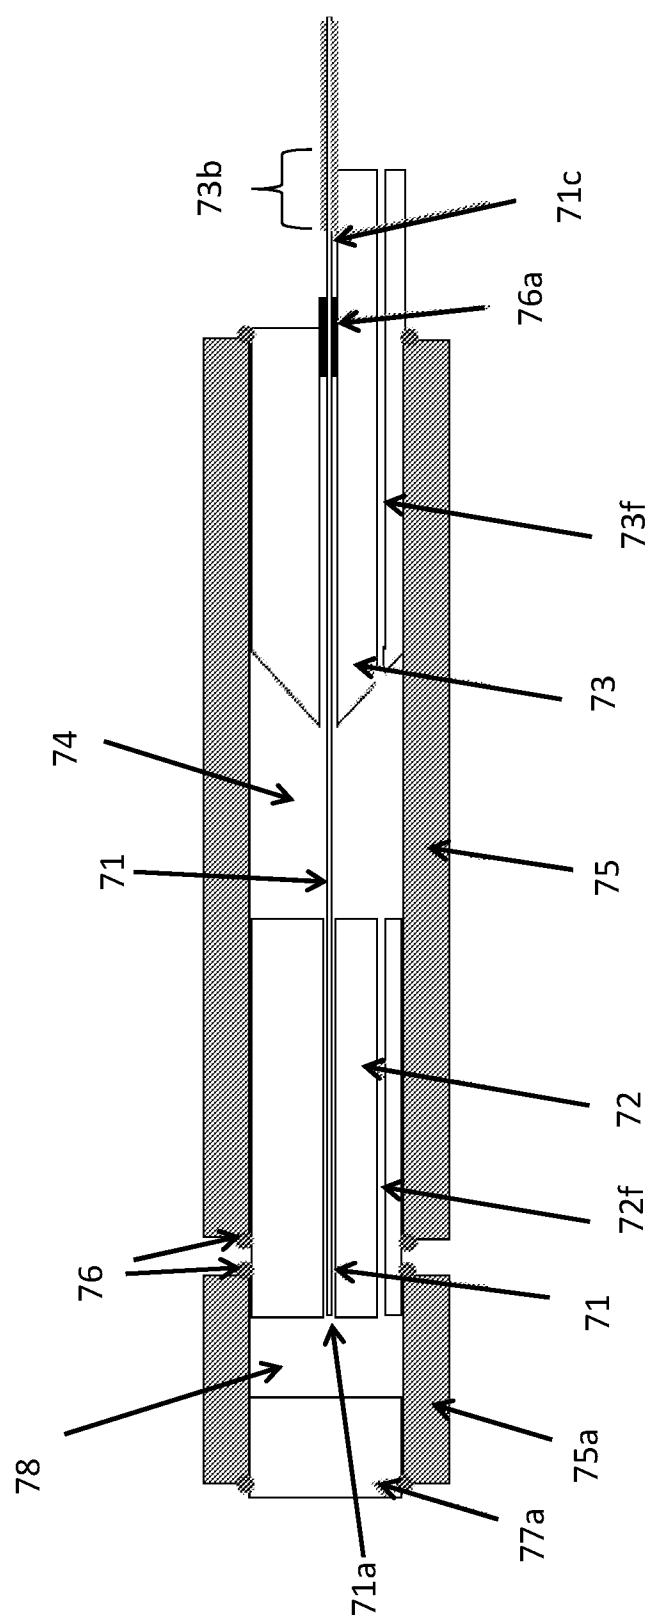


Fig. 9a

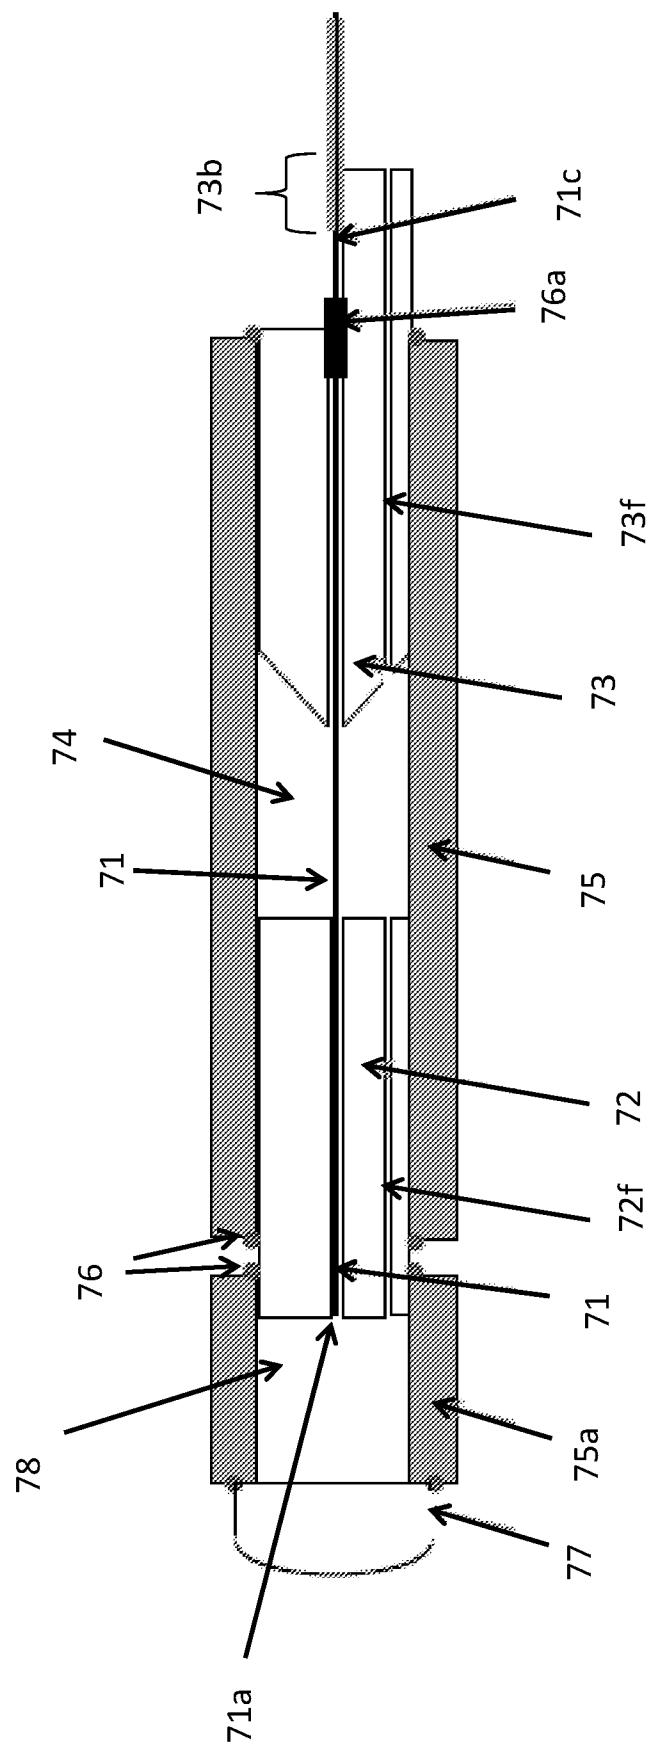


Fig. 10

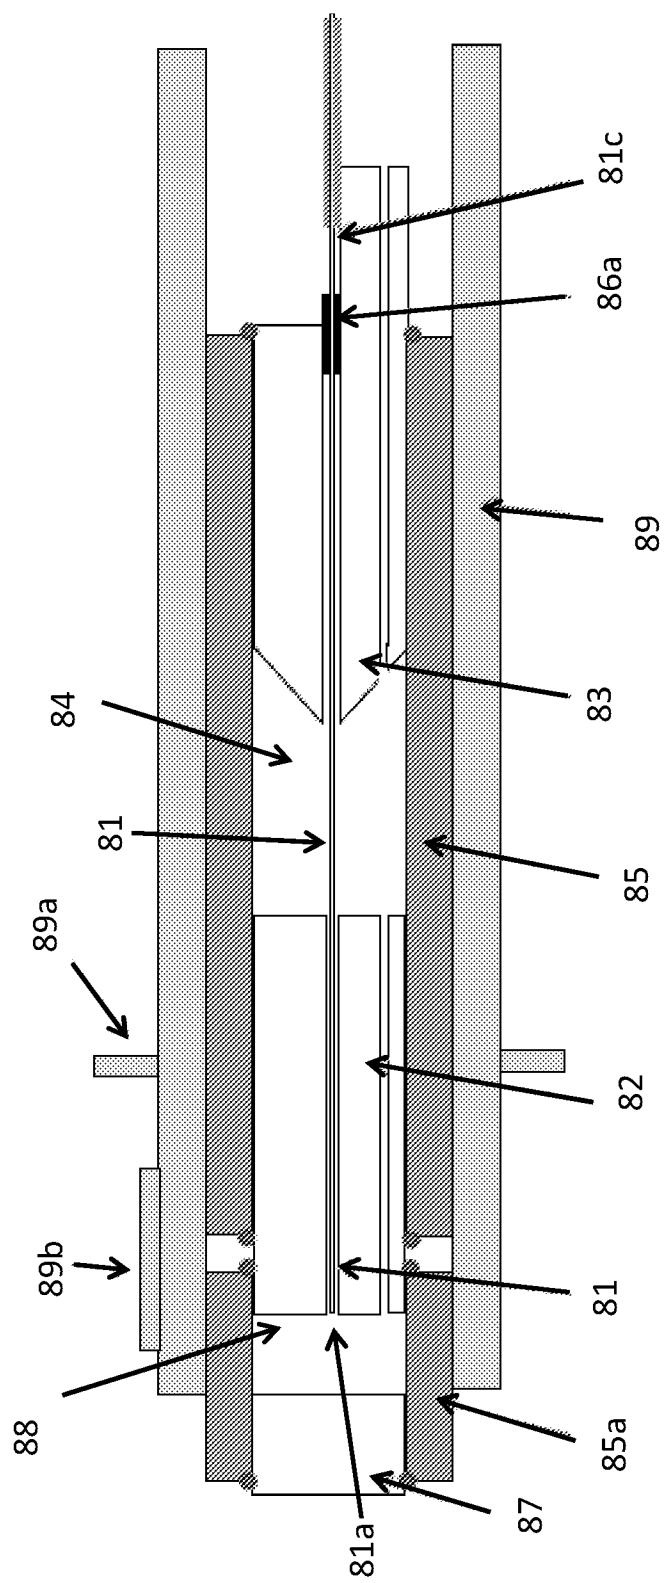


Fig. 11

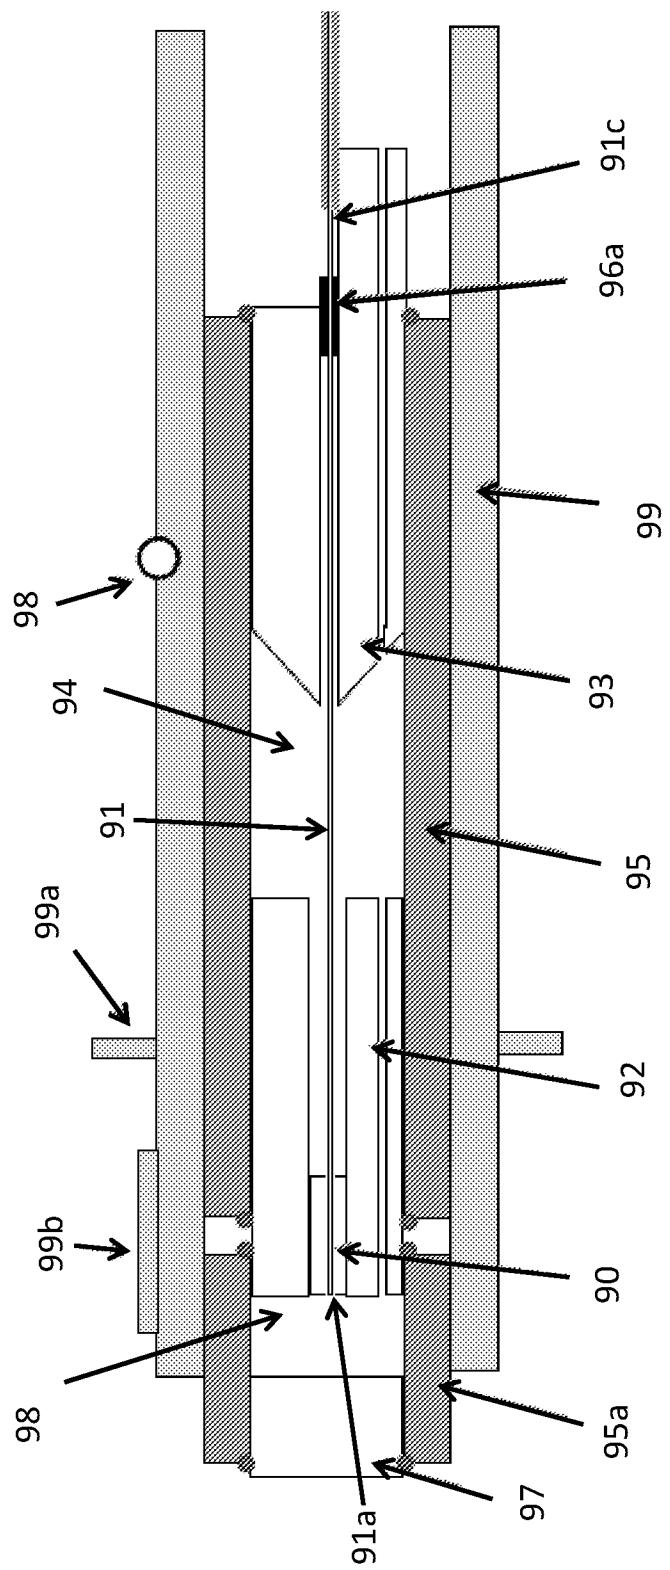


Fig. 12

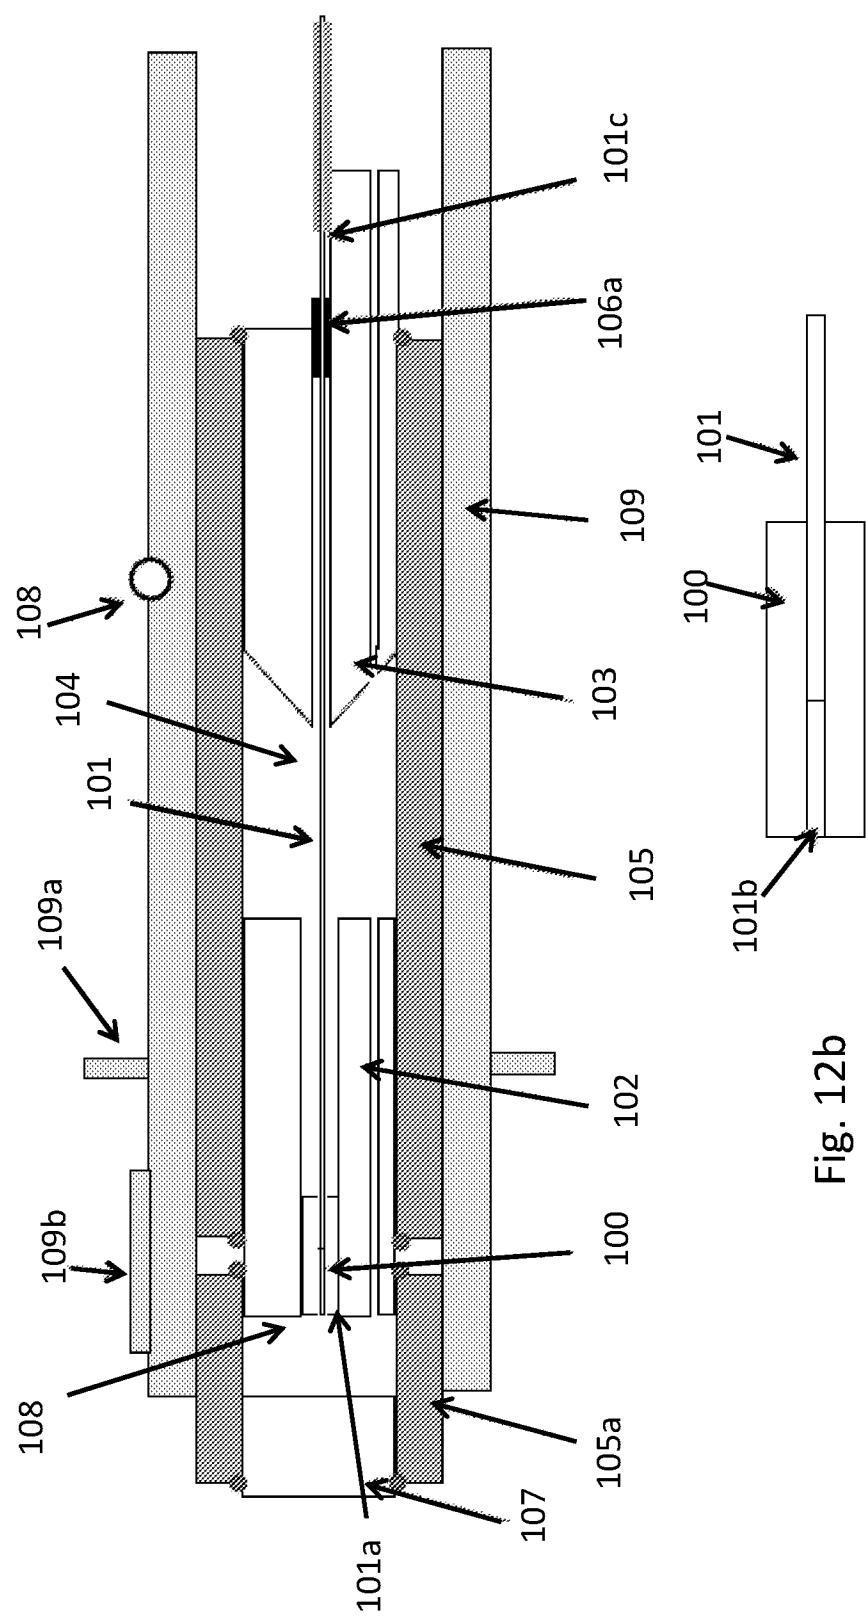


Fig. 12b

Fig. 13

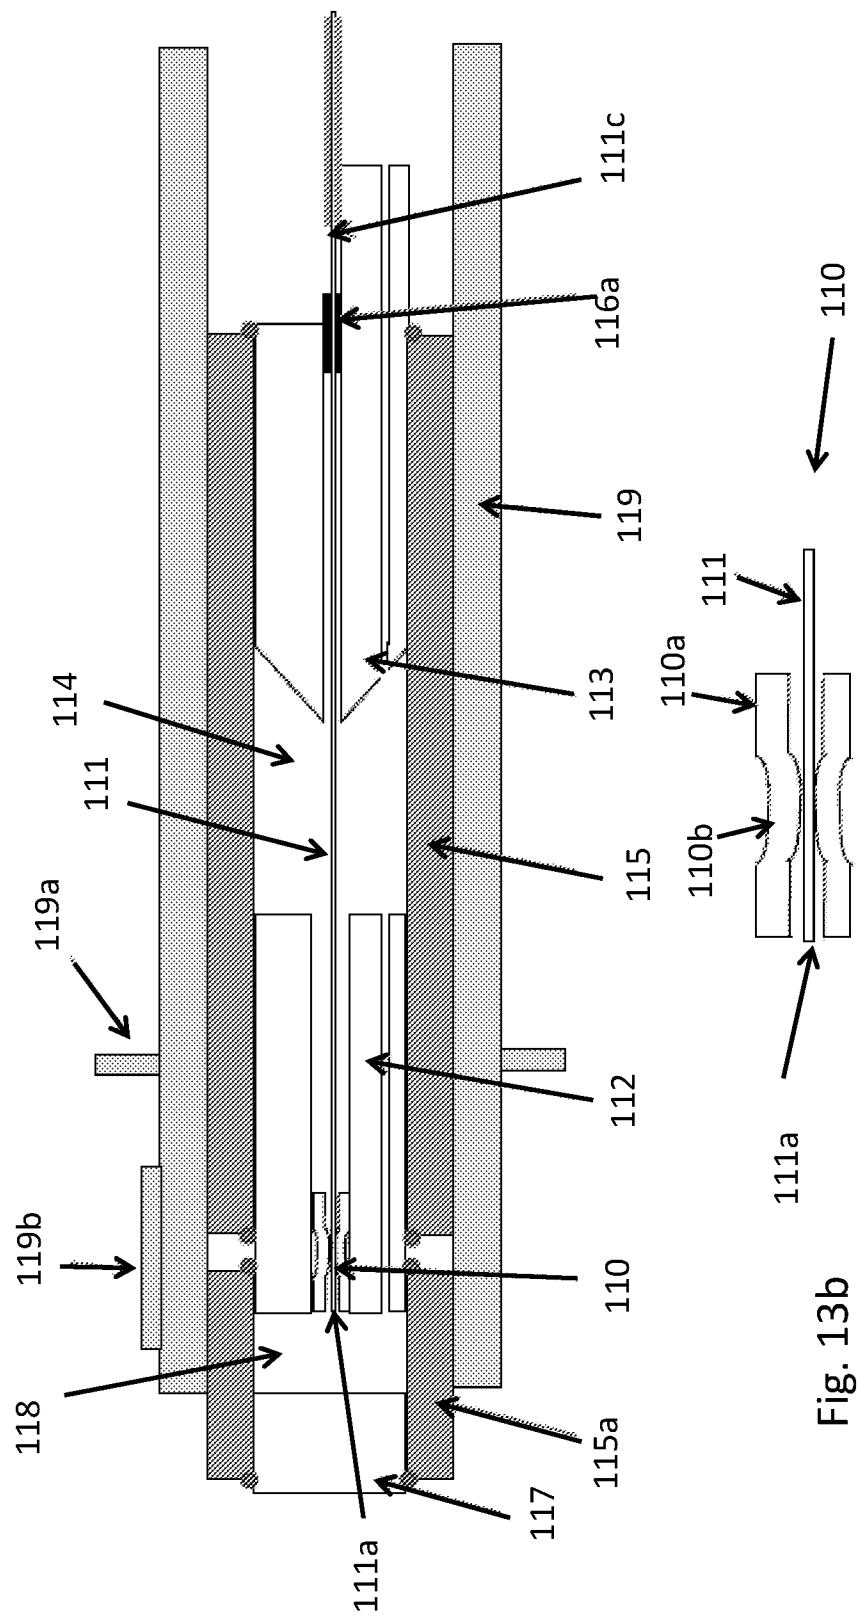


Fig. 13b

Fig. 14a

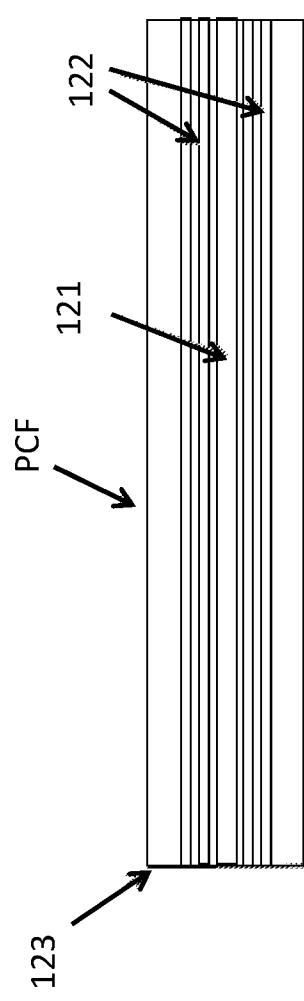


Fig. 14b

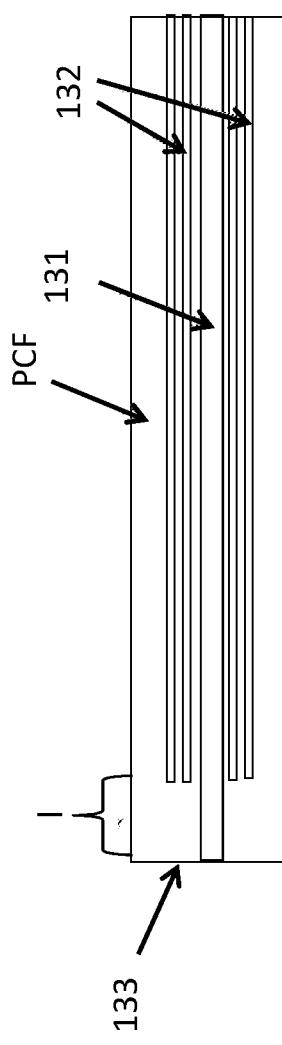


Fig. 14c

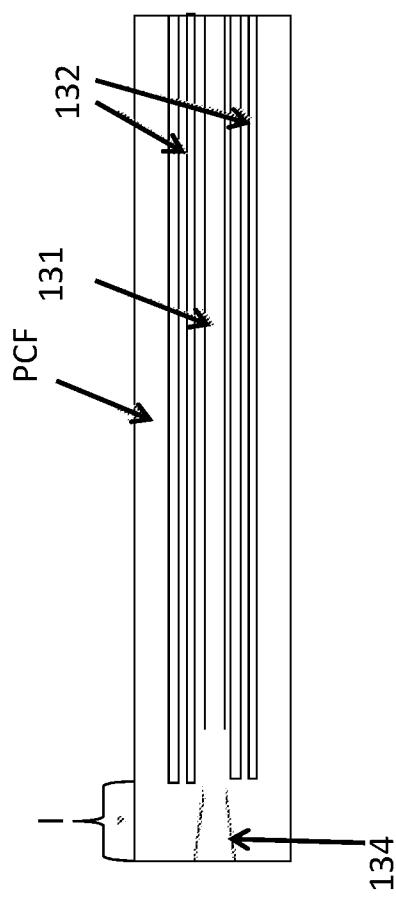


Fig. 14d

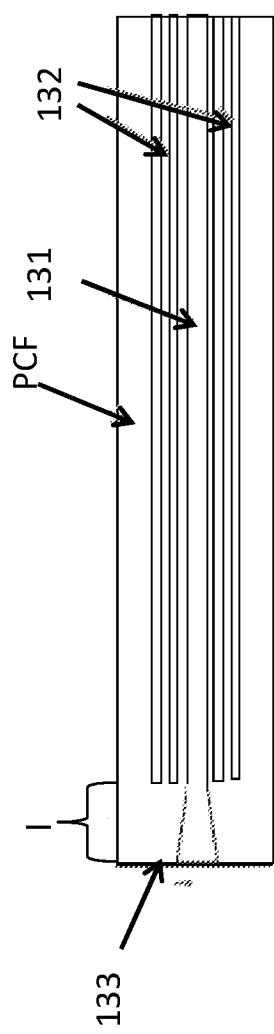


Fig. 15

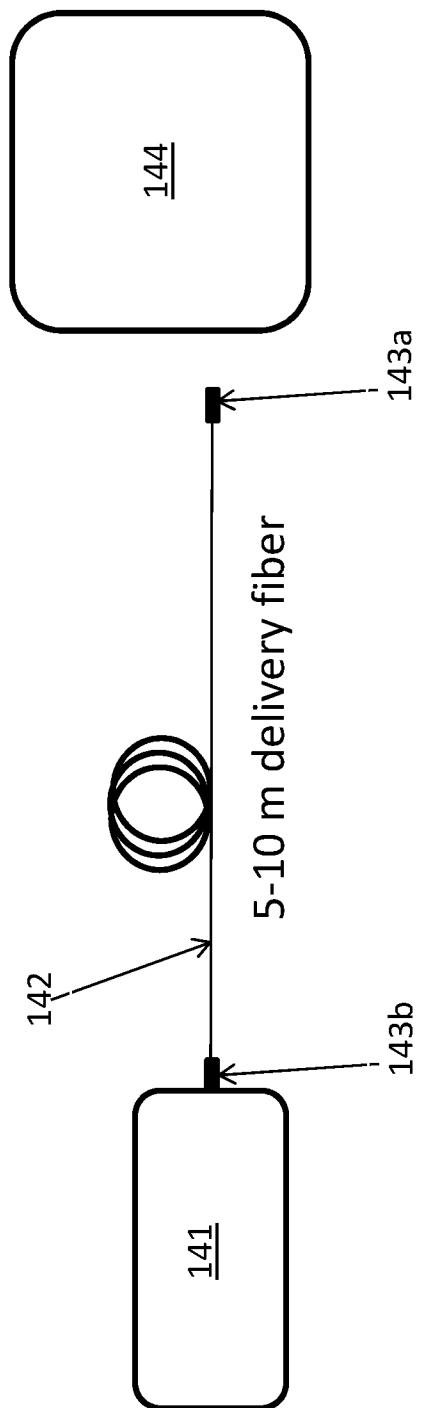


Fig. 16

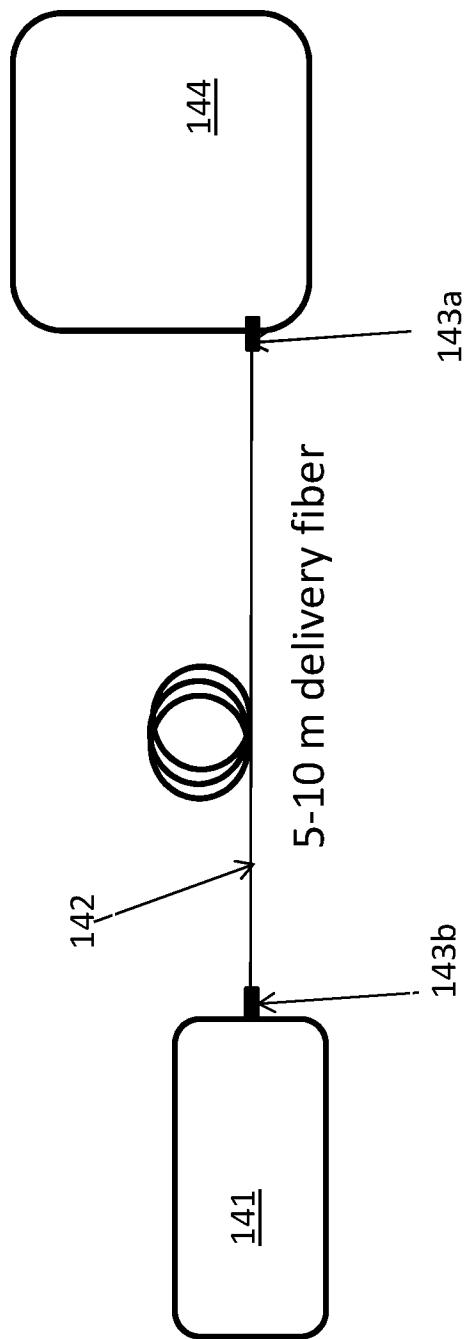


Fig. 17a


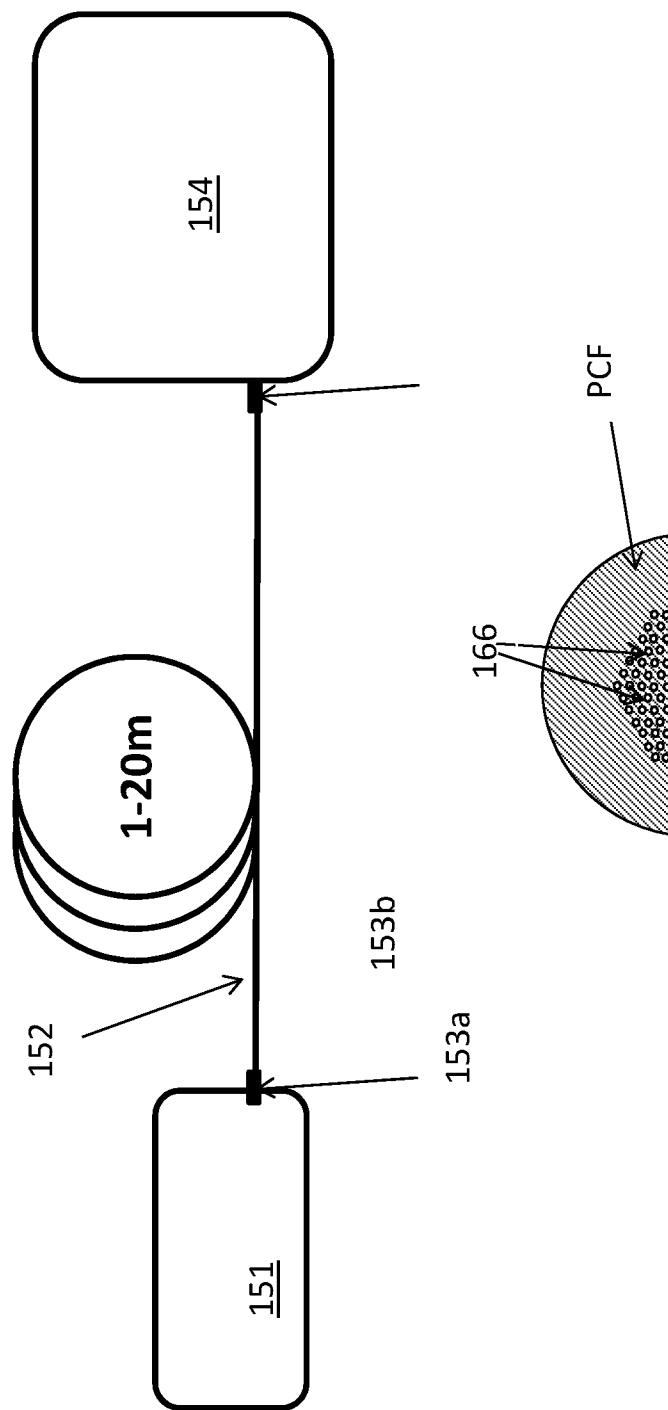


Fig. 17b

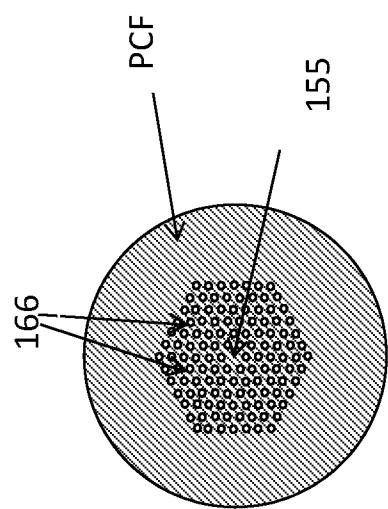

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK2016/050459

A. CLASSIFICATION OF SUBJECT MATTER G02B 6/36 (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC																						
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) G02B																						
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched DK, NO, SE, FI: Classes as above.																						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPODOC, WPI, FULL-TEXT: ENGLISH																						
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding: 2px;">Category*</th> <th style="text-align: left; padding: 2px;">Citation of document, with indication, where appropriate, of the relevant passages</th> <th style="text-align: left; padding: 2px;">Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">X</td> <td style="padding: 2px;">D1: US2007292087 A1 (BROWN, JD) 20 December 2007 (Fig. 3 and Par. [0051]- [0052]).</td> <td style="padding: 2px;">1-28, 30-36, 39-61, 63-65, 67-72</td> </tr> <tr> <td style="padding: 2px;">X</td> <td style="padding: 2px;">D2: EP1096285 A2 (GSI LUMONICS LTD) 2 May 2001 (Fig.2, Par. [0030] and [0045]).</td> <td style="padding: 2px;">1-28, 30-36, 39-61, 63-65, 67-72</td> </tr> <tr> <td style="padding: 2px;">X</td> <td style="padding: 2px;">D3: GB2255199 A (TRIMEDYNE INC) 28 October 1992 (Abstract, Fig. 2, page 7 lines 4-20).</td> <td style="padding: 2px;">1-28, 30-36, 39-61, 63-65, 67-72</td> </tr> <tr> <td style="padding: 2px;">X</td> <td style="padding: 2px;">D4: EP2479594 A1 (OCLARO TECHNOLOGY LTD) 25 July 2012 (Fig. 1 and 4, paragraphs [0029]-[0030], [0053] and [0056], claims 7-8).</td> <td style="padding: 2px;">1-28, 30-36, 39-61, 63-65, 67-72</td> </tr> <tr> <td style="padding: 2px;">A</td> <td style="padding: 2px;">D5: GB2097149 A (MALCO) 27 October 1982 (page 3 lines 101-104 and Fig. 4).</td> <td style="padding: 2px;">1-72</td> </tr> <tr> <td style="padding: 2px;">A</td> <td style="padding: 2px;">D6: US4575181 A (ISHIKAWA, K) 11 March 1986 (column 2 line 65 – column 3 line 3 and Fig. 1 and 3, claims 1-4).</td> <td style="padding: 2px;">1-72</td> </tr> </tbody> </table>		Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	D1: US2007292087 A1 (BROWN, JD) 20 December 2007 (Fig. 3 and Par. [0051]- [0052]).	1-28, 30-36, 39-61, 63-65, 67-72	X	D2: EP1096285 A2 (GSI LUMONICS LTD) 2 May 2001 (Fig.2, Par. [0030] and [0045]).	1-28, 30-36, 39-61, 63-65, 67-72	X	D3: GB2255199 A (TRIMEDYNE INC) 28 October 1992 (Abstract, Fig. 2, page 7 lines 4-20).	1-28, 30-36, 39-61, 63-65, 67-72	X	D4: EP2479594 A1 (OCLARO TECHNOLOGY LTD) 25 July 2012 (Fig. 1 and 4, paragraphs [0029]-[0030], [0053] and [0056], claims 7-8).	1-28, 30-36, 39-61, 63-65, 67-72	A	D5: GB2097149 A (MALCO) 27 October 1982 (page 3 lines 101-104 and Fig. 4).	1-72	A	D6: US4575181 A (ISHIKAWA, K) 11 March 1986 (column 2 line 65 – column 3 line 3 and Fig. 1 and 3, claims 1-4).	1-72
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																				
X	D1: US2007292087 A1 (BROWN, JD) 20 December 2007 (Fig. 3 and Par. [0051]- [0052]).	1-28, 30-36, 39-61, 63-65, 67-72																				
X	D2: EP1096285 A2 (GSI LUMONICS LTD) 2 May 2001 (Fig.2, Par. [0030] and [0045]).	1-28, 30-36, 39-61, 63-65, 67-72																				
X	D3: GB2255199 A (TRIMEDYNE INC) 28 October 1992 (Abstract, Fig. 2, page 7 lines 4-20).	1-28, 30-36, 39-61, 63-65, 67-72																				
X	D4: EP2479594 A1 (OCLARO TECHNOLOGY LTD) 25 July 2012 (Fig. 1 and 4, paragraphs [0029]-[0030], [0053] and [0056], claims 7-8).	1-28, 30-36, 39-61, 63-65, 67-72																				
A	D5: GB2097149 A (MALCO) 27 October 1982 (page 3 lines 101-104 and Fig. 4).	1-72																				
A	D6: US4575181 A (ISHIKAWA, K) 11 March 1986 (column 2 line 65 – column 3 line 3 and Fig. 1 and 3, claims 1-4).	1-72																				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.																						
* Special categories of cited documents: “ A ” document defining the general state of the art which is not considered to be of particular relevance “ E ” earlier application or patent but published on or after the international filing date “ L ” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) “ O ” document referring to an oral disclosure, use, exhibition or other means “ P ” document published prior to the international filing date but later than the priority date claimed																						
Date of the actual completion of the international search 23/02/2017																						
Date of mailing of the international search report 28/02/2017																						
Name and mailing address of the ISA Nordic Patent Institute Helgeshøj Allé 81 DK - 2630 Taastrup, Denmark. Facsimile No. + 45 43 50 80 08																						
Authorized officer Jakob Bonne la Cour Telephone No. +45 43 50 84 80																						

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK2016/050459

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	D7: WO9935524 A2 (PIRELLI CAVIE SISTEMI SPA) 15 July 1999(page 14 lines 11-17 and Fig. 10).	1-72
A	D8: US2013208737 A1 (CLOWES, JR et al.) 15 August 2013 (whole document).	1-72

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/DK2016/050459

Patent document cited in search report / Publication date		Patent family member(s) / Publication date	
US 2007292087 A1 2007.12.20		NONE	
EP 1096285 A2	2001.05.02	EP 1096285 A3	2004.05.06
		JP 2001166176 A	2001.06.22
		JP 3520044B B2	2004.04.19
		US 6347178 B1	2002.02.12
		AT 378614 T T	2007.11.15
		DE 60037091 T T2	2008.09.11
GB 2255199 A	1992.10.28	DE 4212816 A1	1992.10.22
		DE 4212816 C2	2002.02.07
		GB 2255199 B	1994.07.20
		US 5179610 A	1993.01.12
		JPH 05297252 A	1993.11.12
EP 2479594 A1	2012.07.25	WO 2012098456 A1	2012.07.26
		WO 2012098456 A4	2012.09.13
GB 2097149 A	1982.10.27	SE 8202359L L	1982.10.21
		NO 821265 A	1982.10.21
		DK 173582 A	1982.10.21
		FR 2504279 A1	1982.10.22
		NL 8201629 A	1982.11.16
		DE 3214582 A1	1982.12.02
		JPS 581114 A	1983.01.06
US 4575181 A	1986.03.11	NONE	
WO 9935524 A2	1999.07.15	WO 9935524 A3	1999.09.16
		CA 2318504 A1	1999.07.15
		AU 2160599 A	1999.07.26
		AU 742841B B2	2002.01.10
		BR 9813245 A	2000.10.03
		EP 1046071 A2	2000.10.25
		EP 1046071 B1	2002.03.27
		US 6264372 B1	2001.07.24
		AR 018735 A1	2001.12.12
		NZ 505388 A	2001.12.21
		JP 2002501214 A	2002.01.15
		DE 69804508T T2	2002.11.14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/DK2016/050459

Patent document cited in search report / Publication date	Patent family member(s) / Publication date
US 2013208737 A1 2013.08.15	US 2009097512 A1 2009.04.16 US 8848750 B2 2014.09.30 EP 2081074 A1 2009.07.22 EP 2081074 B1 2014.03.05 EP 2492735 A1 2012.08.29 EP 2492735 B1 2014.08.20 EP 2492736 A1 2012.08.29 EP 2492736 B1 2014.08.20 EP 2495598 A1 2012.09.05 EP 2495598 B1 2014.12.03 US 2013188241 A1 2013.07.25 US 9020000 B2 2015.04.28 US 2013208739 A1 2013.08.15 US 8718104 B2 2014.05.06 US 2013208738 A1 2013.08.15 US 9570878 B2 2017.02.14 US 2013208736 A1 2013.08.15 US 9564731 B2 2017.02.07 DK 2081074T T3 2014.06.16 DK 2492736T T3 2014.11.24 DK 2492735T T3 2014.12.01 US 2014369370 A1 2014.12.18 US 9531153 B2 2016.12.27 DK 2495598T T3 2015.01.19 EP 2913701 A1 2015.09.02