



(51) International Patent Classification:

G02B 6/02 (2006.01) G02B 6/028 (2006.01)

(21) International Application Number:

PCT/US2020/034213

(22) International Filing Date:

22 May 2020 (22.05.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/851,798 23 May 2019 (23.05.2019) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:

US 62/851,798 (CON)
Filed on 23 May 2019 (23.05.2019)

(71) Applicant: LAWRENCE LIVERMORE NATIONAL SECURITY, LLC [US/US]; 2300 First Street, Suite 204, Livermore, California 94550 (US).

(72) Inventors: PAX, Paul H.; 235 South Q St., Livermore, California 94550 (US). CHEN, Diana C.; 41712 Olym-

pus Avenue, Fremont, California 94539 (US). MESSERLY, Michael J.; 563 El Capitan Drive, Danville, California 94526 (US).

(74) Agent: GALLENSON, Mavis et al.; 4525 Wilshire Blvd., Suite 240, Los Angeles, California 90010 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: ALL SOLID HYBRID ARROW FIBER

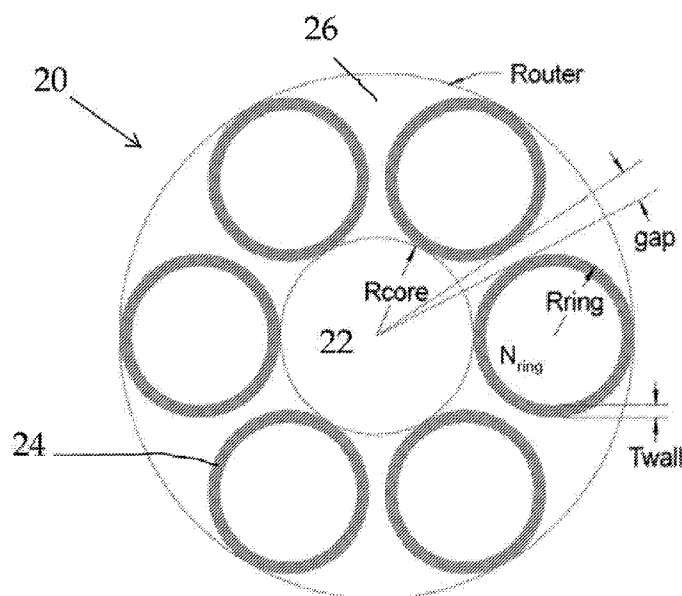


FIG. 2A

(57) Abstract: An all solid hybrid waveguiding structure provides large mode area, acceptable losses of the desired core mode and very high losses of the undesired next higher order mode in the core. Embodiments of the waveguide include a hybrid of low index barriers providing confinement by total internal reflection, and further include high index rings that support guided modes only at effective indices different from that of the desired core mode.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

ALL SOLID HYBRID ARROW FIBER

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Patent Application No. 62/851,798 titled “All Solid Hybrid Arrow Fiber,” filed May 23, 2019, incorporated herein by reference.

STATEMENT AS TO RIGHTS TO INVENTIONS MADE UNDER
FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] The United States Government has rights in this invention pursuant to Contract No. DE-AC52-07NA27344 between the United States Department of Energy and Lawrence Livermore National Security, LLC, for the operation of Lawrence Livermore National Laboratory.

BACKGROUND

Field

[0003] The present technology relates to waveguide designs, and more specifically, it relates to waveguide designs that increase the threshold for transverse modal instability.

Description of Related Art

[0004] High power fiber amplifiers currently face a power limit of a few kilowatts of output due to transverse modal instability (TMI). TMI is caused by a dynamic coupling between the desired mode of the fiber and neighboring higher order modes (HOMs), thought to be mediated by thermal,

scattering and population inversion effects. The current thinking is that suppression of the HOMs will result in suppression of TMI and that HOM suppression of about 40 dB/m at operating temperature is sufficient; or greater than 100 dB/m when cold.

[0005] FIG. 1A shows a prior art design for hollow optical fibers. This design is known as the negative curvature hollow core fiber. In this configuration, fibers **10** do not support true bound modes in the core **12**; light is (imperfectly) confined to the core by rings **14** surrounding it, which comprise an incomplete photonic band gap (PBG) structure. Alternatively, the core confinement has been understood as being due to glancing reflection from the walls of the rings surrounding it, which is enhanced for certain wavelengths by multiple reflections within the wall, via the known anti resonant reflection optical waveguide (ARROW) effect.

[0006] While the propagation loss is non-zero, it can be low enough to support guidance over useful distances. These fibers confine light to their cores in multiple modes with shapes similar to true waveguide eigenmodes, except for their intersection with the wall of the rings. Fortuitously, the desired mode has the lowest loss. FIG. 1B shows the loss versus wavelength for the LP01-like mode (lower series of dots) and LP02-like mode (higher series of dots) for a 50 μm core diameter hollow core fiber having the design of FIG. 1A.

[0007] Hollow core fibers are attractive for carrying high power light and/or high intensity light because the light has only limited interaction with the glass defining the waveguide, resulting in a high damage threshold. However, doping hollow fibers for optical gain can only be achieved by means of a gas medium.

[0008] Various waveguide designs, including hollow core designs, have been proposed and tested in the past, but the present inventors are not aware that any of these have yielded sufficient HOM suppression to substantially increase the TMI threshold.

SUMMARY

[0009] Embodiments of the present technology include an all solid hybrid waveguiding structure providing (i) large mode area, (ii) acceptable losses of the desired core mode and (iii) very high losses of the undesired next higher order mode in the core. Embodiments of the waveguide include a hybrid of low index barriers providing confinement by total internal reflection (TIR); and high index rings that support guided modes only at effective indices different from that of the desired core mode, providing confinement by an effect similar to that in all-solid photonic bandgap (PBG) fibers. The effect of the rings differs from that of the PBG cladding in that (i) they do not fill the entire cladding and so provide imperfect confinement and (ii) they support poorly guided (lossy) modes that can be arranged to couple to and suppress the undesired HOMs. The wall thickness of the rings can be conveniently specified according to the anti-resonant reflection optical waveguide (ARROW) mechanism, as in negative curvature hollow core fibers. The resulting structure is compatible with rare earth doping of the core, and so is suitable for application to high power fiber amplifiers and lasers. The high HOM loss feature makes the present technology particularly relevant to suppression of transverse model instability (TMI) in fiber amplifiers.

[0010] Exemplary applications for the present technology generally include uses in large, effectively single mode fibers. It is especially useful in high power fiber amplifiers and for suppression of TMI in high power fiber amplifiers.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The accompanying drawings, which are incorporated into and form a part of the present disclosure, illustrate embodiments of the technology and, together with the description, serve to explain the principles of the technology.

[0012] FIG. 1A shows a prior art hollow fiber structure with a core diameter of 120 μm .

[0013] FIG. 1B shows the calculated losses vs wavelength for a representative 50 μm core diameter hollow core fiber according to the design of FIG. 1A.

[0014] FIG. 2A shows the geometry for a six-ring design of the present technology, along with its required parameters.

[0015] FIG. 2B shows confinement loss versus wavelength for the design of FIG. 2A.

[0016] FIG. 2C shows the confinement loss for the fundamental mode at various values of D_{core} .

[0017] FIG. 2D shows confinement loss for various ring wall thicknesses.

[0018] FIG. 2E compares bend loss for the point design anti-resonant tube fiber (ART) in both the x and y directions to a step fiber with equivalent core size.

[0019] FIG. 3A illustrates a low contrast design that has 5 nested rings, each having an outer diameter (D_{ring}) of 23 μm .

[0020] FIG. 3B shows confinement loss versus wavelength for mode 1 (lower series of dots) and for mode 2 (upper series of dots).

[0021] FIG. 4 illustrates a low contrast design of the present technology that utilizes an impedance matching strategy for the ring structures in an effort to decrease the fundamental mode loss and increase mode discrimination.

[0022] FIG. 5 illustrates an exemplary low contrast variation that includes added auxiliary elements with an index below that of the background glass.

[0023] FIG. 6A illustrates a fiber design that replaces some of the rings with such auxiliary elements with an index n_{barrier} below that of the background glass.

[0024] FIG. 6B shows confinement loss for the fundamental mode and the relevant next higher order modes, for different sizes of the rings (parameterized by the 'relgap').

[0025] FIG. 6C shows the confinement loss vs wavelength for the fundamental mode ('LP01', mode 1) and relevant higher order modes ('LP11', mode 2) for the relgap=0.13 case.

[0026] FIG. 6D shows the effective indices vs wavelength of the fundamental mode ('LP01', mode 1) and relevant higher order modes ('LP11', mode 2).

[0027] FIG. 6E shows effective index and confinement loss in the heated fiber after adjustment of the ring diameter.

DETAILED DESCRIPTION OF THE TECHNOLOGY

[0028] This technology relates to a basic design for solid optical fibers with features that are beneficial to high power rare-earth doped fiber lasers and amplifiers. The design derives from a prior art design for hollow optical fibers, the so-called negative curvature hollow core fiber discussed above. As noted, these fibers do not support true bound modes in the core. The present technology also achieves core confinement by utilizing a convenient ARROW design rule (constraint) on the ring wall at the operating wavelength λ to obtain minimum losses in the core:

$$2tNA = (m + 1/2)\lambda$$

$$NA = \sqrt{n_{ring}^2 - n_{bg}^2}$$

Here, t is the ring wall thickness, m represents an integer, and the ring material is specified by NA , a function of its index of refraction n_{ring} and that of the background n_{bg} . For a hollow fiber, $n_{bg} = 1$. Note that in the context of the present technology, the term “ring” refers to an outer ring of material of a solid strand of glass, where the outer ring’s index is different from that of material adjacent to the inner boundary of the ring.

[0029] The first part of the present technology is the application of the negative curvature hollow core fiber design to solid doped amplifier fibers. In the present technology, the core is not hollow but comprises a region of rare-earth doped glass of index n_{core} , while the rings are composed of a glass having an outer ring doped with a material (typically Germanium (Ge)) that raises its index to n_{ring} . All other background regions are of undoped glass having index n_{bg} . The core may be co-doped with material (typically Fluorine (F)) to reduce its index to that of the undoped glass, i.e., $n_{core} = n_{bg}$.

[0030] Embodiments of the present technology provide large core fiber designs that satisfy the ARROW condition and are consistent with a core doping

level sufficient to be useful in high power fiber amplifiers. FIG. 2A shows the geometry for a six-ring fiber **20** design according to the present technology, along with the required specification parameters. For simplicity of explanation, core **22** is shown as having a boundary at the core radius R_{core} but the boundary is for explanation only. Rings **24** are shown to have a doped wall thickness T_{wall} and a radius R_{ring} . Core **22** and rings **24** are located within background material **26**

[0031] In an original point design, the propagation loss of the desired mode is non-zero but small enough to be acceptable. However, the propagation loss of the higher order modes (HOMs) is significantly higher than the lowest mode, such that the fiber can be considered to operate in a single transverse mode. In fact, the HOM losses are high enough to be considered as a means of mitigating transverse modal instability (TMI), currently a limiting nonlinear effect in high power fiber amplifiers. TMI is brought on by a nonlinear coupling between the preferred mode and the HOMs; an accepted rule of thumb is that HOM loss of ~ 40 dB/m at the operating temperature is enough to suppress TMI.

[0032] With reference to FIG. 2A, the design parameters for the original point design are $R_{\text{core}} = 15 \mu\text{m}$ (thus $D_{\text{core}} = 30 \mu\text{m}$), $R_{\text{ring}} = 12.47 \mu\text{m}$, $T_{\text{wall}} = 2.5 \mu\text{m}$, $N_{\text{clad}} = 1.45$, $NA_{\text{ring}} = 0.3$ ($N_{\text{del}} = 3.07 \times 10^{-2}$) and number of rings = 6 with a relative angular gap between rings of 0.1. Note that the index of any element other than the core or the ring wall is the background index, or $N_{\text{del}} = 0$. FIG. 2B shows confinement loss versus wavelength for this design. The loss at $1 \mu\text{m}$ for the fundamental mode (LP01-like) is 0.08 db/m. The loss at $1 \mu\text{m}$ for the first higher order mode (LP11-like) is 58 db/m. Yet higher order modes (e.g., LP21-like and LP02-like) can also propagate, but their high losses and large effective index difference from the 'LP01' mode makes them of less concern with respect to TMI. FIG. 2C shows the confinement loss for the fundamental mode at various values of D_{core} . It can be seen that larger cores have lower fundamental mode loss. FIG. 2D shows confinement loss for various ring wall thicknesses. It can be seen that changing the wall thickness does not appreciably alter the confinement loss. FIG. 2E compares bend loss for the point design anti-resonant tube fiber

(ART) in both the x and y directions to a step fiber with equivalent core size. It can be seen the loss is generally less for the ART fiber.

[0033] To accommodate various glass fabrication technologies, a design was developed with reduced the ring contrast while adjusting the ring wall thickness to satisfy the ARROW condition; however, this resulted in an unacceptably high loss for the preferred mode. The design efforts were broadened to include variations on the core size, number of rings and their spacing, multilayer ring structures, and departures from the ARROW condition; all with the goal of reducing the propagation loss of the preferred mode.

[0034] One low contrast design, illustrated in FIG. 3A as fiber **30**, has 5 nested rings **31-35**, each having an outer diameter (D_{ring}) of 23 μm . Rings **31-35** surround core **36**. The FIG. 3B shows confinement loss versus wavelength for mode 1 (lower series of dots) and for mode 2 (upper series of dots). This design has a reduced fundamental mode loss but has lower mode discrimination. In this example, all nested rings are of the same material as in the non-nested case. The other material of the nested ring elements is the same as the background material.

[0035] Another low contrast design, shown in FIG. 4, utilizes an impedance matching strategy for the ring structures in an effort to decrease the fundamental mode loss and increase mode discrimination. This figure shows a geometry that is similar to that of FIG. 2A as having a six-ring fiber **40** design, along with the required specification parameters. For simplicity of explanation again, core **42** is shown as having a boundary at the core radius R_{core} but the boundary is for explanation only. Rings **44** are shown to have a wall thickness T_{wall} and a radius R_{ring} . The rings all include a nested ring configuration, but for explanation purposes, only one ring shows a three-element construction comprises radiuses R_{ring} , $R_{\text{ring } 2}$ and $R_{\text{ring } 3}$. The material in the center of the ring is the same as the background. Specific values of the indices of rings 1-3 can be chosen to achieve a desired ratio of the values of the fields inside and outside the compound ring.

[0036] Faced with unacceptable losses in the desired mode, the confinement due to the ARROW mechanism was augmented with the mechanism of total internal reflection, which is the basis of the robust guidance in traditional dielectric waveguides and fibers. As shown in FIG. 5, additional auxiliary elements (barriers) 52 were introduced into fiber 50. The auxiliary elements have an index n_{barrier} below that of the background glass 54. In some embodiments, the core 56 is rare earth doped and comprises an index that is higher than the barriers 52. Thus, FIG. 5 illustrates a cross-sectional view of an exemplary low contrast variation that includes such auxiliary elements. The rings 58 have a relatively increased index compared to the smaller inner barriers (auxiliary elements 52). The small inner barriers (solid circles) 52 have a relatively decreased index compared to the core 56, the background 54 and the rings 58.

[0037] Another alternative is to replace one or more of the rings with low index barrier elements. Thus, FIG. 6A illustrates a fiber 60 design that replaces some of the rings 61 with such auxiliary elements 62 with an index n_{barrier} below that of the background glass 64. Rings 61 and auxiliary elements 62 surround core 66. In the figure, the circles 62 represent the low index barriers. Such an arrangement could substantially reduce the propagation loss of a preferred mode to a level acceptable in a fiber amplifier.

[0038] While investigating this hybrid structure, attention was placed on decreasing the propagation loss of the preferred mode. But as an exceptionally important side benefit, the fundamental mechanism underlying the enhanced losses of the HOM was discovered (recall that this enhanced loss is crucial for mitigation of TMI). That mechanism is the coupling of the unwanted HOM in the core to a mode supported within the solid material interior to the rings. These ring modes are analogous to those of the core, but are bounded by a concentric circle instead of the “Negative Curvature” boundary of the core. That difference in boundaries leads to drastically higher propagation losses for the ring modes, and therefore any core mode that couples to the ring.

[0039] This coupling requires that the mode(s) involved be resonant, making it sensitive to the size of the rings. It was calculated that by judicious design of the rings, HOM losses can be made high enough, $> \sim 150$ dB/m, before considering the heat load present in active fiber amplifiers, to suppress TMI. Thus, replacing some rings with down-doped “barrier” features reduced loss of the desired mode; while tuning of the “ring modes” can lead to high loss for the HOM, i.e., high mode discrimination.

[0040] FIG. 6B shows confinement loss for the fundamental mode and the relevant next higher order modes, for different sizes of the rings (parameterized by the ‘relgap’). Depending on relgap, some subset of the higher order modes has undesirably low loss; while for relgap=0.13, all of these modes have desirably high loss. The term “relgap” refers to the relevant next higher order mode.

[0041] FIG. 6C shows the confinement loss vs wavelength for the fundamental mode (‘LP01’, mode 1) and relevant higher order modes (‘LP11’, mode 2) for the relgap=0.13 case. Losses vary with wavelength, but in the region of interest the ‘LP01’ mode has a loss of ~ 0.1 dB/m and the ‘LP11’ mode has a loss of ~ 150 dB/m. The two branches of the ‘LP11’ mode loss are due to the two parities with which those modes can couple to the rings (see also Fig. 6D).

[0042] FIG. 6D shows the effective indices vs wavelength of the fundamental mode (‘LP01’, mode 1) and relevant higher order modes (‘LP11’, mode 2). The two branches of the ‘LP11’ mode index are due to the two parities with which those modes can couple to the rings (see also Fig. 6B).

[0043] Simulations concerning a heat loaded (25 W/m) fiber utilizing low contrast rings with barriers were performed, consistent with quantum defect heating in a 20 m fiber at 5 kW. Heating induces a change in the material index, increasing guidance and shifting the effective indices of the modes. In particular, these shifts separate the core ‘LP11’ and ring ‘LP01’ modes in the optimized cold design, resulting in a reduced core ‘LP11’ loss of ~ 30 dB/m. Adjusting the ring diameter ONLY, via adjustment of relative gap from 0.13 to 0.115, results in a core ‘LP11’ loss of $> \sim 140$ dB/m.

[0044] FIG. 6E shows effective index and confinement loss in the heated fiber after adjustment of the ring diameter. The heat induced index change results in yet higher order modes ('LP21' and 'LP02') to propagate. However, their losses and especially their large effective index difference with respect to the 'LP01' mode make them less of a concern with respect to TMI.

[0045] The following design parameters and specifications are provided for an embodiment having low contrast rings with barriers:

- Design parameters
 - Barriers replace rings, $R_{\text{barrier}} = R_{\text{ring}}$
- For cold fiber case
 - $N_{\text{clad}} = 1.45$, $R_{\text{core}} = 15 \mu\text{m}$
 - Number of rings = 6, relative gap = 0.13
 - $R_{\text{ring}} = 11.783 \mu\text{m}$, $T_{\text{wall}} = 1.25 \mu\text{m}$
 - $NA_{\text{ring}} = 0.2$ ($N_{\text{del}} = 1.37 \times 10^{-2}$)
 - $NA_{\text{barrier}} = 0.14$ ($N_{\text{del}} = -6.77 \times 10^{-3}$)
- For hot fiber case, 25W/m heatload
 - $N_{\text{clad}} = 1.45$, $R_{\text{core}} = 15 \mu\text{m}$
 - Number of rings = 6, relative gap = 0.115
 - $R_{\text{ring}} = 11.783 \mu\text{m}$, $T_{\text{wall}} = 1.25 \mu\text{m}$
 - $NA_{\text{ring}} = 0.2$ ($N_{\text{del}} = 1.37 \times 10^{-2}$)
 - $NA_{\text{barrier}} = 0.14$ ($N_{\text{del}} = -6.77 \times 10^{-3}$)

[0046] Broadly, this writing discloses at least the following.

[0047] An all solid hybrid waveguiding structure provides large mode area, acceptable losses of the desired core mode and very high losses of the undesired next higher order mode in the core. Embodiments of the waveguide include a hybrid of low index barriers providing confinement by total internal reflection, and further include high index rings that support guided modes only at effective indices different from that of the desired core mode.

[0048] This writing also presents at least the following Concepts.

[0049] Concepts:

1. An apparatus, comprising:

a length of a background material of undoped optical material having an index of refraction (n_{bg});

a core comprising a length of a solid core material within said length of background material, wherein said core material comprises a rare-earth dopant and has an index of refraction (n_{core}); and

a length of a first set of solid optical material elements located within said length of background material and distributed around said core, wherein each solid optical material element of said first set of solid optical material elements comprises an outer solid ring region having an index of refraction (n_{ring}) that is greater than n_{bg} .

2. The apparatus of concepts 1 and 3-15, wherein said undoped optical material comprises undoped glass.

3. The apparatus of concepts 1, 2 and 4-15, wherein each solid optical material element of said first set of solid optical material elements comprises a solid glass element.

4. The apparatus of concepts 1-3 and 5-15, wherein said first set of solid optical material elements are distributed around said core and curve away from said core.

5. The apparatus of concepts 1-4 and 6-15, wherein each solid optical material element of said first set of solid optical material elements comprises an outer wall, wherein light is partially confined to said core by glancing reflection from at least one said wall of said solid optical material elements.

6. The apparatus of concepts 1-5 and 7-15, wherein each solid optical material element of said first set of solid optical material elements comprises an outer wall, wherein light is partially confined to said core by glancing reflection from at least one said wall of said solid optical material

elements, wherein said glancing reflection is enhanced for certain wavelengths by multiple reflections within said outer solid ring region of at least one solid optical material element of said first set of solid optical material elements.

7. The apparatus of concepts 1-6 and 8-15, wherein to obtain minimum losses in said solid core material at an operating wavelength λ , said each outer solid ring region is set such that

$$2tNA = (m + 1/2)\lambda, \text{ wherein}$$

$$NA = \sqrt{n_{ring}^2 - n_{bg}^2},$$

wherein t is the wall thickness of said each outer solid ring region, wherein said ring comprises a material specified by its numerical aperture NA which is a function of its index of refraction n_{ring} and that of the background n_{bg} and wherein m is an integer.

8. The apparatus of concepts 1-7 and 9-15, further comprising a length of a second set of optical material elements located within said background material and distributed around said core, wherein said second set of optical material elements comprises an index of refraction ($n_{barrier}$) below that of n_{bg} .

9. The apparatus of concepts 1-8 and 10-15, further comprising a length of a second set of optical material elements located within said background material and distributed around said core, wherein said second set of optical material elements comprises an index of refraction ($n_{barrier}$) below that of n_{bg} , wherein each optical material element of said second set of optical material elements comprises glass.

10. The apparatus of concepts 1-9 and 11-15, further comprising a length of a second set of optical material elements located within said background material and distributed around said core, wherein said second set of optical material elements comprises an index of refraction ($n_{barrier}$) below that of n_{bg} , wherein at least one solid optical material element of said

first set of solid optical material elements has a diameter that tunes a mode of said outer solid ring region such that an unwanted higher order mode (HOM) in said core is coupled to a mode supported within the interior of said at least one solid optical material element of said first set of solid optical material elements.

11. The apparatus of concepts 1-10 and 12-15, further comprising a length of a second set of optical material elements located within said background material and distributed around said core, wherein said second set of optical material elements comprises an index of refraction (n_{barrier}) below that of n_{bg} , wherein each said outer solid ring region of said first set of solid optical material elements comprises a diameter that brings at least one of its interior modes into resonance with at least one higher order mode (HOM) of said core, and thereby increases the propagation loss of said at least one HOM.

12. The apparatus of concepts 1-11 and 13-15, wherein at least one solid optical material element of said first set of solid optical material elements has a diameter that tunes a mode of said outer solid ring region such that an unwanted higher order mode (HOM) in said core is coupled to a mode supported within the interior of at least one solid optical material element of said first set of solid optical material elements.

13. The apparatus of concepts 1-12, 14 and 15, wherein each said outer solid ring region of said first set of solid optical material elements comprises a diameter that brings at least one of its interior modes into resonance with at least one higher order mode (HOM) of said core, and thereby increases the propagation loss of said at least one HOM.

14. The apparatus of concepts 1-13 and 15, wherein said core is co-doped with material to reduce its index to that of said undoped optical material.

15. The apparatus of concepts 1-14, wherein said core is co-doped with Fluorine to reduce the index of said core to that of said undoped optical material.

[0050] All elements, parts and steps described herein are preferably included. It is to be understood that any of these elements, parts and steps may be replaced by other elements, parts and steps or deleted altogether as will be obvious to those skilled in the art.

[0051] The foregoing description of the technology has been presented for purposes of illustration and description and is not intended to be exhaustive or to limit the technology to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. The embodiments disclosed were meant only to explain the principles of the technology and its practical application to thereby enable others skilled in the art to best use the technology in various embodiments and with various modifications suited to the particular use contemplated. The scope of the technology is to be defined by the following claims.

We claim:

1. An apparatus, comprising:
a length of a background material of undoped optical material having an index of refraction (n_{bg});
a core comprising a length of a solid core material within said length of background material, wherein said core material comprises a rare-earth dopant and has an index of refraction (n_{core}); and
a length of a first set of solid optical material elements located within said length of background material and distributed around said core, wherein each solid optical material element of said first set of solid optical material elements comprises an outer solid ring region having an index of refraction (n_{ring}) that is greater than n_{bg} .
2. The apparatus of claim 1, wherein said undoped optical material comprises undoped glass.
3. The apparatus of claim 1, wherein each solid optical material element of said first set of solid optical material elements comprises a solid glass element.
4. The apparatus of claim 1, wherein said first set of solid optical material elements are distributed around said core and curve away from said core.
5. The apparatus of claim 1, wherein each solid optical material element of said first set of solid optical material elements comprises an outer

wall, wherein light is partially confined to said core by glancing reflection from at least one said wall of said solid optical material elements.

6. The apparatus of claim 1, wherein each solid optical material element of said first set of solid optical material elements comprises an outer wall, wherein light is partially confined to said core by glancing reflection from at least one said wall of said solid optical material elements, wherein said glancing reflection is enhanced for certain wavelengths by multiple reflections within said outer solid ring region of at least one solid optical material element of said first set of solid optical material elements.

7. The apparatus of claim 1, wherein to obtain minimum losses in said solid core material at an operating wavelength λ , said each outer solid ring region is set such that

$$2tNA = (m + 1/2)\lambda, \text{ wherein}$$

$$NA = \sqrt{n_{ring}^2 - n_{bg}^2},$$

wherein t is the wall thickness of said each outer solid ring region, wherein said ring comprises a material specified by its numerical aperture NA which is a function of its index of refraction n_{ring} and that of the background n_{bg} and wherein m is an integer.

8. The apparatus of claim 1, further comprising a length of a second set of optical material elements located within said background material and distributed around said core, wherein said second set of optical material elements comprises an index of refraction ($n_{barrier}$) below that of n_{bg} .

9. The apparatus of claim 1, further comprising a length of a second set of optical material elements located within said background material and distributed around said core, wherein said second set of optical material

elements comprises an index of refraction (n_{barrier}) below that of n_{bg} , wherein each optical material element of said second set of optical material elements comprises glass.

10. The apparatus of claim 1, further comprising a length of a second set of optical material elements located within said background material and distributed around said core, wherein said second set of optical material elements comprises an index of refraction (n_{barrier}) below that of n_{bg} , wherein at least one solid optical material element of said first set of solid optical material elements has a diameter that tunes a mode of said outer solid ring region such that an unwanted higher order mode (HOM) in said core is coupled to a mode supported within the interior of said at least one solid optical material element of said first set of solid optical material elements.

11. The apparatus of claim 1, further comprising a length of a second set of optical material elements located within said background material and distributed around said core, wherein said second set of optical material elements comprises an index of refraction (n_{barrier}) below that of n_{bg} , wherein each said outer solid ring region of said first set of solid optical material elements comprises a diameter that brings at least one of its interior modes into resonance with at least one higher order mode (HOM) of said core, and thereby increases the propagation loss of said at least one HOM.

12. The apparatus of claim 1, wherein at least one solid optical material element of said first set of solid optical material elements has a diameter that tunes a mode of said outer solid ring region such that an unwanted higher order mode (HOM) in said core is coupled to a mode supported within the interior of at least one solid optical material element of said first set of solid optical material elements.

13. The apparatus of claim 1, wherein each said outer solid ring region of said first set of solid optical material elements comprises a diameter that brings at least one of its interior modes into resonance with at least one higher order mode (HOM) of said core, and thereby increases the propagation loss of said at least one HOM.

14. The apparatus of claim 1, wherein said core is co-doped with material to reduce its index to that of said undoped optical material.

15. The apparatus of claim 1, wherein said core is co-doped with Fluorine to reduce the index of said core to that of said undoped optical material.

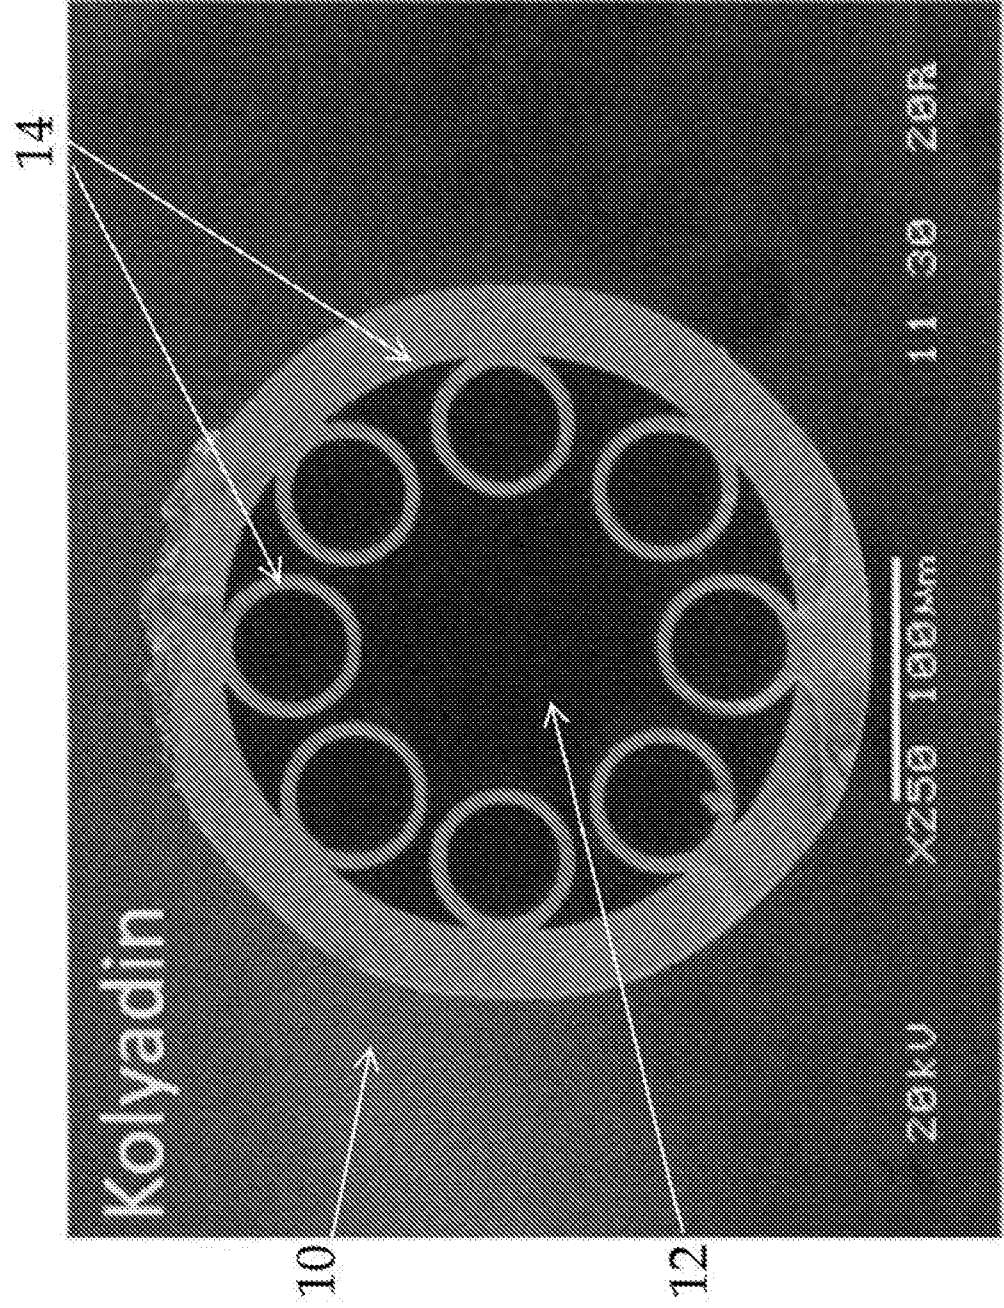


FIG. 1A
PRIOR ART

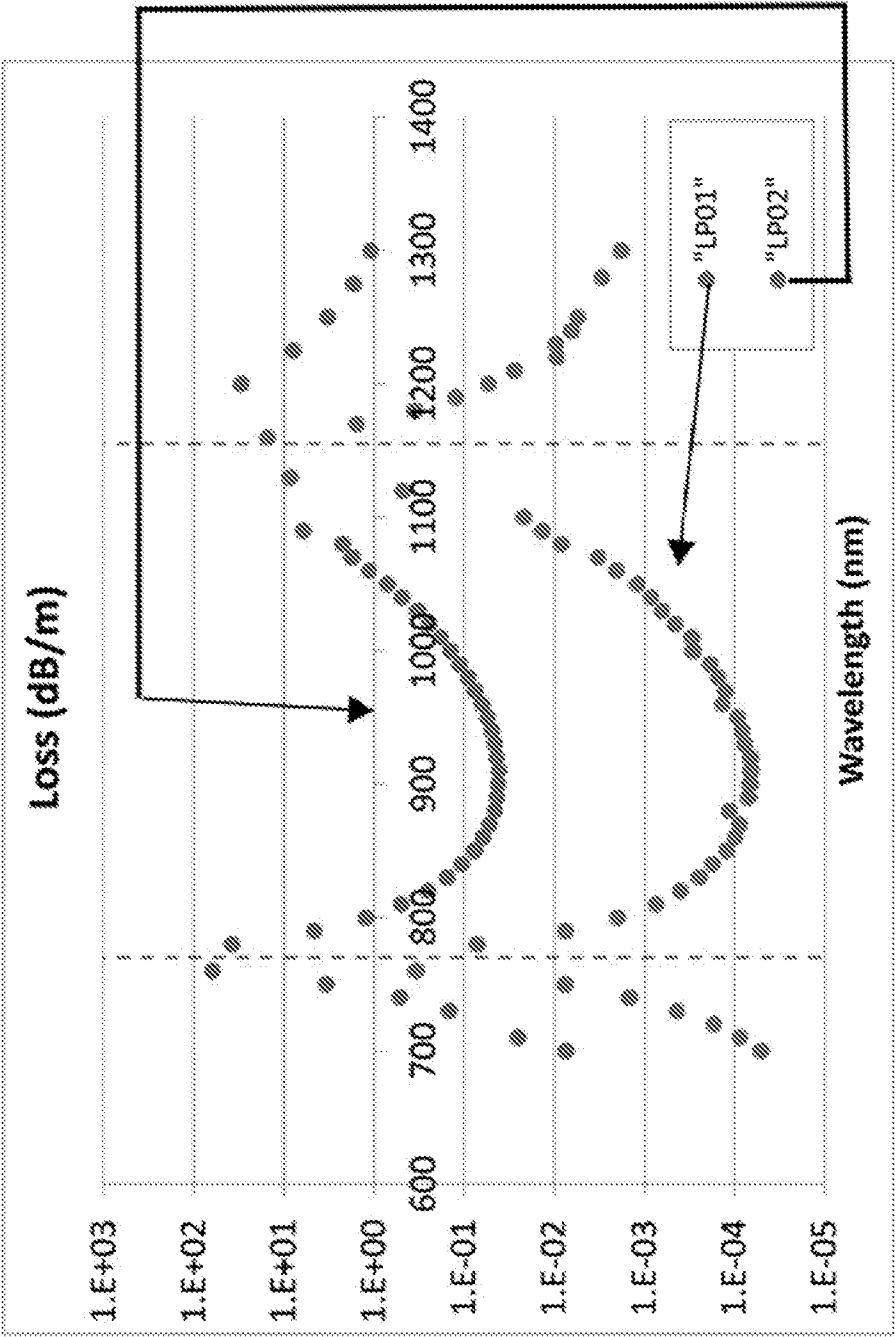


FIG. 1B
PRIOR ART

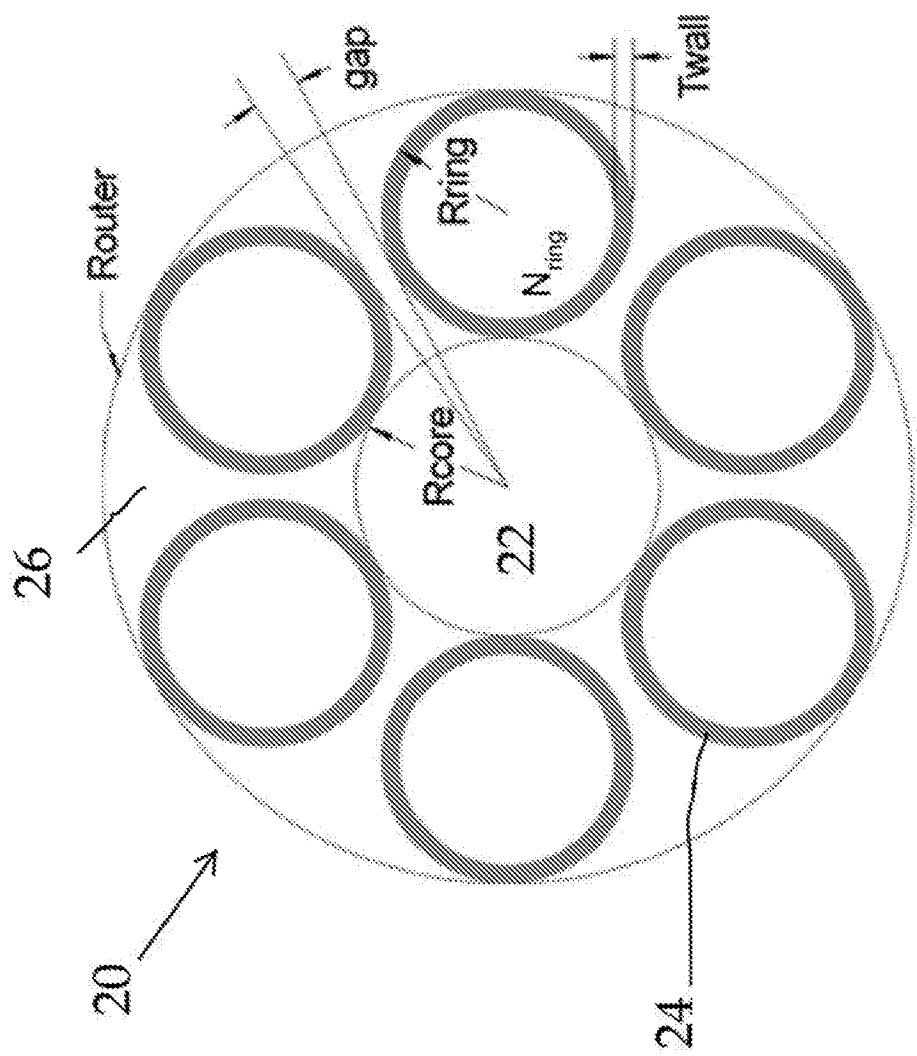


FIG. 2A

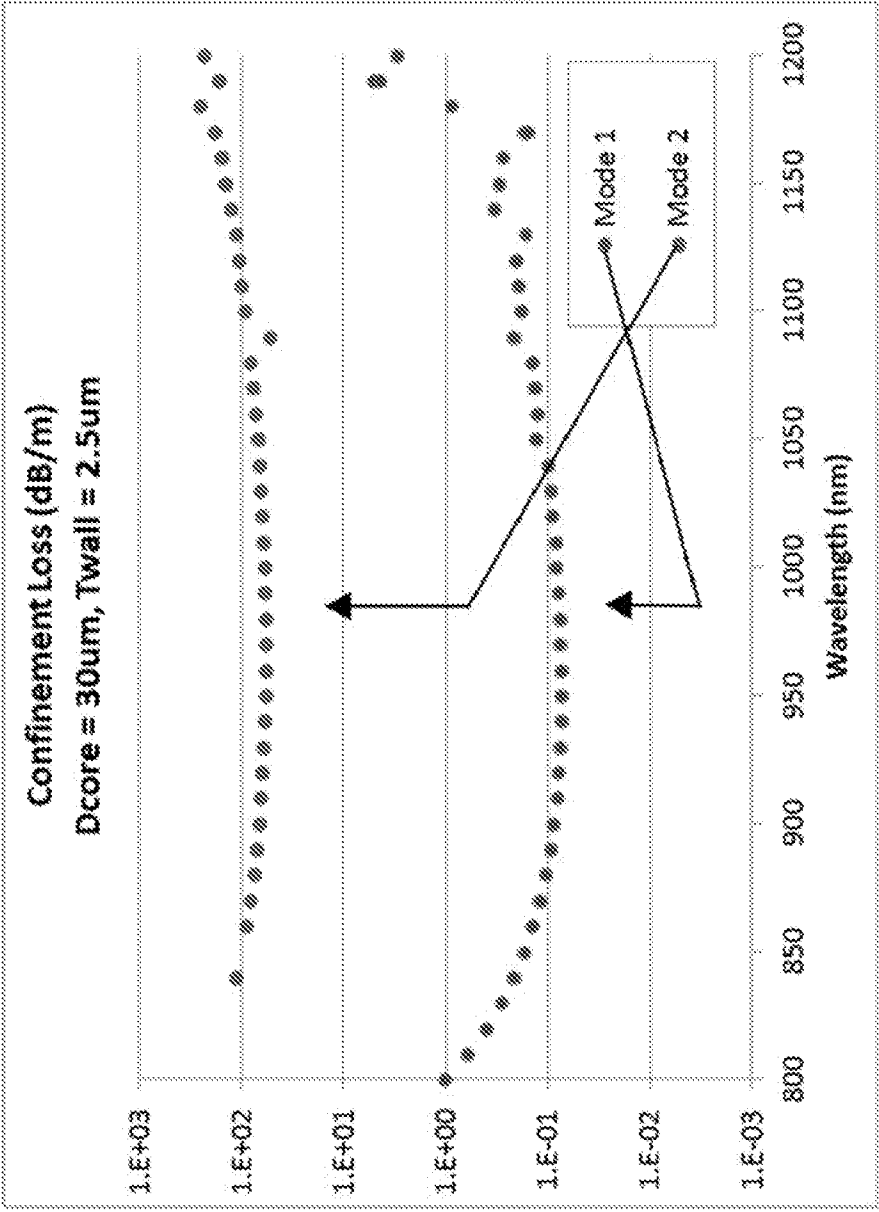


FIG. 2B

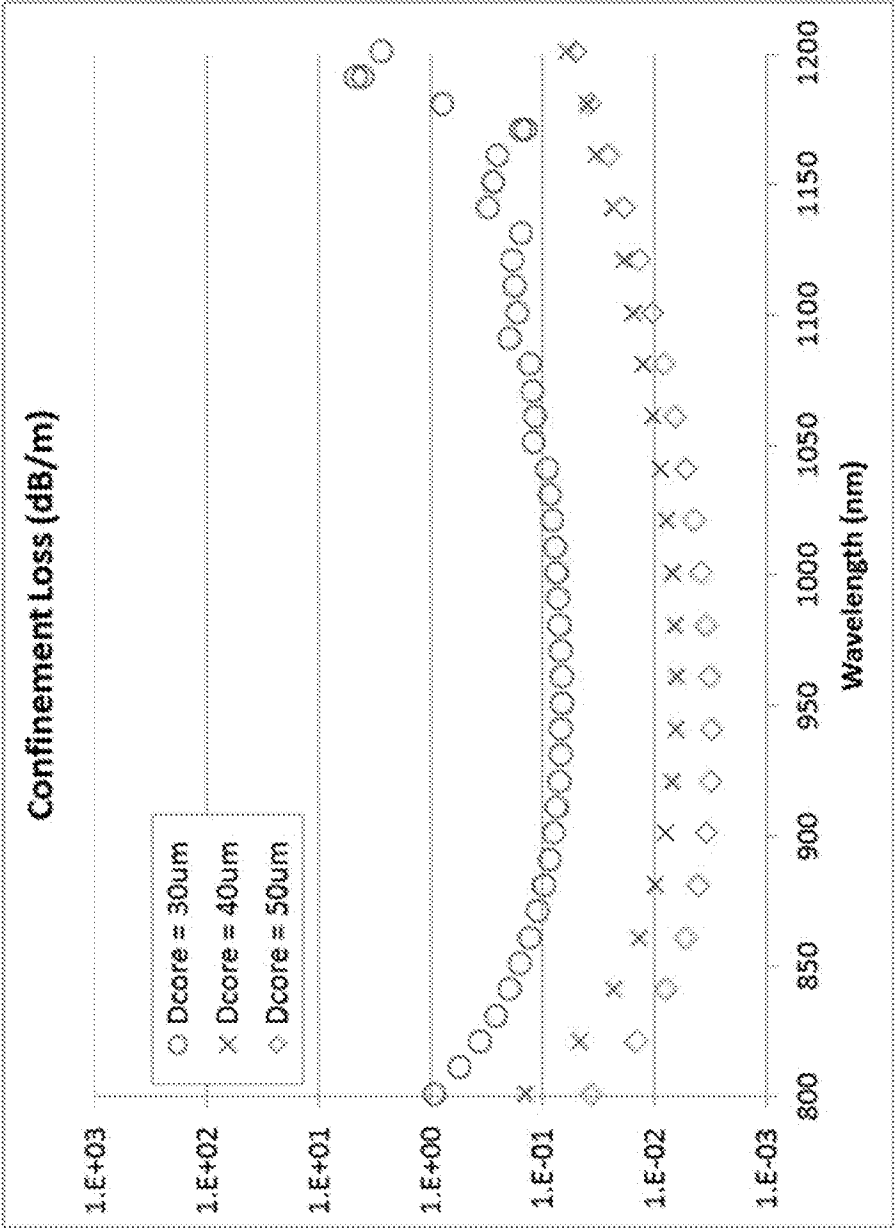


FIG. 2C

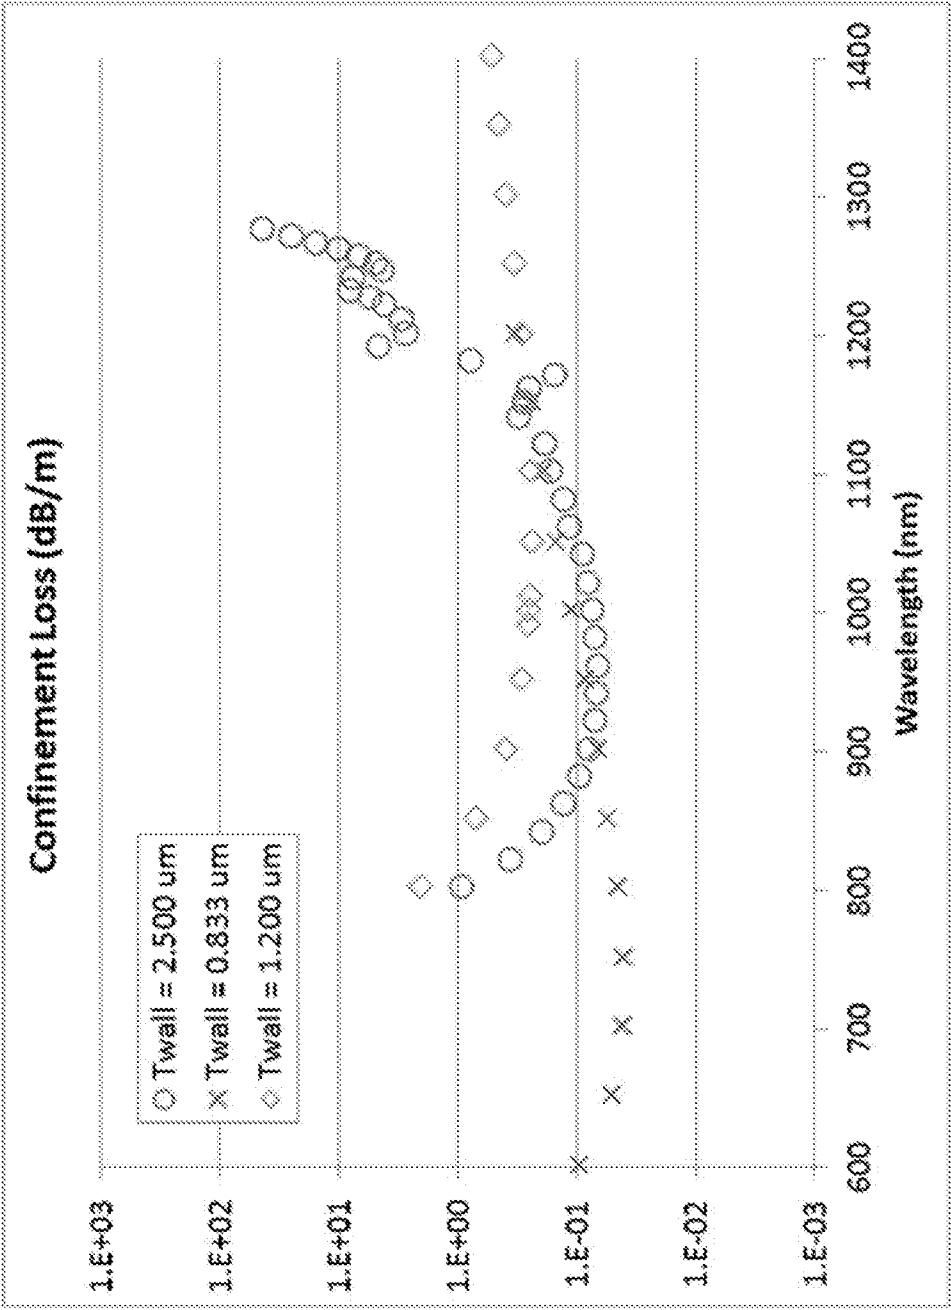


FIG. 2D

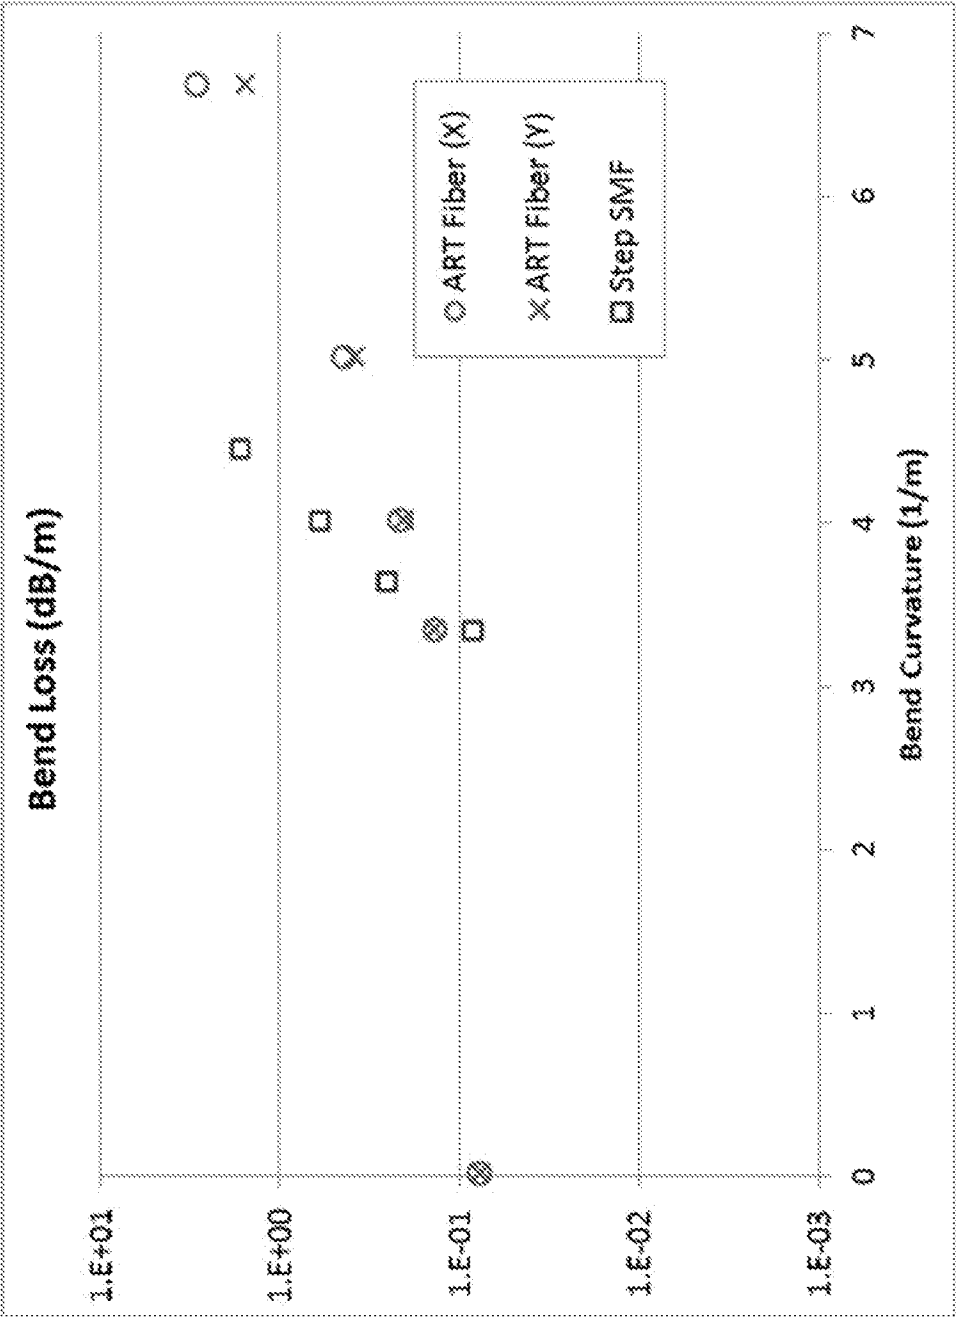


FIG. 2E

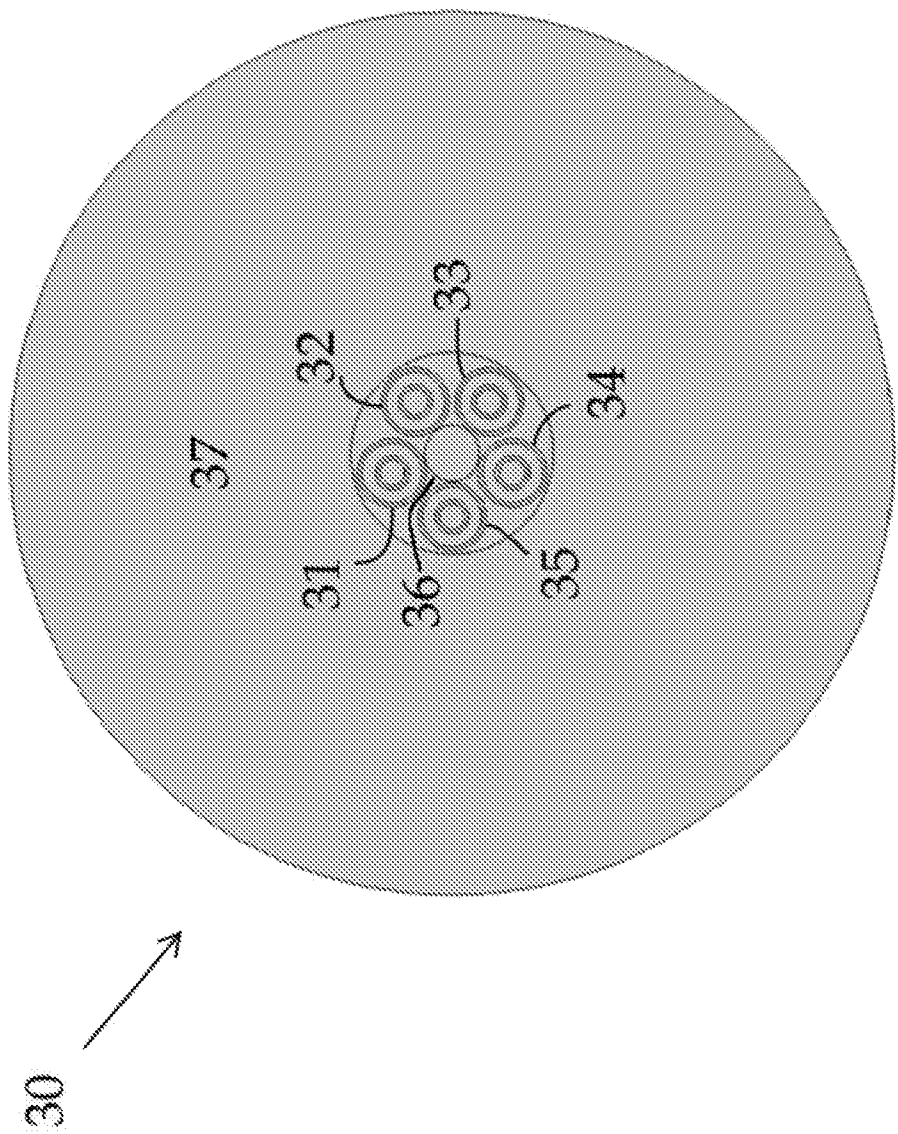


FIG. 3A

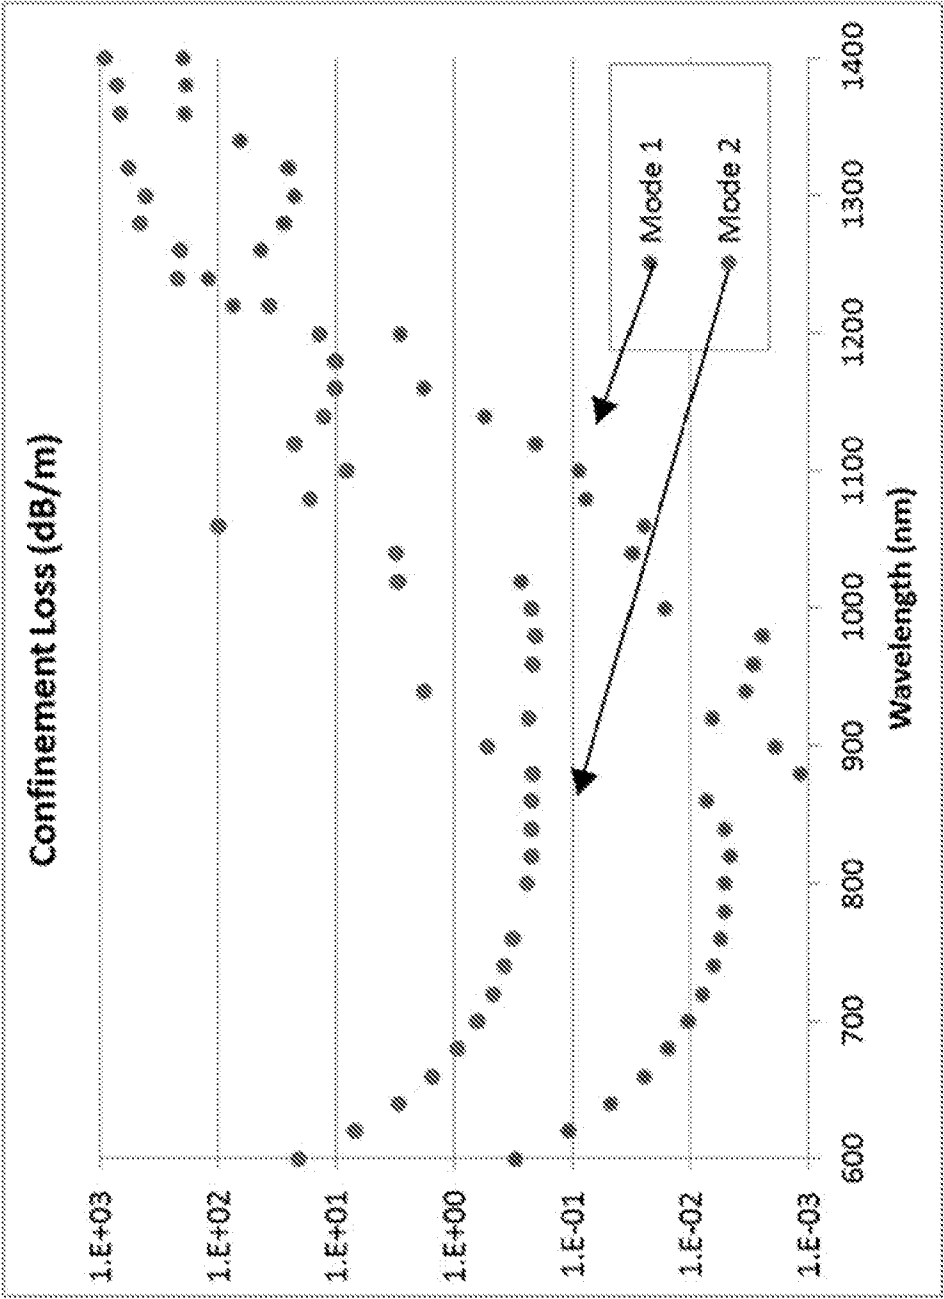


FIG. 3B

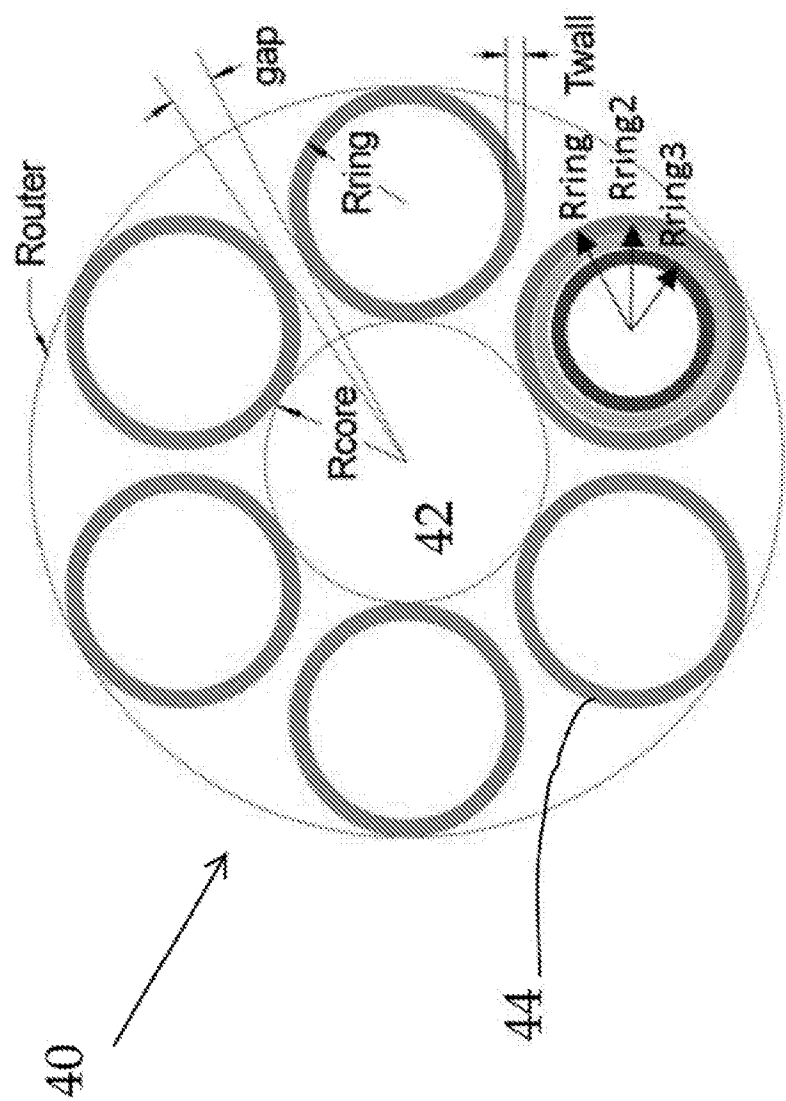


FIG. 4

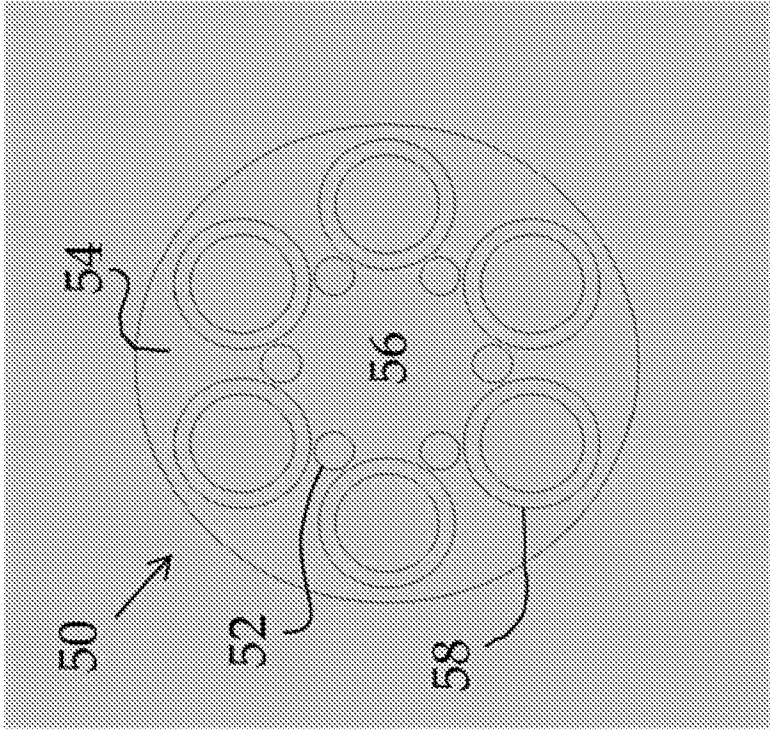


FIG. 5

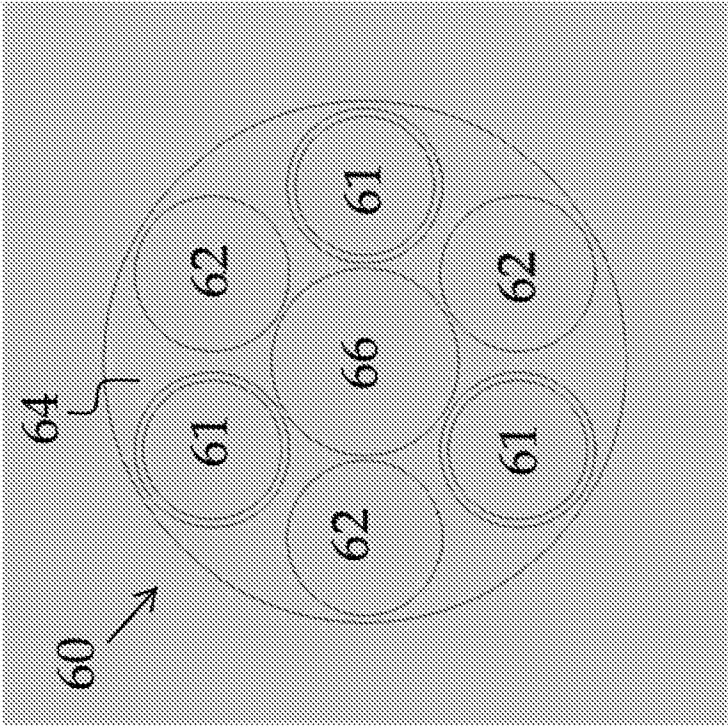


FIG. 6A

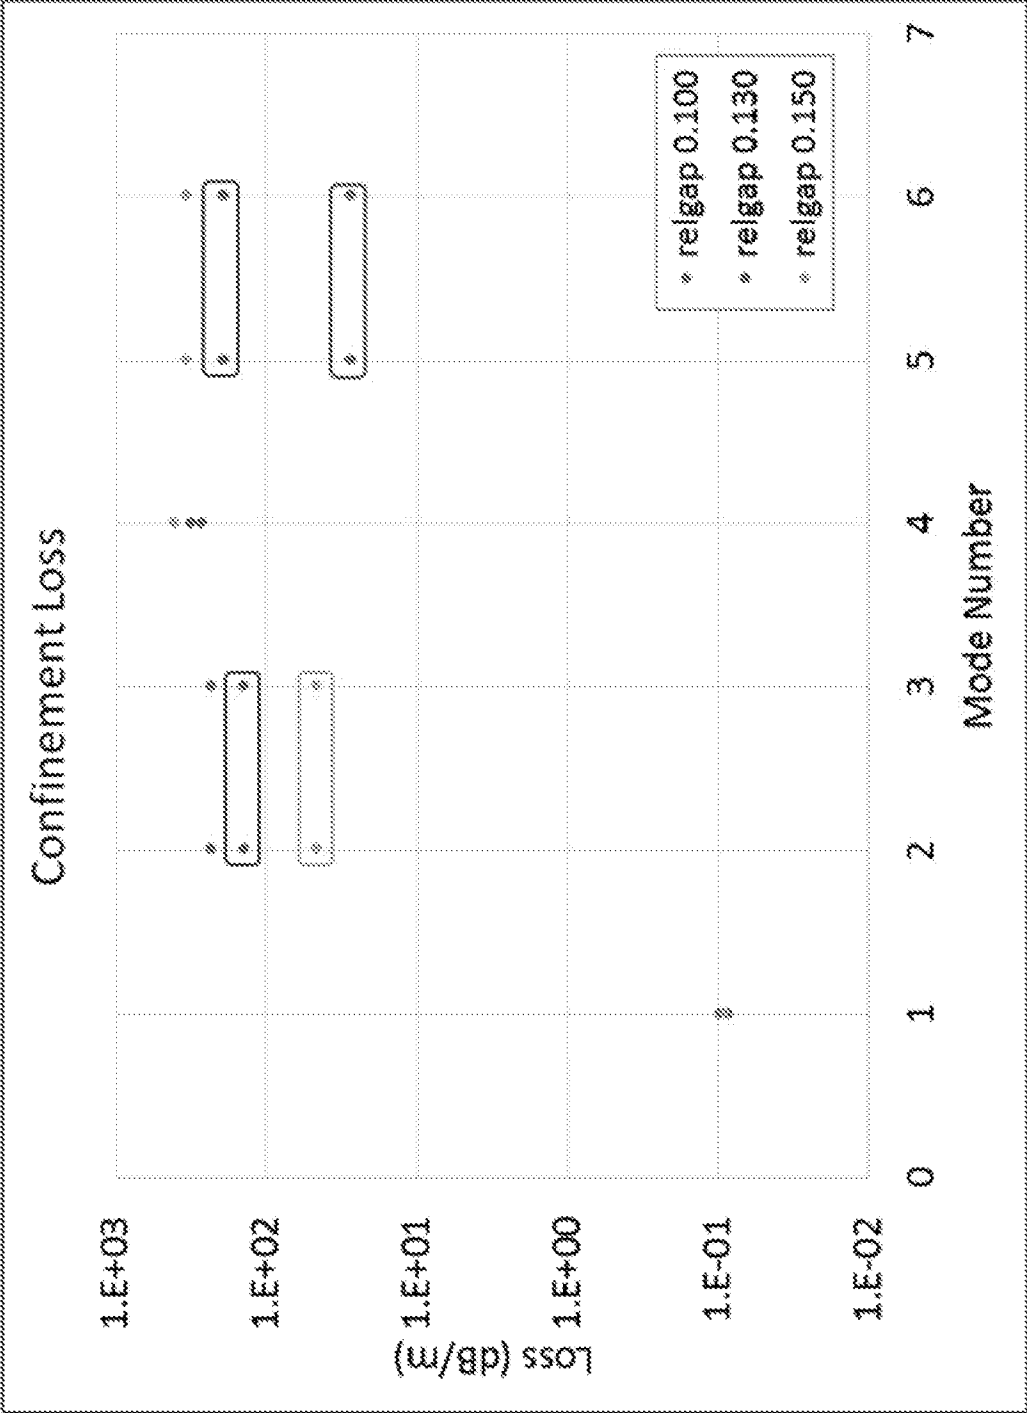


FIG. 6B

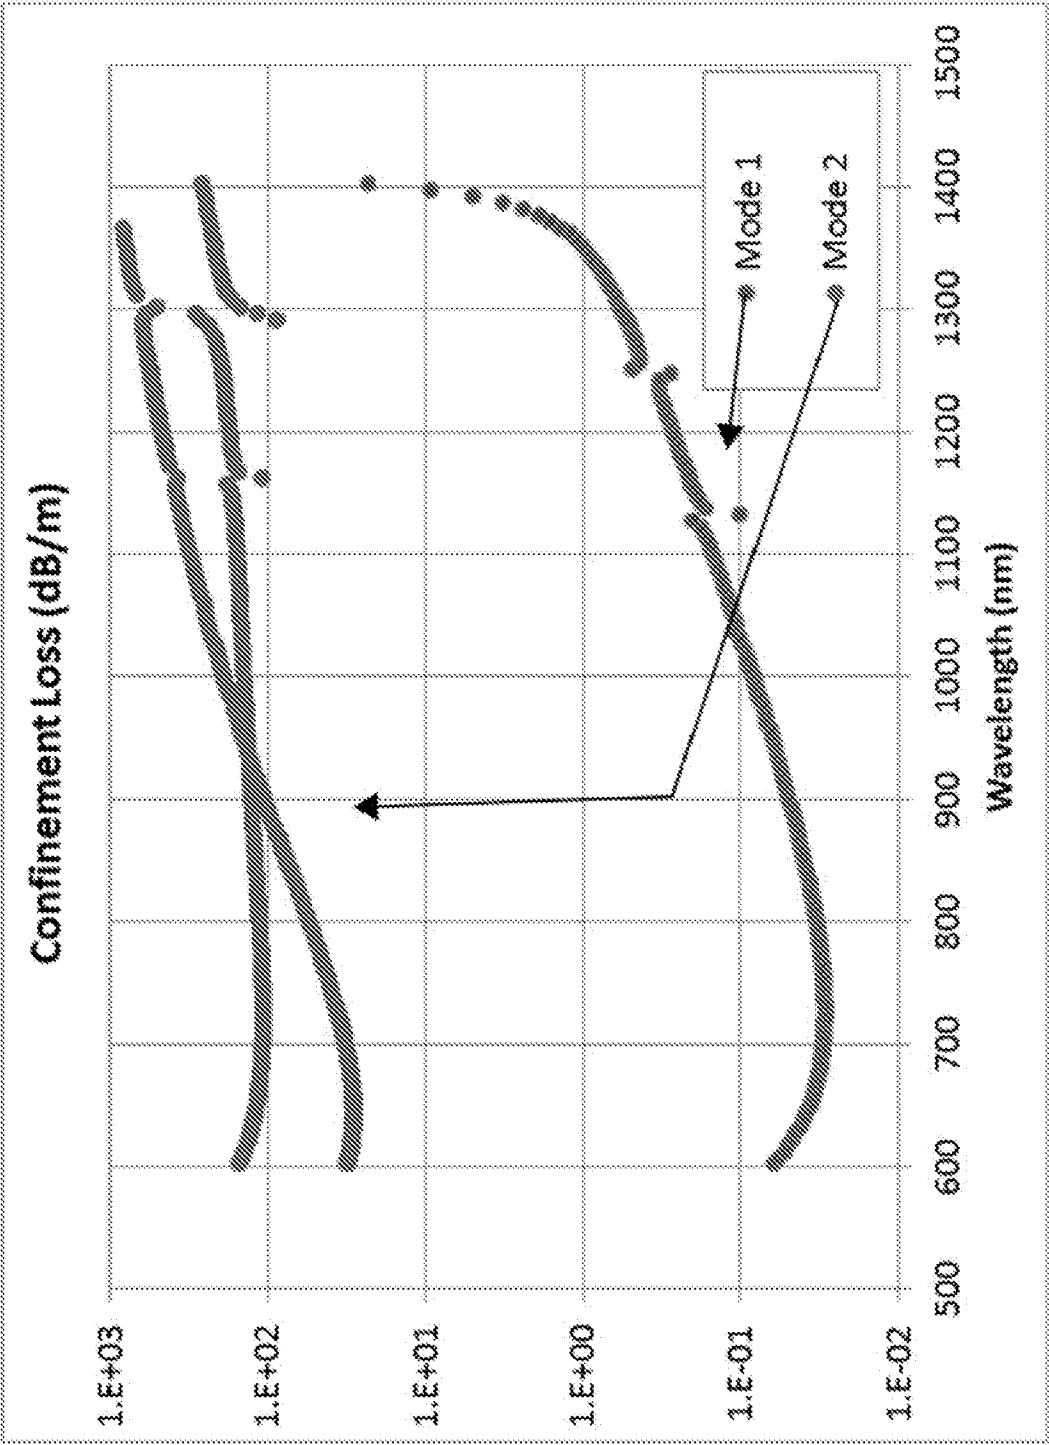


FIG. 6C

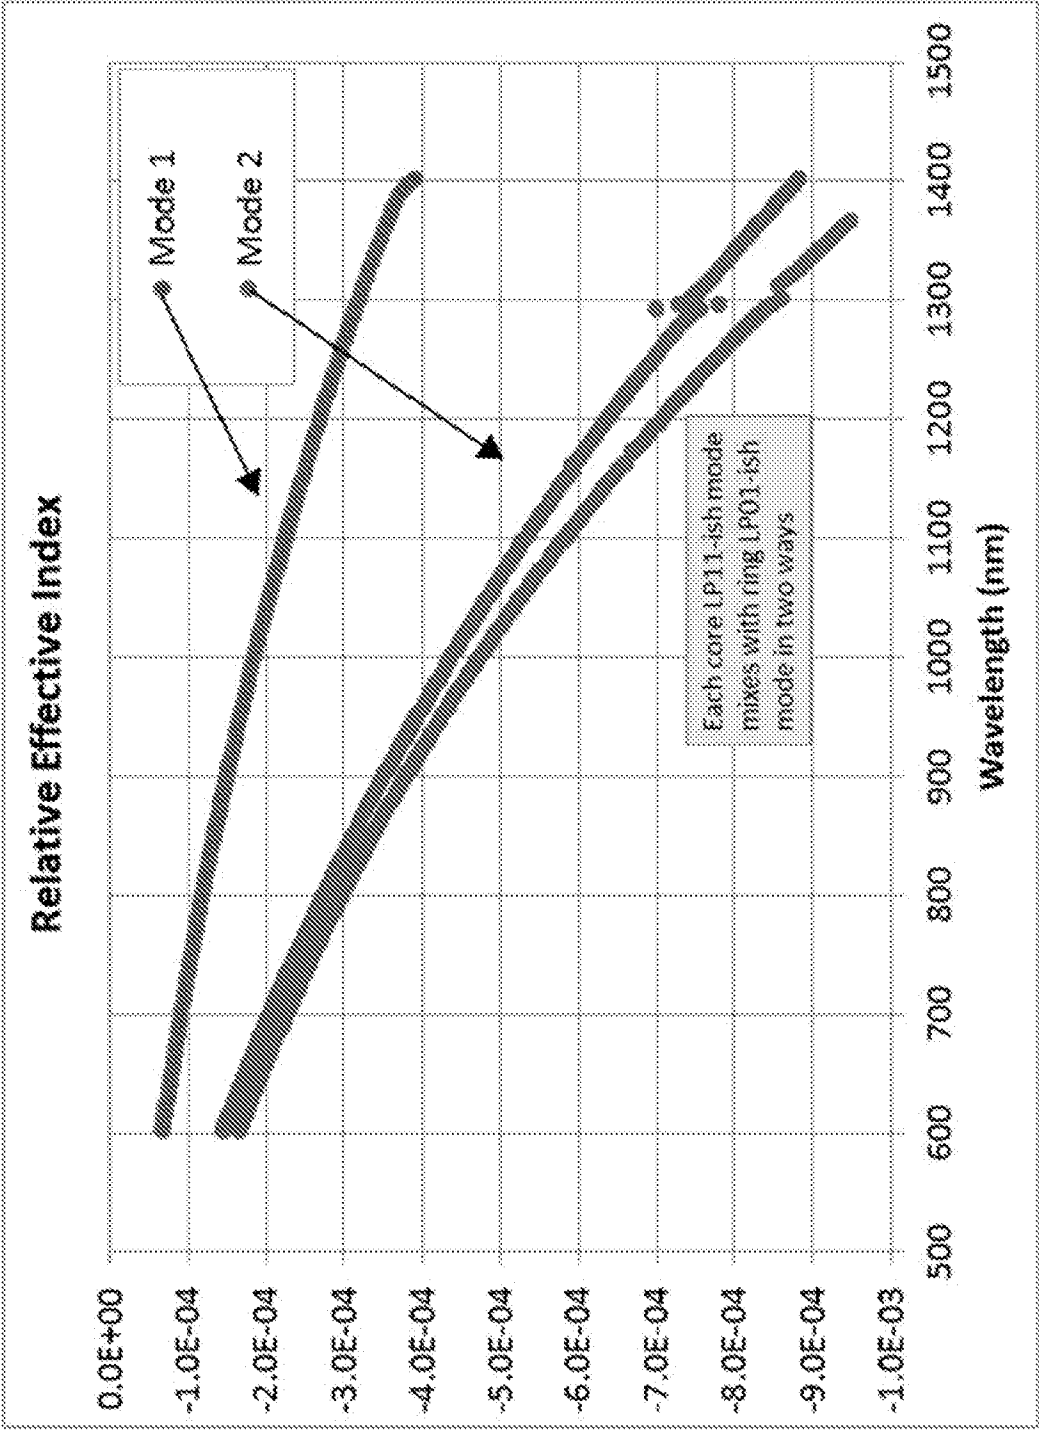


FIG. 6D

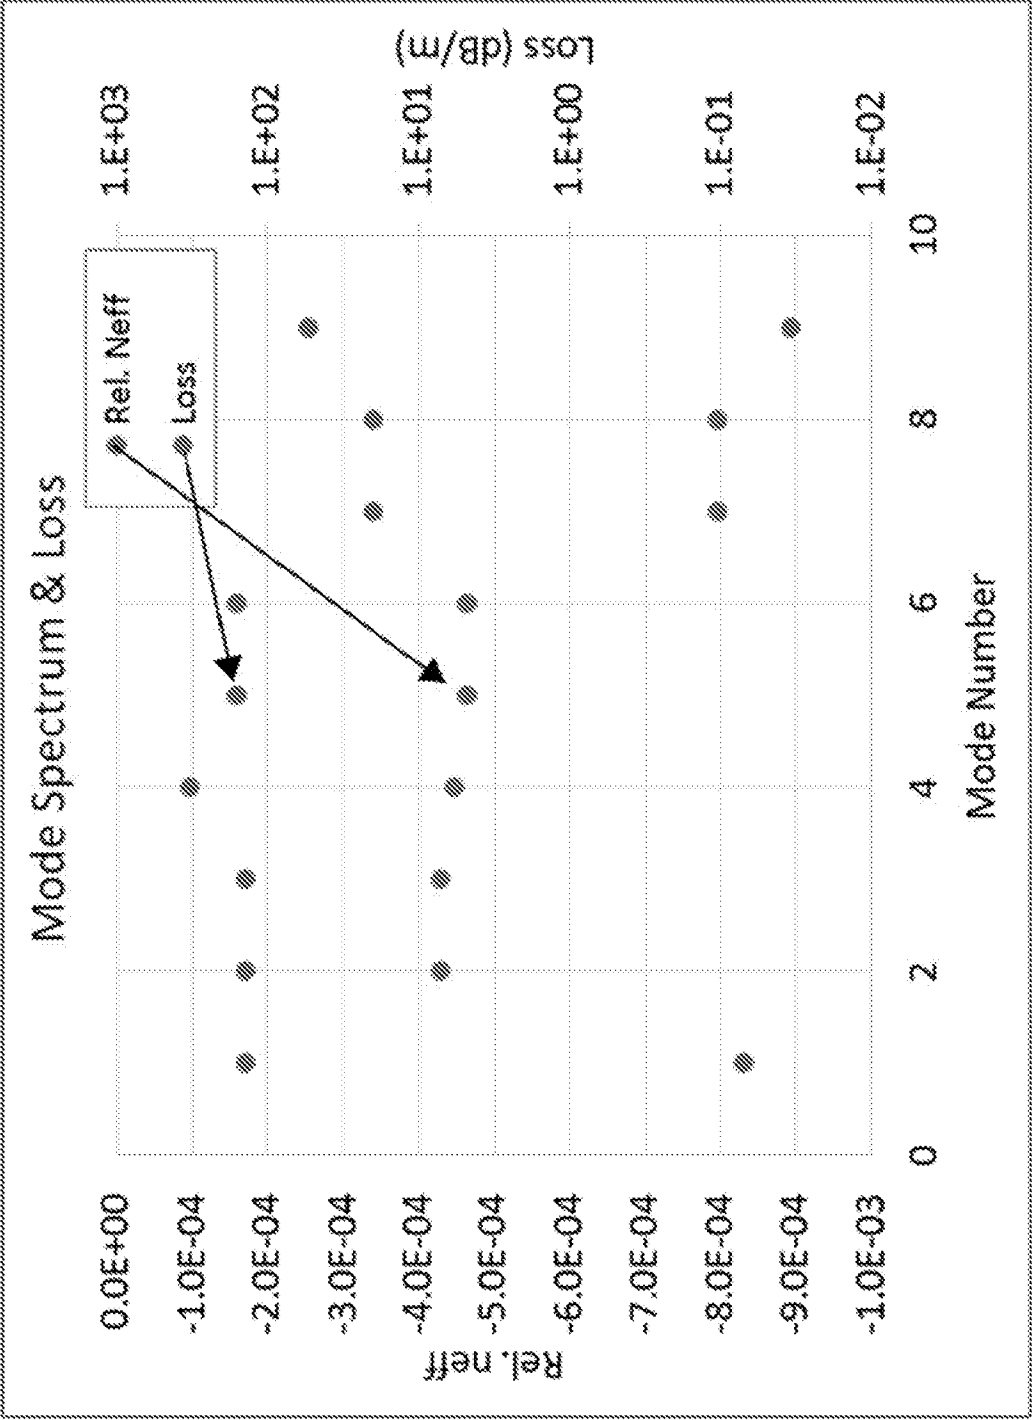


FIG. 6E

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2020/034213**A. CLASSIFICATION OF SUBJECT MATTER****G02B 6/02(2006.01)i, G02B 6/028(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G02B 6/02; G02B 6/26; H01S 3/30; G02B 6/028

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: fiber, high order, refraction, reflection, numerical aperture, thickness

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2015-144181 A1 (NKT PHOTONICS A/S) 01 October 2015 Page 12, line 4 - page 17, line 6; claims 1, 7, 29-32; and figures 2a-2b	1-15
Y	US 2008-0050069 A1 (PETER M.W. SKOVGAARD et al.) 28 February 2008 Paragraphs [0126]-[0127], [0212]; and figures 1-2, 15b	1-15
Y	US 2007-0009216 A1 (PHILIP ST. JOHN RUSSELL et al.) 11 January 2007 Paragraphs [0034]-[0037]	7
A	US 2009-0080469 A1 (THOMAS NIKOLAJSEN) 26 March 2009 Paragraphs [0179]-[0190]; claims 72-92; and figures 3a-7, 13a-14	1-15
A	WEI DING et al, Analytic model for light guidance in single-wall hollow-core anti-resonant fibers, Optics Express, Volume 22, Issue 22, pages 27242-27256, 03 November 2014 [Retrieved: 21 October 2020] from [https://doi.org/10.1364/OE.22.027242] Pages 27244-27246; and figure 2	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

09 November 2020 (09.11.2020)

Date of mailing of the international search report

09 November 2020 (09.11.2020)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

KANG MIN JEONG

Telephone No. +82-42-481-8131



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2020/034213

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2015-144181 A1	01/10/2015	CN 106255907 A	21/12/2016
		CN 106255907 B	24/01/2020
		CN 110989071 A	10/04/2020
		EP 3123216 A1	01/02/2017
		EP 3123216 A4	22/11/2017
		JP 2017-514161 A	01/06/2017
		JP 2020-074045 A	14/05/2020
		JP 6659565 B2	04/03/2020
		KR 10-2016-0138196 A	02/12/2016
		US 10274672 B2	30/04/2019
		US 10698155 B2	30/06/2020
		US 2018-0217323 A1	02/08/2018
		US 2019-0324197 A1	24/10/2019
US 2008-0050069 A1	28/02/2008	EP 2005228 A1	24/12/2008
		EP 2005228 B1	06/10/2010
		EP 2005538 A2	24/12/2008
		EP 2005538 B1	25/02/2015
		US 2009-0103874 A1	23/04/2009
		US 2009-0202204 A1	13/08/2009
		US 7532792 B2	12/05/2009
		WO 2007-107163 A1	27/09/2007
		WO 2007-107164 A2	27/09/2007
		WO 2007-107164 A3	08/11/2007
US 2007-0009216 A1	11/01/2007	US 2005-0276556 A1	15/12/2005
		US 2006-0088260 A1	27/04/2006
		US 2006-0177187 A1	10/08/2006
		US 2008-0138023 A1	12/06/2008
		US 7305164 B2	04/12/2007
		US 7321712 B2	22/01/2008
		US 7346249 B2	18/03/2008
		US 7532798 B2	12/05/2009
		US 7805038 B2	28/09/2010
		WO 2004-057391 A1	08/07/2004
		WO 2004-057392 A1	08/07/2004
		WO 2004-057393 A1	08/07/2004
		WO 2004-057394 A1	08/07/2004
		WO 2004-083918 A1	30/09/2004
		WO 2004-083919 A1	30/09/2004
		WO 2004-113979 A1	29/12/2004
US 2009-0080469 A1	26/03/2009	EP 1902336 A2	26/03/2008
		US 7813603 B2	12/10/2010
		WO 2007-006317 A2	18/01/2007
		WO 2007-006317 A3	08/05/2008