

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 July 2005 (07.07.2005)

PCT


(10) International Publication Number  
WO 2005/060793 A1

- (51) International Patent Classification<sup>7</sup>: A47C 1/02
- (21) International Application Number: PCT/US2004/040979
- (22) International Filing Date: 8 December 2004 (08.12.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
 

60/529,686	15 December 2003 (15.12.2003)	US
60/589,297	20 July 2004 (20.07.2004)	US
10/964,306	13 October 2004 (13.10.2004)	US
- (71) Applicant (for all designated States except US): BE AEROSPACE, INC. [US/US]; 1400 Corporate Center Way, Wellington, FL 33414 (US).
- (72) Inventors: DOWTY, Mark, Brian [US/US]; 8424 Monticello Ridge Drive, Rural Hall, NC 27045 (US). SKELLY, Trevor, B. [GB/US]; 1749 Huntington Woods Court, Winston-Salem, NC 27103 (US). PENLEY, James, Randy [US/US]; 2125 Benwicke Drive, Pfafftown, NC 27040 (US). GRAULS, Alexander, Filip [BE/FR]; Rue du Mourival, F-81800 Couffouloeux (FR). KINNIER, Edgar, Owen [US/US]; 2900 Ormond Drive, Winston-Salem, NC 27106 (US). JOHNSON, Glenn, A. [GB/US]; 120 Kathleen, King, NC 27021 (US). PRINCIP, Michael [US/US]; 426 E. 4th Street, Winston-Salem, NC 27101 (US). MCKELVEY, Gary, William [US/US]; 4406 Rawlins Street, Dallas, TX 75219 (US).
- (74) Agents: ADAMS, Thad, W. et al.; Adams Evans, P.A., 2180 Two Wachovia Center, Charlotte, NC 28282 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,

[Continued on next page]

(54) Title: VEHICLE SEATING WITH PROTECTED LIVING SPACE

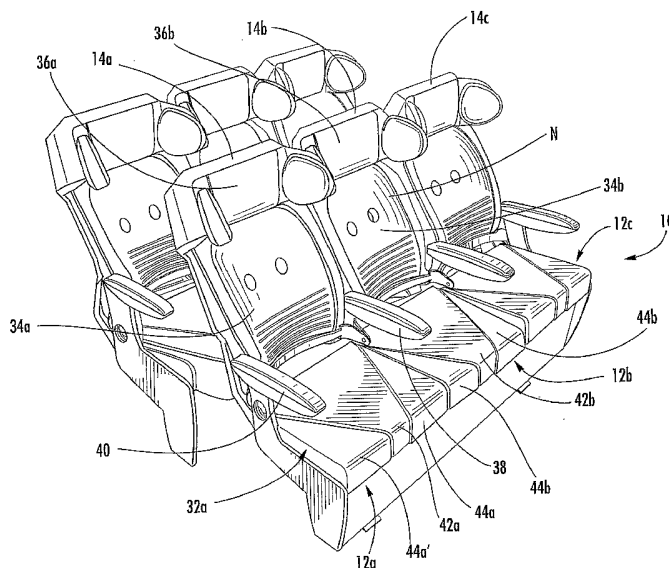

(57) Abstract: A passenger arrangement for a vehicle includes a plurality of seats each having a backshell, a seat back, and a seat bottom. The seat back and the seat bottom are selectively movable in a coordinated manner from an upright seating position to at least one alternate seating position. The seats are disposed within a vehicle separated by a selected pitch equal to or greater than about 71 cm and less than about 140 cm in a fore-and-aft direction, such that each passenger is allotted a preselected volume of living space defined between the backshell of the passenger's seat and the backshell of the seat immediately forward of the passenger's seat. The living space of each passenger remains fixed regardless of the seating position of any of the seats.

WO 2005/060793 A1



PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## VEHICLE SEATING WITH PROTECTED LIVING SPACE

Cross-reference to Related Applications

[0001] This application claims the benefit of U.S. Provisional Application No. 60/529,686 filed December 15, 2003, U.S. Provisional Application No. 60/589,297, filed July 20, 2004, and U.S. Patent Application No. 10/964,306, filed October 13, 2004.

Technical Field and Background of the Invention

[0002] This invention relates generally to seating and more particularly to a tourist/coach class aircraft seating arrangement. Aircraft seating is typically divided into various classes, for example first class, business class, and coach or tourist class. For each class of seating, an individual passenger is allotted a preselected amount of space (both area and volume). First-class seats provide the most individual space, and also may include features to improve comfort, such as fully reclining sleeper functions. In contrast, the tourist/coach class is provided with a relatively small amount of space, in order to provide the most efficient transportation and lowest cost. For example, the longitudinal space or "pitch" of the seat rows may be as little as 71 cm (28 in.) However, this space limitation in combination with the seat design can create a very ineffective environment for either working (e.g.: on a lap top computer) or sleeping/stretching (lack of comfort). This lack of effectiveness can result in passenger frustration. In addition, passengers sitting in a row directly forward of another passenger can "recline" their seat into the "living space" of the passenger behind, resulting in a lack of harmony between passengers and a phenomenon known as "air rage". The lack of passenger effectiveness and harmony between rows of passengers results in economy class travel being frequently considered as a "bad experience". Modern aircraft are increasingly capable of longer flight segments, thus, the ability to create a more "effective" environment within economy class travel, allowing passengers to adopt multiple postures such as sleep and creating better harmony between passengers during long flights is increasingly important.

[0003] One of the primary factors causing angst among passengers is the act of reclining a seat into the living space of another passenger. Another is the natural

competition for armrest space resulting from shared armrests. To alleviate the anger generated within a cabin due to the competition for living space, inventors have conceptualized items that modify FAA certified seating to restrict or eliminate the recline of the seat directly in front of them. Passengers also use violence and intimidation, to regain their living space at the expense of the passenger sitting directly in front of them.

[0004] To alleviate discomfort, it is advantageous for a passenger to sit or lie in various positions during a flight. Overall, with longer flight segments, passengers find it necessary to adopt an increasing number of postures and undertake an increasing number of activities. Such activities include but are not limited to, sitting upright, reclining, watching a movie, working on a lap top computer, stretching or slouching, sleeping, and "perching". Unfortunately, conventional coach class seats do not readily accommodate positions other than simple sitting in the upright or reclined positions, and the amount of recline is limited by the above-mentioned seat pitch.

[0005] Accordingly, it is an object of the invention to provide a passenger seating arrangement in which each passenger's living space is fixed regardless of the position of any of the seats.

[0006] It is another object of the invention to provide a passenger seating arrangement in which a fixed living space is provided even with a very small pitch between seats.

[0007] It is another object of the invention to provide a passenger seat which enables a passenger to recline without raising or lowering his or her center of gravity.

#### Brief Summary of the Invention

[0008] These and other objects are met by the present invention, which in one embodiment provides a passenger seating arrangement for a vehicle, including: a plurality of seats each having a backshell, a seat back, and a seat bottom, the seat back and seat bottom being selectively movable in a coordinated manner from an upright

seating position to at least one alternate seating position. The seats are disposed within the vehicle separated by a selected pitch of equal to or greater than about 71 cm and less than about 140 cm in a fore-and-aft direction, such that each passenger is allotted a preselected volume of living space defined between the backshell of the passenger's seat and the backshell of the seat immediately forward of the passenger's seat. The living space of each passenger remains fixed regardless of the seating position of any of the seats.

[0009] According to another embodiment of the invention, each of the backshells is fixed.

[0010] According to another embodiment of the invention, the seats are disposed in laterally-extending rows which are spaced-apart from each other by the pitch.

[0011] According to another embodiment of the invention, the pitch is about 79 cm.

[0012] According to another embodiment of the invention, the seat back and seat bottom of each of the seats are selectively movable in a coordinated manner between an upright seating position and a reclined seating position. A center of gravity of a passenger seated in the seat remains at a substantially constant height above a floor of the vehicle when the seat is moved between the upright position and the reclined seating position.

[0013] According to another embodiment of the invention, each of the passenger seats further comprises a headrest mounted to the backshell at a position above the seat back.

[0014] According to another embodiment of the invention, each of the seat backs is a compound-curved member having a plurality of spaced-apart lateral elements.

[0015] According to another embodiment of the invention, a passenger seating arrangement for a vehicle includes a plurality of seats each having a fixed, upwardly-extending backshell having a rearwardly-inclined surface; a seat bottom which is selectively translatable fore and aft relative to the backshell; and a seat back having a

lower end pivotally attached to the seat bottom and an upper end which slidably engages the backshell. The seat back and seat bottom are selectively movable in a coordinated manner from an upright seating position to a reclined seating position in which, relative to the upright seating position, the seat bottom and the seat back are disposed in a forward-translated position and the seat back is disposed in a tilted-backwards position. The seats are disposed within the vehicle separated by a selected pitch in a fore-and-aft direction, such that each passenger is allotted a preselected volume of living space defined between the backshell of the passenger's seat and the backshell of the seat immediately forward of the passenger's seat. The living space of each passenger remains fixed regardless of the seating position of any of the seats.

[0016] According to another embodiment of the invention, the seat back is enabled to enter the reclined position by the interaction of the upper end of the seat back with the inclined surface.

[0017] According to another embodiment of the invention, a passenger set for a vehicle includes a frame for being attached to a floor of the vehicle; a fixed backshell mounted to the frame; a movable seat back inserted into the backshell; and a movable seat bottom attached to the frame. The seat back and seat bottom are selectively movable in a coordinated manner between an upright seating position and a reclined seating position. A center of gravity of a passenger seated in the seat remains at a substantially constant height above the floor when the seat is moved between the upright position and the reclined seating position.

[0018] According to another embodiment of the invention, the backshell includes an inclined section; the seat back has an upper end which bears against the inclined section, and a lower end which is pivotally attached to an aft end of the seat bottom; and the seat bottom is selectively translatable forward and aft relative to the backshell, such that translatory motion of the seat bottom causes translatory motion of seat back relative to the inclined section, which in turn changes a tilt angle of the seat back.

Brief Description of the Drawings

[0019] The subject matter that is regarded as the invention may be best understood by reference to the following description taken in conjunction with the accompanying drawing figures in which:

[0020] Figure 1A is a perspective view of a passenger seat set constructed in accordance with the present invention, disposed in an upright sitting position;

[0021] Figure 1B is a perspective view of the passenger seat set of Figure 1, with one of seats disposed in a reclined position;

[0022] Figure 1C is a perspective view of the passenger seat set of Figure 1, with one of seats disposed in a "slouching" position;

[0023] Figure 1D is a perspective view of the passenger seat set of Figure 1, with one of seats disposed in a "side sleep" position;

[0024] Figure 1E is a perspective view of the passenger seat set of Figure 1, with one of seats disposed in a "perch" position;

[0025] Figure 2 is rear perspective view of the passenger seat set of Figure 1;

[0026] Figure 3 is a schematic side view of two adjacent seat rows;

[0027] Figure 4 is a perspective view of a seat frame and attached backshells;

[0028] Figure 5 is a perspective view of a seat back and perimeter frame;

[0029] Figure 6 is front view of a partially disassembled seat, showing the internal construction thereof;

- [0030] Figure 7 is front view of a seat bottom having a pivoted support wing;
- [0031] Figure 8 is a side view of the upper portion of a seat back;
- [0032] Figure 9 is a perspective view of a headrest;
- [0033] Figure 10 is another perspective view of a headrest;
- [0034] Figure 11 is a perspective view of a seat; and
- [0035] Figure 12 is a perspective view of a seat incorporating a shoulder harness attached thereto.

#### Description of the Preferred Embodiment and Best Mode

[0036] Referring to the drawings wherein identical reference numerals denote the same elements throughout the various views, Figures 1A-1E, 2, and 3 illustrate an exemplary passenger seat set 10. 6 In the illustrated example, the seat set 10 includes three seats 12a, 12b, and 12c, which are supported by rigid backshells 14a, 14b, and 14c, respectively, each of which includes a stationary video screen 13 and a folding tray table 15. In contrast to prior art seats, the backshells 14a, 14b, and 14c are contoured with sculpted clearance areas 16 and 17 to provide room for the knees of an aft-seated passenger. The seats 12 could alternatively be arranged as single units or in side-by-side units of any number of adjacent seats. The backshells 14a, 14b, and 14c are attached to and supported by a transverse main beam 18 in a cantilevered fashion. The main beam 18 is attached to leg units 20 and 22 that are in turn mounted to the floor of the vehicle. The main beam 18 is depicted here as an "I" section member, but the shape is not critical and may be varied. For example, a hollow cross-section (not shown) may

be used. Each leg unit 20 and 22 includes a longitudinal bottom member 24, a vertical upright member 26, and a longitudinal top member 28, which may all be part of a single unitary component. The leg units 20 and 22 may be tied together by a transverse front beam 30, which may be a hollow box-section member suitable for containing electronics or other seat-related equipment (not shown). The main beam 18 and the leg units 20 and 22 cooperatively define a seat frame.

[0037] The seats 12a, 12b, and 12c are substantially identical to each other, accordingly any part of the following description specifically referring to one of the seats 12a, 12b, or 12c, or to the components thereof, may be taken to apply to the other seats as well. The seat 12a includes a seat bottom 32a, a seat back 34a, and a headrest 36a. Armrests 38 and 40 are positioned on opposite sides of the seat 12a. One or more of the armrests 38 and 40 may be shared with the adjacent seat 12b in the seat set 10. The armrests 38 and 40 are moved forward from the backshell 14a so that no gap is required between adjacent backshells 14. This helps create the space needed to accommodate the living-space protected postures described below. The seat bottom 32a includes a central portion 42a and at least one support wing 44a. In the illustrated example, a pair of support wings 44a and 44a' are pivotally attached to the central portion 42a at angled hinge lines.

[0038] The seat 12a allows a passenger seated therein to reconfigure the seat 12a to achieve a number of different sitting postures (which are described in detail below) while ensuring that the living space of the individual passengers are mutually protected from each other. In each of these configurations, no part of the seat 12a extends

beyond the backshell 14a or the backshell of the seat which is positioned directly in front of the seat 12a. In contrast to prior art seats, these protected living space postures are possible even though the seat rows are mounted with a very small longitudinal spacing or pitch, denoted "P". The pitch P is set according to the wishes of the individual aircraft operator. In the illustrated example, the pitch P will be in the accepted range for "coach class" seats which have not heretofore had the capability of providing multiple postures with fixed living space. This range for the pitch "P" is about 79 cm (31 in.) to about 92 cm (36 in.), and more typically about 81 cm (32 in.) to about 86 cm (34 in.) The seats 12 may also be spaced at an even smaller pitch by limiting their motion somewhat, for example about 71 cm (28 in.) For comparison, it is noted that the accepted pitch between prior art business-class seats is substantially larger, for example about 140 cm (55 in.) or greater. The seat 12a may be reconfigured by various means. For example, the moving components of the seat 12a may be connected to actuators which operate in response to commands from individual switches or a control unit. Alternatively, individual manual controls may be provided for the various seat components.

[0039] Figure 1A shows the seat 12a configured for a regular sitting posture. In this configuration, the seat bottom 32a is at its most rearward location, the seat back 34a is at its most upright position against the backshell 14a, and the headrest 36a is in a raised position. The passenger is comfortably supported in the regular sitting posture by the cushioning of the headrest 36a and the seat bottom 32a, and the flexing action of the seat back 34a, described in more detail below. The seat bottom 32a may be equipped with a "waterfall" feature, described in more detail below, which allows the

effective front-to-rear length of the seat bottom 32a to be selectively reduced for increased passenger comfort. Because the backshell 14a of the passenger's seat 12a and those of all the surrounding seats are rigid and do not move, the passenger's individual allotted space is protected from intrusion of the other passengers.

[0040] Figure 1B shows the seat 12a configured for a "reclined" posture. The seat bottom 32a is translated forward relative to the backshell 14a. The clearance areas 16 and 17 of the backshell 14a and the forward-positioned armrests of the seat positioned ahead of seat 12a accommodate the passenger's knees and thus allow the passenger in the seat 12a to move farther forward than would otherwise be possible. The bottom end of the seat back 34a is pulled forward along with the seat bottom 32a, and the upper end of the seat back 34a moves down the surface of the backshell 14a, in a manner discussed in more detail below. The seat back 34a thus moves forward while tilting backwards into a reclined position. The head rest 36a may also be lowered, either manually or automatically in unison with the motion of the seat back 34a, so that the head rest 36a maintains a constant relative height compared to the upper end of the seat back 34a. Throughout the recline motion, the seat back 34a is restrained by the backshell 14a and does not move aft, thus it does not intrude into the space of a passenger seated behind seat 12a. This recline position is achieved without the need to lower the passenger's center of gravity. Thus, no special equipment is needed to lift the passenger, unlike prior art designs which lower the passenger's center of gravity, and thus have to generate a "return" force sufficient to lift the weight of the heaviest anticipated passenger, in order to return to the upright position.

[0041] Figure 1C shows the seat 12a configured for a "slouch" or "slump" posture. The seat bottom 32a is translated yet further forward relative to the backshell 14a as compared to the "reclined" position. The bottom end of the seat back 34a is pulled farther forward along with the seat bottom 32a, and the upper end of the seat back 34a moves further down the surface of the backshell 14a. The front edge of the seat bottom 32a is lowered. This configuration allows the passenger to stretch out his or her body and legs, and makes it easier for the passenger to place his or her feet beneath the seat bottom of the seat mounted forward of the seat 12a.

[0042] Figure 1D shows the seat 12a configured for a "side sleep" or "fetal" posture. In this configuration, the seat bottom 32a is translated forward and its front edge is lowered, and the seat back 34a is pivoted back as for the "slouch" posture. The seat back 34a is rotated about a line essentially parallel to the passenger's spine, thus creating a shoulder niche "N". One of the support wings 44a of the seat bottom 32a is pivoted upward along the hinge line 46, depending on the direction the passenger wishes to turn. The head rest 36b about a generally longitudinal axis, causing the side of the headrest 36a towards the direction of the passenger's roll to be lowered towards the shoulder niche N. This position allows the passenger to stretch out vertically, creates a suitable shoulder resting area and headrest, supports the passenger's hips in the rotated position, and prevents the passenger from slipping down off of the seat 12a. The passenger may thus remain in the sleeping position without requiring any muscular activity. It is noted that the support wings 44 need not be hinged. Any structure with allows a portion of the seat bottom 32a to effectively lift upward to support the passenger's in a rotated position may be used. For example, the hinged support wings

44a may be replaced with cushions which can be selectively inflated to create an effectively raised support wing.

[0043] Figure 1E shows the seat 12a configured for a "perching" posture as follows. The seat bottom 12a is translated backwards and rotated upwards into a raised position. In the raised position the back edge of the seat bottom 32a provides a surface for the passenger to prop against, much the same as sitting on a raised stool. As well as providing an alternative posture, the perch position may be used to facilitate ingress or egress between seat rows by substantially reducing the effective front-to-back length of the seat bottom 32a.

[0044] Figures 4-11 illustrate an example of how the internal construction of the seat 12a may be arranged. Referring to Figure 11, The seat 12a includes a rigid bottom perimeter frame 48 which is connected to the rigid backshell 14a so that it can translate forwards and backwards with respect thereto, for example using slide rail assembly 50. The bottom perimeter frame 48 is covered by a flexible seat pan 52 (removed for clarity in Figure 11) and a padded bottom cushion (not shown). The bottom perimeter frame 48 is attached to the main beam 18 so that its front end can be selectively raised and lowered to positions above or below horizontal, for example it may be allowed to rock on spaced apart bottom frame pivots 54 and 56.

[0045] Referring to Figure 6, the seat pan 52 includes a pair of angled hinge lines 58 defining a pair of flaps 60 and 60' that form portions of the support wings 44a and 44a'. Each of the flaps 60 and 60' overlies a left or right support lever 62 or 64, respectively.

The support levers 62 and 64 can be individually pivoted to either a lowered position or a raised position (see Figure 7), and there are provisions for maintaining the support levers 62 and 64 in the selected position. In the raised position, the selected flap 60 or 60' is pivoted upward to support the passenger's hip and thigh as described above. The seat bottom 32a may also incorporate a front "waterfall" feature. Specifically, a portion of the front edge of the bottom perimeter frame 48 may be constructed so that it can be selectively folded downwards, thus allowing the seat pan 52 to curl downwards under the passenger's weight and reduce the effective front-to-back length of the seat bottom. In the illustrated example, a hinged lateral support bar 66 (see Figure 11) is disposed between the support levers 62 and 64 and the front edge of the seat pan 52. Both support levers 62 and 64 may be pivoted downwards simultaneously along with the support bar 66.

[0046] A rigid back perimeter frame 68 (see Figure 5) is connected to the bottom perimeter frame 48 at back pivots 70 and 70'. The upper end of the back perimeter frame 68 includes rollers 72 or other suitable structure which bear against the backshell 14a and allow the back perimeter frame 68 to slide up and down with respect thereto. The reclining motion of the seat back 34a is governed by the interaction of the rollers 72 with the backshell 14a as the bottom end of the seat back 34a is pulled forwards or backwards relative to the backshell 14a by the seat bottom 32a. The amount of recline (i.e. change in seat back tilt angle) for a given amount of motion of the seat bottom 32a may be thus be selected by appropriate contouring of the surface of the backshell 14a.

[0047] A backrest 74 is attached to the back perimeter frame 68. The backrest 74 is

a compound-curved member having a plurality of spaced-apart lateral elements 76. The entire backrest 74 is constructed of an appropriate resilient material such as plastic or synthetic rubber. The lateral elements 76 of the backrest 74 can flex individually to separate positions when a passenger sits in the seat 12a. This provides a relatively constant support to the passenger's spine while allowing for variance in the exact seating position. The backrest 74 may be enclosed by a dress cover 78 as shown in Figure 5.

[0048] Referring to Figures 6, 9 and 10, the headrest 36a is attached to the backshell 14a above the seat back 34a. The headrest 36a comprises a center portion 82 and two forward-angled side portions 84 and 84'. The entire headrest 36a is mounted so that it can rotate about a generally longitudinal axis. It may also be arranged to translate vertically. For example, as shown in Figure 8, a bar 86 may link the headrest 36a to the seat back 34a. A side pad 88 is mounted on each of the side portions 84 and 84a of the headrest 36a. Each side pad 88 is tapered in thickness and is centrally mounted so that it can both rotate about its center and move laterally relative to the side portion 84 or 84'. Rotation of the tapered side pad 88 has the effect of changing the angle at which it meets the passenger's head, even though the side portion 84 or 84' is not pivoted, and lateral motion of the side pad 88 changes the effective width of the head rest 36a, as shown in Figures 9 and 10.

[0049] Figure 12 illustrates a seat 12a' which incorporates a shoulder harness 90. The shoulder harness 90 may be connected to a lap belt 92 with a buckle 94 with the shoulder harness 90. The shoulder harness 90 restrains the passenger in his or her

own seat 12a during an impact, unlike prior art designs in which the seat forward of the passenger's seat 12a is expected to dissipate the impact of the passenger. Thus, the headpath trajectory of a passenger seated in the seat 12a during an impact is reduced. This allows the front row seat in each zone of an aircraft cabin to be placed closer to the forward bulkhead. This results in increased space in the cabin which can be used to provide addition seat rows or provide addition space (i.e. increased seat pitch) for some or all of the passengers.

[0050] The seating arrangement described above has multiple advantages over prior art seating arrangements. By virtue of the fixed backshell 14 with no conventional "aft recline", the last row in each of an aircraft cabin can be placed closer to the rear bulkhead of the zone, increasing the available room in the aircraft cabin.

[0051] It should be noted that the fixed living space described herein can be achieved in a number of alternate ways. For example, the backshells 14 may be configured to move, so long as it does not move aft. Alternatively, a backshell may be provided that is fixed for only part of its length, i.e. the upper portion of the backshell 14 may be allowed to recline while the lower part remains fixed.

[0052] The foregoing has described a seating arrangement having a features which allow a passenger to assume multiple postures within limited space constraints. These seat features may be combined with each other as desired to produce a seat having multiple comfort features. While specific embodiments of the present invention have been described, it will be apparent to those skilled in the art that various modifications

thereto can be made without departing from the spirit and scope of the invention. Accordingly, the foregoing description of the preferred embodiment of the invention and the best mode for practicing the invention are provided for the purpose of illustration only and not for the purpose of limitation.

## What Is Claimed Is:

1. A passenger seating arrangement for a vehicle, comprising:
  - a plurality of seats each having a backshell, a seat back, and a seat bottom, said seat back and seat bottom being selectively movable in a coordinated manner from an upright seating position to at least one alternate seating position;
  - said seats being disposed within said vehicle separated by a selected pitch equal to or greater than about 71 cm and less than about 140 cm in a fore-and-aft direction, such that each passenger is allotted a preselected volume of living space defined between the backshell of said passenger's seat and the backshell of the seat immediately forward of said passenger's seat;
  - wherein said living space of each passenger remains fixed regardless of the seating position of any of said seats.
  
2. The passenger seating arrangement of claim 1 wherein each of said backshells is fixed.
  
3. The passenger seating arrangement of claim 1 wherein said seats are disposed in laterally-extending rows which are spaced-apart from each other by said pitch.
  
4. The passenger seating arrangement of claim 1 wherein said pitch is about 79 cm.

5. The passenger seating arrangement of claim 1 wherein said seat back and seat bottom of each of said seats are selectively movable in a coordinated manner between an upright seating position and a reclined seating position; and

wherein a center of gravity of a passenger seated in said seat remains at a substantially constant height above a floor of said vehicle when said seat is moved between said upright position and said reclined seating position.

6. The seating arrangement of claim 1 wherein each of said passenger seats further comprises a headrest mounted to said backshell at a position above said seat back.

7. The seating arrangement of claim 1 wherein each of said seat backs is a compound-curved member having a plurality of spaced-apart lateral elements.

8. A passenger seating arrangement for a vehicle, comprising:

a plurality of seats each having:

a fixed, upwardly-extending backshell having a rearwardly-inclined surface;

a seat bottom which is selectively translatable fore and aft relative to said backshell; and

a seat back having a lower end pivotally attached to said seat bottom and an upper end which slidably engages said backshell, said seat back and seat bottom being selectively movable in a coordinated manner from an upright seating position to a reclined seating position in which, relative to said upright seating position, said seat bottom and said seat back are disposed in a forward-translated position and said seat

back is disposed in a tilted-backwards position;

said seats being disposed within said vehicle separated by a selected pitch in a fore-and-aft direction, such that each passenger is allotted a preselected volume of living space defined between the backshell of said passenger's seat and the backshell of the seat immediately forward of said passenger's seat;

wherein said living space of each passenger remains fixed regardless of the seating position of any of said seats.

9. The seating arrangement of claim 8 wherein said seat back is enabled to enter said reclined position by the interaction of said upper end of said seat back with said inclined surface.

10. The seating arrangement of claim 8 wherein each of said passenger seats further comprises a headrest mounted to said backshell at a position above said seat back.

11. The seating arrangement of claim 8 wherein each of said seat backs is a compound-curved member having a plurality of spaced-apart lateral elements.

12. A passenger seat for a vehicle, comprising:  
a frame for being attached to a floor of said vehicle;  
a fixed backshell mounted to said frame;  
a movable seat back inserted into said backshell and  
a movable seat bottom attached to said frame, said seat back and seat bottom

being selectively movable in a coordinated manner between an upright seating position and a reclined seating position;

wherein a center of gravity of a passenger seated in said seat remains at a substantially constant height above said floor when said seat is moved between said upright position and said reclined seating position.

13. The passenger seat of claim 12 wherein:

said backshell includes an inclined section;

said seat back has an upper end which bears against said inclined section, and a lower end which is pivotally attached to an aft end of said seat bottom; and

said seat bottom is selectively translatable forward and aft relative to said backshell, such that translatory motion of said seat bottom causes translatory motion of seat back relative to said inclined section, which in turn changes a tilt angle of said seat back.

14. The passenger seat of claim 12 wherein each of said passenger seats further comprises a headrest mounted to said backshell at a position above said seat back.

15. The seating arrangement of claim 12 wherein each of said seat backs is a compound-curved member having a plurality of spaced-apart lateral elements.



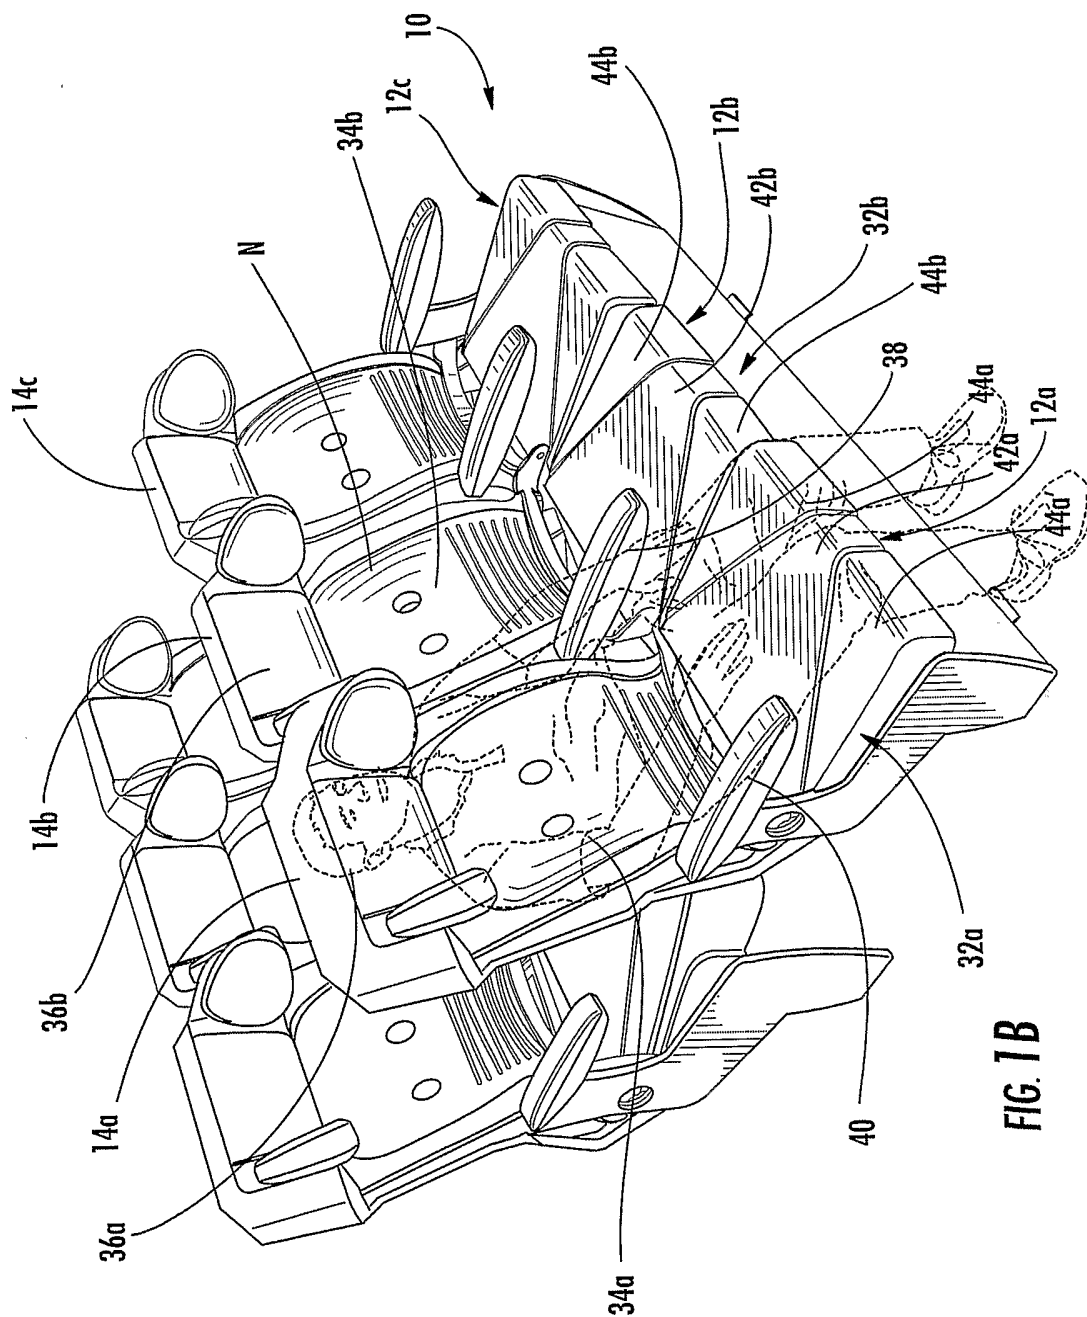


FIG. 1B

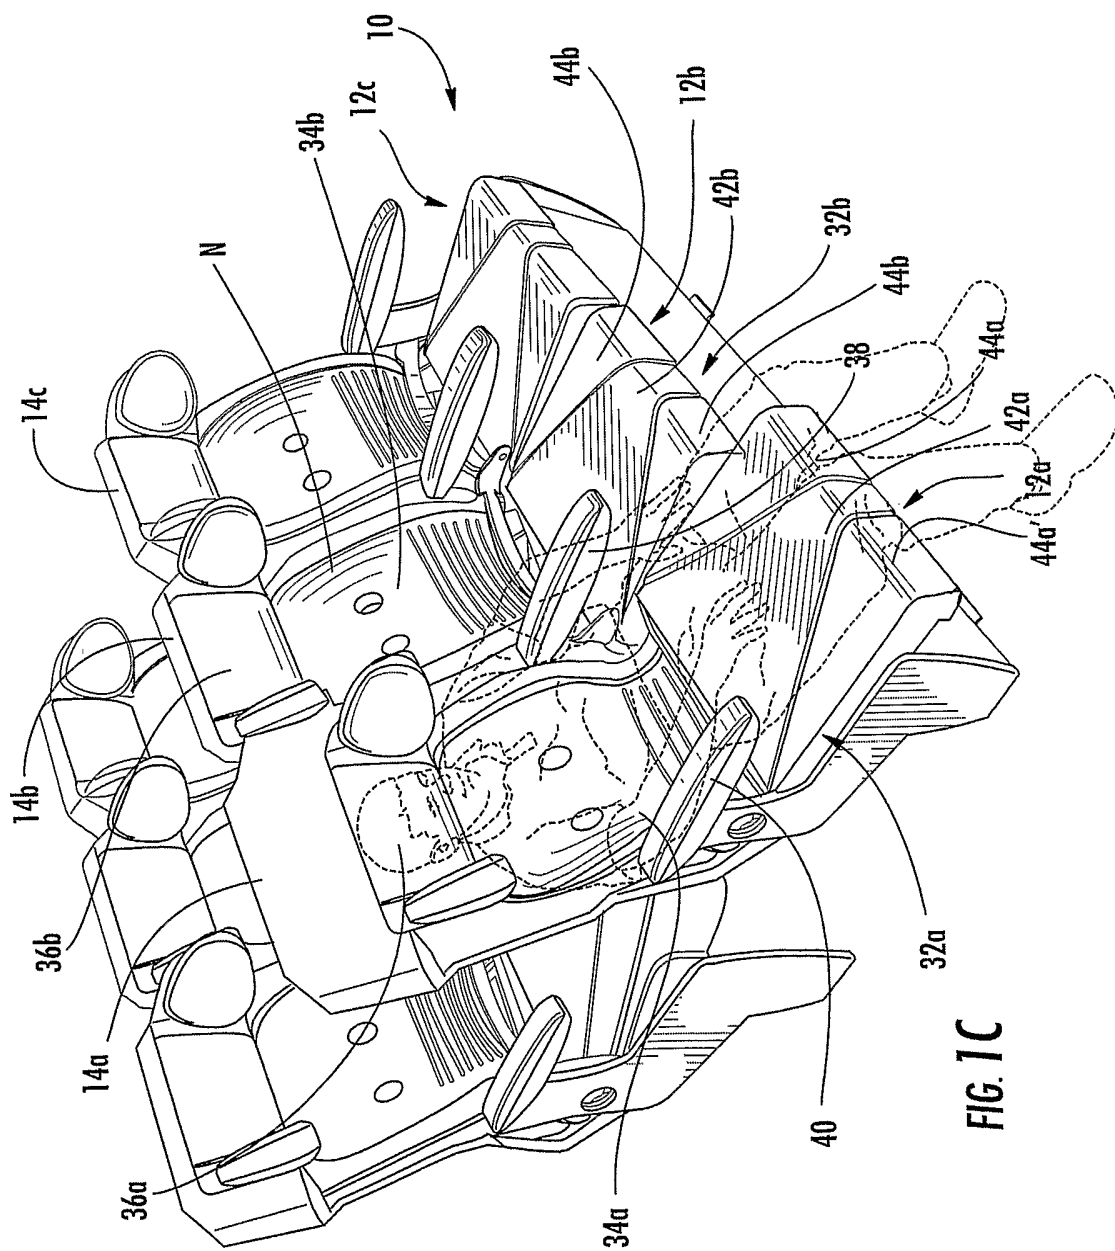


FIG. 1C

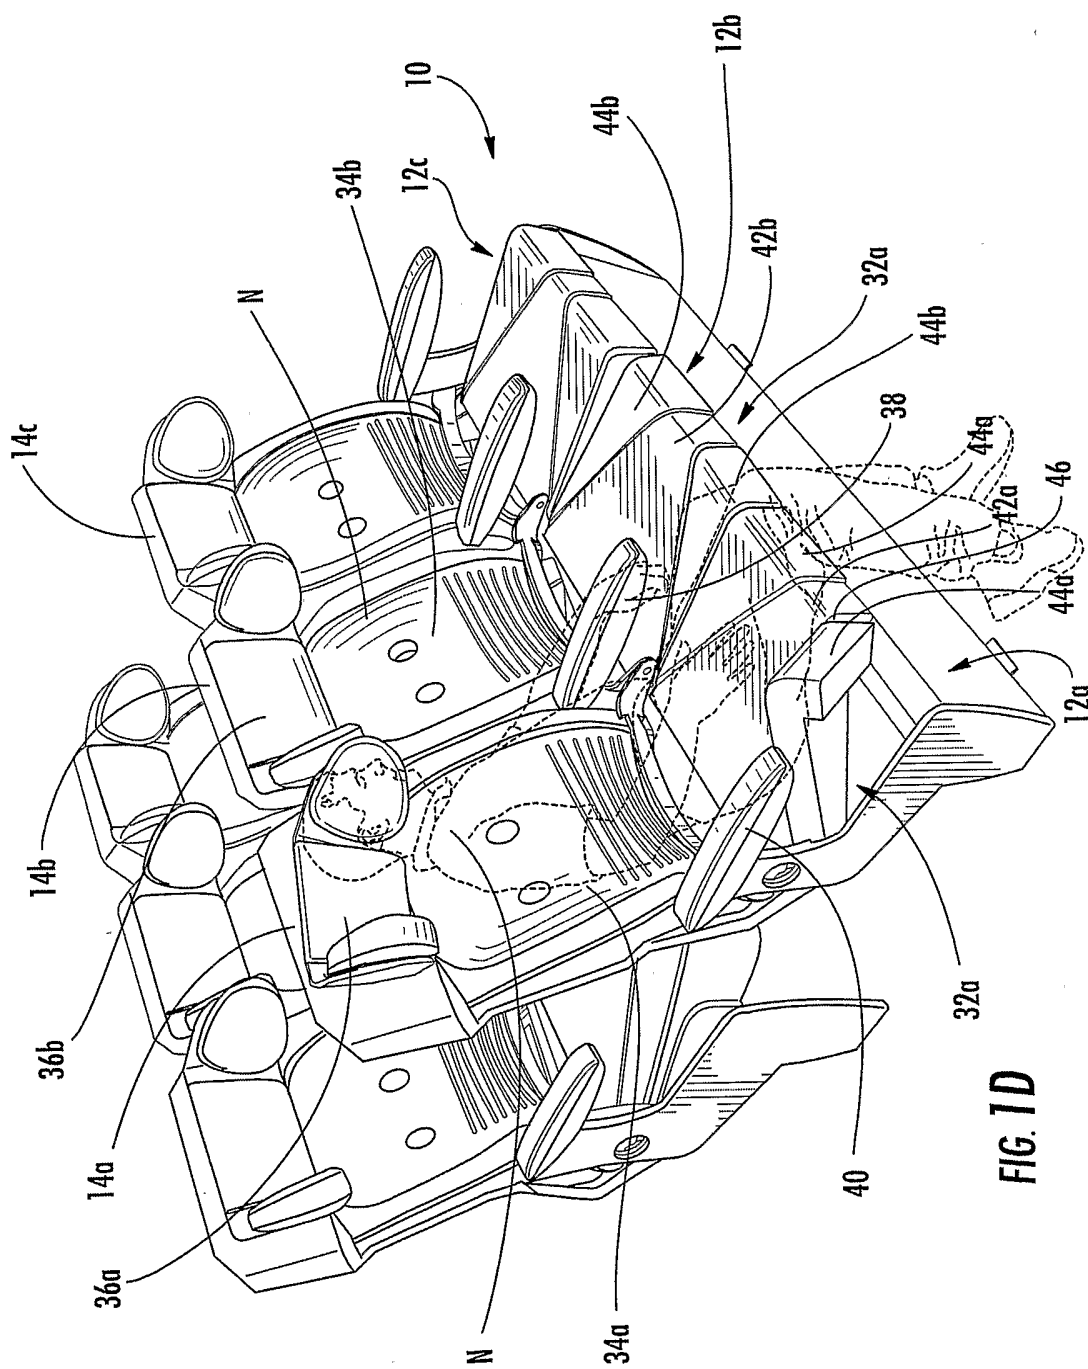


FIG. 1D



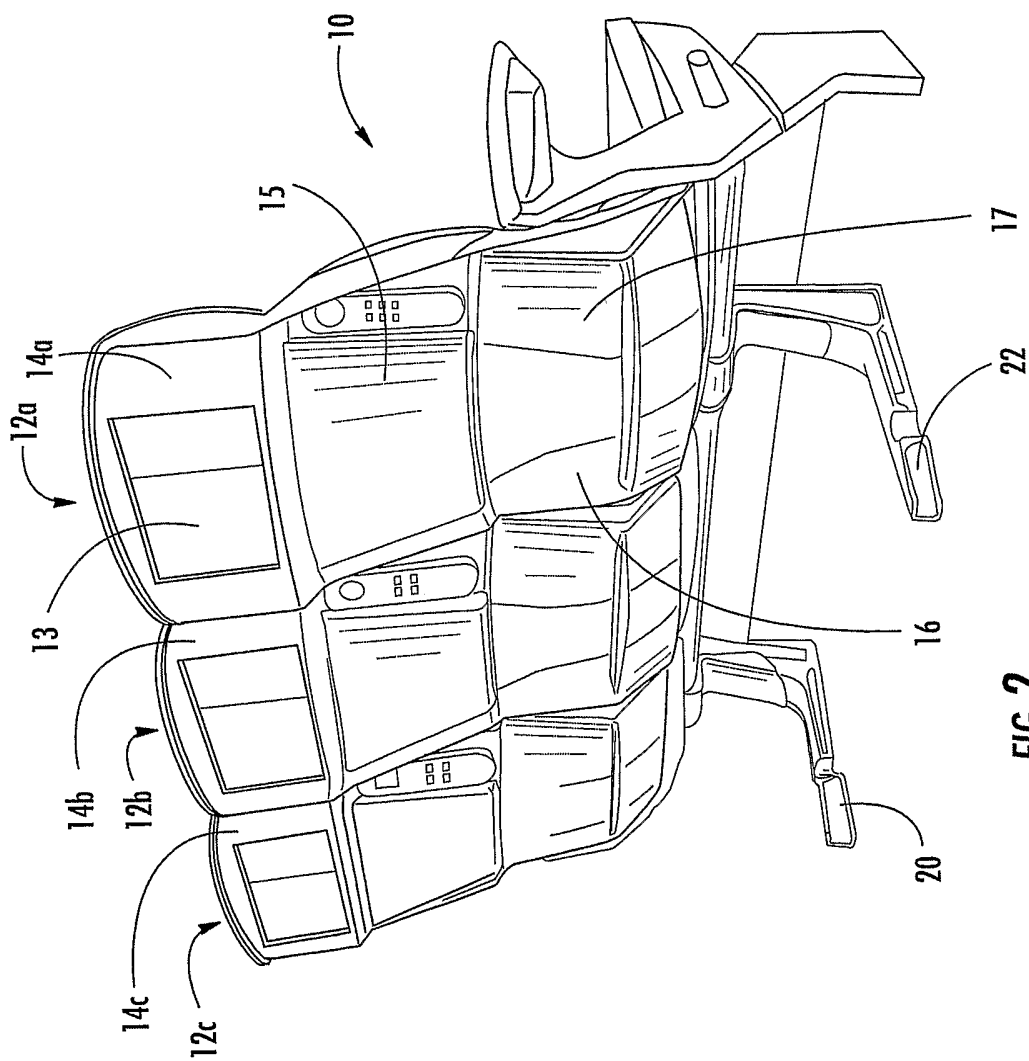


FIG. 2

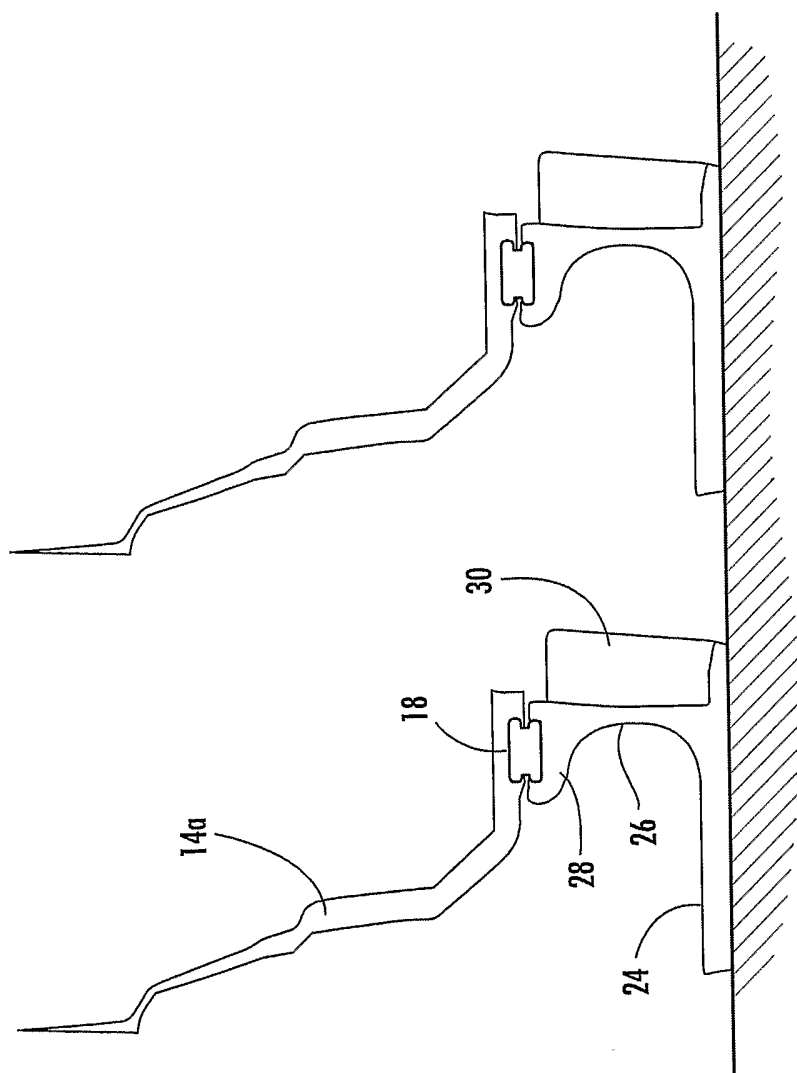


FIG. 3

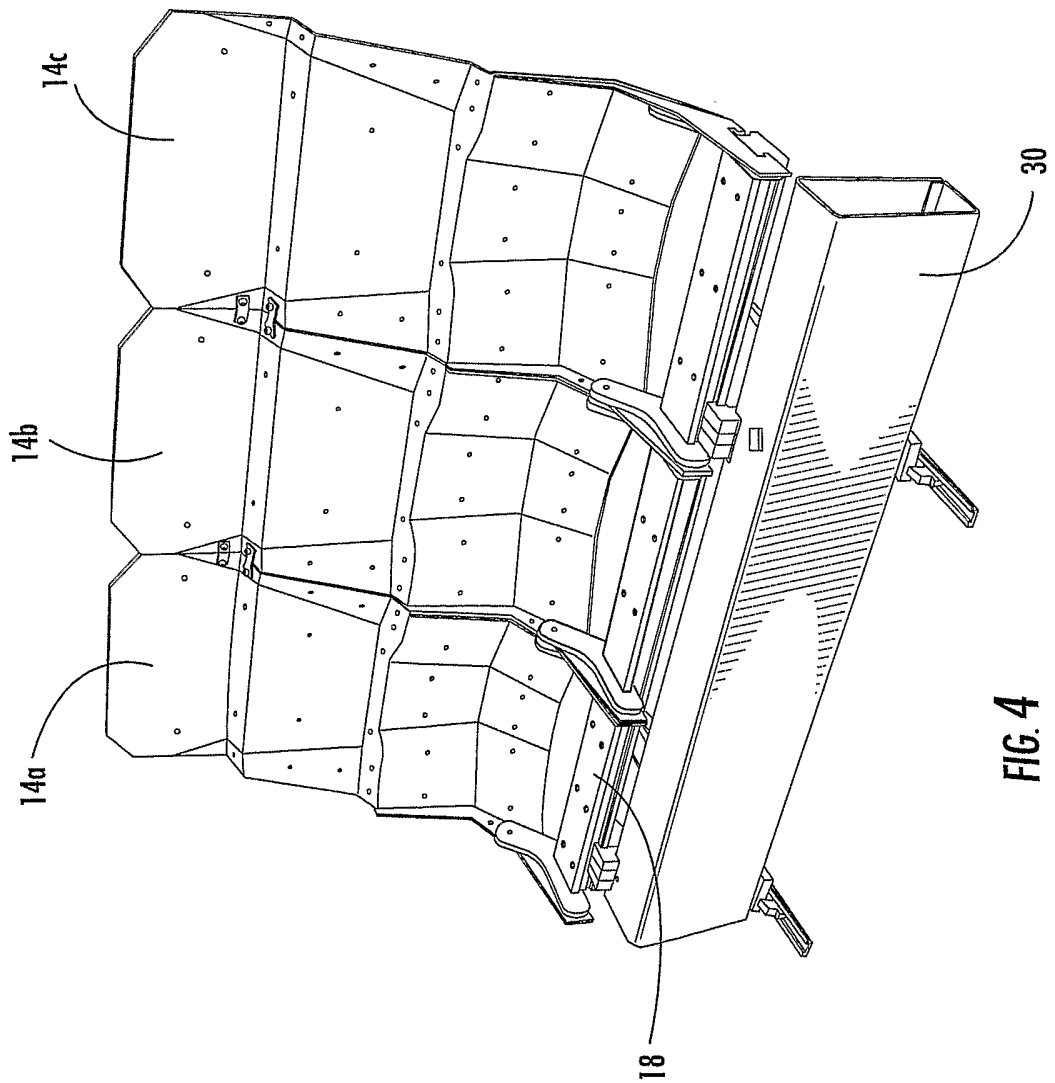


FIG. 4

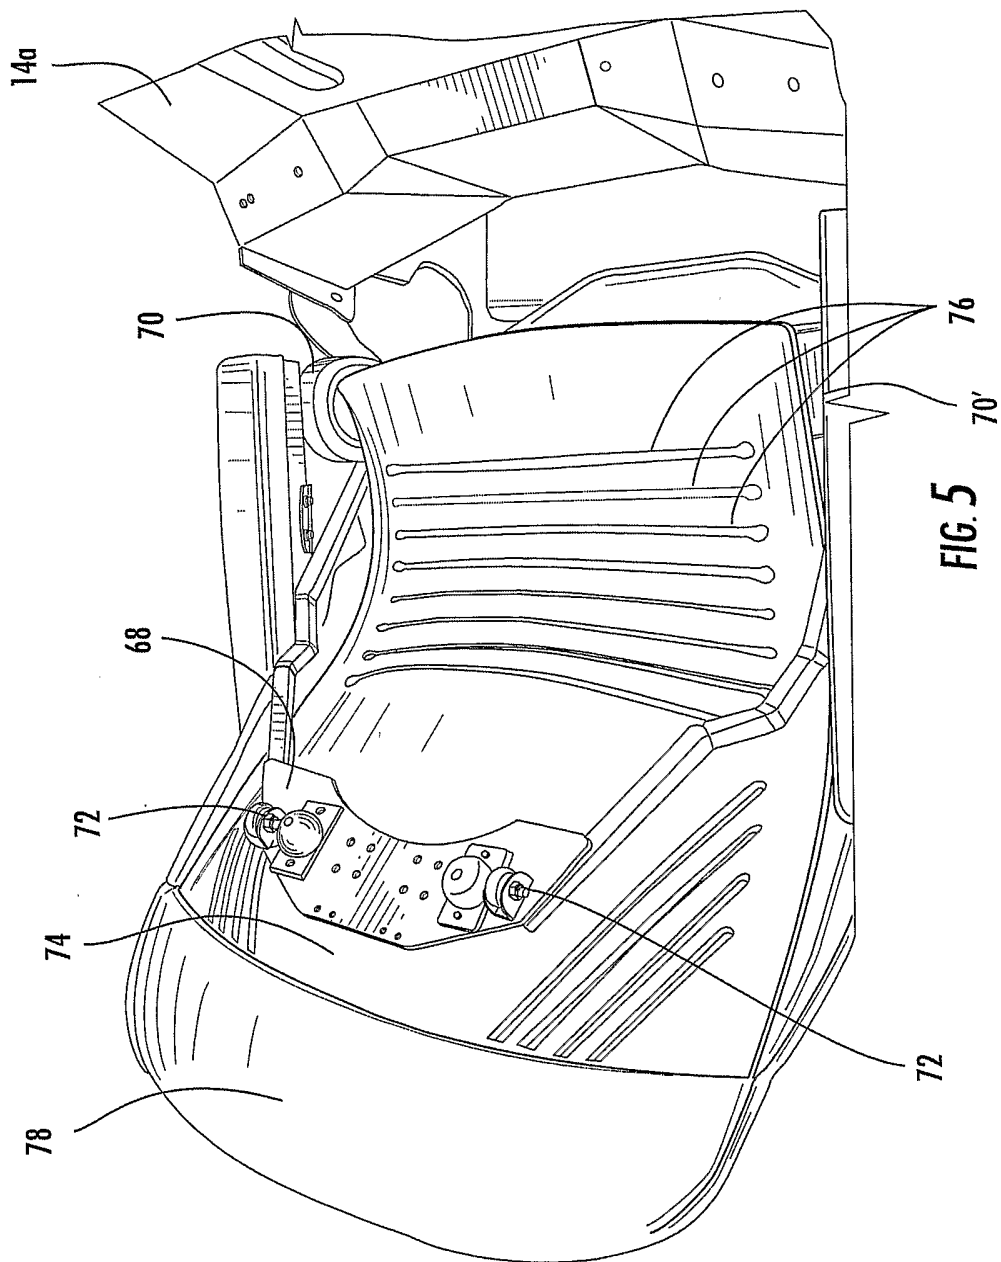
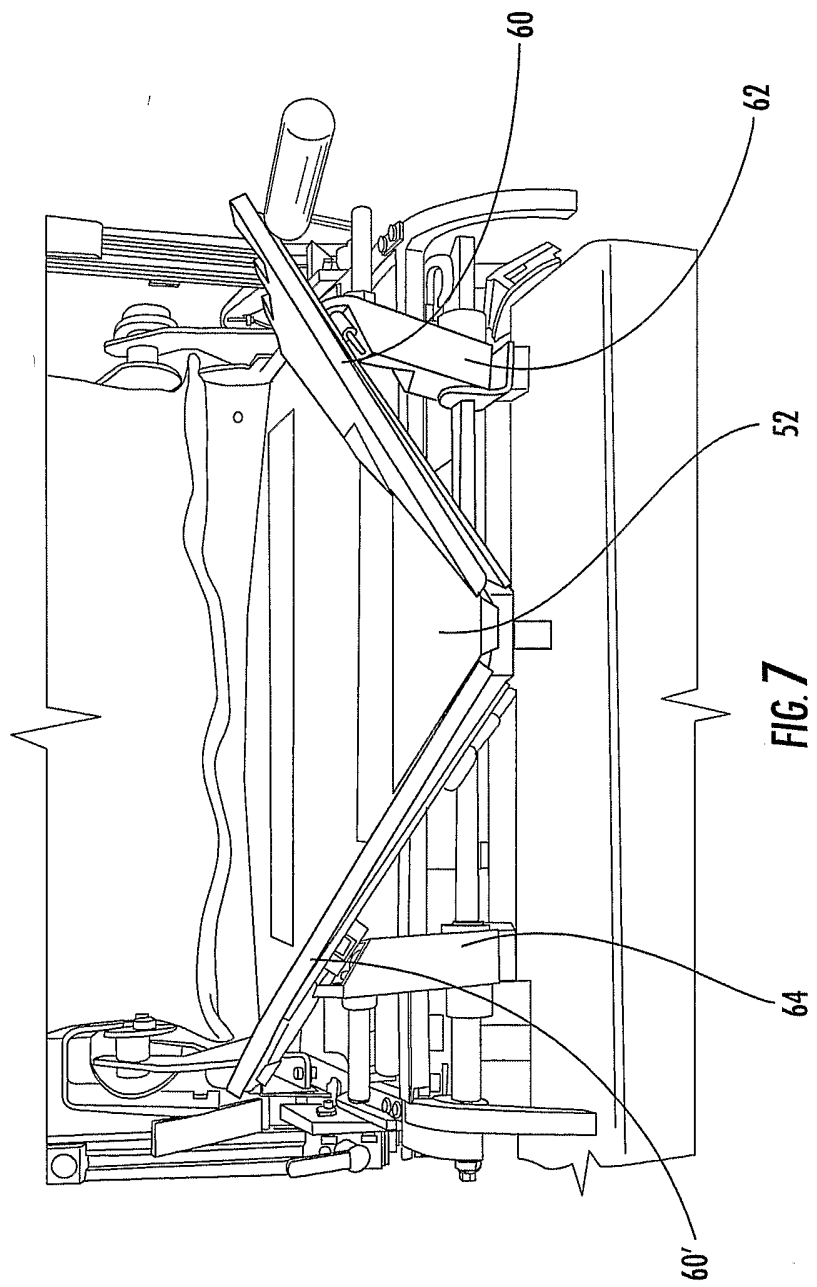
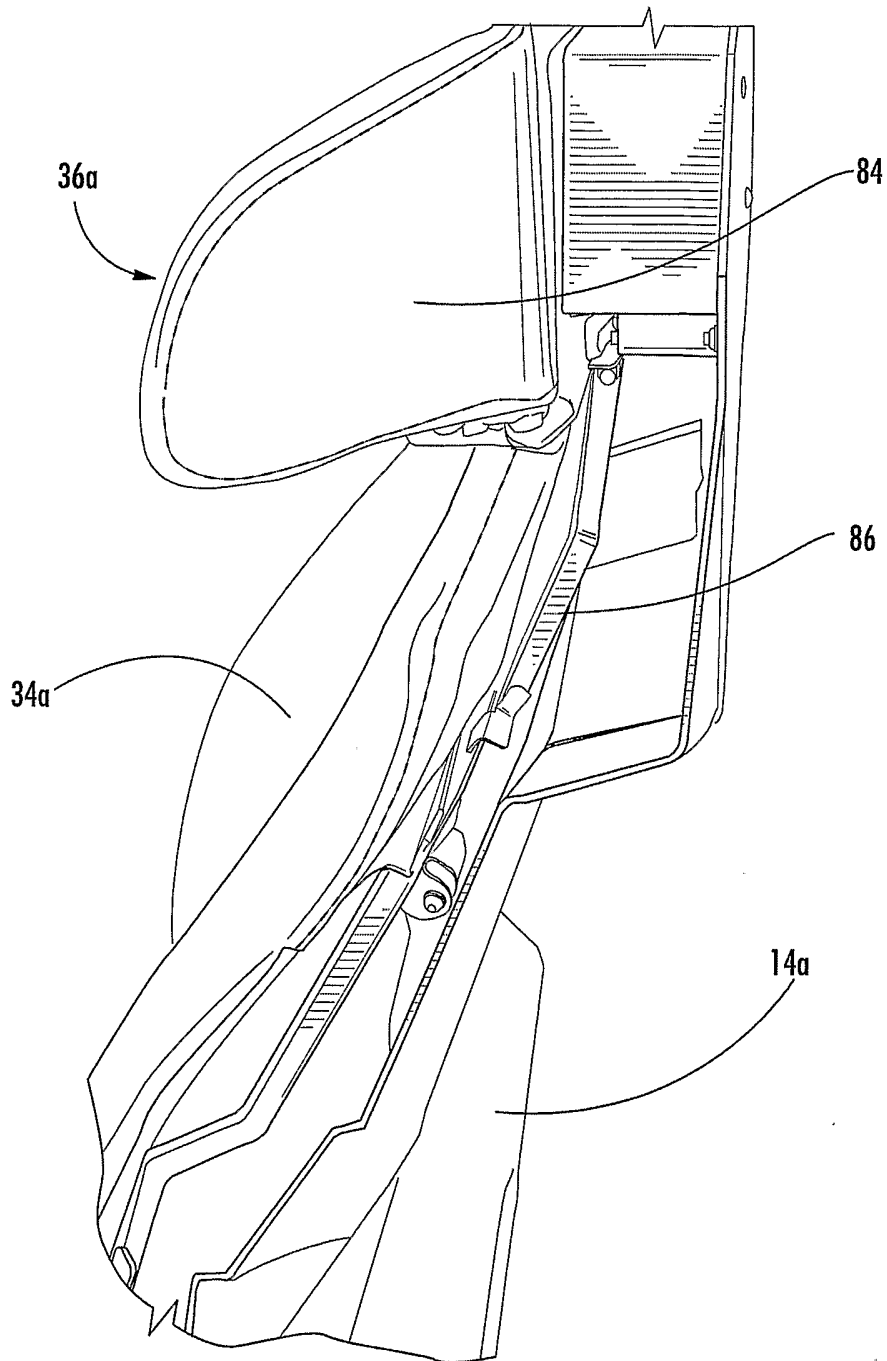



FIG. 5







**FIG. 8**

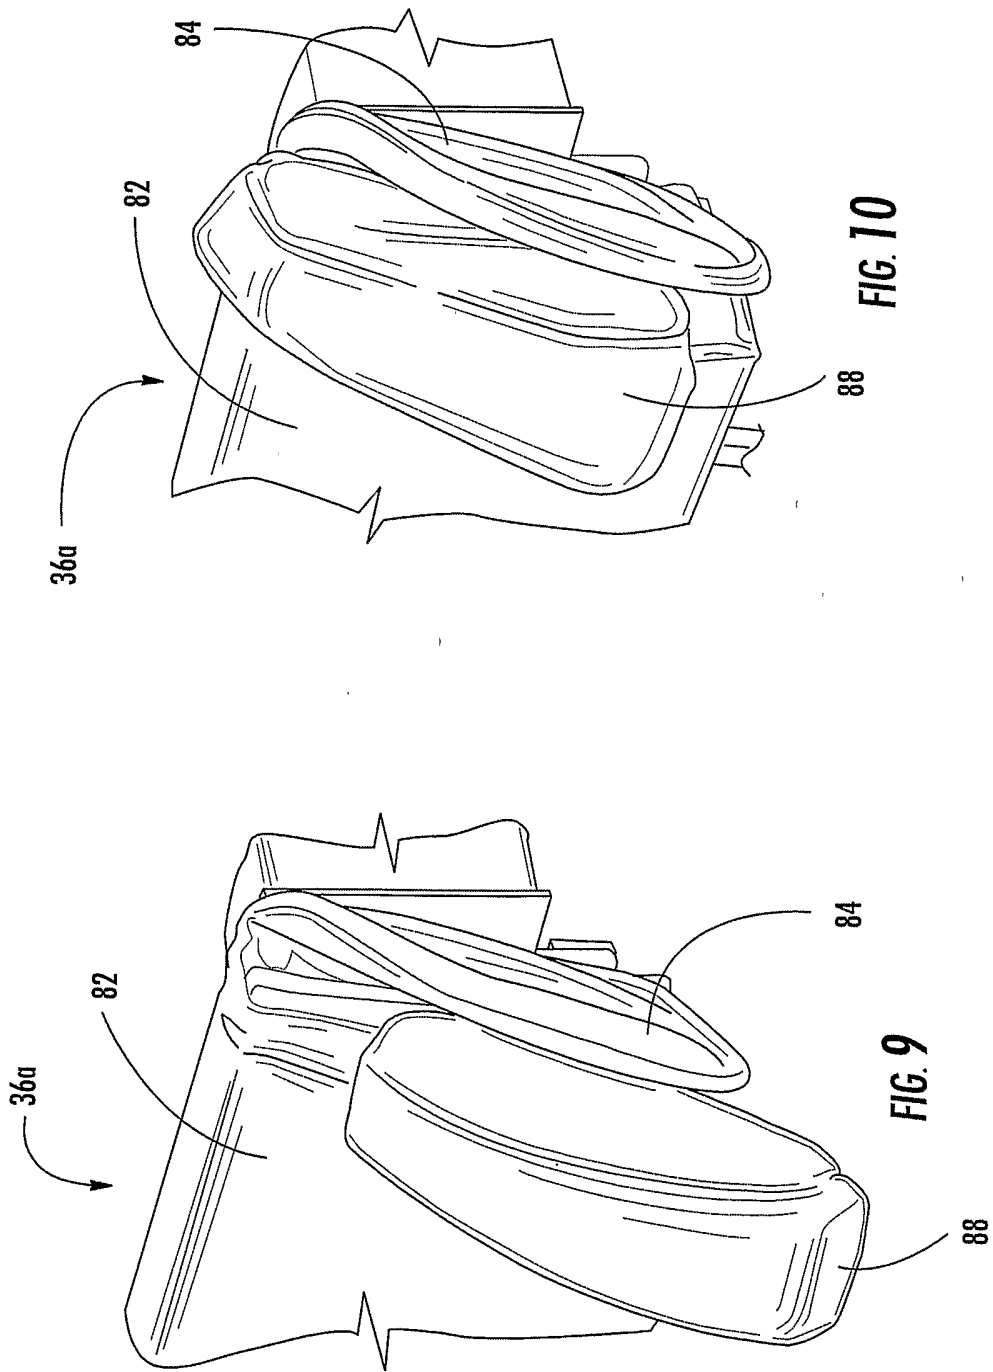

14/15

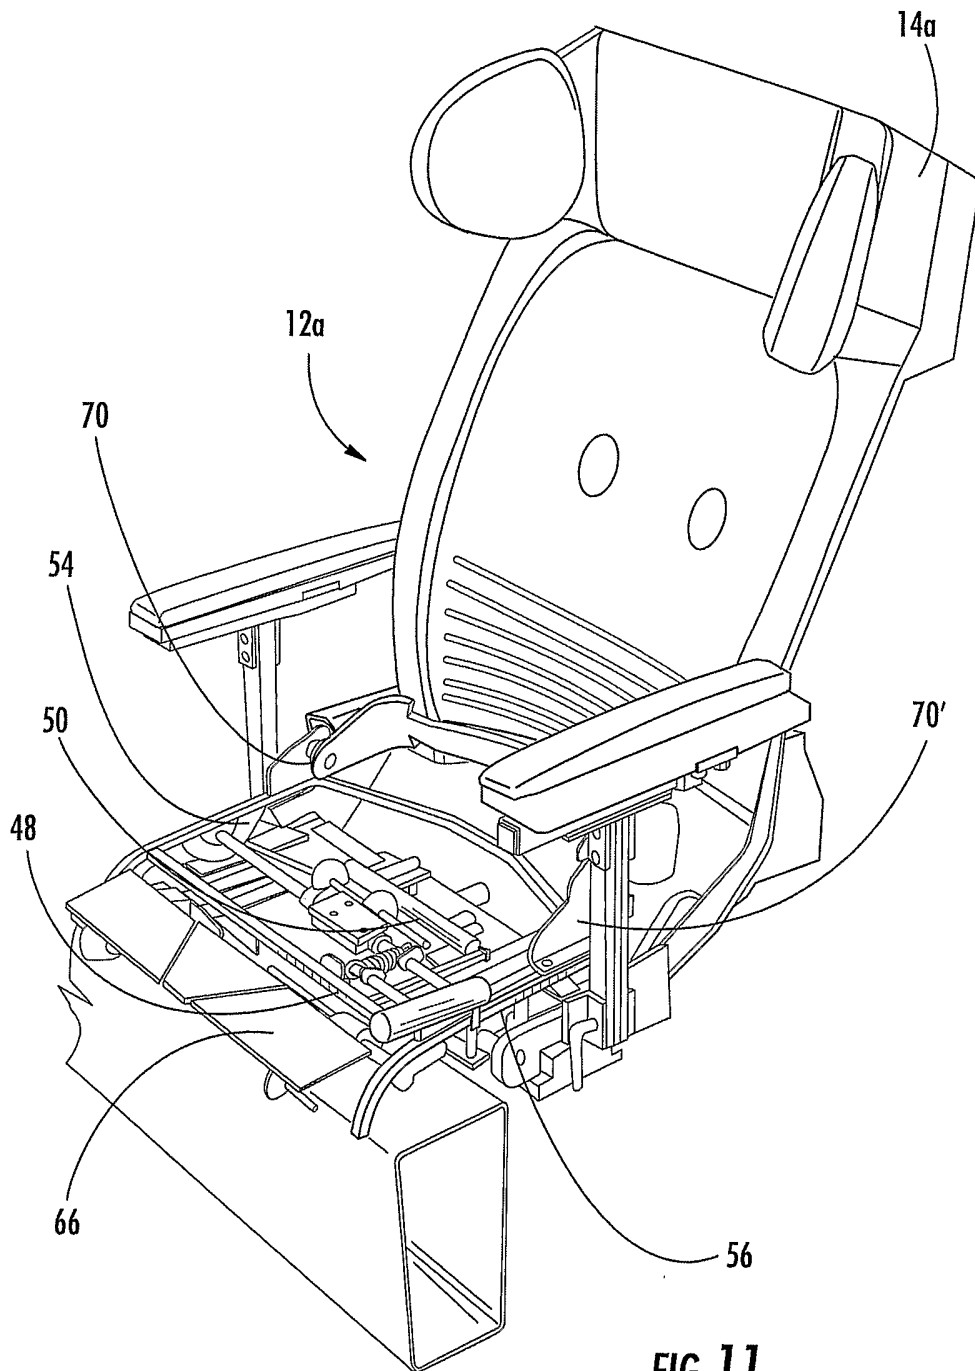


FIG. 11



**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/US04/40979

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(7) : A47C 1/02  
 US CL : 297/325

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 U.S. : 297/325, 343, 340, 317, 318, 320, 353

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3,019,050 (Spielman) 15 February 1960, entire document	8-10, 12-14
X	US 3,019,050 (Spielman) 15 February 1960, entire document.	8-10, 12-14
---		-----
Y	US 87,216 (Southrack) 23 February 1869, Figures 1-3.	7, 11, 15
A	US 4,018,166 (Gutridge et al.) 19 April, 1977.	
A	US 133,130 (Way) 19 November 1872.	
P	US 6,669,143 (Johnson) 30 December 2003.	

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

02 May 2005 (02.05.2005)

Date of mailing of the international search report

20 MAY 2005

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US  
 Commissioner for Patents  
 P.O. Box 1450  
 Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

Peter Cuomo *[Signature]*  
 Telephone No. 571-272-5250