

(19)



(11)

**EP 3 124 905 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**06.05.2020 Bulletin 2020/19**

(51) Int Cl.:  
**F28D 1/053** <sup>(2006.01)</sup>      **F28F 1/12** <sup>(2006.01)</sup>  
**F28F 17/00** <sup>(2006.01)</sup>      **F28B 9/08** <sup>(2006.01)</sup>  
**F28D 21/00** <sup>(2006.01)</sup>

(21) Application number: **16182173.1**

(22) Date of filing: **01.08.2016**

(54) **HEAT EXCHANGER**

WÄRMETAUSCHER

ÉCHANGEUR DE CHALEUR

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

- **JUNG, Seungmo**  
**08592 Seoul (KR)**
- **KIM, Juhyok**  
**08592 Seoul (KR)**

(30) Priority: **31.07.2015 KR 20150108929**

(74) Representative: **Vossius & Partner**  
**Patentanwälte Rechtsanwälte mbB**  
**Siebertstrasse 3**  
**81675 München (DE)**

(43) Date of publication of application:  
**01.02.2017 Bulletin 2017/05**

(73) Proprietor: **LG ELECTRONICS INC.**  
**Yeongdeungpo-gu**  
**Seoul 07336 (KR)**

(56) References cited:  
**EP-A1- 2 653 819**      **EP-A1- 2 840 341**  
**US-A1- 2007 251 681**

(72) Inventors:  
 • **LEE, Eungyul**  
**08592 Seoul (KR)**

**EP 3 124 905 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention relates to a heat exchanger, and more particularly, to a heat exchanger which may easily discharge condensed water when it is used as an evaporator.

**[0002]** Generally, a heat exchanger may be used as a condenser or an evaporator in a refrigeration cycle device, which is comprised of a compressor, a condenser, an expander, and an evaporator.

**[0003]** In addition, the heat exchanger is installed in, for example, a vehicle or a refrigerator, and performs heat exchange between refrigerant and air.

**[0004]** Heat exchangers may be sorted into a fin-tube-type heat exchanger and a micro-channel-type heat exchanger depending on the structure thereof.

**[0005]** The fin-tube-type heat exchanger is fabricated using copper, and the micro-channel-type heat exchanger is fabricated using aluminum.

**[0006]** The micro-channel-type heat exchanger defines micro flow-paths therein, and therefore, has higher efficiency than the fin-tube-type heat exchanger.

**[0007]** Although the fin-tube-type heat exchanger is easily fabricated by welding fins and tubes, the micro-channel-type heat exchanger disadvantageously requires high initial investment costs for fabrication thereof because it is fabricated via brazing after being introduced into a furnace.

**[0008]** FIG. 1 is a sectional view illustrating a conventional micro-channel-type heat exchanger.

**[0009]** The conventional micro-channel-type heat exchanger includes a plurality of flat tubes 1 having micro flow paths therein, fins 2 located between the respective flat tubes 1 to interconnect the flat tubes 1 in order to conduct heat, and headers 3 and 4 respectively assembled to one side and to the other side of the flat tubes 1.

**[0010]** The fins 2 are coupled to flat tubes 1 located at opposite sides thereof. The fins 2 are arranged in a zigzag arrangement in the longitudinal direction of the flat tubes 1.

**[0011]** The conventional micro-channel-type heat exchanger has considerably higher heat exchange efficiency between refrigerant and air than the fin-tube-type heat exchanger, but has difficulty in discharging condensed water when it is used as an evaporator.

**[0012]** The conventional micro-channel-type heat exchanger problematically causes deterioration in heat exchange efficiency because condensed water, which is generated when the heat exchanger is used as an evaporator, may not be discharged and the condensed water may stagnate and freeze between the fins.

**[0013]** A conventional heat exchanger is shown in Korean Patent Registration No. 10-0765557.

**[0014]** EP 2 653 819 A1 discloses a heat exchanger according to the preamble of claim 1.

**[0015]** US 2007/251681 A1 relates to a corrugate fin of an evaporator including wave crest portions, wave trough portions, and flat connection portions connecting

together the wave crest portions and the wave trough portions. Opposite end portions of a cutout extend to corresponding connection portions located at opposite ends of the wave crest portion and the wave trough portion. A projection projecting inward is formed integrally with end portions of the connection portions, the end portions of the connection portions corresponding to opposite ends of the cutout. The projection extends between the end portions of the connection portions located at the opposite ends of the wave crest portion and the wave trough portion. The projection projects inward in a shape resembling a lying letter V.

**[0016]** Therefore, the present invention has been made in view of the above problems, and it is an object of the present invention to provide a micro-channel-type heat exchanger, which may easily discharge condensed water.

**[0017]** It is another object of the present invention to provide a micro-channel-type heat exchanger, which may be fabricated via a fin roll method.

**[0018]** It is another object of the present invention to provide a micro-channel-type heat exchanger, which may easily move fluid in the longitudinal direction of flat tubes and in a direction perpendicular to the longitudinal direction of the flat tubes.

**[0019]** It is a further object of the present invention to provide a micro-channel-type heat exchanger, which may easily move condensed water, generated in upper fins, to lower fins.

**[0020]** These objects of the present invention are achieved with the features of the independent claim. The dependent claims relate to further aspects of the invention.

**[0021]** Any references in the following description to embodiments, objects, aspects and/or examples which are not covered by the appended claims are considered as not being part of the present invention.

**[0022]** According to one aspect, the present invention provides a heat exchanger including a plurality of flat tubes formed in a micro-channel form, and a fin located between the flat tubes to conduct heat, wherein the fin includes a first fin portion located between two flat tubes, a first bent portion bent at the first fin portion so as to come into contact with one of the two flat tubes, a second fin portion bent at the first bent portion, the second fin portion being opposite the first fin portion and being located between the two flat tubes, a flow space defined between the first fin portion and the second fin portion, a second bent portion bent at the second fin portion so as to come into contact with a remaining one of the two flat tubes, and a condensed water discharge hole formed by cutting at least one of the first bent portion and the second bent portion and a condensed water discharge fin bent at one of the first bent portion and the second bent portion.

**[0023]** The condensed water discharge fin may be bent in the same direction as a direction in which the first fin portion or the second fin portion is formed.

**[0024]** Each flat tube may be located so as to come into close contact with the condensed water discharge fin.

**[0025]** The condensed water discharge fin and the condensed water discharge hole may be located at an edge of the fin.

**[0026]** Two condensed water discharge fins may be formed on opposite sides of the condensed water discharge hole.

**[0027]** The two condensed water discharge fins may be arranged so as to face each other.

**[0028]** The condensed water discharge fin may include a first condensed water discharge fin formed on the first bent portion and a second condensed water discharge fin formed on the second bent portion, and the first condensed water discharge fin and the second condensed water discharge fin may be bent in opposite directions.

**[0029]** The first condensed water discharge fin and the second condensed water discharge fin may be arranged in a line in a vertical direction.

**[0030]** The first condensed water discharge fin and the second condensed water discharge fin may be offset in a vertical direction.

**[0031]** At least one of the first fin portion and the second fin portion may be provided with a vent for communication of the flow space and an adjacent flow space with each other.

**[0032]** The fin portion may further be provided with a louver for forming the vent and guiding air.

**[0033]** The at least one of the first fin portion and the second fin portion may further be provided with a first vent and a second vent, and provided with a first-first louver for forming the first vent and a first-second louver for forming the second vent, and the first-first louver and the first-second louver may be formed in opposite directions.

**[0034]** The above and other objects, features and other advantages of the present invention will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a sectional view illustrating a conventional micro-channel-type heat exchanger;

FIG. 2 is a perspective view of a micro-channel-type heat exchanger according to an example not within the scope of the invention;

FIG. 3 is a rear perspective view of FIG. 2;

FIG. 4 is a front view of FIG. 2;

FIG. 5 is a plan view of FIG. 2;

FIG. 6 is a left side view of FIG. 2;

FIG. 7 is a perspective view of a micro-channel-type heat exchanger according to an embodiment of the present invention;

FIG. 8 is a front view of FIG. 7;

FIG. 9 is a plan view of FIG. 7; and

FIG. 10 is a right side view of FIG. 1.

**[0035]** Hereinafter, the present invention will be de-

scribed in detail with reference to the accompanying drawings.

**[0036]** A micro-channel-type heat exchanger according to a first example not within the scope of the invention will be described with reference to FIGs. 2 to 6.

**[0037]** The micro-channel-type heat exchanger according to the present example includes a plurality of flat tubes 10 defining a plurality of flow paths therein, fins 20 arranged between and respectively coupled to the two flat tubes 10 to conduct heat, and a first header (not illustrated) and a second header (not illustrated) assembled to respective ends of the flat tubes 10 to move refrigerant.

**[0038]** In the micro-channel-type heat exchanger, when refrigerant is supplied to the first header, the refrigerant passes through the flat tubes 10 and moves to the second header. On the other hand, when refrigerant is supplied to the second header, the refrigerant moves to the first header.

**[0039]** The first header and the second header have a structure that is well known to those skilled in the art, and thus, a detailed description thereof will be omitted herein.

**[0040]** The flat tubes 10 have a flat shape and define multiple flow paths therein. The flat tubes 10 are formed of a metal material. In the present embodiment, the flat tubes are formed of aluminum.

**[0041]** In the present example, the flat tubes 10 are horizontally arranged, and the fins 20 are also arranged so as to extend horizontally. The micro-channel-type heat exchanger according to the present example has a structure for the easy discharge of condensed water because the flat tubes 10 and the fins 20 are horizontally arranged.

**[0042]** Unlike the present example, the flat tubes 10 and the fins 20 may be arranged so as to extend vertically.

**[0043]** The fins 20 are bent in the longitudinal direction of the flat tubes 10. The fins 20 have the advantage of low manufacturing costs because they may be fabricated by repeatedly conducting a fin-rolling method.

**[0044]** The fins 20 are formed of a metal material. In the present example, the fins 20 are formed of aluminum, like the flat tubes 10. The fins 20 serve to rapidly conduct the heat in the flat tubes 10 so as to increase heat exchange efficiency.

**[0045]** The fins 20 are arranged between the flat tubes 10. By way of explanation, a fin 20 located at the uppermost position is defined as a first fin 20-1, a fin 20 located under the first fin 20-1 is defined as a second fin 20-2, and a fin 20 located under the second fin 20-2 is defined as a third fin 20-3.

**[0046]** Each fin 20 includes a first fin portion 30 located between the two flat tubes 10, a first bent portion 50 bent at the first fin portion 30 so as to come into contact with any one of the two flat tubes 10, a second fin portion 40 bent at the first bent portion 50 so as to be opposite the first fin portion 30 and to be located between the two flat tubes 10, and a second bent portion 60 bent at the second fin portion 40 so as to come into contact with the other one of the two flat tubes 10.

**[0047]** For convenience of description, the flat tube 10 that is in contact with the first bent portion 50, is defined as a first flat tube 11, and the flat tube 10 that is in contact with the second bent portion 60, is defined as a second flat tube 12.

**[0048]** The fin 20 is configured such that the first fin portion 30, the first bent portion 50, the second fin portion 40, and the second bent portion 60 are repeated.

**[0049]** The first fin portion 30 supports the first flat tube 11 and the second flat tube 12.

**[0050]** The first fin portion 30 is oriented perpendicular to the longitudinal direction of the first flat tube 11 and the second flat tube 12.

**[0051]** Like the first fin portion 30, the second fin portion 40 also supports the first flat tube 11 and the second flat tube 12, and is oriented perpendicular to the longitudinal direction of the first flat tube 11 and the second flat tube 12.

**[0052]** The first fin portion 30 and the second fin portion 40 are spaced apart from each other by a predetermined distance. A flow space 25 for the movement of air is defined between the first fin portion 30 and the second fin portion 40.

**[0053]** Air for heat exchange passes through the flow space 25 defined between the first fin portion 30 and the second fin portion 40.

**[0054]** The smaller the gap in the flow space 25 defined between the first fin portion 30 and the second fin portion 40, the greater the number of fin portions that can be installed, which may increase heat exchange efficiency.

**[0055]** However, when the gap in the flow space 25 is small, condensed water, generated when the heat exchanger operates as an evaporator, may be attached and fixed to the first fin portion 30 and the second fin portion 40 via surface tension. In the present example, the flow space 25 has the gap to prevent condensed water from connecting the first fin portion 30 and the second fin portion 40 to each other via surface tension.

**[0056]** The condensed water generated in the first fin portion 30 and the second fin portion 40 comes into contact with air, which moves along the flow space 25, thus falling down.

**[0057]** At least one of the first fin portion 30 and the second fin portion 40 is provided with vents 21 and 22, which communicate with an adjacent flow space 25'.

**[0058]** In the present example, both the first fin portion 30 and the second fin portion 40 are provided with the vents 21 and 22. Although each of the first fin portion 30 and the second fin portion 40 is provided with the two vents 21 and 22, only one vent may be provided, unlike the present embodiment.

**[0059]** For convenience of description, the vents 21 and 22 are defined as a first vent 21 and a second vent 22.

**[0060]** The vents 21 and 22 may take the form of holes or slits.

**[0061]** In the present example, the vents 21 and 22 are formed by cutting the first fin portion 30 and the second fin portion 40.

**[0062]** The first fin portion 30 is provided with a first-first louver 31 for forming the first vent 21. Further, the first fin portion 30 is provided with a first-second louver 32 for forming the second vent 22.

5 **[0063]** The first-first louver 31 is formed by bending the cut first fin portion 30. The first vent 21 is formed in the location in which the first-first louver 31 is cut.

**[0064]** The first-second louver 32 is formed in the same method as the first-first louver 31.

10 **[0065]** The louvers 31 and 32 serve to guide some of the air moving along the flow space 25 to the neighboring flow space 25'.

**[0066]** In the present example, the first-first louver 31 and the first-second louver 32 are formed so as to guide the air in different directions.

15 **[0067]** For example, when the first-first louver 31 is formed to guide the air from the adjacent flow space 25' to the flow space 25, the first-second louver 32 is formed to guide the air from the flow space 25 to the adjacent flow space 25'.

**[0068]** The louvers protrude from the first fin portion 30 or the second fin portion 40 to the flow space 25 or the adjacent flow space 25'.

25 **[0069]** The louver is formed perpendicular to the longitudinal direction of the first flat tube 11 and the second flat tube 12.

**[0070]** Louvers, formed in the second fin portion 40, have the same structure as the louvers formed in the first fin portion 30, and for convenience of description, are defined as a second-first louver 41 and a second-second louver 42.

**[0071]** The second fin portion 40 is provided with the first vent 21 formed by the second-first louver 41 and the second vent 22 formed by the second-second louver 42.

35 **[0072]** Because the first-first louver 31 and the first-second louver 32 are formed in opposite directions, the direction in which the fins 20 are installed need not be considered upon the installation of the heat exchanger.

**[0073]** The first bent portion 50 comes into close contact with the first flat tube 11 and conducts heat from the first flat tube 11.

**[0074]** The first bent portion 50 is formed into a plane in the present example.

45 **[0075]** Although the first bent portion 50 is located at the top and the second bent portion 60 is located at the bottom in the present embodiment, they may be located at the opposite positions.

**[0076]** The first bent portion 50 is provided with a condensed water discharge fin 70; 71 to discharge condensed water from the flow space 25.

**[0077]** The condensed water discharge fin 70 is formed by cutting and bending the first bent portion 50.

55 **[0078]** As such, the first bent portion 50 is provided with a condensed water discharge hole 51 at the location at which the condensed water discharge fin 70 is present. The condensed water discharge hole formed in the first bent portion 50 is defined as a first condensed water discharge hole 51.

**[0079]** In the present example, two condensed water discharge fins 70 are formed on the first bent portion 50 so as to face each other. Only one condensed water discharge hole 51 is provided.

**[0080]** Because the two condensed water discharge fins 70 are formed in a limited area, the length of the condensed water discharge fins 70 is half or less the width of the first bent portion 50.

**[0081]** In addition, a connector 52 for connecting the first fin portion 30 and the second fin portion 40 to each other is formed on the edge of the first bent portion 50.

**[0082]** The connector 52 is the portion that remains when the condensed water discharge fins 70 are formed. As such, the connector 52 is formed so as to be in contact with the condensed water discharge hole 51. The connector 52 connects the first fin portion 30 and the second fin portion 40 to each other, thus improving the strength of the fin 20.

**[0083]** The condensed water present in the flow space 25 may be discharged from the flow space 25 through the condensed water discharge hole 51.

**[0084]** The condensed water discharge fins 70 guide the flow of condensed water when the condensed water is discharged.

**[0085]** Likewise, the second bent portion 60 is provided with a condensed water discharge hole 61 and condensed water discharge fins 70; 72, in the same manner as the first bent portion 50. The condensed water discharge hole, formed in the second bent portion 60, is defined as a second condensed water discharge hole 61.

**[0086]** Because the flat tubes 10 are stacked one above another and the fins 20 are arranged between the flat tubes 10, the condensed water discharge fins 71 formed on the first bent portion 50 and the condensed water discharge fins 72 formed on the second bent portion 60 are vertically arranged.

**[0087]** For convenience of description, the condensed water discharge fin provided on the first bent portion 50 is defined as a first condensed water discharge fin 71 and the condensed water discharge fin provided on the second bent portion 60 is defined as a second condensed water discharge fin 72.

**[0088]** The first condensed water discharge fin 71 and the second condensed water discharge fin 72 may be vertically arranged. The first condensed water discharge fin 71 and the second condensed water discharge fin 72 may be aligned in a line. When the first condensed water discharge fin 71 and the second condensed water discharge fin 72 are aligned in a line, the first condensed water discharge fin 71 and the second condensed water discharge fin 72 may be spaced apart from each other by a predetermined distance.

**[0089]** The predetermined distance between the first condensed water discharge fin 71 and the second condensed water discharge fin 72 is the distance by which condensed water can move by surface tension.

**[0090]** In the present example, the second condensed water discharge fin 72 of the first fin 20-1 and the first

condensed water discharge fin 71 of the second fin 20-2 are spaced apart from each other by a predetermined distance. Unlike the present example, the second condensed water discharge fin 72 of the first fin 20-1 and the first condensed water discharge fin 71 of the second fin 20-2 may come into contact with each other.

**[0091]** As such, condensed water, generated in the flow space 25 defined in the upper fin 20, may be discharged to the condensed water discharge hole 61 and may move downward along the second condensed water discharge fin 72. Then, the condensed water may move downward along the second condensed water discharge fin 72 and the first condensed water discharge fin 71 adjacent thereto.

**[0092]** The flat tube 10 may be located so as to come into close contact with the condensed water discharge fin 70. When the heat exchanger is used as an evaporator, the flat tube 10 has the lowest temperature. The condensed water, generated in the flat tube 10, may rapidly move downward through the condensed water discharge fin 70, which is in close contact with the flat tube 10. Through the rapid movement of the condensed water, it may be possible to minimize the freezing of condensed water on the surface of the flat tube 10.

**[0093]** In the present example, the condensed water discharge fins 70 and the condensed water discharge holes 51 and 61 are formed only on one side of the fin 20. Unlike the present example, the condensed water discharge fins 70 and the condensed water discharge holes 51 and 61 may be formed on opposite sides of the fin 20.

**[0094]** In addition, although the condensed water discharge fins 70 and the condensed water discharge holes 51 and 61 are formed by cutting the first bent portion 50 and the second bent portion 60 in the present example, unlike the present example, only the condensed water discharge holes 51 and 61 may be formed. In addition, when only the condensed water discharge holes 51 and 61 are formed, the holes 51 and 61 may be provided in a plural number along the first bent portion 50 or the second bent portion 60.

**[0095]** A micro-channel-type heat exchanger according to an embodiment of the present invention will be described below with reference to FIGs. 7 to 10.

**[0096]** The heat exchanger according to the present embodiment has differences in terms of the position and alignment of the condensed water discharge fins compared to the first embodiment.

**[0097]** A fin 120 according to the present embodiment is provided with condensed water discharge fins 170 on opposite edges of the first bent portion 50. The fin 120 is provided with the condensed water discharge fins 170 on opposite edges of the second bent portion 60.

**[0098]** For convenience of description, the condensed water discharge fins provided on the first bent portion 50 are defined as first condensed water discharge fins 171, and the condensed water discharge fins provided on the second bent portion 60 are defined as second condensed

water discharge fins 172.

**[0099]** The first bent portion 50 is provided on opposite edges thereof with condensed water discharge holes 51.

**[0100]** The second bent portion 60 is provided on opposite edges thereof with condensed water discharge holes 61.

**[0101]** Unlike the first embodiment, each condensed water discharge hole 51 or 61 is provided with one condensed water discharge fin 170.

**[0102]** The first condensed water discharge fin 171 and the second condensed water discharge fin 172, provided on the fin 120, are offset in the vertical direction. That is, the first condensed water discharge fin 171 and the second condensed water discharge fin 172 are not aligned in a line, unlike the first embodiment.

**[0103]** As such, when the fins 120 are stacked one above another, the first condensed water discharge fin 171 and the second condensed water discharge fin 172 are offset in the left-to-right direction. In particular, the first condensed water discharge fin 171 and the second condensed water discharge fin 172 are arranged so as to face each other at the offset positions.

**[0104]** In the state in which the fins 120 are stacked one above another, the second condensed water discharge fin 172 of the upper fin 120 and the first condensed water discharge fin 171 of the lower fin 120 are arranged so as to face each other.

**[0105]** In the present embodiment, when viewing the fins 120 from the front side, the first condensed water discharge fin 171 and the second condensed water discharge fin 172 are arranged in a line.

**[0106]** Unlike the present embodiment, the first condensed water discharge fin 171 may be offset when viewing the fins 120 from the front side. The second condensed water discharge fin 172 may also be offset when viewing from the front side.

**[0107]** The other configurations are the same as in the first embodiment, and thus a detailed description thereof will be omitted herein.

**[0108]** As is apparent from the above description, a heat exchanger of the present invention has one or more following effects.

**[0109]** First, the present invention has the advantage of easily discharging condensed water from a flow space, which is defined between a first fin portion and a second fin portion, through condensed water discharge holes and condensed water discharge fins.

**[0110]** Second, the present invention has the advantage of fabricating the heat exchanger using a fin-rolling machine because the condensed water discharge holes and the condensed water discharge fins are formed by cutting and bending the first fin portion and the second fin portion.

**[0111]** Third, the present invention has the advantage of reducing fabrication costs through the use of the fin-rolling machine.

**[0112]** Fourth, the present invention has the advantage of easily discharging condensed water by arranging the

condensed water discharge fins in a line or in a zigzag arrangement.

**[0113]** Fifth, the present invention has the advantage of easily discharging condensed water by forming the condensed water discharge fins in the direction of gravity.

**[0114]** Sixth, the present invention has the advantage of rapidly discharging condensed water because the condensed water discharge fins are arranged in contact with the condensed water discharge holes, through which condensed water is discharged from the flow space.

**[0115]** Seventh, the present invention has the advantage of easily discharging condensed water generated inside fins even when flat tubes and the fins are horizontally installed.

## Claims

1. A heat exchanger comprising:

a plurality of flat tubes formed in a micro-channel form;

an upper side fin (120) formed of a metal material and being positioned between one flat tube and another flat tube, conducting heat of the flat tubes (10), disposed on an upper side of the flat tube (12);

a lower side fin (120) formed of a metal material and being positioned between one flat tube and another flat tube, conducting the heat of the flat tube (12), disposed on a lower side of the flat tube (12);

wherein the upper side fin (120) includes:

a first fin portion (30) located on the upper side of the flat tube (12), formed in a vertical direction;

a first bent portion (50) bent at the first fin portion (30), being located above the flat tube (12), being spaced apart from the flat tube (12);

a second fin portion (40) bent downward from the first bent portion (50), the second fin portion (40) being opposite the first fin portion (30) and being located above the flat tube (12);

a flow space (25) defined between the first fin portion (30) and the second fin portion (40), being located above the flat tube (12);

a second bent portion (60) bent at the second fin portion (40) so as to come into contact with the flat tube (12), being located above the flat tube (12);

a condensed water discharge hole (51; 61) formed by cutting at least one of the first bent portion (50) and the second bent portion (60);

a first condensed water discharge fin (171)

bent upwardly from the first bent portion (50), being located above the flat tube (12); a second condensed water discharge fin (172) bent downwardly from the second bent portion (60), being located to be in close contact with the flat tube (12); wherein the lower side fin (120) includes:

a first fin portion (30) located on the lower side of the flat tube (12), formed in a vertical direction;

a first bent portion (50) bent at the first fin portion (30), being located below the flat tube (12), so as to come into contact with the flat tube (12);

a second fin portion (40) bent downward from the first bent portion (50), the second fin portion (40) being opposite the first fin portion (30) and being located below the flat tubes (12);

a flow space (25) defined between the first fin portion (30) and the second fin portion (40), being located below the flat tube (12);

a second bent portion (60) bent at the second fin portion (40), being spaced apart from the flat tube (12), being located below the flat tube (12);

a condensed water discharge hole (51; 61) formed by cutting at least one of the first bent portion (50) and the second bent portion (60), being located below the flat tube (12);

a first condensed water discharge fin (171) bent upwardly from the first bent portion (50), being located to be in close contact with the flat tube (12); and

a second condensed water discharge fin (172) bent downwardly from the second bent portion (60), being located below the flat tube (12);

**characterized in that**

a connector (52) for connecting each of the corresponding first fin portion (30) and the corresponding second fin portion (40) to each other, is formed on the edge of the corresponding first bent portion (50);

wherein each of the first condensed water discharge fins (171) is formed with the entire width of the corresponding first bent portion (50), arranged in line with the corresponding first fin portion (30), forming the corresponding condensed water discharge hole (51), wherein each of the second condensed water discharge fins (172) is formed with the entire width of the correspond-

ing second bent portion (60), arranged in line with the corresponding second fin portion (40), forming the corresponding condensed water discharge hole (61), wherein each of the first condensed water discharge fins (171) and each of the second condensed water discharge fins (172) are bent in opposite directions to each other.

2. The heat exchanger according to claim 1, wherein the flat tube (12) is located so as to come into close contact with the first condensed water discharge fin (171) and the second condensed water discharge fin (172).
3. The heat exchanger according to claim 1 or 2, wherein the first condensed water discharge fin (171), the second condensed water discharge fin (172) and the condensed water discharge hole (51; 61) are located at an edge of the fin (120).
4. The heat exchanger according to claim 1, wherein the first condensed water discharge fin (171) of the lower fin and the second condensed water discharge fin (172) of the upper fin are offset in a vertical direction.
5. The heat exchanger according to any one of claims 1 to 4, wherein at least one of the first fin portion (30) and the second fin portion (40) is provided with a vent (21, 22) for communication of the flow space (25) and an adjacent flow space (25') with each other.
6. The heat exchanger according to claim 5, wherein the at least one fin portion (30, 40) is further provided with a louver (31, 32, 41, 42) for forming the vent (21, 22) and guiding air.
7. The heat exchanger according to claim 5, or 6, wherein the at least one of the first fin portion (30) and the second fin portion (40) is further provided with a first vent (21) and a second vent (22), and provided with a first-first louver (31) for forming the first vent (21) and a first-second louver (32) for forming the second vent (22), and the first-first louver (31) and the first-second louver (32) are formed in opposite directions.

**Patentansprüche**

1. Wärmetauscher, mit:
  - mehreren Flachrohren, die in einer Mikrokanalform ausgebildet sind;
  - einer oberseitigen Rippe (120), die aus einem

Metallmaterial ausgebildet ist und zwischen einem Flachrohr und einem anderen Flachrohr angeordnet ist, die Wärme der Flachrohre (10) leitet und auf einer Oberseite des Flachrohrs (12) angeordnet ist; 5  
 einer unterseitigen Rippe (120), die aus einem Metallmaterial ausgebildet ist und zwischen einem Flachrohr und einem anderen Flachrohr angeordnet ist, die die Wärme des Flachrohrs (12) leitet und auf einer Unterseite des Flachrohrs (12) angeordnet ist; 10  
 wobei die oberseitige Rippe (120) aufweist:

einen ersten Rippenabschnitt (30), der auf der Oberseite des Flachrohrs (12) angeordnet ist, der in einer vertikalen Richtung ausgebildet ist; 15  
 einen ersten gebogenen Abschnitt (50), der am ersten Rippenabschnitt (30) gebogen ist, der über dem Flachrohr (12) angeordnet ist und vom Flachrohr (12) beabstandet ist; 20  
 einen zweiten Rippenabschnitt (40), der vom ersten gebogenen Abschnitt (50) nach unten gebogen ist, wobei der zweite Rippenabschnitt (40) dem ersten Rippenabschnitt (30) gegenüberliegt und über dem Flachrohr (12) angeordnet ist ; 25  
 einen Strömungsraum (25), der zwischen dem ersten Rippenabschnitt (30) und dem zweiten Rippenabschnitt (40) definiert ist, der über dem Flachrohr (12) angeordnet ist; 30  
 einen zweiten gebogenen Abschnitt (60), der am zweiten Rippenabschnitt (40) so gebogen ist, dass er mit dem Flachrohr (12) in Kontakt kommt, der über dem Flachrohr (12) angeordnet ist; 35  
 ein Kondenswasserabflussloch (51; 61), das durch Schneiden von mindestens einem des ersten gebogenen Abschnitts (50) und des zweiten gebogenen Abschnitts (60) ausgebildet ist; 40  
 eine erste Kondenswasserabflussrippe (171), die vom ersten gebogenen Abschnitt (50) nach oben gebogen ist, die über dem Flachrohr (12) angeordnet ist; 45  
 eine zweite Kondenswasserabflussrippe (172), die vom zweiten gebogenen Abschnitt (60) nach unten gebogen ist, die so angeordnet ist, dass sie engem Kontakt mit dem Flachrohr (12) steht; 50  
 wobei die unterseitige Rippe (120) aufweist:

einen ersten Rippenabschnitt (30), der auf der Unterseite des Flachrohrs (12) angeordnet und in eine vertikale Richtung ausgebildet ist; 55  
 einen ersten gebogenen Abschnitt (50), der am ersten Rippenabschnitt

(30) gebogen ist, der unter dem Flachrohr (12) so angeordnet ist, dass er mit dem Flachrohr (12) in Kontakt kommt; einen zweiten Rippenabschnitt (40), der vom ersten gebogenen Abschnitt (50) nach unten gebogen ist, wobei der zweite Rippenabschnitt (40) dem ersten Rippenabschnitt (30) gegenüberliegt und unter den Flachrohren (12) angeordnet ist;  
 einen Strömungsraum (25), der zwischen dem ersten Rippenabschnitt (30) und dem zweiten Rippenabschnitt (40) definiert ist, der unter dem Flachrohr (12) angeordnet ist;  
 einen zweiten gebogenen Abschnitt (60), der am zweiten Rippenabschnitt (40) gebogen ist und vom Flachrohr (12) beabstandet ist, der unter dem Flachrohr (12) angeordnet ist;  
 ein Kondenswasserabflussloch (51; 61), das durch Schneiden von mindestens einem des ersten gebogenen Abschnitts (50) und des zweiten gebogenen Abschnitts (60) ausgebildet ist, das unter dem Flachrohr (12) angeordnet ist ;  
 eine erste Kondenswasserabflussrippe (171), die vom ersten gebogenen Abschnitt (50) nach oben gebogen ist, die so angeordnet ist, dass sie mit dem Flachrohr (12) in engem Kontakt steht; und  
 eine zweite Kondenswasserabflussrippe (172), die vom zweiten gebogenen Abschnitt (60) nach unten gebogen ist, die unter dem Flachrohr (12) angeordnet ist;  
**dadurch gekennzeichnet, dass**  
 ein Verbindungsstück (52) zum gegenseitigen Verbinden jeweils des entsprechenden ersten Rippenabschnitts (30) und des entsprechenden zweiten Rippenabschnitts (40) an der Kante des entsprechenden ersten gebogenen Abschnitts (50) ausgebildet ist;  
 wobei jede der ersten Kondenswasserabflussrippen (171) mit der gesamten Breite des entsprechenden ersten gebogenen Abschnitts (50) ausgebildet ist, in einer Reihe mit dem entsprechenden ersten Rippenabschnitt (30) angeordnet ist und das entsprechende Kondenswasserabflussloch (51) bildet, wobei jede der zweiten Kondenswasserabflussrippen (172) mit der gesamten Breite des entsprechenden zweiten gebogenen Abschnitts (60) ausgebil-

det ist, in einer Reihe mit dem entsprechenden zweiten Rippenabschnitt (40) angeordnet ist und das entsprechende Kondenswasserabflussloch (61) bildet, wobei jeweils die ersten Kondenswasserabflussrippen (171) und jeweils die zweiten Kondenswasserabflussrippen (172) in zueinander entgegengesetzte Richtungen gebogen sind.

2. Wärmetauscher nach Anspruch 1, wobei das Flachrohr (12) so angeordnet ist, dass es mit der ersten Kondenswasserabflussrippe (171) und der zweiten Kondenswasserabflussrippe (172) in engen Kontakt kommt.
3. Wärmetauscher nach Anspruch 1 oder 2, wobei die erste Kondenswasserabflussrippe (171), die zweite Kondenswasserabflussrippe (172) und das Kondenswasserabflussloch (51; 61) an einer Kante der Rippe (120) angeordnet sind.
4. Wärmetauscher nach Anspruch 1, wobei die erste Kondenswasserabflussrippe (171) der unteren Rippe und die zweite Kondenswasserabflussrippe (172) der oberen Rippe in eine vertikale Richtung versetzt sind.
5. Wärmetauscher nach einem der Ansprüche 1 bis 4, wobei mindestens einer des ersten Rippenabschnitts (30) und des zweiten Rippenabschnitts (40) mit einer Entlüftung (21, 22) zur gegenseitigen Verbindung des Strömungsraums (25) und eines benachbarten Strömungsraums (25') versehen ist.
6. Wärmetauscher nach Anspruch 5, wobei der mindestens eine Rippenabschnitt (30, 40) ferner mit einer Klappe (31, 32, 41, 42) zum Bilden der Entlüftung (21, 22) und zum Leiten von Luft versehen ist.
7. Wärmetauscher nach Anspruch 5, oder 6, wobei der mindestens eine des ersten Rippenabschnitts (30) und des zweiten Rippenabschnitts (40) ferner mit einer ersten Entlüftung (21) und einer zweiten Entlüftung (22) versehen ist, und mit einer ersten-ersten Klappe (31) zum Bilden der ersten Entlüftung (21) und einer ersten-zweiten Klappe (32) zum Bilden der zweiten Entlüftung (22) versehen ist, und die erste-erste Klappe (31) und die erste-zweite Klappe (32) in entgegengesetzte Richtungen ausgebildet sind.

## Revendications

1. Échangeur de chaleur, comprenant :  
  - une pluralité de tuyaux plats en forme de microcanaux ;

une ailette de côté supérieur (120) constituée d'un matériau métallique et disposée entre un tuyau plat et un autre tuyau plat, conduisant la chaleur des tuyaux plats (10) et disposée sur un côté supérieur du tuyau plat (12) ;  
 une ailette de côté inférieur (120) constituée d'un matériau métallique et disposée entre un tuyau plat et un autre tuyau plat, conduisant la chaleur du tuyau plat (12) et disposée sur un côté inférieur du tuyau plat (12) ;  
 où l'aillette de côté supérieur (120) comprend :

une première partie d'aillette (30) disposée sur le côté supérieur du tuyau plat (12), formée dans la direction verticale ;  
 une première partie pliée (50) sur la première partie d'aillette (30), située au-dessus du tuyau plat (12), espacée du tuyau plat (12) ;  
 une deuxième partie d'aillette (40) pliée vers le bas depuis la première partie pliée (50), la deuxième partie d'aillette (40) étant opposée à la première partie d'aillette (30) et étant située au-dessus du tuyau plat (12) ;  
 un espace d'écoulement (25) défini entre la première partie d'aillette (30) et la deuxième partie d'aillette (40), situé au-dessus du tuyau plat (12) ;  
 une deuxième partie pliée (60) sur la deuxième partie d'aillette (40) de manière à venir en contact avec le tuyau plat (12), située au-dessus du tuyau plat (12) ;  
 un trou d'évacuation de l'eau de condensation (51 ; 61) formé par découpe de la première partie pliée (50) et/ou de la deuxième partie pliée (60) ;  
 une première ailette d'évacuation de l'eau de condensation (171) pliée vers le haut depuis la première partie pliée (50), située au-dessus du tuyau plat (12) ;  
 une deuxième ailette d'évacuation de l'eau de condensation (172) pliée vers le bas depuis la deuxième partie pliée (60), située pour être en contact étroit avec le tuyau plat (12) ;  
 où l'aillette de côté inférieur (120) présente :

une première partie d'aillette (30) disposée sur le côté inférieur du tuyau plat (12), formée dans la direction verticale ;  
 une première partie pliée (50) pliée sur la première partie d'aillette (30), disposée en dessous du tuyau plat (12) de manière à venir en contact avec le tuyau plat (12) ;  
 une deuxième partie d'aillette (40) pliée vers le bas depuis la première partie pliée (50), la deuxième partie d'aillette (40) étant opposée à la première partie

d'ailette (30) et étant située en dessous des tuyaux plats (12) ;

un espace d'écoulement (25) défini entre la première partie d'ailette (30) et la deuxième partie d'ailette (40), situé en dessous du tuyau plat (12) ;

une deuxième partie pliée (60) sur la deuxième partie d'ailette (40), espacée du tuyau plat (12), située en dessous du tuyau plat (12) ;

un trou d'évacuation de l'eau de condensation (51 ; 61) formé par découpe de la première partie pliée (50) et de la deuxième partie pliée (60), situé en dessous du tuyau plat (12) ;

une première ailette d'évacuation de l'eau de condensation (171) pliée vers le haut depuis la première partie pliée (50), située pour être en contact étroit avec le tuyau plat (12) ; et

une deuxième ailette d'évacuation de l'eau de condensation (172) pliée vers le bas depuis la deuxième partie pliée (60), située en dessous du tuyau plat (12) ;

**caractérisé**

**en ce qu'un** connecteur (52) destiné à connecter l'une à l'autre la première partie d'ailette (30) correspondante et la deuxième partie d'ailette (40) correspondante, est formé sur le bord de la première partie pliée (50) correspondante ;

où chacune des premières ailettes d'évacuation de l'eau de condensation (171) est formée sur toute la largeur de la première partie pliée (50) correspondante, disposée en ligne avec la première partie d'ailette (30) correspondante, formant le trou d'évacuation correspondant de l'eau de condensation (51),

où chacune des deuxièmes ailettes d'évacuation de l'eau de condensation (172) est formée sur toute la largeur de la deuxième partie pliée (60) correspondante, disposée en ligne avec la deuxième partie d'ailette (40) correspondante, formant le trou d'évacuation correspondant de l'eau de condensation (61),

où chacune des premières ailettes d'évacuation de l'eau de condensation (171) et chacune des deuxièmes ailettes d'évacuation de l'eau de condensation (172) est pliée dans une direction opposée à l'autre.

2. Échangeur de chaleur selon la revendication 1, où le tuyau plat (12) disposé pour venir en contact étroit avec la première ailette d'évacuation de l'eau de condensation (171) et la deuxième ailette d'évacuation de l'eau de condensation (172).

3. Échangeur de chaleur selon la revendication 1 ou la revendication 2, où la première ailette d'évacuation de l'eau de condensation (171), la deuxième ailette d'évacuation de l'eau de condensation (172) et le trou d'évacuation de l'eau de condensation (51 ; 61) étant situés sur un bord de l'ailette (120).

4. Échangeur de chaleur selon la revendication 1, où la première ailette d'évacuation de l'eau de condensation (171) de l'ailette inférieure et la deuxième ailette d'évacuation de l'eau de condensation (172) de l'ailette supérieure sont décalées dans la direction verticale.

5. Échangeur de chaleur selon l'une des revendications 1 à 4, où la première partie d'ailette (30) et/ou la deuxième partie d'ailette (40) sont pourvues d'un évent (21, 22) permettant la communication l'un avec l'autre de l'espace d'écoulement (25) avec un espace d'écoulement (25') adjacent.

6. Échangeur de chaleur selon la revendication 5, où ladite au moins une partie d'ailette (30, 40) est en outre pourvue d'un volet (31, 32, 41, 42) pour former l'évent (21, 22) et guider l'air.

7. Échangeur de chaleur selon la revendication 5 ou la revendication 6, où la première partie d'ailette (30) et/ou la deuxième partie d'ailette (40) sont en outre pourvues d'un premier évent (21) et d'un deuxième évent (22), et sont pourvues d'un premier-premier volet (31) pour former le premier évent (21) et d'un premier-deuxième volet (32) pour former le deuxième évent (22), et où le premier-premier volet (31) et le premier-deuxième volet (32) sont formés dans des directions opposées.

FIG. 1

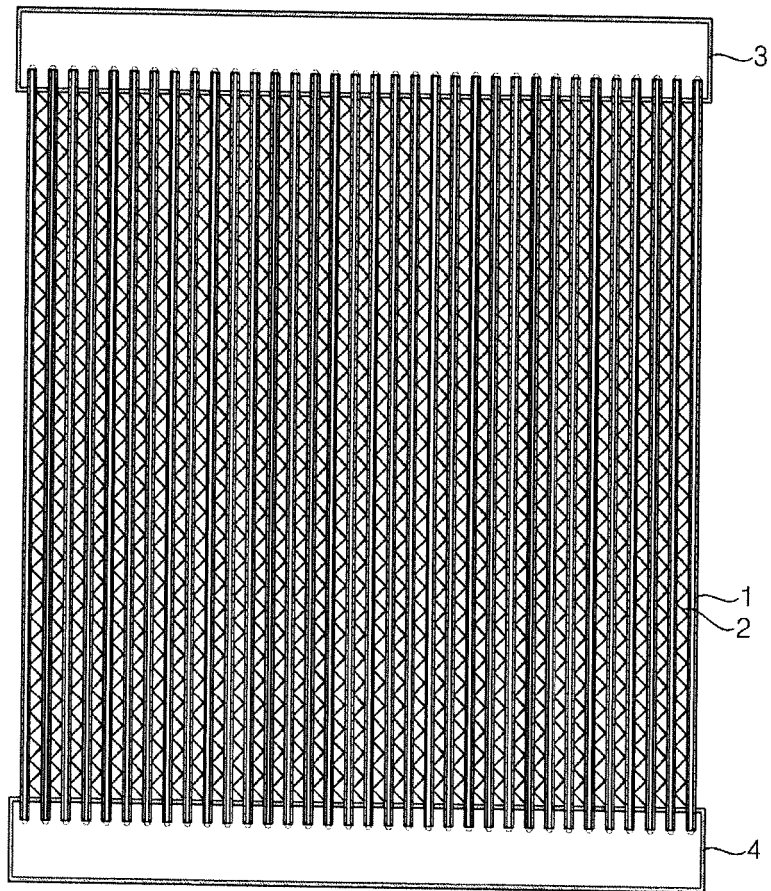


FIG. 2

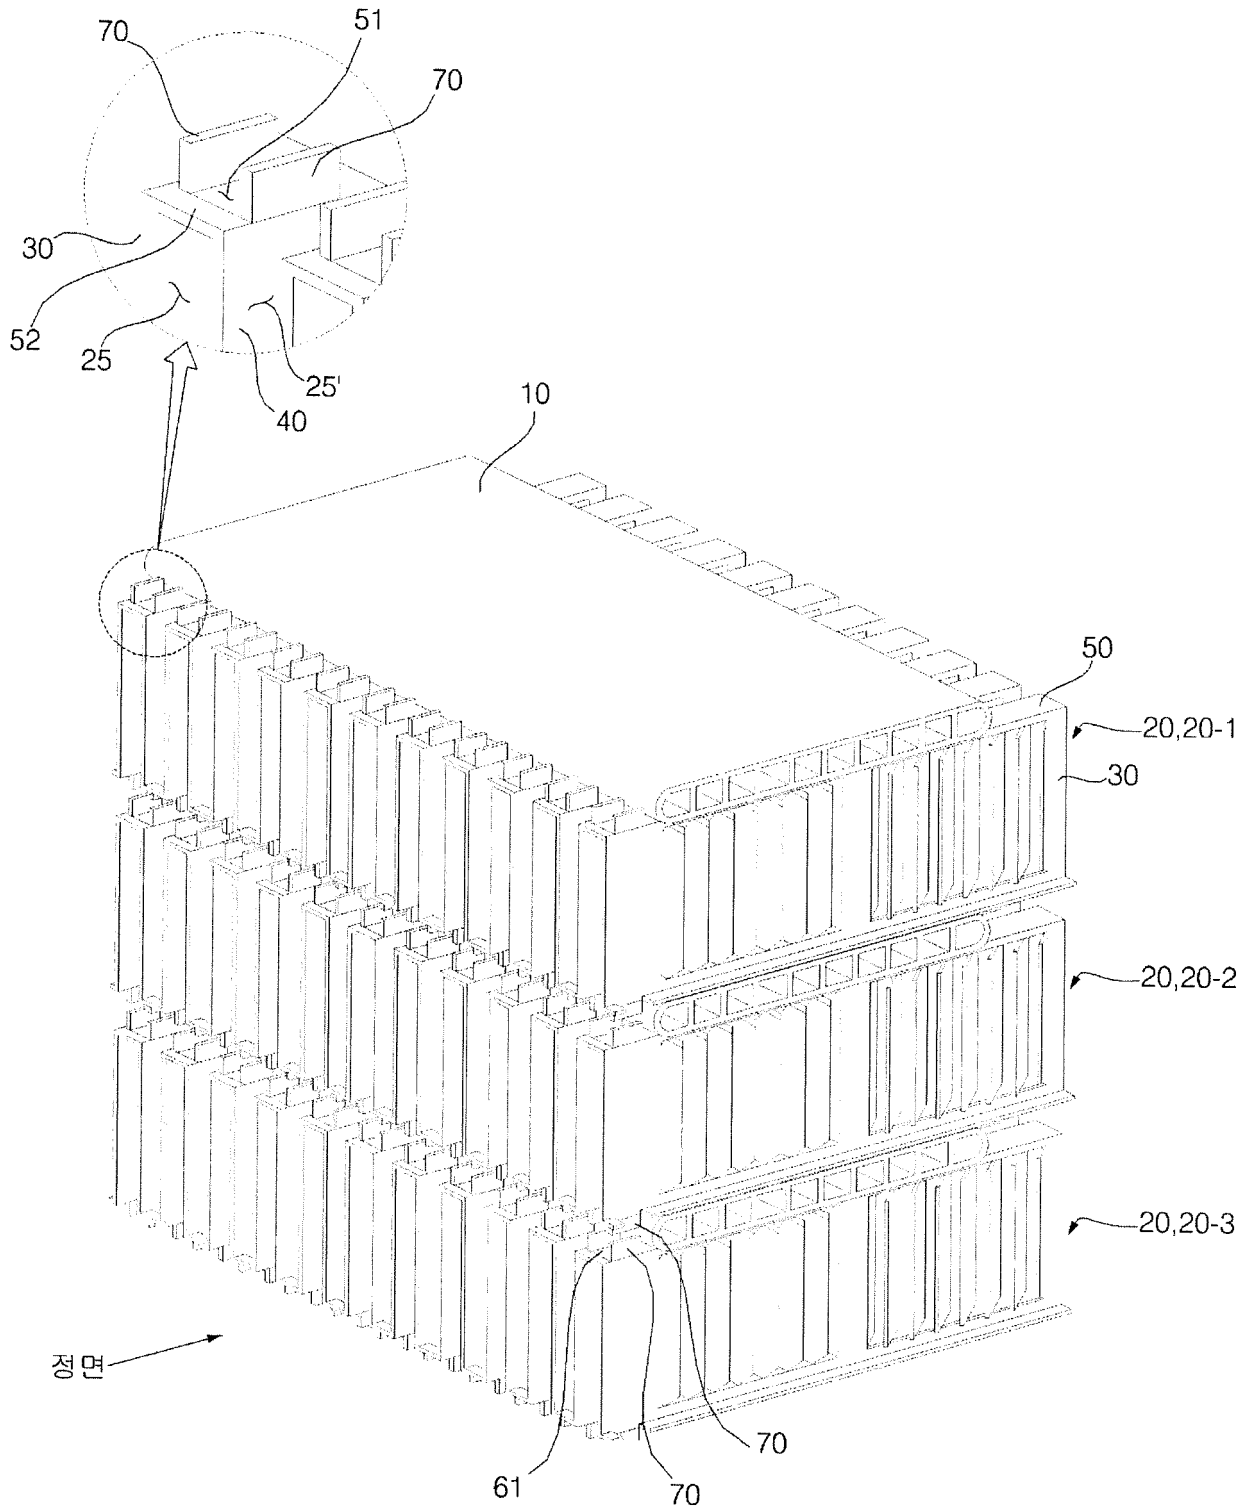


FIG. 3

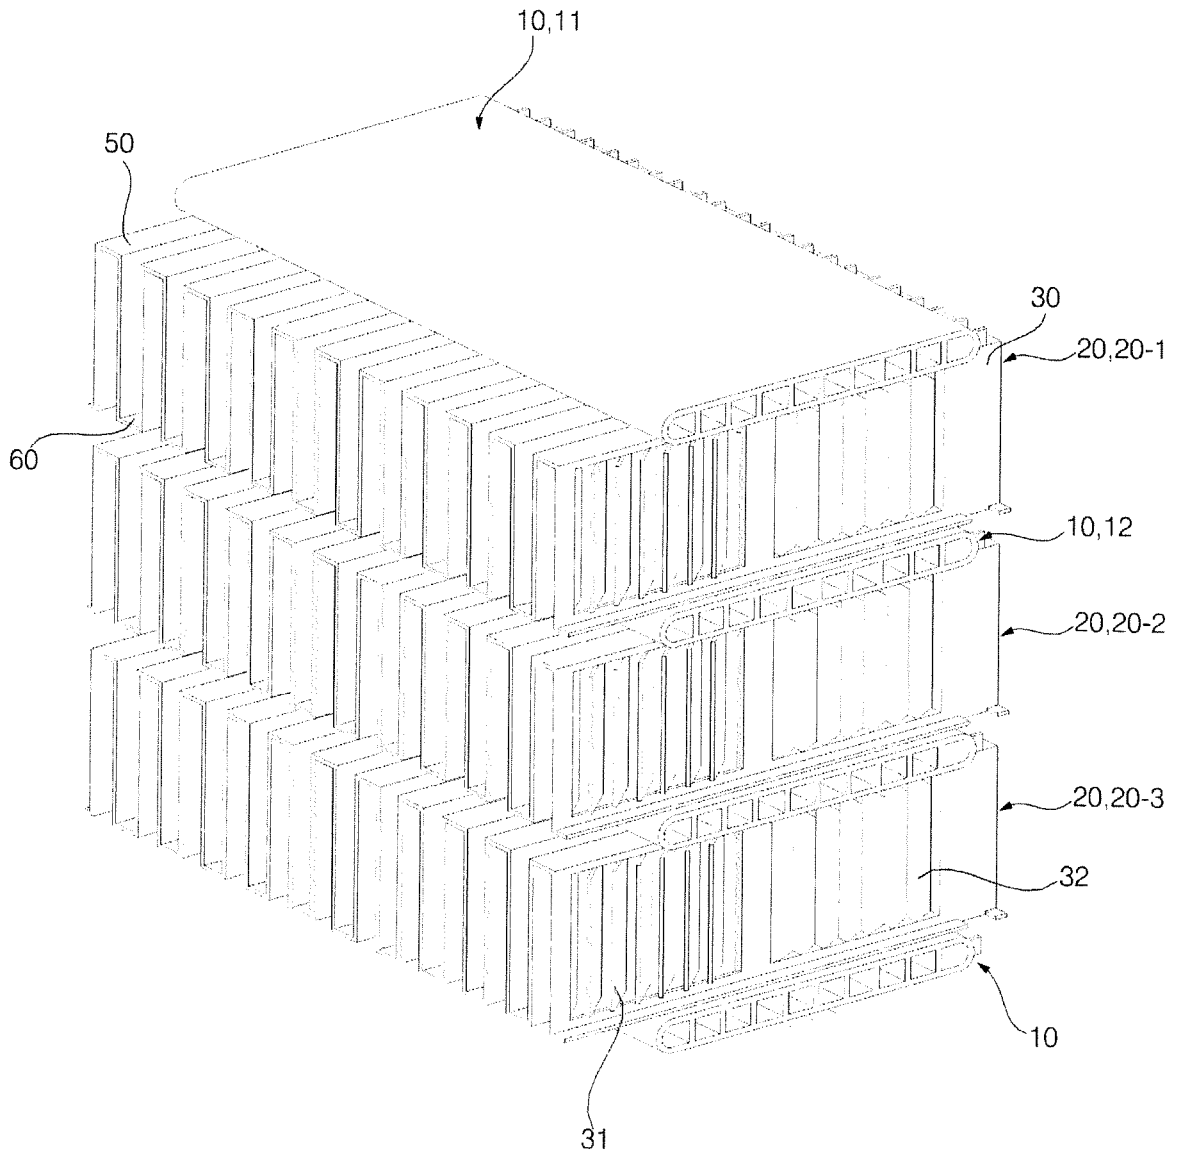


FIG. 4

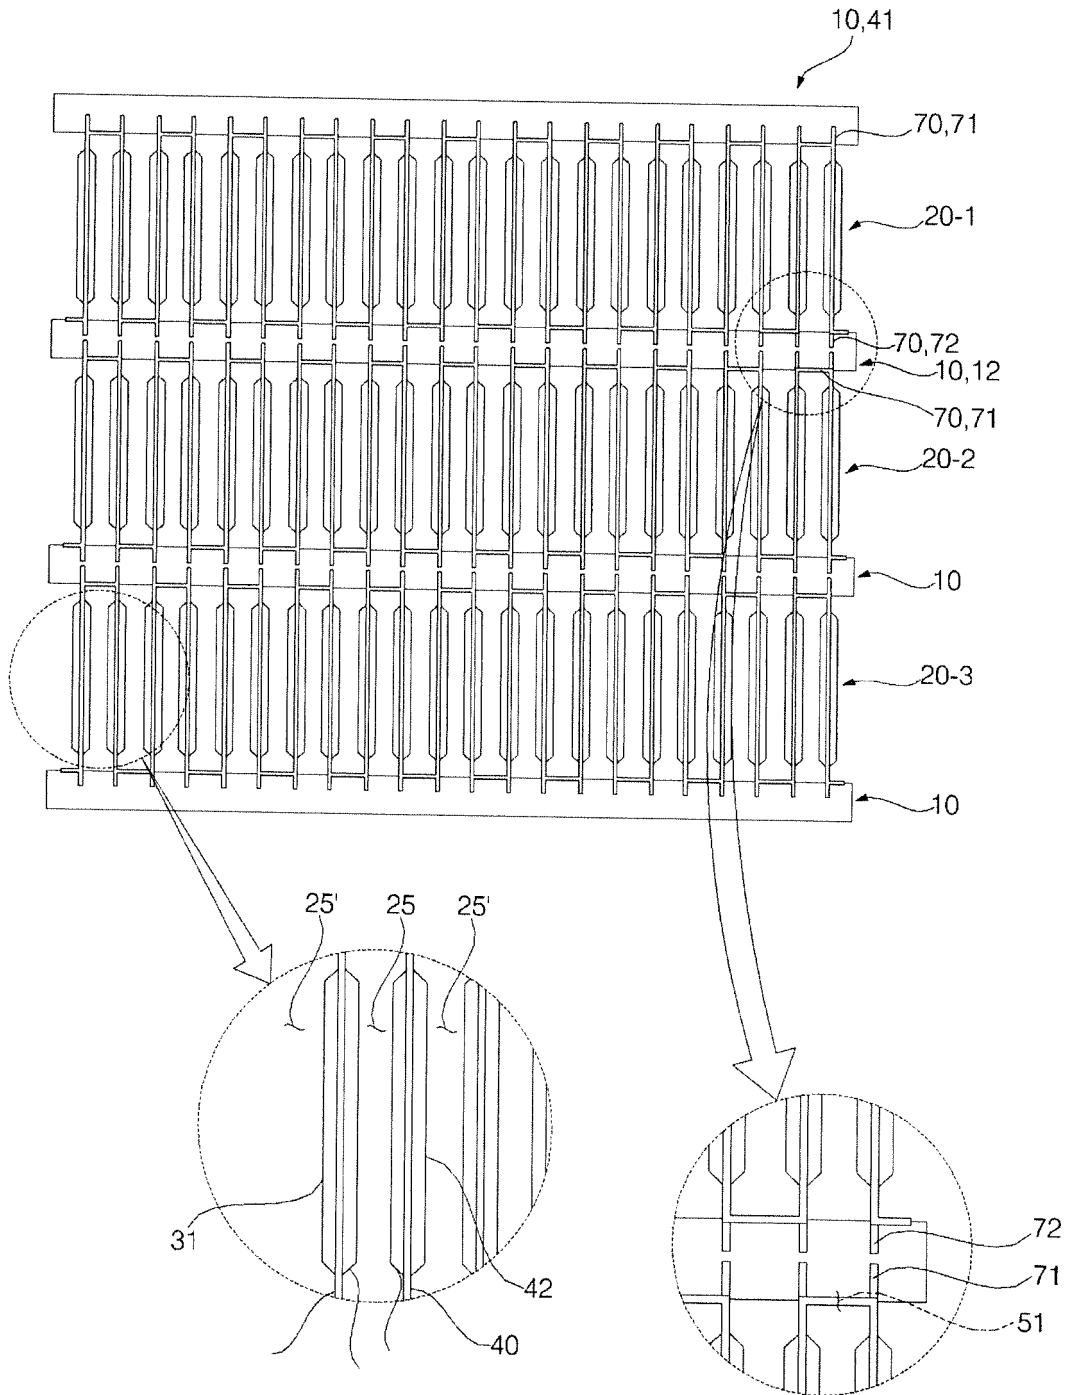


FIG. 5

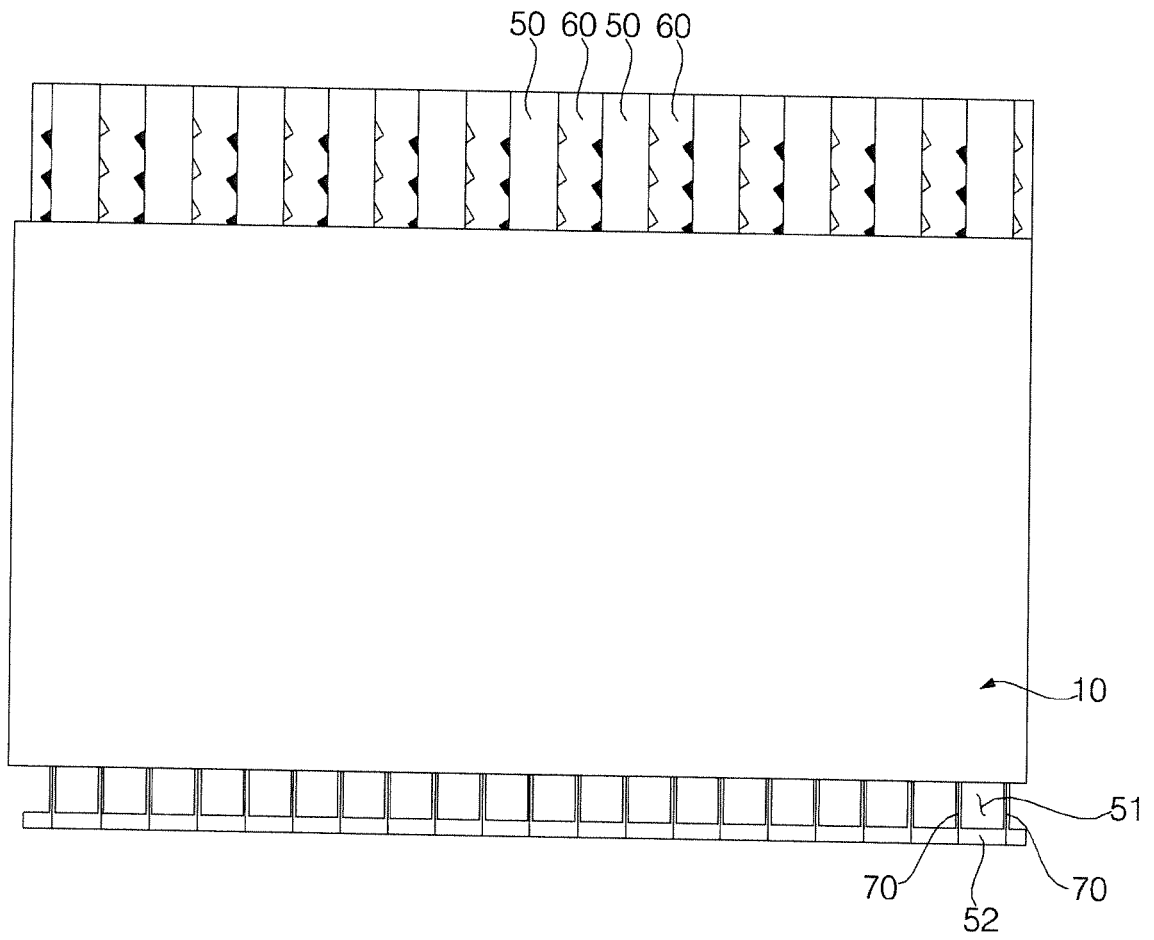


FIG. 6

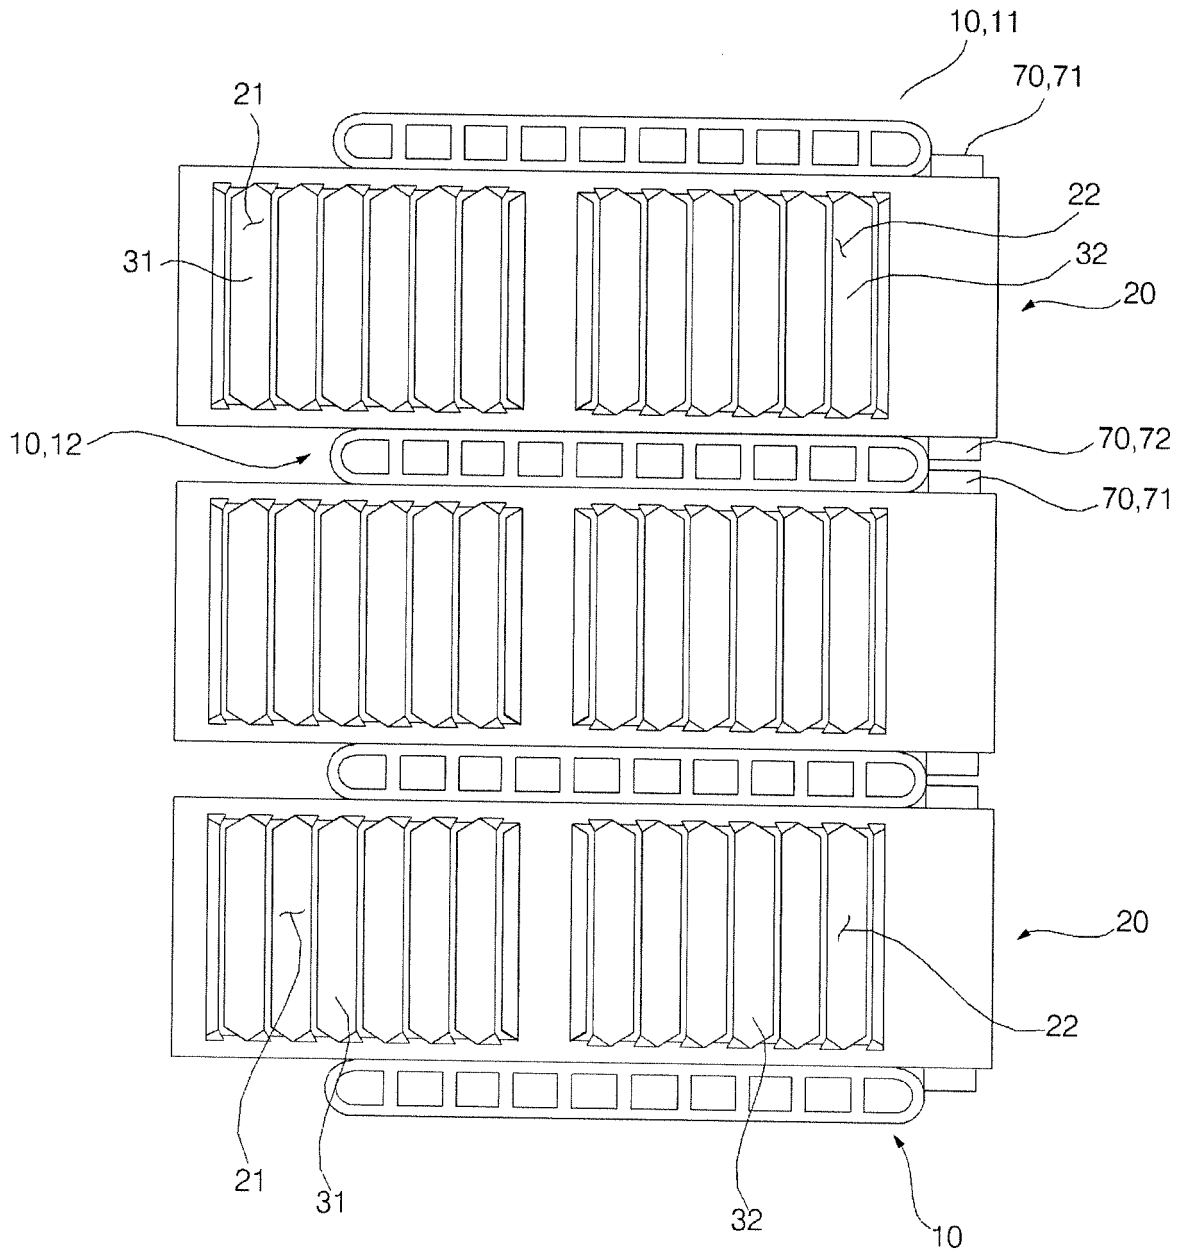


FIG. 7

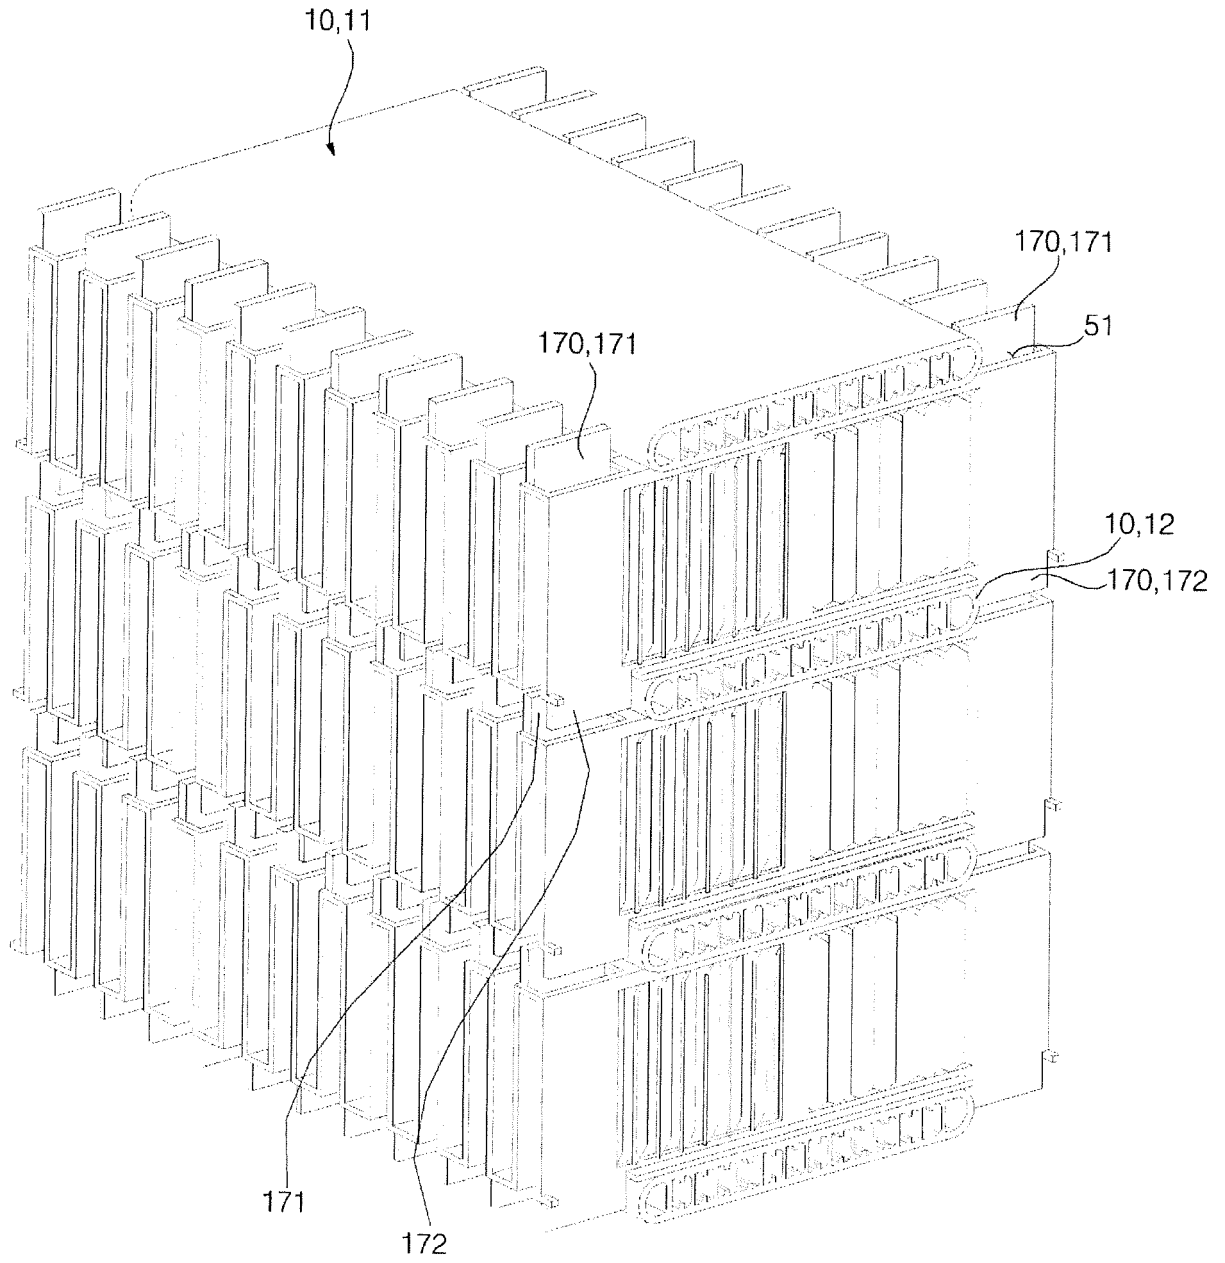


FIG. 8

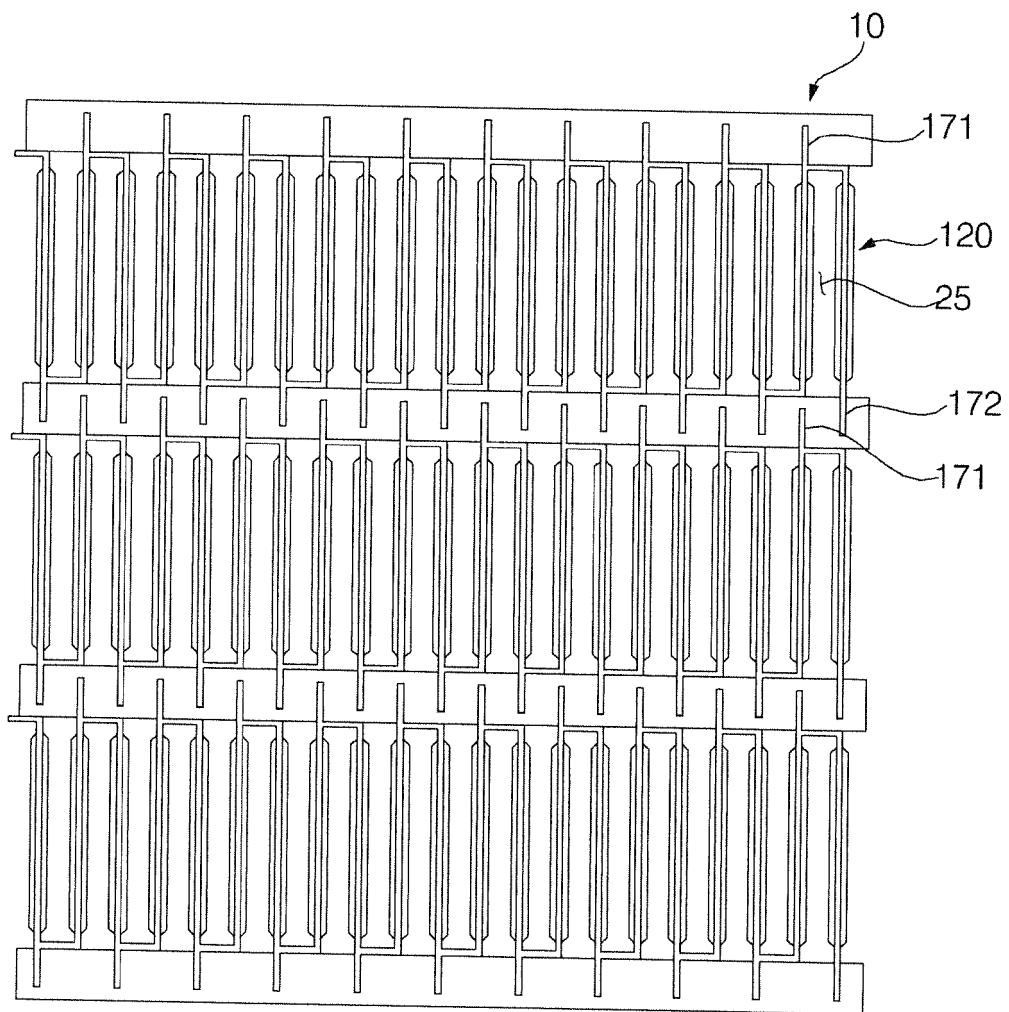


FIG. 9


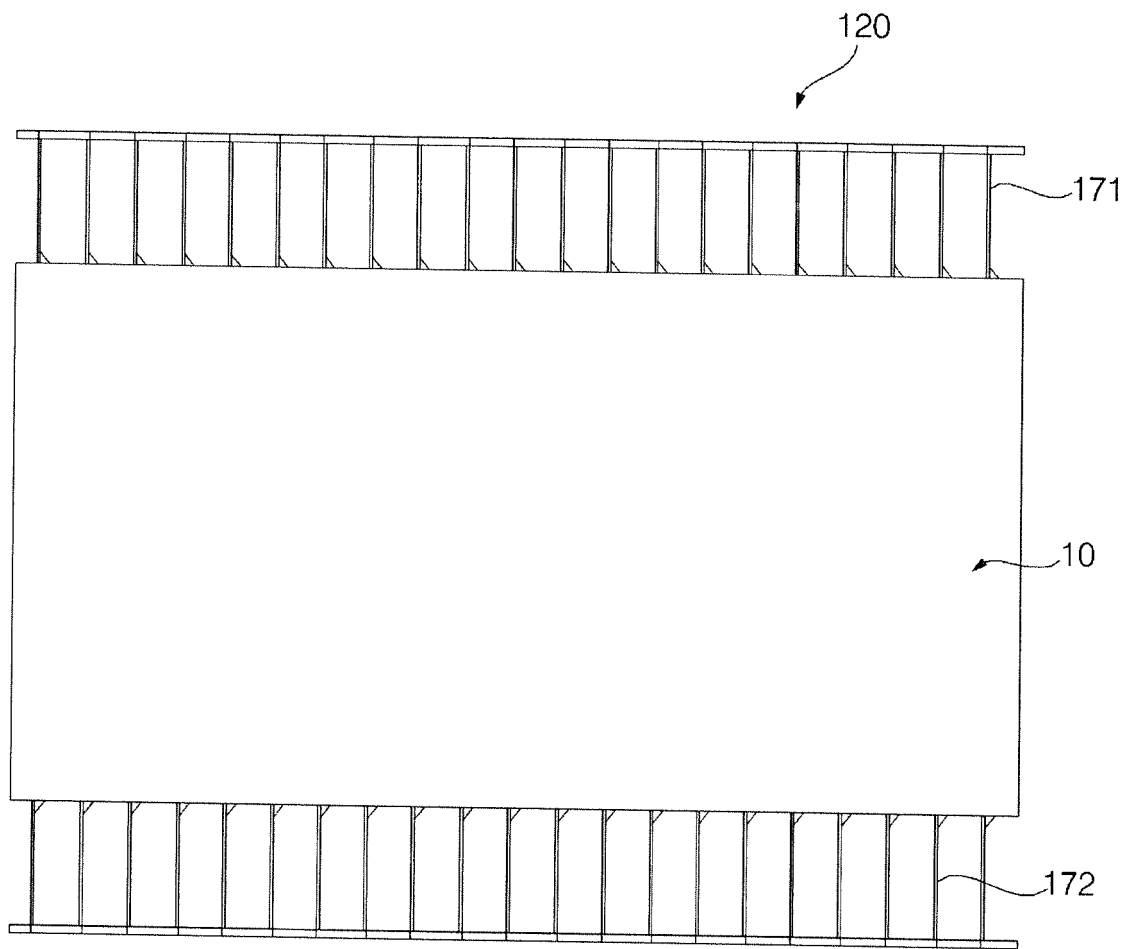


FIG. 10

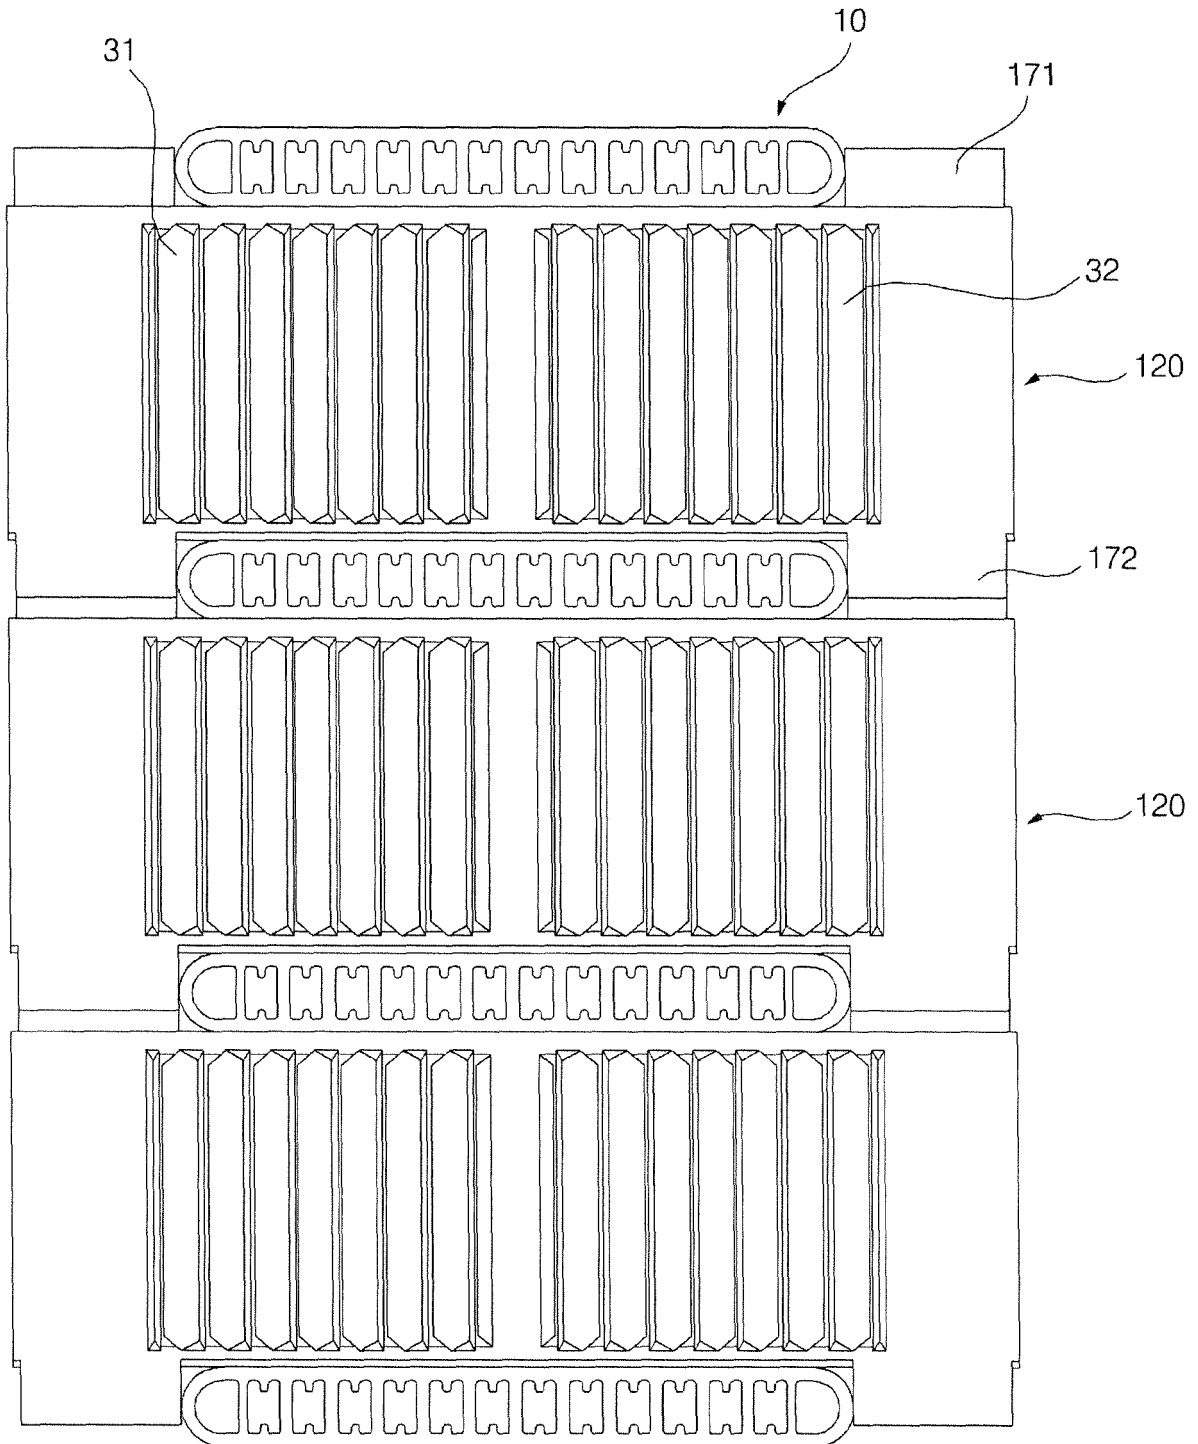

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- KR 100765557 [0013]
- EP 2653819 A1 [0014]
- US 2007251681 A1 [0015]