



**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

---

trip time based on the detection rule being triggered by the pong probe packet that is received by said source element from said target element in response to the ping probe packet. Furthermore, a corresponding software defined network controller for round-trip time determination between a source element and a target element is disclosed.

## METHOD AND SOFTWARE DEFINED NETWORK CONTROLLER FOR PERFORMING ROUND-TRIP TIME DETERMINATION BETWEEN A SOURCE ELEMENT AND A TARGET ELEMENT

5       The present invention relates to a method for performing round-trip time determination between a source element and a target element.

Furthermore, the present invention relates to a software defined network controller for round-trip time determination between a source element and a target element.

10

In recent years network monitoring is a crucial task for Internet service providers (ISPs) to ensure their network is working as expected and that the service level agreements (SLAs) with their customers are fulfilled.

15

According to known methods and systems for network monitoring, the network monitoring is deployed by using dedicated monitoring probes that generate and receive test traffic. The term test traffic may also be designated as probe traffic, wherein probe packets are generated and transmitted in the network for testing and determining network parameters. Fig. 1 illustrates an application scenario of a typical network monitoring probe deployment. The goal is to perform full end-to-end path monitoring to ensure that the whole network is working as intended. The monitoring probes are located close to the customer edge inside the points of presence of the ISPs. The monitoring probes are attached to the network like regular customers would be connected, i.e. by using the access technologies such as DSL, Cable, PON, FttH, etc. that are present at the point of presence (PoP).

20

25

30

While the network is managed by the network management system (NMS) the monitoring probes are orchestrated by a monitoring manager, which may receive some information from the Operations Support System and Business Support System (OSS/BSS system). Typically such information may include guarantees given to the customers according to the service level agreements (SLAs). Furthermore, this information may include information about the topology of the network, especially with respect to the location of the monitoring probes.

In the field of network monitoring, there are diverse network probing mechanisms such as round-trip time (RTT) measurement, wherein a mechanism similar to the ping tool is usually utilized. A monitoring probe A sends a packet to a monitoring probe B, which sends back a reply to the monitoring probe A, and then the monitoring probe A can calculate the RTT by subtracting the time-stamp of the reply from the time-stamp of the initial probe packet.

Conventional methods and systems for network monitoring have the problem that relevant probing techniques require careful crafting of the probe traffic. However, this is not possible in network elements, neither in legacy networks nor in typical software defined networks (SDNs) such as networks controlled by OpenFlow. With regard to OpenFlow it is exemplarily referred to non-patent literature of Open Networking Foundation: "OpenFlow Switch Specification", Version 1.3.4 (March 27, 2014 – TS - 019) retrievable at

"<https://www.opennetworking.org/images/stories/downloads/sdn-resources/onf-specifications/openflow/openflow-switch-v1.3.4.pdf>".

Hence, known network monitoring systems are implemented with dedicated monitoring probe devices and a probing orchestrator, which is cumbersome and inflexible.

Software-defined networking may provide various new capabilities that have not been available in legacy networks. A use case might be to use SDN controlled network elements to perform network measurement instead of dedicated network measurement/monitoring probe devices that are used in legacy networks. However, by doing this, time-stamping capabilities may be needed in SDN switches as

- The control channel delay between a SDN controller and a switch cannot be determined with high accuracy and depends on the current load on the control channel.

- 3 -

- The SDN controller performs the time-stamping in software, this means that depending on when the processing of the time-stamping is scheduled relatively to a Packet\_out message and a Packet\_in message the time stamp may be inaccurate.

5

- Various implementations of OpenFlow agents and their hidden processing logic do not allow to estimate and to correlate processing delays of one type of messages based on the measurements for the others. Moreover, these delays and their cross-correlations may change significantly under dynamically changing load of a switch. Furthermore, such approaches typically do not consider time-stamping inaccuracy introduced by the SDN controller's processing logic.

10

15

However, in this regard it is disadvantageous that time-stamping capabilities could not be widely available in forwarding elements such as SDN switches.

20

In view of the above it is therefore an objective of the present invention to improve and further develop a method of the initially described type for performing round-trip time determination between a source element and a target element in such a way that an alternative mechanism for round-trip determination, in particular without the requirement of time-stamping capability in a forwarding element, is provided.

25

In accordance with the invention, the aforementioned object is accomplished by a method for performing round-trip time determination between a source element and a target element, wherein said source element is a forwarding element of a software defined network, wherein said software defined network comprises one or more forwarding elements and a software defined network controller for controlling the one or more forwarding elements, the method comprising the steps of:

30

- a) instructing, in particular by said software defined network controller, said source element to install a low priority detection rule, wherein the low priority detection rule is triggerable by an incoming pong probe packet;

b) instructing, in particular by said software defined network controller, said source element to install at least one high priority detection rule having a timeout period, wherein the high priority detection rule is triggerable by an incoming pong probe packet;

c) instructing, in particular by said software defined network controller, said source element to send a ping probe packet from said source element to said target element;

d) deriving, in particular by said software defined network controller, an estimate range for the round-trip time based on the detection rule being triggered by the pong probe packet that is received by said source element from said target element in response to the ping probe packet.

Furthermore, the aforementioned objective is accomplished by a software defined network controller for round-trip time determination between a source element and a target element, wherein said source element is a forwarding element of a software defined network,

preferably wherein the software defined network controller is configured to instruct said target element to install a pong probe packet generation rule, wherein the pong probe packet generation rule is triggerable by an incoming ping probe packet,

wherein the software defined network controller is further configured to instruct said source element to install a low priority detection rule, wherein the low priority detection rule is triggerable by an incoming pong probe packet,

wherein the software defined network controller is further configured to instruct said source element to install at least one high priority detection rule having a timeout period, wherein the high priority detection rule is triggerable by an incoming pong probe packet,

wherein the software defined network controller is further configured to instruct said source element to send a ping probe packet from said source element to said target element, and

wherein the software defined network controller is further configured to derive an estimate range for the round-trip time based on the detection rule being triggered by the pong probe packet that is received by said source element from said target element in response to the ping probe packet.

5

According to the invention it has first been recognized that round-trip time (RTT) determination in the context of software defined networking can be performed by employing flow rules in combination with timeout functionality. A flow rule timeout, i.e. for example a flow table entry timeout, may be implemented such that an internal timer is started and the flow rule/entry is removed after the specified timeout period. According to the invention, the source element is instructed to install a low priority detection rule, wherein the low priority detection rule is triggered by an incoming pong probe packet. For example, the software defined network controller can instruct the source element accordingly. In order to perform the measuring process the source element is instructed to install at least one high priority detection rule having a timeout period, wherein the high priority detection rule is also triggerable by an incoming pong probe packet. Moreover, preferably by the software defined network controller, the source element is instructed to send a ping probe packet from the source element to the target element. Then, an estimate range for the round-trip time is derived based on the detection rule being triggered by the pong probe packet that is received by the source element from the target element in response to the ping probe packet. The detection rule being triggered may be the low priority detection rule or the at least one high priority detection rule. Thus, by the use of timeouts for flow rules together with the possibility to generate an immediate response on the target element in the context of RTT determination allows substituting the need for time-stamping of data packets in forwarding elements and/or the need for dealing with inaccuracy of control-channel RTT estimation.

10

15

20

25

30

Hence, a method and a software defined network controller according to the present invention provide an alternative mechanism for round-trip determination, in particular wherein time-stamping capabilities in the source element and/or in the target element is not required for the determination of round-trip times.

The term “probe packet” may refer in particular in the claims, preferably in the description, to a packet used in an active measurement experiment/task to collect knowledge on a given network parameter of interest, in particular such as a round-trip time between a source element and a target element.

5

The term “ping probe packet” may refer in particular in the claims, preferably in the description, to an initial probe packet that is sent from the source element that may preferably function as source monitoring probe to the target element that may preferably function as target monitoring probe.

10

The term “pong probe packet” may refer in particular in the claims, preferably in the description, to a reply probe packet that is sent out from the target element that may preferably function as target monitoring probe. In the context of a round-trip time measurement as measuring task the pong probe packet is sent as reply from the target element to the source element that may preferably function as source monitoring probe.

15

According to embodiments of the invention the method may additionally comprise the step of instructing the target element to install a pong probe packet generation rule, wherein the pong probe packet generation rule is triggerable by an incoming ping probe packet. For example, the target element may be instructed by the software defined network controller accordingly. Furthermore, the step of instructing the target element to install the pong probe packet generation rule may be performed prior to sending out the ping probe packet according to step c). Thus, the target element is able to respond to an incoming ping probe packet, wherein the pong probe packet can be generated by the pong probe packet generation rule. Then, the pong probe packet will be received by the source element from the target element. In this regard, the target element may be a forwarding element of the software defined network. Hence, according to an embodiment of the present invention, the method may comprise the steps of:

20

25

30

- instructing, in particular by the software defined network controller, the target element to install a pong probe packet generation rule, wherein the

- 7 -

pong probe packet generation rule is triggerable by an incoming ping probe packet.

- 5       - instructing, in particular by the software defined network controller, the source element to install a low priority detection rule, wherein the low priority detection rule is triggerable by an incoming pong probe packet;
- 10       - instructing, in particular by the software defined network controller, the source element to install at least one high priority detection rule having a timeout period, wherein the high priority detection rule is triggerable by an incoming pong probe packet;
- 15       - instructing, in particular by the software defined network controller, the source element to send a ping probe packet from the source element to the target element;
- 20       - deriving, in particular by the software defined network controller, an estimate range for the round-trip time based on the detection rule being triggered by the pong probe packet that is received by the source element from the target element in response to the ping probe packet.

25       Furthermore, it may be conceivable that the target element is a network element of another network. For instance, the target element may be any network device that is able to respond to the ping probe packet with a pong probe packet, e.g. an endpoint device such as a desktop computer, laptop, smartphone, tablet, thin client, printer, etc.

30       According to embodiments of the invention the software defined network controller may configure network elements such as the source element and/or the target element, to generate one or more probe packets by creating probe packet template information that is provided to the network elements, wherein the probe packet template information includes one or more probe packet templates and/or probe packet template handling instructions. Thus, the software defined network controller can configure the network elements, i.e. the source element and/or the

target element for probe packet generation. For example, the concept of Packet Template (PT) as exemplarily specified in the document WO 2015/000517 A1 can be used in an advantageous way for probe packet generation on network elements. Document WO 2015/000517 A1 describes a mechanism for generating packets directly on forwarding network elements such as switches of a software defined network. This mechanism for programming in-switch generation may be used according to an embodiment of the present invention in order to improve, enrich and simplify round-trip time determination, namely by generating probe packets using the Packet Template (PT) mechanism. Advantageously, the most network elements from the customer edge all the way up to the backbone gateway are SDN-enabled and in-switch packet generation enabled. Hence, by using one or more probe packet templates the load on the control channel between the forwarding elements and the software defined network controller is significantly reduced.

Furthermore, with regard to in-switch packet generation, e.g. by using Packet Templates, it is exemplarily referred to the non-patent literature of

- Roberto Bifulco, Julien Boite, Mathieu Bouet and Fabian Schneider: "Improving SDN with InSPired Switches", 2016, In Proceedings of the Symposium on SDN Research (SOSR '16), ACM, New York, NY, USA retrievable at "[http://conferences.sigcomm.org/sosr/2016/papers/sosr\\_paper\\_42.pdf](http://conferences.sigcomm.org/sosr/2016/papers/sosr_paper_42.pdf)"

and to the non-patent literature of

- F. Schneider, R. Bifulco and A. Matsiuk: "Better ARP handling with InSPired SDN switches", In 2016 IEEE International Symposium on Local and Metropolitan Area Networks (LANMAN), Rome, Italy, pp. 1-6.

Probe packet template information provided to a forwarding element such as a switch may comprise triggering instructions, a probe packet template and probe packet handling instructions. Thus, the triggering instructions may represent a trigger for the probe packet generation. The probe packet template may be

represented by a byte array, including the packet headers and content, for generating the probe packet on the forwarding network element. The probe packet handling instructions represent instructions what to do with the byte array before sending it out as probe packet.

5

According to embodiments of the invention the pong probe packet generation rule may be configured to generate a pong probe packet that is sent back to the source element. Thus, the target element, e.g. a forwarding element of the software defined network, may be prepared by the software defined network controller in such way that an immediate response on the target element can be generated.

10

According to embodiments of the invention the low priority detection rule according to step a) may be permanently enabled on the source element. Thus, a default rule is provided in order to process incoming probe packets.

15

According to embodiments of the invention the low priority detection rule may be configured to drop the incoming pong probe packet. Hence, an incoming pong probe packet is discarded and thus not forwarded to the software defined network controller whereof the software defined network controller can conclude that the target element has received the pong probe packet after the timeout period of the high priority detection rule or even not received at all.

20

According to embodiments of the invention the low priority detection rule may be configured to mark the incoming pong probe packet as late, and to forward the marked pong probe packet. Thus, the software defined network controller will know if the pong probe packet has been received after the timeout period of the high priority detection rule.

25

According to embodiments of the invention the high priority detection rule may be configured to forward the incoming pong probe packet to the software defined network controller. Thus, the software defined network controller will know if the pong probe packet has been received within the timeout period of the high priority detection rule. Hence, the software defined network controller can conclude if a

30

pong probe packet has been received early or late with regard to the adjusted timeout period of the high priority detection rule.

5 According to embodiments of the invention the high priority detection rule may be further configured to mark the incoming pong probe packet as early. Thus, the software defined network controller will know whether the pong probe packet has been received within the timeout period of the high priority detection rule. In this case, the low priority detection rule might forward the received pong probe packet – preferably unmodified – to the software defined network controller.

10 According to embodiments of the invention, it may be provided that activating the high priority detection rule according to step b) and sending the ping probe packet according to step c) are synchronized. Thus, the precision and accuracy of the round-trip time determination/estimation can be increased.

15 According to embodiments of the invention, one or more measurement iterations may be performed, wherein a measurement iteration may comprise steps b), c) and d) such that the measurement iterations comprises instructing the source element to install at least one high priority detection rule having a timeout period, instructing the source element to send a ping probe packet from the source  
20 element to the target element, and deriving an estimate range for the round-trip time based on the detection rule being triggered by the pong probe packet that is received by the source element from the target element in response to the ping probe packet.

25 According to embodiments of the invention, it may be provided that – prior to starting a measurement iteration that preferably comprises steps b), c) and d) – the estimate range for the round-trip time is initially defined, wherein a lower bound and an upper bound of the estimate range is set up. For example, on controller  
30 side two variables may be set up for these bounds, which represent the current best estimate range. Initially, it is started with suitable values:

- For example, these bounds may be defined by setting the lower bound to zero and the upper bound to a worst case estimate of an upper bound

depending on the network in which the measurements are performed. Examples for such upper bounds would for example be 1000ms for world-wide networks, 200ms for nation-wide networks in Europe, or 20ms for data-center networks.

5

- Another option to determine the bounds may be to run a series of tests (again using the timeout test approach) with exponentially increasing timeout values. One can stop the testing if the tests show an above the RTT result. In this case one would use the highest timeout value that is still below the RTT as lower bound and the smallest timeout value above the RTT as upper bound.

10

According to embodiments of the invention, it may be provided that a measurement iteration, which may comprise steps b), c) and d), is iteratively repeated. Advantageously, the timeout period of the high priority detection rule according to step b), which is installed on the source element per measurement iteration, may be set to a new timeout period value based on the estimate range derived in the preceding measurement iteration. In doing so, step d) of the current measurement iteration may update the estimate range for the round-trip time.

15

20

Hence, embodiments of the present invention can be used to estimate a round-trip time (RTT) between two network elements, i.e. between a source element and a target element. For example, these two network elements may be SDN forwarding elements. At a high-level, the timeout functionality is leveraged to determine whether the RTT is below or above the hard timeout value of a flow rule in the SDN forwarding element functioning as source element. Before the measurements start, an estimation of the RTT is initially made which defines coarse lower and upper bounds for the RTT as exemplarily described above. During the measurements, i.e. during the measurement iterations, a flow rule with different hard timeouts is installed each time in the originating switch and simultaneously a ping is generated from the same switch. The interaction of the installed rule with a ping reply, i.e. pong probe packet, helps estimating the RTT by narrowing the lower and upper bounds of the initial estimation / estimate range of the RTT. The bounds are modified according to whether the ping reply arrives at the originating

25

30

source element before or after the previous relevant flow entry is removed. The hard flow timeout is modified in the next measurement iteration and the same concept is triggered again until a predetermined and/or satisfactory estimation or rather estimate range is achieved.

5

According to embodiments of the invention the new timeout period value of a current measurement iteration may be computed by

$$\frac{(\text{upper} + \text{lower})}{2},$$

10

wherein upper is the upper bound of the estimate range derived in the preceding measurement iteration, and wherein lower is the lower bound of the estimate range derived in the preceding measurement iteration. Thus, a new timeout period can be computed in a fast and efficient way.

15

According to embodiments of the invention the estimate range may be updated by modifying a lower bound and/or an upper bound of the estimated range depending on whether the pong probe packet, which is responsive to the ping probe packet previously sent out, is received by the source element within the timeout period of the high priority detection rule. Thus, the estimate range can be adapted in a suitable way such that the accuracy of the estimate range will be increased.

20

According to embodiments of the invention a measurement iteration – in particular comprising steps b), c) and d) – may be repeated until a predetermined accuracy of the estimate range for the round-trip time is achieved.

25

According to embodiments of the invention the software defined network controller may perform measurement tasks in parallel, wherein the measurement tasks comprise steps a), b) and c), and wherein the timeout period of the high priority detection rules according to step b) of the measurement tasks are set to different timeout period values. The measurement tasks may additionally comprise the step according to which the target element is instructed to install a pong probe packet generation rule, wherein the pong probe packet generation rule is triggerable by

30

an incoming ping probe packet. This step may be performed preferably prior to sending out the ping probe packet according to step c). Hence, in order to increase the speed of the measuring process such that it converges to a good estimation of the RTT, the method according to an embodiment of the invention  
5 can be extended by running multiple parallel tests. Thus, the round-trip time can be faster estimated and this parallel process requires a small number of flow entries compared to the total number of flow entries in current SDN switches.

According to embodiments of the invention, it may be provided that multiple high  
10 priority detection rules are installed in the source element by step b), wherein the multiple high priority detection rules are assigned with different priorities, wherein the timeout period of the multiple high priority detection rules are set to different timeout period values, and wherein the multiple high priority detection rules are configured to embed information about their timeout period value into the incoming  
15 pong probe packet and to forward the pong probe packet to the software defined network controller. Thus, the determination/estimation of the round-trip time is more advanced and accelerated.

An embodiment of the present invention may also be used for measuring the  
20 round-trip time of flows belonging to different queues at network elements. The software defined network controller needs only to hold information about the dedicated queues at the network elements in order to appropriately craft the flow rules – such as pong probe packet generation rule, low priority detection rule, high priority detection rule and/or rule for sending out a ping probe packet – to use for  
25 this measurement.

Embodiments of the present invention may be used for single-hop round-trip time measurements and for multi-hop round-trip time measurements. Thus, round-trip time estimation/determination between two end network elements that are  
30 connected with arbitrary number of network elements in between can be performed. For example, this may be realized by modifying the rules to use in a way which accommodates the end-to-end path by leveraging the single-hop concept. This is feasible since the software-defined network controller is a centralized entity that holds information about the complete network topology.

At least one embodiment of the present invention provides a solution that does not require time-stamping for the estimation of round-trip times, while still avoiding the inaccuracies such as:

5

- The control channel delay between a SDN controller and a switch cannot be determined with high accuracy and depends on the current load on the control channel.

10

- The SDN controller performs the time-stamping in software, this means that depending on when the processing of the time-stamping is scheduled relatively to a Packet\_out message and a Packet\_in message the time stamp may be inaccurate.

15

- Various implementations of OpenFlow agents and their hidden processing logic do not allow to estimate and to correlate processing delays of one type of messages based on the measurements for the others. Moreover, these delays and their cross-correlations may change significantly under dynamically changing load of a switch. Furthermore, such approaches typically do not consider time-stamping inaccuracy introduced by the SDN controller's processing logic.

20

At least one embodiment of the present invention enables RTT estimation without the need for in-switch time-stamping while not requiring the controller to perform RTT estimation and time-stamping and while avoiding the need for control channel RTT estimation when doing in-network RTT measurements.

25

There are several ways how to design and further develop the teaching of the present invention in an advantageous way. To this end it is to be referred to the patent claims subordinate to patent claim 1 on the one hand and to the following explanation of further embodiments of the invention by way of example, illustrated by the figure on the other hand. In connection with the explanation of the further embodiments of the invention by the aid of the figure, generally further embodiments and further developments of the teaching will be explained.

30

In the drawings

Fig. 1 is a schematic view illustrating an application scenario of a typical network monitoring probe deployment,

Fig. 2 is a sequence diagram illustrating a method according to an embodiment of the present invention,

Fig. 3 is a schematic view illustrating an exemplary event timeline for a method according to the embodiment of Fig. 2,

Fig. 4 is a flow chart diagram illustrating a method according to an embodiment of the present invention,

Fig. 5 is a table illustrating flow rules for a method according to an embodiment of the present invention, and

Fig. 6 is a table illustrating a numerical example for a method according to an embodiment of the present invention.

Fig. 1 shows an application scenario of a typical network monitoring probe deployment. Fig. 1 shows an Internet backbone 1 of an Internet service provider (ISP). The Internet backbone 1 is accessible by a Point of Presence (PoP) 2, wherein network connection may be provided from one or more backbone gateways 3 via an aggregation layer 4 through to the customer edge 5. The network is managed by a network management system (NMS) 6 that is located within a system/business support system (OSS/BSS) 7. The OSS/BSS 7, operated together by the ISP, are used to support a range of telecommunication services. According to Fig. 1, monitoring probes 8 are placed at the customer edge 5 of the network. The monitoring probes 8 are orchestrated by a monitoring manager 9 that may receive information from the OSS/BSS 7. This information may include the guarantees given to the customers according to service level agreements (SLAs)

10. Furthermore, this information may include information about the topology of the network, in particular with respect to the location of the monitoring probes.

Fig. 2 shows in the lower part a sequence diagram illustrating a method according to an embodiment of the present invention. The example of Fig. 2 assumes a simple network of two switches S1 and S2, which are connected to each other. The switches S1 and S2 are controlled by a software defined network (SDN) controller C.

According to the embodiment of Fig. 2 the round-trip time (RTT) between switch S1 as source element and switch S2 as target element is estimated by using only flow entry timeouts and in-switch packet generation as follows:

1. Preconfiguration:

- Install a pong probe packet generation rule I in switch S2, which is triggered when a predefined ping probe packet (designated as "ping" in the figures) arrives from switch S1. Switch S2 as target element will generate a pong probe packet (designated as "pong" in the figures) that is sent back to switch S1. The pong probe packet generation rule can be programmed via Packet Template (PT). With regard to Packet Template, it is exemplarily referred to document WO 2015/000517 A1.
- Install a "default" permanent (hard timeout = 0) low priority detection rule II in switch S1 that discards/drops pong packets when a pong probe packet is received. In general, two rules with same match but different priorities and hard timeouts are installed to help estimating the round-trip time. The low priority detection rule II is matched when the other rule (e.g. the high priority detection rule III) with the same match but with higher priority and a hard timeout  $\neq 0$  has been removed.

2. On the controller side, set up two variables that represent the current best estimate range R\_EST for the round-trip time RTT between switch S1 and switch S2 (lower and upper bounds of R\_EST):

- An option to define these bounds is to set the lower bound to zero and the upper bound to a worst case estimate of an upper bound depending on the network in which the measurements are performed. Examples for such upper bounds would for example be 1000ms for world-wide networks, 200ms for nation-wide networks in Europe, or 20ms for data-center networks.
- Another option to determine the bounds is to run a series of tests (again using the timeout test approach) with exponentially increasing timeout values. One can stop the testing if the tests show an above the RTT result. In this case one would use the highest timeout value that is still below the RTT as lower bound and the smallest timeout value above the RTT as upper bound.

3. The SDN controller C sends two instructions to switch S1:

- The SDN controller C sends to switch S1 a high priority detection rule III that matches on pong probe packets. The high priority detection rule III has a timeout (designated as TO in Fig. 2, Fig. 3, Fig. 4 and Fig. 6) of X, where X can be computed by  $\frac{1}{2} * (\text{upper bound} + \text{lower bound})$ . Furthermore, the high priority detection rule III comprise the action to send the received pong probe packet to the SDN controller C:
  - i. This means that if the pong probe packet is received within the timeout of X, it is sent to the SDN controller C, whereas
  - ii. if the pong probe packet is received after the timeout of X, it is silently discarded by the low priority detection rule II. Therefore, the SDN controller C can identify that the value of the hard timeout that it previously used is above the RTT (if the pong probe packet is received by the SDN controller C) or below the RTT (if the pong probe packet is dropped). Another approach on this conclusion – instead of using the low priority detection rule II

to discard/drop pong probe packets that arrive after the timeout expiry of the high priority detection rule III – may be installing a rule that should mark the pong probe packet if received at the switch S1 after the timeout passed, so that the SDN controller C can distinguish between an early (i.e. within the timeout) and a late (i.e. after the timeout) pong probe packet and can use this information along with the selected hard flow timeout to estimate/determine the RTT appropriately. The marking can be provided through e.g. a modification of any unused packet header in the pong probe packet.

- The SDN controller C instructs the switch S1 to send out a ping probe packet from S1 according to rule IV. The ping probe packet is matching the pong probe packet generation rule I in switch S2, which performs in-switch packet generation. To increase the precision of the RTT estimation in the switch S1 the ping generation event (according to rule IV), which is generated by a Packet\_out message or which may be created by exploiting the PacketTemplate approach, and the high priority detection rule III activation event should happen synchronously. For example, both events may be transmitted by the SDN controller C within the same flow\_mod message which may carry the two events as separate OpenFlow experimental instructions. The instructions are then immediately executed to achieve the event synchronization. Otherwise, both events can be communicated to the switch S1 with separate OpenFlow messages but carrying OpenFlow experimental instructions to trigger the events simultaneously using an internal timer at the switch S1.

4. If a pong probe packet (e.g., packet-in message carrying the pong probe packet due to the high priority detection rule III) is returned to the SDN controller C within an appropriate period as adjustment timeout ATO, then the upper bound for the estimate range will be decreased.

If after an appropriate period no pong probe packet is returned, then the lower bound for the estimate range will be increased. In the example illustrated by Fig. 2, the “appropriate” period ATO is chosen to be longer than the sum of the chosen timeout  $X$  from the high priority detection rule III, the estimated round-trip time of the control channel between the controller  $C$  and switch  $S1$  (designated as  $RTT_{CC}$  in Fig. 2) and a safety margin  $\Delta$ . It is to be noted that if the low priority detection rule II marks the “late” pong probe packet, there is no need to estimate the “appropriate” period ATO of the SDN controller  $C$ , rather the reception of any pong probe packet (either late or not) may serve as a trigger for subsequent steps of the operation. Also it is to be noted that ATO estimation does not impact the precision of the RTT estimation, but is solely needed for triggering of subsequent steps of the algorithm.

The embodiment of Fig. 2 leverages a mandatory feature of the OpenFlow Switch specification, namely hard flow timeouts. A hard flow timeout works as follows: When the switch receives a flow\_mod message with a hard flow timeout other than 0, the switch will start an internal timer and remove the flow entry after the specified timeout. This timeout functionality in combination with the possibility to generate an immediate response on the target switch, which for instance is feasible by exploiting the Packet Template approach as exemplarily specified in the document WO 2015/000517 A1, allows substituting the need for either:

- In-switch packet time-stamping, which is a functionality usually not available in switches, assuming a switch-based RTT measurement model, or
- Dealing with control-channel RTT estimation inaccuracy, assuming a controller-based RTT measurement model.

Fig. 3 shows an exemplary event timeline for a method according to the embodiment Fig. 2. According to the example of Fig. 3 the timeout period of the high priority detection rule III is set to 10. At point  $t = 8$ , switch  $S1$  as source element receives a pong probe packet (designated as “pong” in the figures) from the target element. Switch  $S1$  looks matching rule up in its flow table 11. Since two rules match, namely the low priority detection rule II and the high priority detection rule III, the rule having the higher priority is selected. Due to the action defined by

the high priority detection rule III, the pong probe packet is forwarded to the SDN controller. At point  $t = 10$  the high priority detection rule III is removed from the flow table 11 of switch S1. Therefore, the pong probe packet that is received at point  $t = 12$  by switch S1 is processed by the remaining low priority detection rule II. Thus,  
5 the pong probe packet is dropped.

Fig. 4 shows a flow chart diagram illustrating a method according to an embodiment of the present invention. As described above with regard to Fig. 2 and Fig. 3, depending if the pong probe packet returned within the timeout or not, the  
10 RTT estimate range is updated according to the controller algorithm illustrated by Fig. 4. If the estimate range is small enough to provide the desired estimation, the execution of the algorithm can stop. If the desired estimation is not achieved, the SDN controller chooses another timeout value NewTO (designated as Y in Fig. 2) based on a suitable search strategy. Moreover, the SDN controller C executes the  
15 step of installing the high priority rule (rule V in Fig. 2) and ping generation (rule IV in Fig. 2) again. For example a binary search may be used as search strategy. However, other ones with tractable complexity would also be sufficient. Thus, the controller algorithm illustrated by Fig. 4 is configured to vary the timeouts in order to reduce the RTT estimation range.

In order to increase the speed that this process converges to a good estimation of the RTT, the method according to another embodiment can be extended by running multiple parallel tests. In particular, the controller sends in parallel multiple  
20 sets of messages, with each set comprising of the rules I, II, III and IV. Each set has slightly different match, action and hard timeout fields, so the parallel tests can happen on the data plane without any interference and be successfully identified by the SDN controller C. The SDN controller C chooses different hard flow timeout values for each set of parallel messages; therefore it can faster estimate the RTT. This parallel process requires a small number of flow entries compared to the total  
25 number of flow entries in current SDN switches.

Fig. 5 shows a table illustrating flow rules for a more advanced approach on accelerating the estimation of the RTT, wherein the previously mentioned approach of running multiple parallel tests is extended. Here, the priority feature  
30

defined in the OpenFlow specification and the capability to encode the different timeouts in an unused field of the packet header is exploited. In the approach of Fig. 5, the rules II and III according to Fig. 2 are replaced with multiple flow rules installed at switch S1 in order to estimate the RTT. All packets are sent to the SDN controller. The rules installed at switch S1 have the same match but different hard timeout and priority values. Using the example of Fig. 5, it is considered that the RTT is greater than two seconds but lower than three seconds. This means that the last two table entries will be removed before the pong reply is received by the switch S1. The pong probe packet will be matched to the remaining three flow rules. The third flow rule will be selected among those matched since it contains the highest priority. The third rule has a timeout value of three seconds. This value is encoded in the packet before it is sent to the SDN controller. Upon the reception of the pong probe packet, the SDN controller identifies that the RTT is lower than three seconds based on the encoded value. Furthermore, it identifies that the RTT is greater than two seconds (i.e., the timeout value of the rule that has been removed last before the pong probe packet's reception – the SDN controller can keep track of all the timeout values used). The embodiment of Fig. 5 eliminates the measurement rounds needed to determine/estimate the RTT and reduces the amount of flow rules needed compared to the approach of using parallel tests. However, the approach illustrated by Fig. 5 requires that all the installed flow rules at switch S1 are concurrently activated.

Fig. 6 shows a table illustrating a numerical example for a method according to an embodiment of the present invention, in particular concerning the embodiment illustrated by Fig. 4. To illustrate the intended working of the embodiment a simple topology is assumed where the two switches S1 and S2 are connected to each other via direct link or a network, both switches are controlled by a SDN controller which also controls the network between the two switches.

Example setting: It is assumed that the RTT between switch S1 and switch S2 is  $RTT_{S1\_S2} = 12\text{ms}$ , and the RTT between the SDN controller and the switches is  $RTT_{C\_S1} = 18\text{ms}$ . It is further assumed that the RTTs are composed of equal components of one-way delays (i.e. controller to switch S1 is 9ms delay). The target accuracy in this example is  $Acc = 2\text{ms}$ .

Initially the controller does not know the RTT between the switch S1 and the switch S2. According to the above stated controller algorithm according to Fig. 4, it has to choose initial lower and upper bounds for the estimated RTT. For the lower bound it would choose lower bound  $LB = 0\text{ms}$ , as RTTs cannot be negative. For the upper bound UB it could produce an estimate by sending a packet\_out(pong) to switch S1, with only the pong probe packet generation rule installed in switch S2 and no low priority detection rule installed in S1, and measuring the time between sending the packet\_out for the ping probe packet and receiving the packet\_in for the pong probe packet. In this case this would be at least 30ms ( $RTT\_C\_S1 + RTT\_S1\_S2 = 18\text{ms} + 12\text{ms}$ ), plus potential processing delays in the SDN controller and the switch. Adding a 2ms processing delay an upper bound of  $UB=32\text{ms}$  is got. Now the measurement rounds/iterations are started as illustrated by Fig. 6.

Once the target accuracy is achieved, the execution can be stopped and the estimated RTT between switch S1 and switch S2 can be determined as between 11ms and 12ms.

Many modifications and other embodiments of the invention set forth herein will come to mind to the one skilled in the art to which the invention pertains having the benefit of the teachings presented in the foregoing description and the associated drawings. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

## List of reference signs

- |    |                           |
|----|---------------------------|
| 1  | Internet Backbone         |
| 2  | Point of Presence         |
| 3  | Backbone Gateways         |
| 4  | Aggregation Layer         |
| 5  | Customer Edge             |
| 6  | Network Management System |
| 7  | OSS/BSS                   |
| 8  | Monitoring Probes         |
| 9  | Monitoring Manager        |
| 10 | SLA                       |
| 11 | Flow table                |

## Claims

1. Method for performing round-trip time determination between a source element and a target element, wherein said source element is a forwarding element of a software defined network, wherein said software defined network comprises one or more forwarding elements and a software defined network controller for controlling the one or more forwarding elements, the method comprising the steps of:

a) instructing, in particular by said software defined network controller, said source element to install a low priority detection rule, wherein the low priority detection rule is triggerable by an incoming pong probe packet;

b) instructing, in particular by said software defined network controller, said source element to install at least one high priority detection rule having a timeout period, wherein the high priority detection rule is triggerable by an incoming pong probe packet;

c) instructing, in particular by said software defined network controller, said source element to send a ping probe packet from said source element to said target element;

d) deriving, in particular by said software defined network controller, an estimate range for the round-trip time based on the detection rule being triggered by the pong probe packet that is received by said source element from said target element in response to the ping probe packet.

2. Method according to claim 1, preferably prior to sending out the ping probe packet according to step c), the method additionally comprising the step of:

instructing, in particular by said software defined network controller, said target element to install a pong probe packet generation rule, wherein the pong probe packet generation rule is triggerable by an incoming ping probe packet.

3. Method according to claim 2, wherein the pong probe packet generation rule is configured to generate a pong probe packet that is sent back to said source element.
- 5 4. Method according to any of claims 1 or 3, wherein the low priority detection rule according to step a) is permanently enabled on said source element.
5. Method according to any of claims 1 to 4, wherein the low priority detection rule is configured to drop the incoming pong probe packet.
- 10 6. Method according to any of claims 1 to 5, wherein the low priority detection rule is configured
- to mark the incoming pong probe packet as late, and
- to forward the marked pong probe packet to said software defined network
- 15 controller.
7. Method according to any of claims 1 to 6, wherein the high priority detection rule is configured to forward the incoming pong probe packet to said software defined network controller.
- 20 8. Method according to any of claims 1 to 7, wherein activating the high priority detection rule according to step b) and sending the ping probe packet according to step c) are synchronized.
- 25 9. Method according to any of claims 1 to 8, wherein prior to starting a measurement iteration that preferably comprises steps b), c) and d) the estimate range for the round-trip time is initially defined, wherein a lower bound and an upper bound of the estimate range is set up.
- 30 10. Method according to any of claims 1 to 9, wherein a measurement iteration comprising steps b), c) and d) is iteratively repeated,
- wherein the timeout period of the high priority detection rule according to step b), which is installed on said source element per measurement iteration, is set

to a new timeout period value based on the estimate range derived in the preceding measurement iteration, and

wherein step d) of the current measurement iteration updates the estimate range for the round-trip time.

5

11. Method according to claim 10, wherein the new timeout period value of a current measurement iteration is computed by

$$\frac{(\text{upper} + \text{lower})}{2},$$

10

wherein upper is the upper bound of the estimate range derived in the preceding measurement iteration, and wherein lower is the lower bound of the estimate range derived in the preceding measurement iteration.

15

12. Method according to any of claims 1 to 11, wherein the estimate range is updated by modifying a lower bound and/or a upper bound of the estimated range depending on whether the pong probe packet, which is responsive to the ping probe packet previously sent out, is received by said source element within the timeout period of the high priority detection rule.

20

13. Method according to any of claims 1 to 12, wherein a measurement iteration, in particular comprising steps b)-d), is repeated until a predetermined accuracy of the estimate range for the round-trip time is achieved.

25

14. Method according to any of claims 1 to 13, wherein said software defined network controller performs measurement tasks in parallel, wherein said measurement tasks comprise steps a)-c), and wherein the timeout period of the high priority detection rules according to step b) of said measurement tasks are set to different timeout period values.

30

15. Method according to any of claims 1 to 14, wherein multiple high priority detection rules are installed in said source element by step b),

wherein said multiple high priority detection rules are assigned with different priorities,

wherein the timeout period of said multiple high priority detection rules are set to different timeout period values, and

5            wherein said multiple high priority detection rules are configured to embed information about their timeout period value into the incoming pong probe packet and to forward the pong probe packet to said software defined network controller.

10           16. Software defined network controller for round-trip time determination between a source element and a target element, in particular for executing a method according to any of claims 1 to 15, wherein said source element is a forwarding element of a software defined network,

             preferably wherein the software defined network controller is configured to instruct said target element to install a pong probe packet generation rule, wherein  
15           the pong probe packet generation rule is triggerable by an incoming ping probe packet,

             wherein the software defined network controller is further configured to instruct said source element to install a low priority detection rule, wherein the low priority detection rule is triggerable by an incoming pong probe packet,

20           wherein the software defined network controller is further configured to instruct said source element to install at least one high priority detection rule having a timeout period, wherein the high priority detection rule is triggerable by an incoming pong probe packet,

             wherein the software defined network controller is further configured to  
25           instruct said source element to send a ping probe packet from said source element to said target element, and

             wherein the software defined network controller is further configured to derive an estimate range for the round-trip time based on the detection rule being triggered by the pong probe packet that is received by said source element from  
30           said target element in response to the ping probe packet.

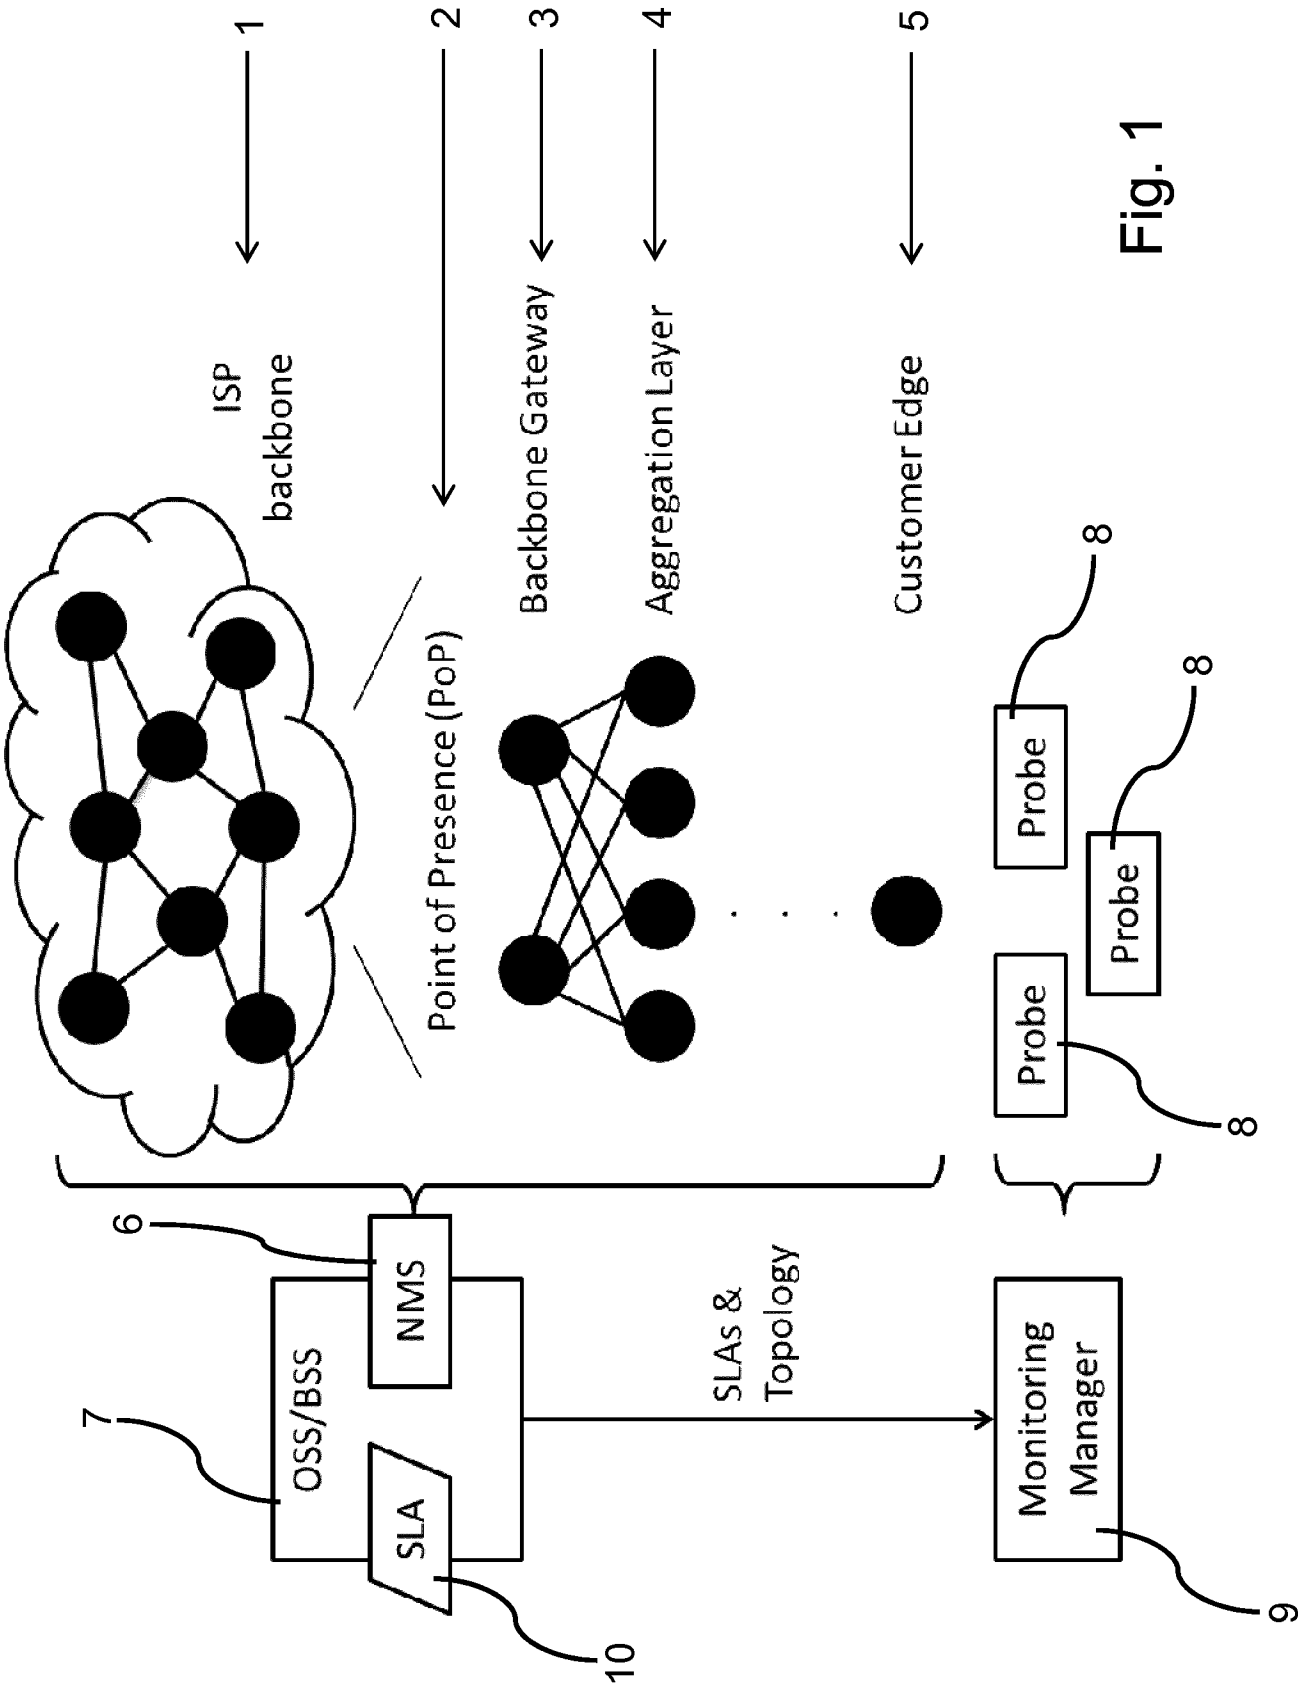
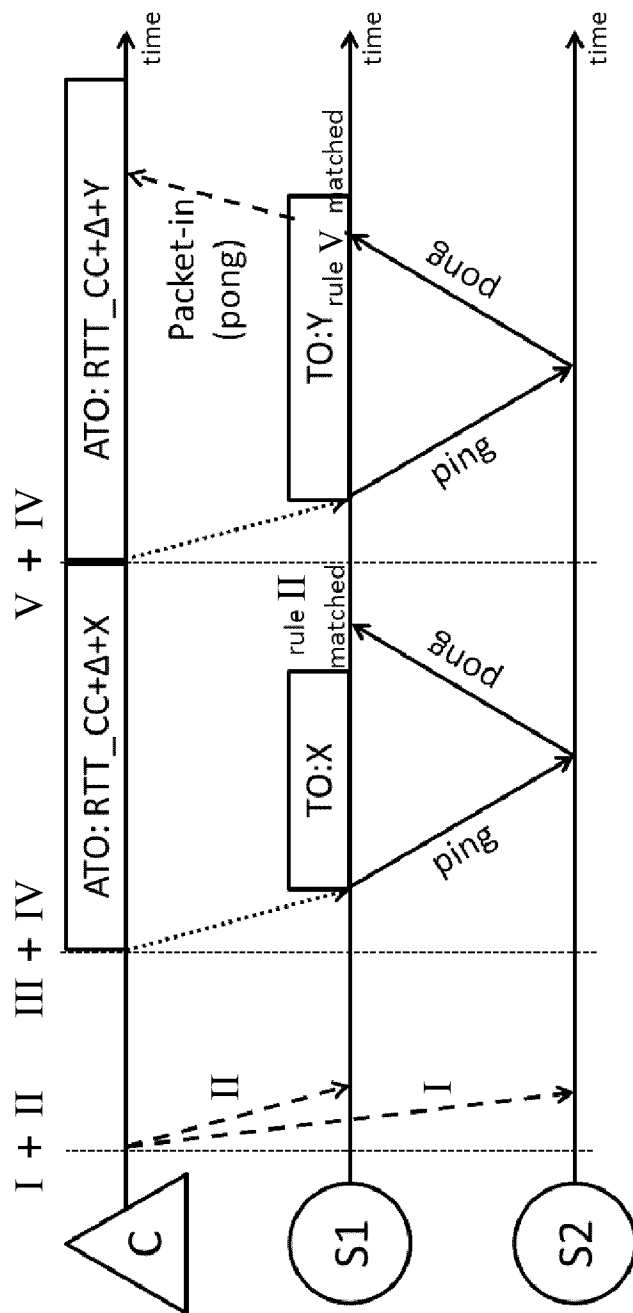


Fig. 1

| Match |      | Action            | Prio | Timeout | Comment                                             |
|-------|------|-------------------|------|---------|-----------------------------------------------------|
| I     | ping | generate (pong)   |      | 0       | Respond to ping                                     |
| II    | pong | discard           | low  | 0       | Drop packet when received after TO                  |
| III   | pong | packet_in         | high | X sec   | Send early pong to controller                       |
| IV    |      | packet_out (ping) |      | n/a     | Send out ping                                       |
| V     | pong | packet_in         | high | Y sec   | Repeat with different TO (in this example $Y > X$ ) |
| ↑     | ↑    | ↑                 |      | ↑       | Change TO until RTT is accurate                     |



**Fig. 2**

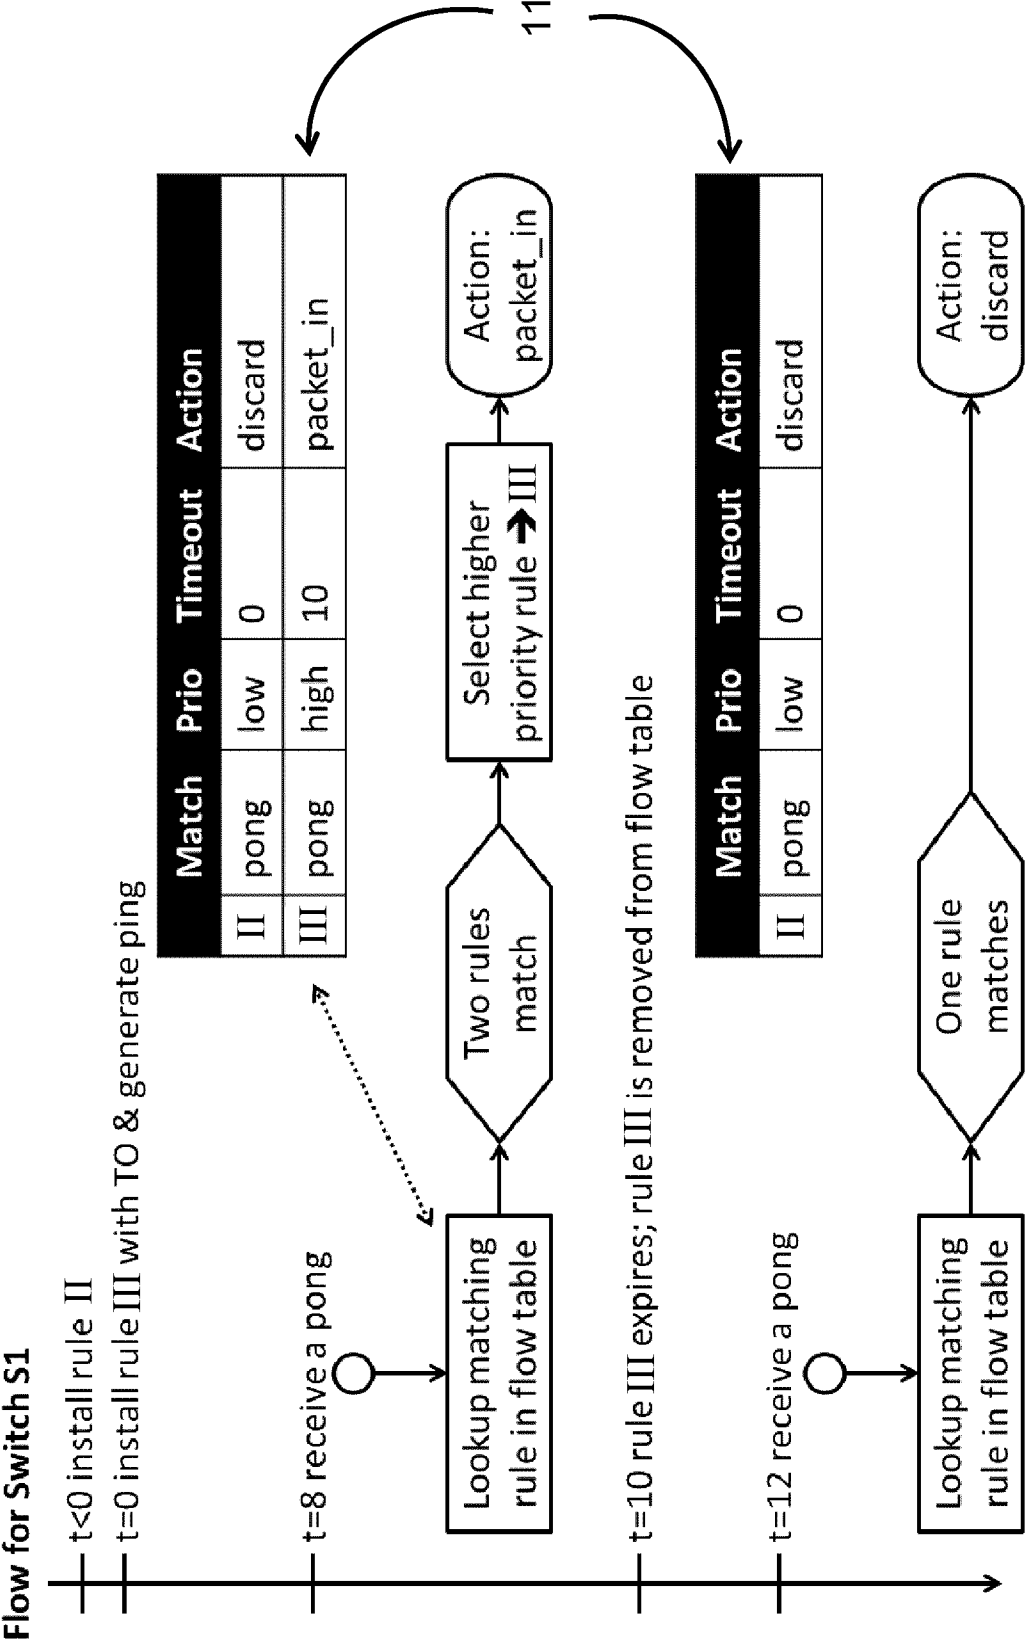


Fig. 3

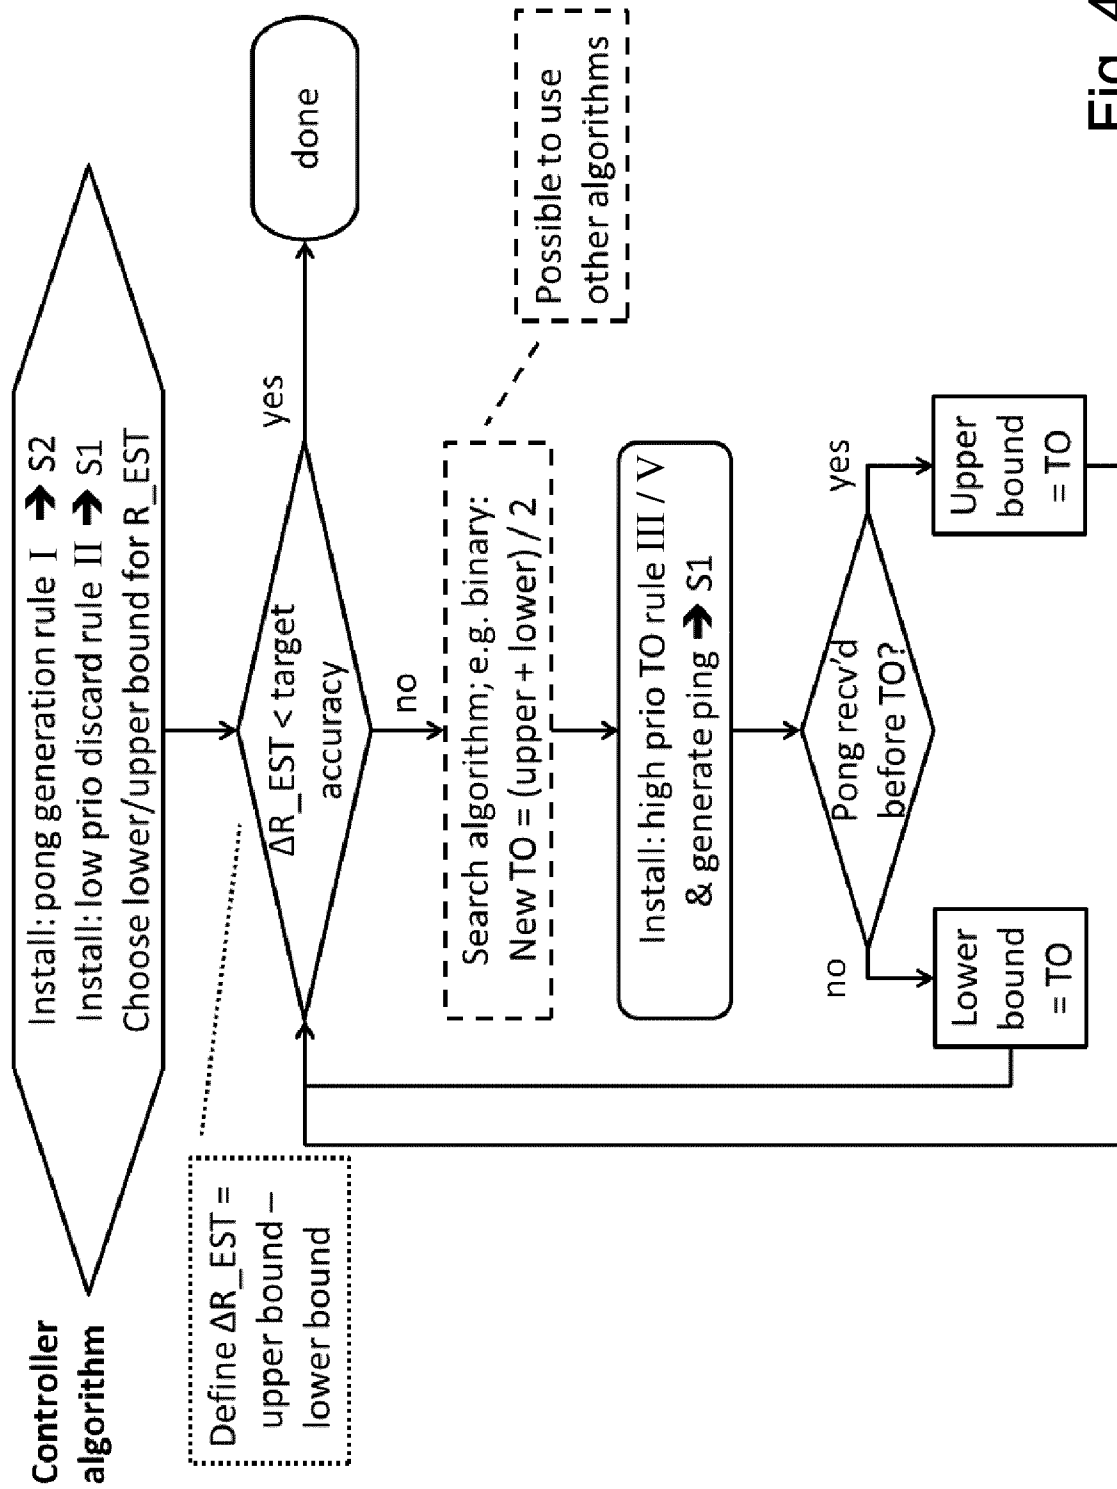


Fig. 4

| Match | Priority | Timeout | Action                         |
|-------|----------|---------|--------------------------------|
| pong  | 1        | 0       | Set-Field: d_port=0; packet_in |
| pong  | 2        | 4       | Set-Field: d_port=4; packet_in |
| pong  | 3        | 3       | Set-Field: d_port=3; packet_in |
| pong  | 4        | 2       | Set-Field: d_port=2; packet_in |
| pong  | 5        | 1       | Set-Field: d_port=1; packet_in |

Fig. 5

| LB          | UB          | UB-LB = ΔR_EST         | ΔR_EST < Acc              | (LB+UB)/2 = Select TO       | Pong before TO |
|-------------|-------------|------------------------|---------------------------|-----------------------------|----------------|
| 0ms         | 32ms        | 32ms-0ms = <b>32ms</b> | No (32ms>2ms)             | (0ms+32ms)/2 = <b>16ms</b>  | Yes -> UB=TO   |
| 0ms         | <b>16ms</b> | 16ms-0ms = <b>16ms</b> | No (16ms>2ms)             | (0ms+16ms)/2 = <b>8ms</b>   | No -> LB=TO    |
| <b>8ms</b>  | 16ms        | 16ms-8ms = <b>8ms</b>  | No (8ms>2ms)              | (8ms+16ms)/2 = <b>12ms</b>  | Yes -> UB=TO   |
| 8ms         | <b>12ms</b> | 12ms-8ms = <b>4ms</b>  | No (4ms>2ms)              | (8ms+12ms)/2 = <b>10ms</b>  | No -> LB=TO    |
| <b>10ms</b> | 12ms        | 12ms-10ms = <b>2ms</b> | No (2ms>=2ms)             | (10ms+12ms)/2 = <b>11ms</b> | No -> LB=TO    |
| <b>11ms</b> | 12ms        | 12ms-11ms = <b>1ms</b> | Yes ( <b>1ms&lt;2ms</b> ) | done                        |                |

Fig. 6

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2016/080794

A. CLASSIFICATION OF SUBJECT MATTER  
INV. H04L12/26 H04L12/715 H04L12/24  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                                                                                                                                                                                                                                                                          | Relevant to claim No. |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| X         | ATARY ALON ET AL: "Efficient Round-Trip Time monitoring in OpenFlow networks", IEEE INFOCOM 2016 - THE 35TH ANNUAL IEEE INTERNATIONAL CONFERENCE ON COMPUTER COMMUNICATIONS, IEEE, 10 April 2016 (2016-04-10), pages 1-9, XP032930135, DOI: 10.1109/INFOCOM.2016.7524501 [retrieved on 2016-07-27] abstract; figures 1, 2,; table III page 1, right-hand column, line 1 - page 2, left-hand column, line 11 page 6, right-hand column, lines 13-23<br>----- | 1-16                  |
| A         | WO 2014/128265 A1 (NEC EUROPE LTD [DE]) 28 August 2014 (2014-08-28) abstract; figures 1, 2 page 3, lines 13-26<br>-----                                                                                                                                                                                                                                                                                                                                     | 1-16                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 May 2017

Date of mailing of the international search report

01/06/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Fantacone, Vincenzo

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/080794

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| W0 2014128265 A1                          | 28-08-2014          | EP 2959639 A1              | 30-12-2015          |
|                                           |                     | US 2016014007 A1           | 14-01-2016          |
|                                           |                     | W0 2014128265 A1           | 28-08-2014          |
| -----                                     |                     |                            |                     |