



12

EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification :
06.10.93 Bulletin 93/40

51 Int. Cl.⁵ : **B65D 81/34**

21 Application number : **90110193.1**

22 Date of filing : **29.05.90**

54 **Container for pre-cooked and/or ready-to-eat food.**

30 Priority : **26.09.89 IT 5336989 U**

43 Date of publication of application :
03.04.91 Bulletin 91/14

45 Publication of the grant of the patent :
06.10.93 Bulletin 93/40

84 Designated Contracting States :
BE DE DK ES FR GB LU NL

56 References cited :
EP-A- 0 248 601
DE-A- 3 919 120
FR-A- 2 085 368
GB-A- 2 216 864

73 Proprietor : **SOC.A.M.A. S.p.A.**
Corso Galileo Ferraris 90
I-10129 Torino (IT)

72 Inventor : **Covi, Enzo**
C.so Peschiera 156
I-10100 Torino (IT)
Inventor : **Porcellana, Giacomo Luca**
C.so Regio Parco 24
I-10100 Torino (IT)

74 Representative : **Modiano, Guido, Dr.-Ing. et al**
Modiano & Associati S.r.l. Via Meravigli, 16
I-20123 Milano (IT)

EP 0 419 764 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The present invention relates to a container for pre-cooked and/or ready-to-eat food.

In the technology of production and preservation of pre-cooked food intended to be eaten directly, after possible warming, it is fundamentally important that the food be packaged in appropriate containers adapted to allow its generic thermal treatment, ensure its correct preservation and allow to eat the food without requiring its transfer into individual plates or serving dishes.

Plate-shaped or tray-shaped containers made of heat-resistant polymeric material are generally used for this purpose (DE-A-3 919 120), their content being protected with a thin film of plastic material which adheres to the planar edge of the container and can be removed by the consumer by so-called "peeling", which consists in exerting, on said film, a traction directed at an appropriate angle with respect to the adhesion plane defined by the container edge, which is briefly termed "suture plane" hereafter.

The film generally separates by initially applying a traction force having a certain inclination -- equal to approximately 45° -- with respect to the suture plane and this, though on one hand it constitutes a positive circumstance in terms of the correct and easy removal of the film, on the other hand it constitutes a hardly negligible disadvantage in terms of the protection of the product.

During the various thermal treatments, such as reviving, pasteurization and the like, due to the forming of steam, the protective film in fact inflates, assuming a substantially lens-like convex shape, so that stresses are generated at the regions of suture to the edge of the container, and their orientation can reach and exceed said limit inclination, consequently producing the progressive and spontaneous separation of said film and therefore compromising the correct seal of the package.

The aim of the present invention is to eliminate the above described disadvantage without however compromising ease in opening the package.

An object of the present invention is to improve the protection of the packaged food, preventing incidental tearings of the film, by means of a lid which can be easily applied by machines suitable for continuous production processes and is just as easily removable by the consumer without compromising the integrity of the container.

This aim and these objects, and others which will become apparent from the following detailed description are achieved by a container for pre-cooked and/or ready-to-eat food, as defined in the appended claims.

The features and advantages of the present invention will become apparent from the following detailed description of an embodiment of the container and with reference to the accompanying exemplifying

drawings, wherein:

figure 1 is a top plan view of the base half-shell of the container,

figure 2 is a transverse sectional view taken along the line II-II of figure 1,

figure 3 is an enlarged-scale detail view of figure 1,

figure 4 is a bottom plan view of the lid,

figure 5 is a sectional view taken along the line V-V of figure 4,

figure 6 is an enlarged-scale detail view of figure 5,

figure 7 is a transverse sectional view of the container, complete with base shell and lid,

figure 8 is an enlarged-scale detail view of figure 7,

figure 9 is a bottom view of the container with the lid, taken in the direction of the arrows IX-IX of figure 8,

figure 10 is a view, similar to figure 9, illustrating the method for disengaging the lid from the base shell.

With reference to figures 1 to 3, 10 generally indicates the base half-shell, which comprises a cup-like tray 11 surrounded by a protruding edge 12, said half-shell, which is preferably made of heat-resistant polymeric material, being suitable to act as a plate for eating the food packaged therein.

As is clearly shown in figure 1, the plan profile of the shell 10 is curvilinear and pseudo-rectangular, and is defined by pairs of opposite homologous sides L, L' constituted by arcs of a circle which have respective differentiated radii. The edge 12 substantially has the same profile as the half-shell, from which it differs due to the presence of widened grip portions 12a which surround the larger sides L'. The edge 12 is furthermore concave, at least at the grip portions 12a, and ends with a slightly undercut lip 12b.

The concavity of the edge 12 defines a curved suture surface 14 for a protective film 15 made of plastic material, of a per se known kind, which can be removed by so-called "peeling".

The concavity of the surface 14 is chosen so that it is, at least in the region of connection of the edge 12 to the tray 11, tangent or approximately tangent to the geometrical solid SG along which the film 15 arranges itself when it is stressed by the pressure of the steam produced by any thermal treatment of the food packaged in the container. Therefore, in the presence of steam, the film is subjected to a traction which is parallel to the suture surface at the specified region, and this, in accordance with the aim and objects of the invention, prevents the progressive and spontaneous separation of said film from the edge 12. Advantageously, the curvature of the suture surface 14 is such that the tangent to said surface, in said region of connection to the tray 11, is approximately 30° with respect to the plane P which is tangent to the edges

of the container.

A removable lid 20 (figure 4) co-operates, for food protection, with the base half-shell 10, is likewise made of polymeric material and can be snap connected to the underlying base half-shell. For this purpose, the lid, which is also cup-shaped, has an edge 21 the plan profile whereof coincides with the plan profile of the edge 12 of the base half-shell on which said lid can be superimposed.

Pairs of raised portions or opposite teeth 22 are formed on the edge 21 of the lid, are arranged substantially at the regions of connection between the curvilinear sides of the edge and are adapted to engage in a snap fashion, by virtue of the elastic deformability of the material of the container, the undercut lip 12b provided on the edge 12 of the base half-shell 10.

The engagement of the lid 20 onto the half-shell 10 therefore occurs by superimposing the former on the latter (figure 7) and exerting thereon a slight pressure, this operation being easily and rapidly executable by means of machines adapted for continuous packaging.

The removal of the lid is performed just as easily by virtue of the particular plan profile of the container.

For this purpose it is in fact sufficient to rotate the lid relative to the base half-shell by such an angle as to disengage the raised portions 22 from the lip 12b, as clearly shown in figure 10 of the accompanying drawings, the angle of the disengagement rotation R being comprised between 15 and 20°.

Where technical features mentioned in any claim are followed by reference signs, those reference signs have been included for the sole purpose of increasing the intelligibility of the claims and accordingly such reference signs do not have any limiting effect on the scope of each element identified by way of example by such reference signs.

Claims

1. A container for pre-cooked and/or ready-to-eat food, comprising a tray-shaped base half-shell (10) adapted to act as a plate for eating the food and a protective film (15) to be welded thereto, characterized in that said half-shell (10) has, in plan view, a pseudo-rectangular curvilinear profile and a concave protruding edge (12) which defines a curved suture surface (14) for the protective film (15), said suture surface being at least approximately tangent, at least in the region of connection of the edge (12) to the tray (11), to the geometrical solid (SG) along which the protective film arranges itself when it is subjected to the steam pressure which is produced in the food thermal treatment steps.

2. A container according to claim 1, characterized by a film protection lid (20) provided with pairs of opposite raised portions (22) adapted to co-operate with an undercut lip (12b) of the edge (12) of the base half-shell (10) to allow a snap-together coupling of said lid and said base half-shell, the disengagement of the lid being obtainable, by virtue of the plan profile of the container, by means of a reduced rotation thereof relative to the base half-shell.
3. A container according to claim 1, characterized in that the plan profile of the half-shell (10) is defined by pairs of opposite homologous sides (L, L') constituted by arcs of circles which have respective differentiated radii.
4. A container according to claim 1, characterized in that the edge (12) of the base half-shell (10) has widened grip (14) portions which surround the longer curvilinear sides (L') and in that the concave suture surface (14) of the film (15) is provided at least on said widened portions (14) of the edge (12).
5. A container according to claim 1, characterized in that the curvature of the concave suture surface (14) provided on the edge of the base half-shell (10) is directed with an angle of approximately 30° with respect to the plane (P) which is tangent to the edges (12) of the container.
6. A container according to claim 2, characterized in that said pairs of opposite raised portions (22) are provided on the edge (21) of the lid (20) and are arranged substantially at the region of connection of the curvilinear sides (L, L') of the edge (12).

Patentansprüche

1. Behälter für vorgekochte und/oder eßfertige Lebensmittel, umfassend eine schüsselförmige Halbschale (10), welche als Teller zum Essen der Lebensmittel ausgelegt ist, sowie einen daran anzuschweißenden schützenden Film (15), dadurch gekennzeichnet, daß die Halbschale (10) in der Draufsicht ein im wesentlichen rechteckiges, jedoch abgerundet-gekrümmtes Profil und eine konkave, hervorstehende Kante (12) aufweist, welche eine gekrümmte Verbindungsoberfläche (14) für den schützenden Film (15) bildet, und diese Verbindungsfläche mindestens im Bereich der Verbindung der Kante (12) mit der Schüssel (11) etwa tangential zu der geometrischen Figur (SG) verläuft, zu welcher sich der schützende Film anordnet, wenn er dem bei den thermischen Behandlungsschritten der Lebens-

mittel erzeugten Dampfdruck ausgesetzt wird.


2. Behälter nach Anspruch 1, gekennzeichnet durch einen Filmschutzdeckel (20), welcher Paare einander gegenüberliegender erhöhter Bereiche (22) aufweist, die in Eingriff mit einer unterschrittenen Lippe (12b) der Kante (12) der Halbschale (10) bringbar sind, wodurch Deckel und Halbschale nach Art einer Schnappkupplung miteinander verbunden werden und wobei die Lösung des Deckels aufgrund der ebenen Form des Behälters mithilfe einer reduzierten Drehung des Deckels bezüglich der Halbschale erreichbar ist. 5
3. Behälter nach Anspruch 1, dadurch gekennzeichnet, daß die ebene Form der Halbschale (10) durch Paare einander gegenüberliegender homologer Seiten (L, L') definiert ist, welche durch Kreisbögen mit entsprechend verschiedenen Radien gebildet werden. 10
4. Behälter nach Anspruch 1, dadurch gekennzeichnet, daß die Kante (12) der Halbschale (10) vergrößerte Griffbereiche (14) aufweist, welche die längeren abgerundet-gekrümmten Seiten (L') umgeben und die konkave Verbindungsoberfläche (14) des Films (15) mindestens auf diesen vergrößerten Bereichen (14) der Kante (12) vorhanden ist. 15
5. Behälter nach Anspruch 1, dadurch gekennzeichnet, daß die Krümmung der konkaven Verbindungsoberfläche (14) auf der Kante der Halbschale (10) einen Winkel von etwa 30° bezüglich der Ebene (P) aufweist, welche tangential zu den Kanten (12) des Behälters verläuft. 20
6. Behälter nach Anspruch 2, dadurch gekennzeichnet, daß die Paare einander gegenüberliegender erhöhter Bereiche (22) sich auf der Kante (21) des Deckels (20) befinden und im wesentlichen im Bereich der Verbindung der abgerundet-gekrümmten Seiten (L, L') der Kante (12) angeordnet sind. 25




Revendications

1. Récipient pour aliment précuit et/ou prêt à être consommé, comprenant une demi-coquille de base (10) en forme de plateau, adaptée pour servir comme assiette pour manger l'aliment, et un film protecteur (15) destiné à être soudé sur celle-ci, caractérisé en ce que ladite demi-coquille (10) présente, vue en plan, un profil curviligne pseudo-rectangulaire et un bord en saillie concave (12) qui définit une surface de suture courbée 50

(14) pour le film protecteur (15), ladite surface de suture étant au moins approximativement tangente, au moins dans la région de liaison du bord (12) au plateau (11), au solide géométrique (SG) le long duquel le film protecteur se place quand il est soumis à la pression de vapeur qui est produite dans les étapes de traitement thermique de l'aliment. 10

2. Récipient selon la revendication 1, caractérisé par un couvercle (20) de protection du film, muni de paires de parties en saillie opposées (22), adaptées pour coopérer avec une lèvre en contre-dépouille (12b) du bord (12) de la demi-coquille de base (10) pour permettre un accouplement par encliquetage dudit couvercle et de la demi-coquille de base, le désengagement du couvercle étant obtenu, en raison du profil plan du récipient, au moyen d'une rotation limitée de celui-ci par rapport à la demi-coquille de base. 15
3. Récipient selon la revendication 1, caractérisé en ce que le profil plan de la demi-coquille (10) est défini par des paires de côtés homologues opposés (L, L') constitués par des arcs de cercle qui ont des rayons différenciés respectifs. 20
4. Récipient selon la revendication 1, caractérisé en ce que le bord (12) de la demi-coquille de base (10) présente des parties de préhension élargies (12a) qui entourent les côtés (L') curvilignes plus longs et en ce que la surface de suture concave (14) du film (15) est au moins prévue sur les parties élargies (12a) du bord (12). 25
5. Récipient selon la revendication 1, caractérisé en ce que la courbure de la surface de suture concave (14), prévue sur le bord de la demi-coquille de base (10), est dirigée selon un angle approximativement de 30° par rapport au plan (P) qui est tangent aux bords (12) du récipient. 30
6. Récipient selon la revendication 2, caractérisé en ce que lesdites paires de parties en saillie, opposées (22), sont prévues sur le bord (21) du couvercle (20) et sont agencées sensiblement au niveau de la zone de liaison des côtés curvilignes (L, L') du bord (12). 35

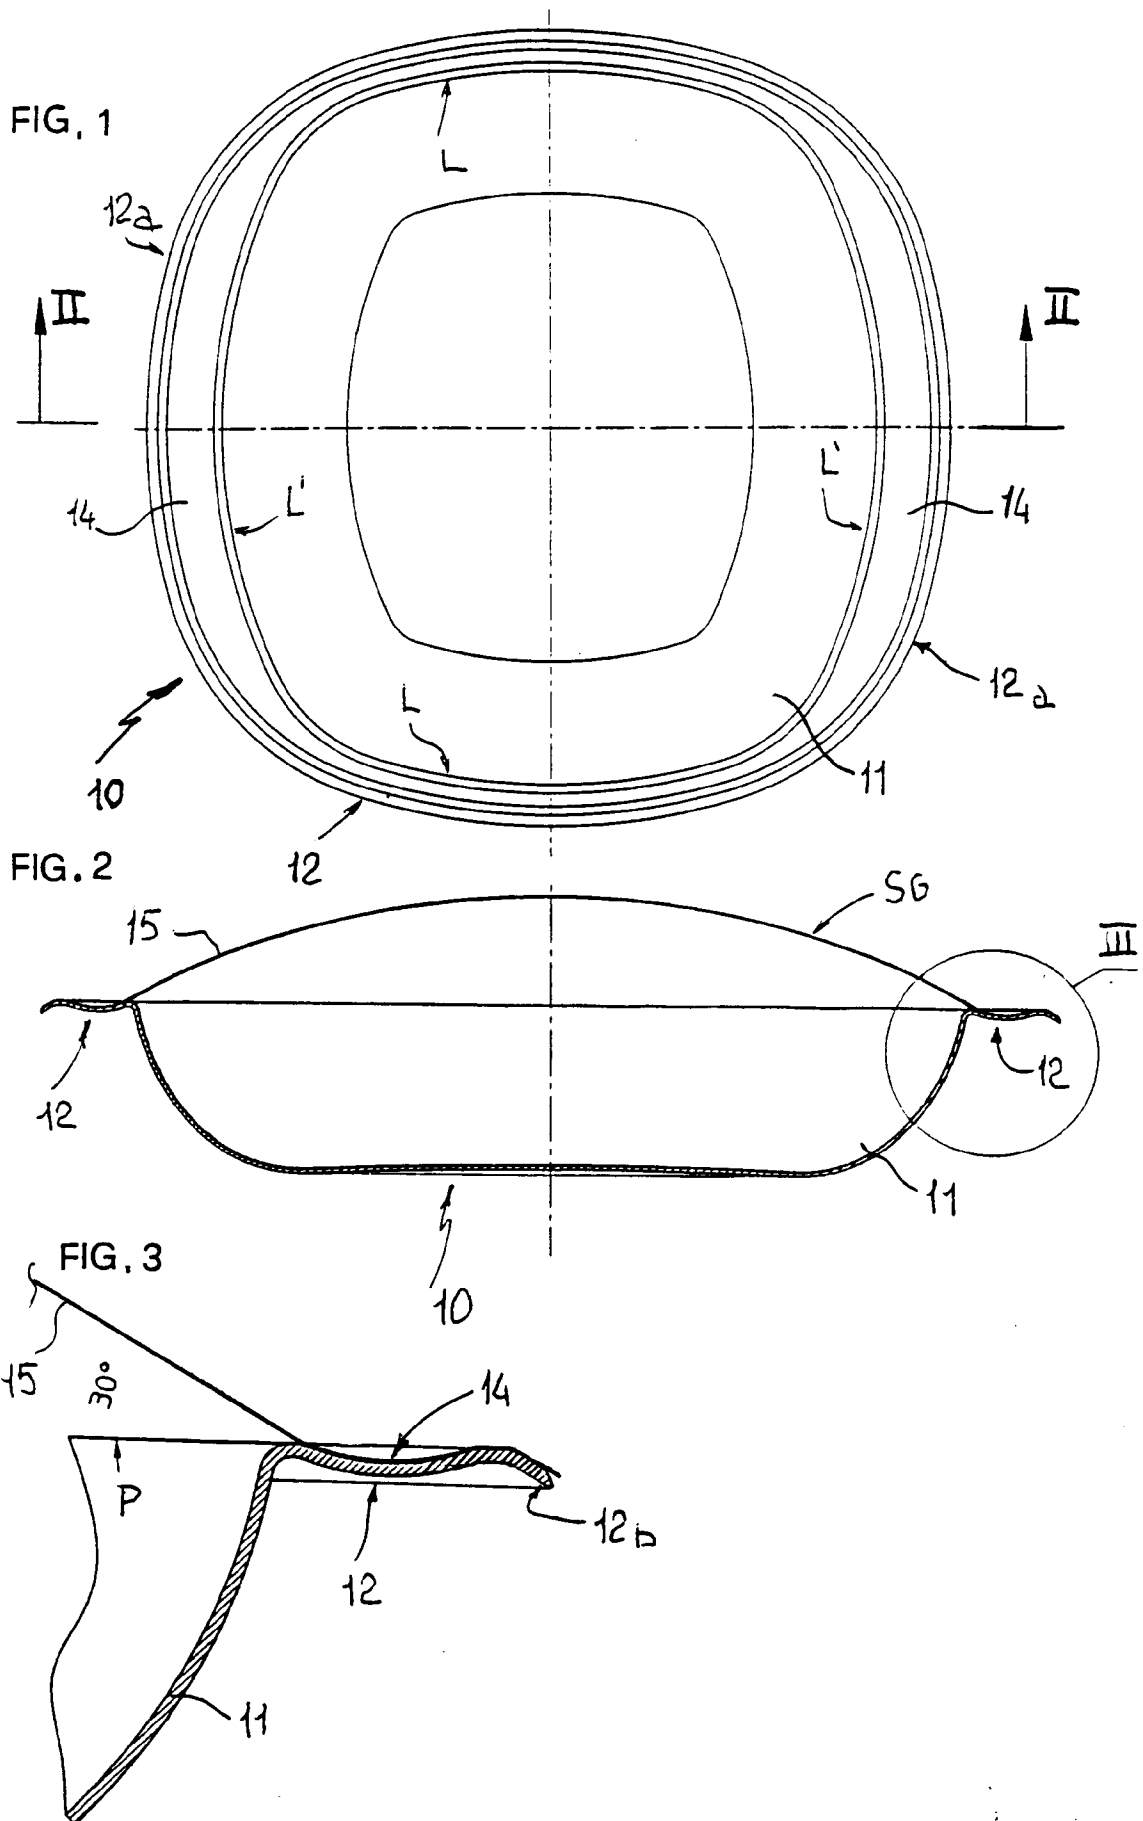

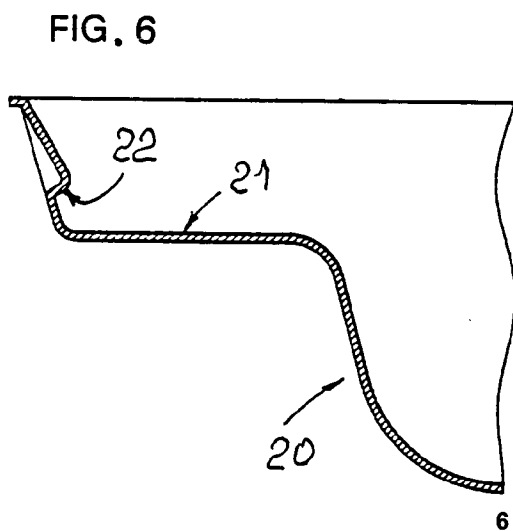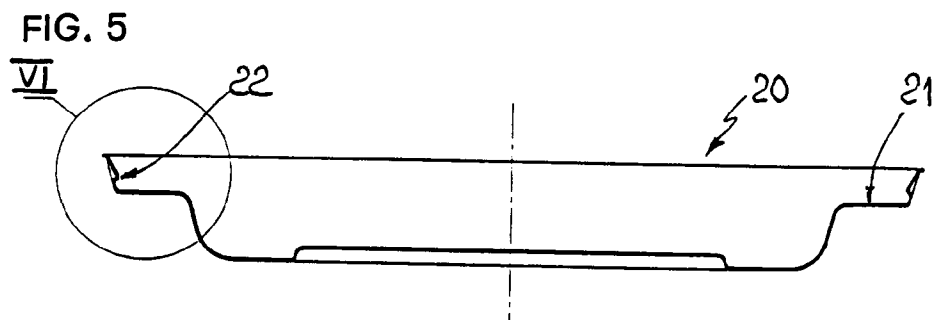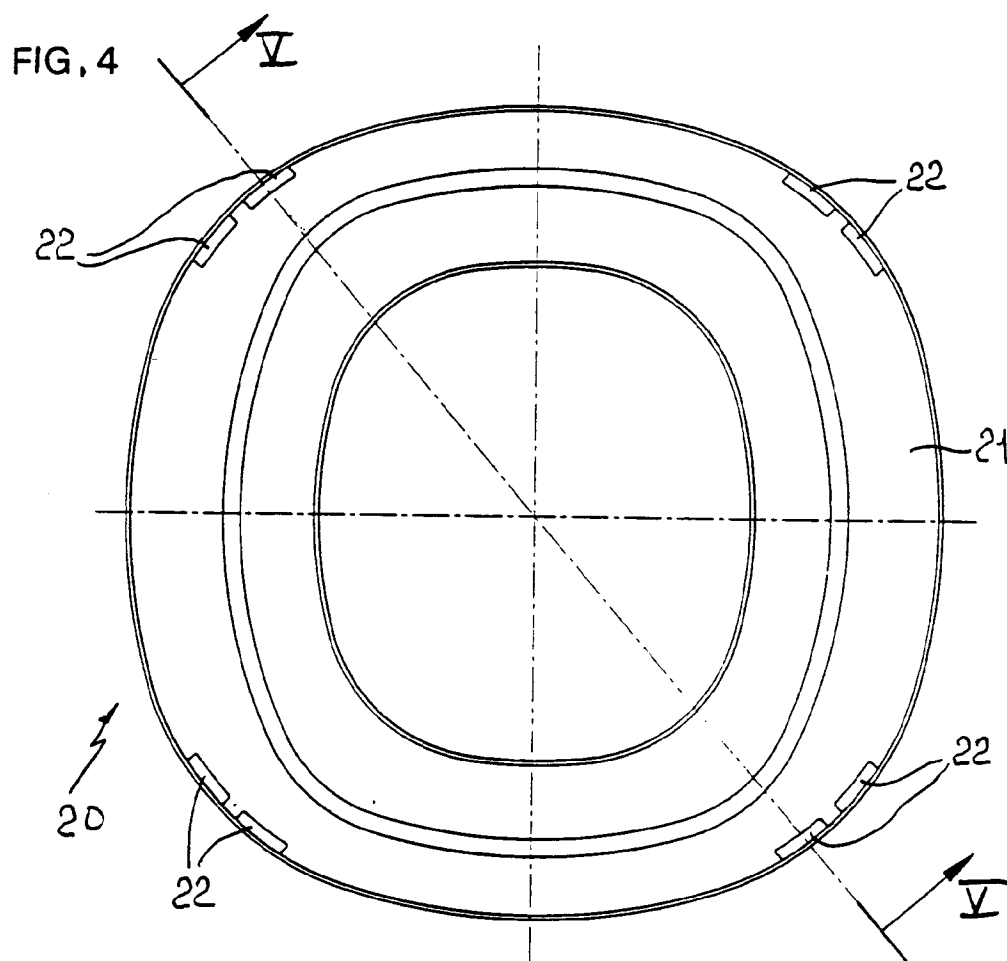

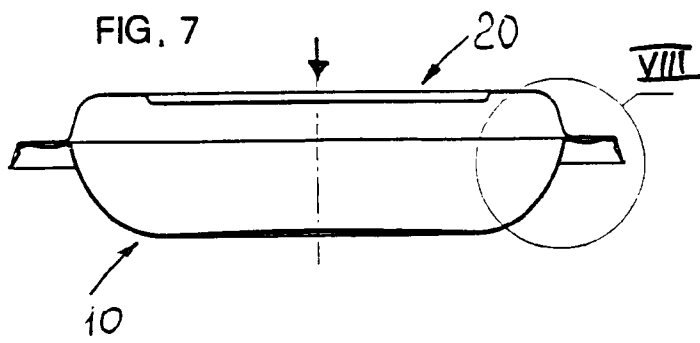


FIG. 8

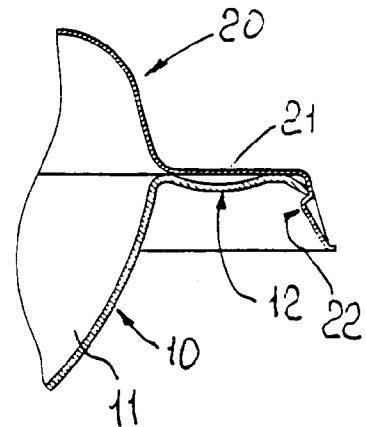


FIG. 9

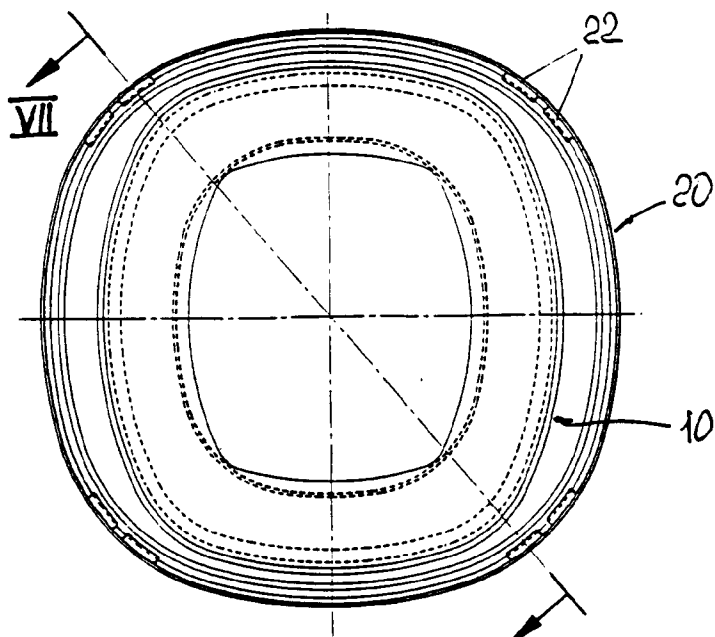


FIG. 10

