



(51) International Patent Classification:
F01D 5/14 (2006.01)

(21) International Application Number:
PCT/US2014/067643

(22) International Filing Date:
26 November 2014 (26.11.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/909,733 27 November 2013 (27.11.2013) US

(71) Applicant: RUTGERS, THE STATE UNIVERSITY OF
NEW JERSEY [US/US]; Old Queen's Somerset Street,
New Brunswick, NJ 08909 (US).

(72) Inventors: DIEZ-GARIAS, Francisco, Javier; 98 Brett
Road, Piscataway, NJ 08854 (US). VAQUERO, Arturo,
Villegas; 98 Brett Road, Piscataway, NJ 08854 (US).

(74) Agents: BUTCH, Peter, J. et al.; Fox Rothschild LLP,
997 Lenox Drive, Building 3, Lawrenceville, NJ 08648-
2311 (US).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: BLADE FLOW DEFLECTOR

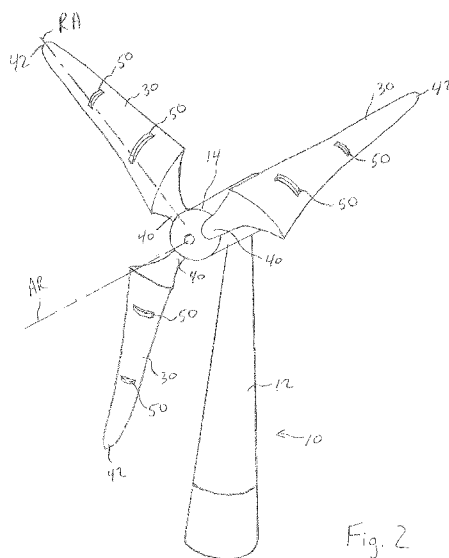

(57) Abstract: An airfoil blade assembly including a blade which includes a lift generating section with a first profiled body defined between a pressure surface and a suction surface. The first profiled body extends from a first leading edge to a first trailing edge with a first chord extending from the first leading edge to the first trailing edge and being perpendicular to the radial direction. At least one flow deflector extends along either the pressure surface or the suction surface within the lift generating section of the blade. The at least one flow deflector defines a second profiled body extending between a second leading edge and a second trailing edge with a second chord extending between the second leading edge and the second trailing edge. The second profiled body defines an outer surface facing away from respective pressure surface or suction surface along which the flow deflector extends.



BLADE FLOW DEFLECTOR

BACKGROUND

[0001] This application claims the benefit of US Provisional Application No. 61/909,733, filed November 27, 2014, the contents of which are incorporated herein by reference.

Statement of the Technical Field

[0002] The present disclosure relates to blades. More specifically, the present disclosure relates to blades having incorporated flow deflectors.

Description of the Related Art

[0003] Wind turbines produce power proportional to the swept area of their blades, and the amount of air flow passing over the blades at any given time. Various design choices such as rotor diameter, blade length and load limitations are considered during design and fabrication of a wind turbine. Longer blades provide for more energy production in low winds. However, longer blades require more materials, higher manufacture and transportation costs, larger and more robust rotor design to support the added weight of the longer blades, and failsafe systems for preventing potential damage to the turbines in high wind situations as the longer blades may produce damaging levels of torque at high wind speeds.

[0004] Conversely, using shorter blades has its own set of drawbacks. For example, in low winds shorter blades may not have enough surface area to produce enough torque to move the rotor, thereby producing no power.

[0005] Regardless of size, all wind turbine blades are limited in overall efficiency due to various resulting properties of the air flow. Due to the rotational movement of the blades during operation, at least a portion of the air flow impacting the blade is converted to a radial

component moving about the length of the blade from the root toward the tip of the blade. Fig. 1 illustrates a standard wind turbine 10 with a mast 12 supporting a hub 14 from which a plurality of blades 16 are supported. The mass of air affected by the turbine forms a stream tube as the wind must slow down due to energy extracted by the turbine. Wind W directed at the turbines will have an initial area as indicated by the circle 18. As the wind W reaches the blades 16, the air flow has two components, namely an axial flow W_A and a radial flow W_R , with the area of the wind flow expanding radially as indicated by circle 20 due to the conservation of mass flow rate along the stream tube. The flow continues to expand radially downstream, as indicated by the increased area at circle 22, since the pressure in the wake must return to the atmospheric pressure after a pressure drop experienced by passing through the rotor disc. Based on the conservation of momentum, this radial flow W_R reduces the efficiency of the turbine since it creates a radial force from the available total force from the wind. This radial force is not contributing to any torque or power produced by the rotor.

[0006] The present disclosure addresses these and other similar problems resulting from conventional blade design. It allows the blade to convert part of that radial force into a tangential force by redirecting the radial flow W_R , thereby increasing the torque and power extracted by the turbine.

SUMMARY

[0007] In at least one embodiment, the present disclosure describes an airfoil blade assembly including a blade extending in a radial direction from a root towards a tip. The blade includes a lift generating section with a first profiled body defined between a pressure surface and a suction surface. The first profiled body extends from a first leading edge to a first trailing edge with a first chord extending from the first leading edge to the first trailing edge and being perpendicular

to the radial direction. At least one flow deflector extends along either the pressure surface or the suction surface within the lift generating section of the blade. The at least one flow deflector defines a second profiled body extending between a second leading edge and a second trailing edge with a second chord extending between the second leading edge and the second trailing edge. The second profiled body defines an outer surface facing away from respective pressure surface or suction surface along which the flow deflector extends.

[0008] In at least one embodiment, the present disclosure describes a wind turbine assembly including a hub configured to rotate in a direction of rotation and a plurality of blade assemblies attached to the hub assembly and including flow deflectors attached to the blades. The flow deflectors are configured so as to alter the incident airflow so that an additional force is produced in the direction of rotation and an additional power is generated. The deflectors are not limited to wind turbines but may be positioned on blades used in various applications, for example, helicopters, hydro turbines, airplane wings, engines, propellers, and industrial turbines.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] Embodiments will be described with reference to the following drawing figures, in which like numerals represent like items through the figures, and in which:

[0010] Fig. 1 is a perspective view of an example prior art wind turbine and the corresponding typical air flow thereabout.

[0011] Fig. 2 is a perspective view of an example of a wind turbine having blades incorporating flow deflectors in accordance with an embodiment of the present disclosure.

[0012] Fig. 3 is a perspective view of an example blade incorporating flow deflectors in accordance with an embodiment of the present disclosure.

[0013] Fig. 4 is a cross-sectional view along the line 4-4 in Fig. 3.

[0014] Fig. 5 is a cross-sectional view along the line 5-5 in Fig. 3

[0015] Fig. 6 is a top plan view of a portion of the blade of Fig. 3.

[0016] Fig. 7 is a top plan view of a blade incorporating a flow deflector in accordance with an embodiment of the disclosure and illustrating the resultant forces thereon.

[0017] Fig. 8 is a top plan view of another blade incorporating a flow deflector in accordance with an embodiment of the disclosure and illustrating the resultant forces thereon.

DETAILED DESCRIPTION

[0018] This disclosure is not limited to the particular systems, devices and methods described, as these can vary. The terminology used in the description is for the purpose of describing the particular versions or embodiments only, and is not intended to limit the scope.

[0019] As used in this document, the singular forms “a,” “an,” and “the” include plural references unless the context clearly dictates otherwise. Unless defined otherwise, all technical and scientific terms used herein have the same meanings as commonly understood by one of ordinary skill in the art. As used in this document, the term “comprising” means “including, but not limited to.”

[0020] The present disclosure relates to deflectors positioned on either the pressure surface or suction surface of a blade. The blades will be described herein in conjunction with a wind turbine, however, the disclosure is not limited to such and the deflectors may be positioned on blades used in various applications, for example, helicopters, hydro turbines, airplane wings, engines, propellers, and industrial turbines.

[0021] Referring to Figs. 2-6, blades 30 incorporating flow deflectors 50 in accordance with an embodiment of the disclosure will be described. The blades 30 are illustrated positioned on the hub 14 of a wind turbine 10 with the hub 14 supported by a mast 12. The hub 14 and blades

30 rotate about an axis of rotation AR. Each blade 30 extends radially along a radial axis RA from a root 40 to a tip 42. Each blade 30 generally includes three sections, namely a root section 32, a transition section 36 and a lift generating section 34. The root section 32 connects the blade 30 to the hub 14. The lift generating segment 34 is furthest from the hub 14 and includes a profiled body 37 extending between a pressure surface 39 and a suction surface 38. The profiled body 37 extends between a leading edge 31 and a trailing edge 33. A chord 35 is defined from the leading edge 31 to the trailing edge 33 and is perpendicular to the radial axis RA. The chord 35 has a length L and the profile body 37 has a height H.

[0022] One or more flow deflectors 50, 50' are provided along the pressure surface 39, the suction surface 38 or both surfaces within the lift generating section 34. The flow deflectors 50, 50' may be positioned proximate the leading edge 31, the trailing edge 33 or anywhere in between. In the illustrated embodiment, a pair of flow deflectors 50 are positioned along the suction surface 38 of each blade 30 and a single flow deflector 50' is positioned along the pressure surface 39 of each blade 30. The number and position of the deflectors 50, 50' are not limited to the illustrated embodiment and can be selected depending on the configuration of the blade 30 and the operating environment. The deflectors 50, 50' may be formed integral with blade 30 or may be formed separately and attached thereto. For example, the deflectors 50, 50' may be attached to the blade 30 utilizing aerospace double-sided tape with a thickness on the order of micrometers or utilizing small flat head rivets to minimize drag. Various other attachment mechanisms may be utilized. Additionally, the deflectors 50, 50' may be provided along the surfaces during original manufacture of the blades 30 or may be attached to existing blades 30 in a retro-fit fashion. Furthermore, the deflectors 50, 50' may be adjustably positioned

such that the position and orientation may be adjusted to correspond to current operating condition (e.g. more or less wind).

[0023] Each flow deflector 50, 50' has a profile body 52 extending from a leading edge 51 to a trailing edge 53. A chord 55 is defined from the leading edge 51 to the trailing edge 53 and is perpendicular to the radial axis RA or at angle α thereto as described hereinafter. The chord 55 has a length l and the profile body 52 has a height h and a width w . Each profile body 52 has an outer surface 54 and a contact surface 56, 56' and defines a streamline body, such as a flat plate or a thin airfoil. The deflectors 50, 50' generally extend such that they extend beyond the boundary layer flow over the blade 30.

[0024] The flow deflectors 50, 50' may be sized proportional to the blade 30. For example, the flow deflectors may have a chord length l which is between $1/8$ to 1 that of the blade chord length L , and more preferably between $1/4$ to $1/2$ of the length L . Also, the flow deflectors may have a height h which is between $1/10$ to 1 that of the blade height H , and more preferably between $1/8$ to $1/2$ of the height H . Also, the width w of the flow deflections may also be proportional to the chord length L of the blade 30, with a width w between about 1-10% of the blade chord length L . It is understood that if more than one deflector 50, 50' is positioned on the blade 30, the deflectors 50, 50' may have different configurations. For example, the suction surface deflectors 50 may be sized differently than the pressure side deflectors 50', however, it is also possible that there may be differences in configuration between multiple suction surface deflectors 50 or multiple suction pressure deflectors 50'.

[0025] Referring to Fig. 6, each of the deflectors 50, 50' may be positioned at an angle α relative to the blade 30. More specifically, the chord 55 of each deflector may be at an angle α relative to the chord 35 of the blade 30. The angle α may be between about -5° and 45° and

more preferably between about 0° and 15° . If multiple deflectors 50, 50' are positioned along either surface 38, 39, they may be at different angles α . The deflectors 50, 50' are spaced from one another in the direction of the radial axis RA by a distance D. The distance D may vary between deflectors 50, 50' on a given surface and between surfaces. As one example, the distance D may be equal to the chord length L.

[0026] Referring to Figs. 7 and 8, an illustration of resultant increased efficiency from the flow deflectors 50, 50' will be described. Fig. 7 shows the moment, $M + M_{DI}$, and force, $F_T + F_{DI}$, generated by a blade 30 with a deflector 50. The additional force contribution by the deflector to the turbine blade is F_{DI} . This force generates an additional moment M_{DI} which contributes to the total power generated by the turbine. Fig. 8 shows an in-plane curved wind turbine blade 30' with a flow deflector 50. The configuration of the lift generating section 36' is distinct from that of the blade 30 in Fig. 7. This configuration of blade with the flow deflector 50 generates an additional torque M_{D2} , that contributes to the power generated and it is due to the normal force F_{D2} created by the deflector 50.

[0027] Integrating the deflectors 50, 50' onto existing turbines, or incorporating their design into new turbines will increase the overall efficiency of the turbines. The deflectors may act as passive flow controllers, not requiring any additional control or monitoring equipment. By introducing the flow deflectors at several positions along the blade's length, the radial component of velocity of the incoming air flow may be redirected to produce an additional amount of torque on the rotor, thereby increasing the overall power produced by the turbine.

[0028] These and other advantages of the present invention will be apparent to those skilled in the art from the foregoing specification. Accordingly, it will be recognized by those skilled in the art that changes or modifications may be made to the above-described embodiments without

departing from the broad inventive concepts of the invention. It should therefore be understood that this invention is not limited to the particular embodiments described herein, but is intended to include all changes and modifications that are within the scope and spirit of the invention as defined in the claims.

CLAIMS

What we claimed is:

1. An airfoil blade assembly comprising:

a blade extending in a radial direction from a root towards a tip, the blade including a lift generating section with a first profiled body defined between a pressure surface and a suction surface, the first profiled body extending from a first leading edge to a first trailing edge with a first chord extending from the first leading edge to the first trailing edge and being perpendicular to the radial direction, and

at least one flow deflector extending along either the pressure surface or the suction surface within the lift generating section of the blade, the at least one flow deflector defining a second profiled body extending between a second leading edge and a second trailing edge with a second chord extending between the second leading edge and the second trailing edge, the second profiled body defining an outer surface facing away from respective pressure surface or suction surface along which the flow deflector extends.

2. The airfoil blade assembly according to claim 1 wherein the second chord is at angle α of between -5° and 45° relative to the first chord.
3. The airfoil blade assembly according to claim 1 wherein the second chord is at angle α of between 0° and 15° relative to the first chord.

4. The airfoil blade assembly according to claim 1 wherein a plurality of flow deflectors extends along either the pressure surface or the suction surface within the lift generating section of the blade.
5. The airfoil blade assembly according to claim 4 wherein the flow deflectors are separated from one another by a given distance.
6. The airfoil blade assembly according to claim 5 wherein the given distance is equal to a length of the first chord.
7. The airfoil blade assembly according to claim 1 wherein at least one flow deflector extends along the pressure surface within the lift generating section of the blade and at least one flow deflector extends along the suction surface within the lift generating section of the blade.
8. The airfoil blade assembly according to claim 1 wherein the at least one flow deflector is positioned along the blade between the first leading edge and the first trailing edge.
9. The airfoil blade assembly according to claim 1 wherein the first profile body has a first height and the second profile body has a second height and wherein the second height is between $1/10$ to 1 that of the first height.

10. The airfoil blade assembly according to claim 1 wherein the first profile body has a first height and the second profile body has a second height and wherein the second height is between $1/8$ to $1/2$ that of the first height.
11. The airfoil blade assembly according to claim 1 wherein the second profile body has a width which is equal to approximately 1-10% a length of the first chord.
12. The airfoil blade assembly according to claim 1 wherein the at least one flow deflector is formed integrally with the first profile body.
13. The airfoil blade assembly according to claim 1 wherein the at least one flow deflector is formed separately from the first profile body and is attached thereto.
14. The airfoil blade assembly according to claim 1 wherein the at least one flow deflector is attached to the first profile body utilizing aerospace double-sided tape.
15. The airfoil blade assembly according to claim 1 wherein the at least one flow deflector is attached to the first profile body utilizing flat head rivets.
16. The airfoil blade assembly according to claim 1 wherein the at least one flow deflector is adjustably connected to the profile body.

17. The airfoil blade assembly according to claim 1 wherein the blade has an in-plane curved configuration.

18. A turbine assembly comprising:

a hub configured to rotate in a direction of rotation;

a plurality of blade assemblies according to claim 1 attached to the hub assembly,

wherein the flow deflectors are configured so as to alter the incident airflow so that an additional force is produced in the direction of rotation and an additional power is generated.

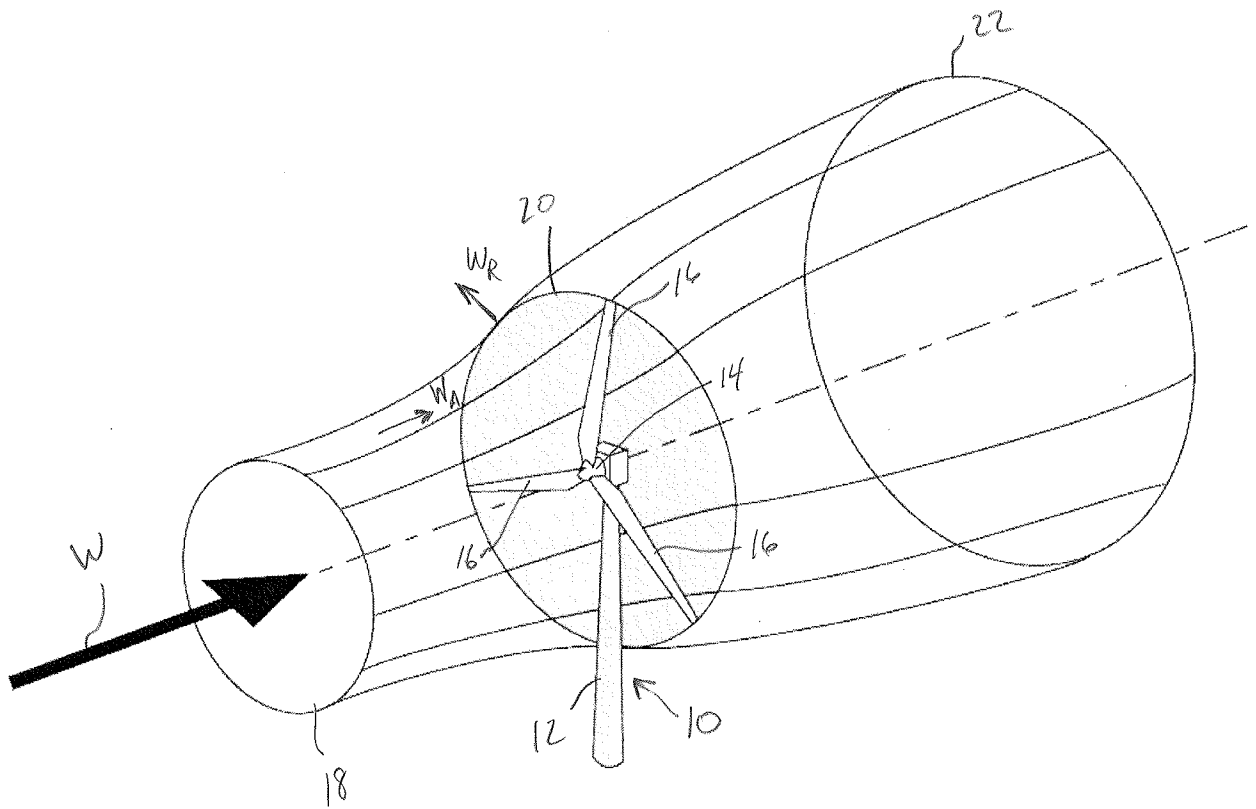


Fig. 1
(Prior Art)

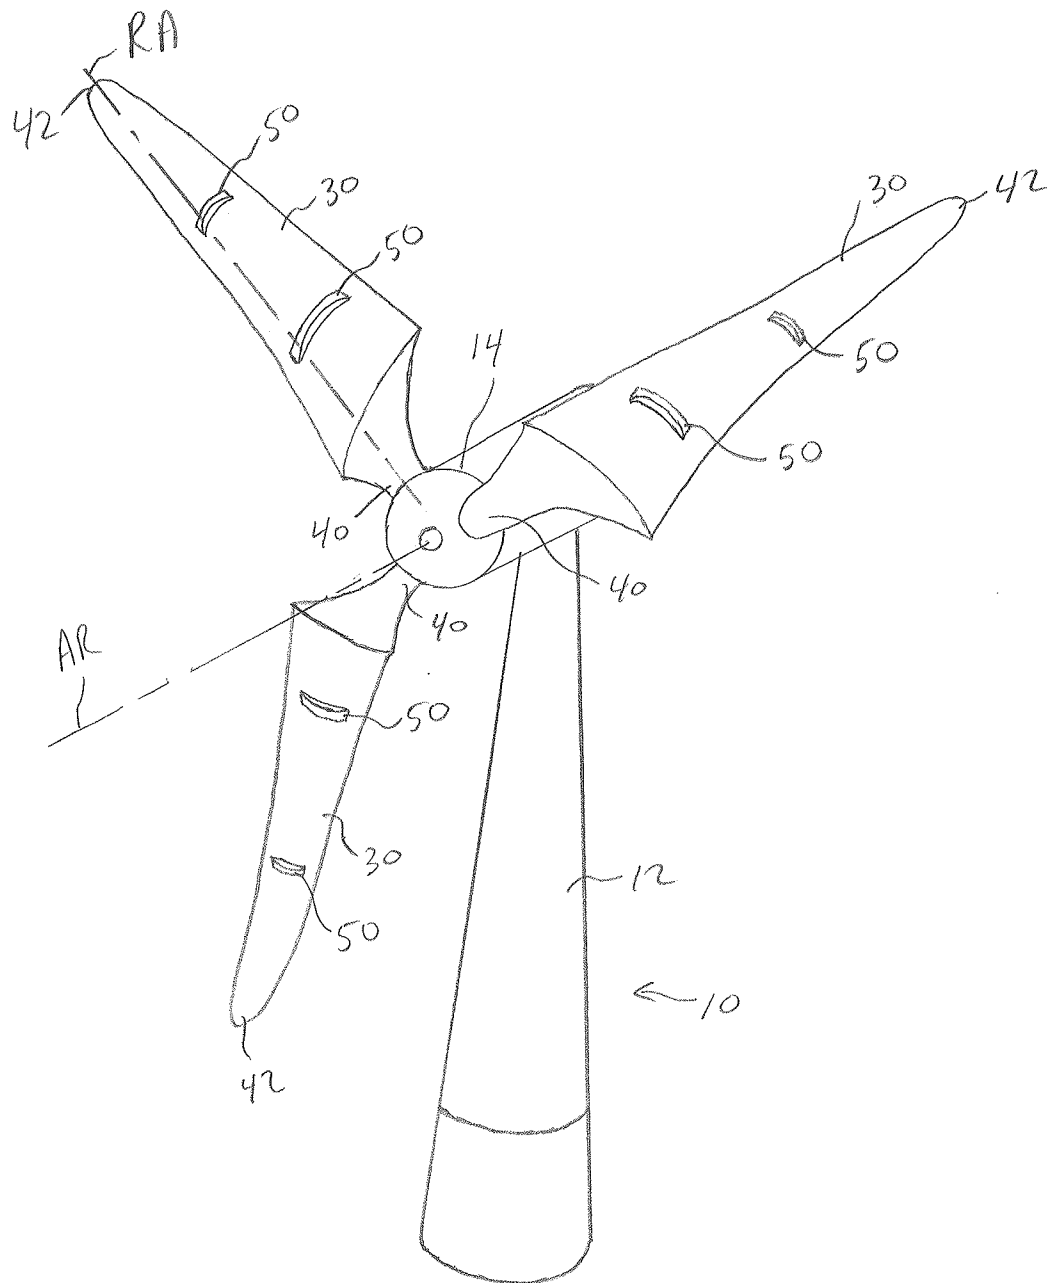
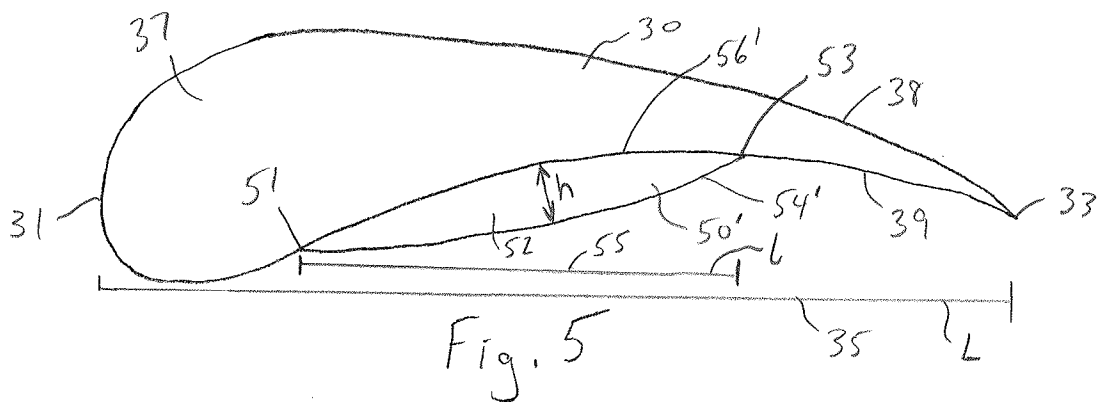
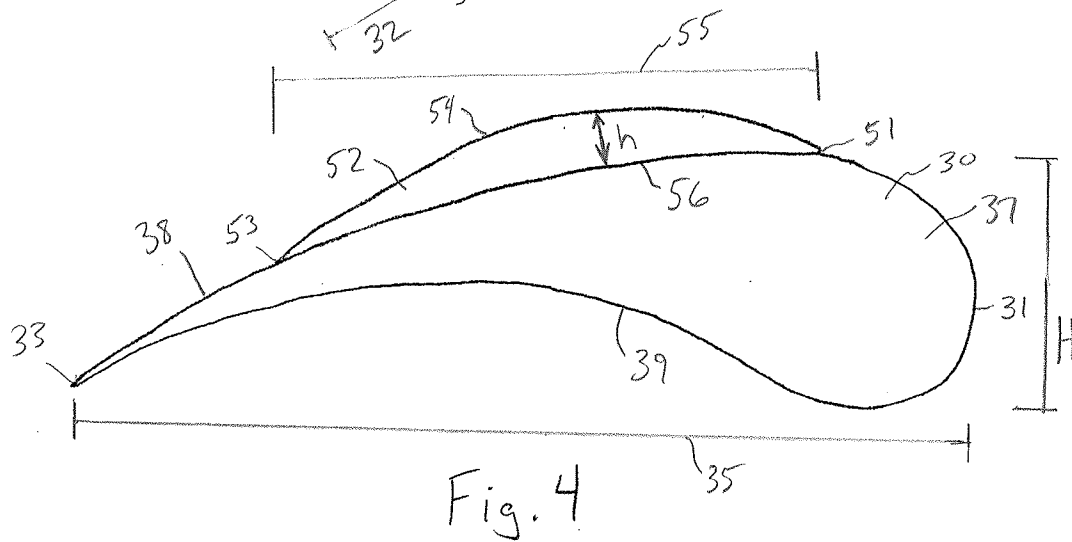
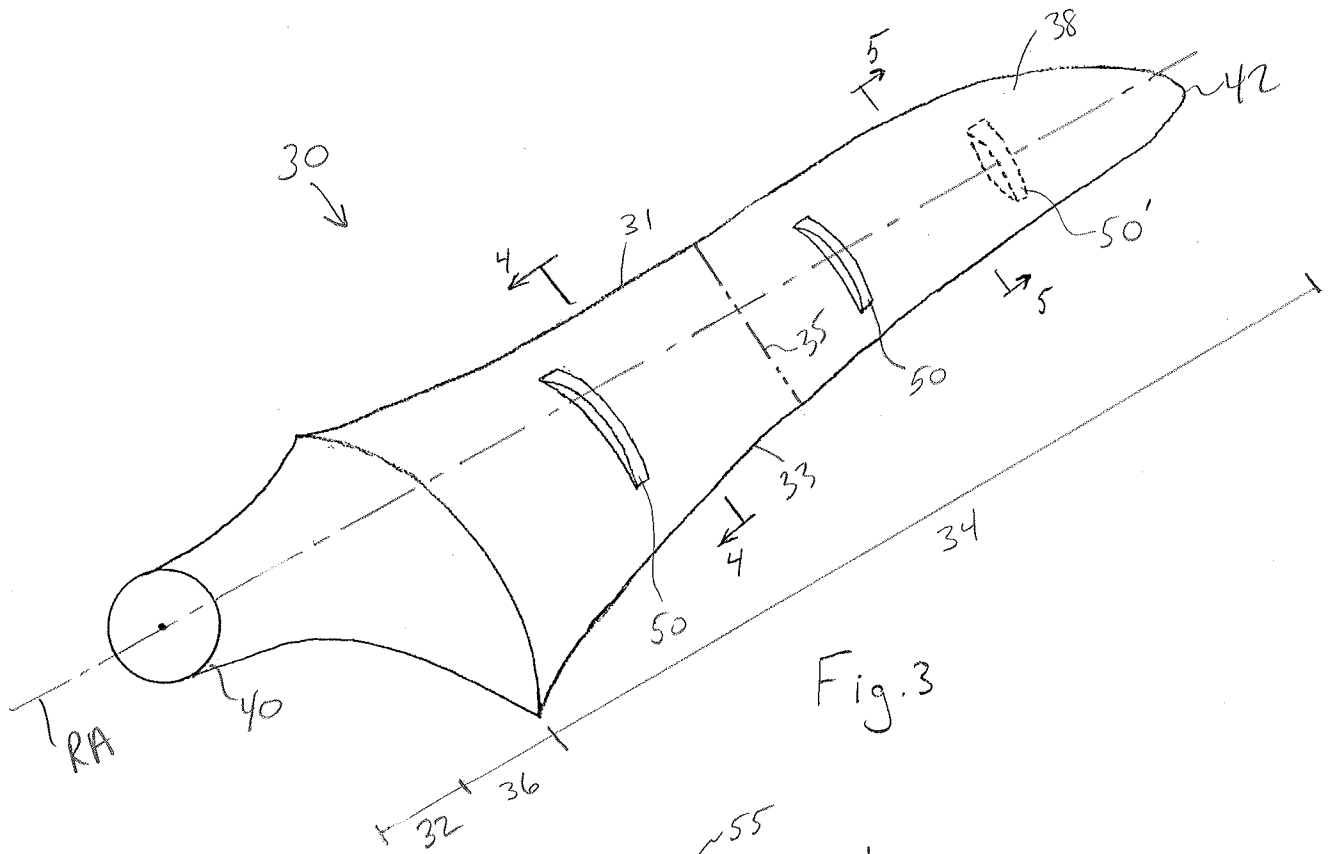


Fig. 2



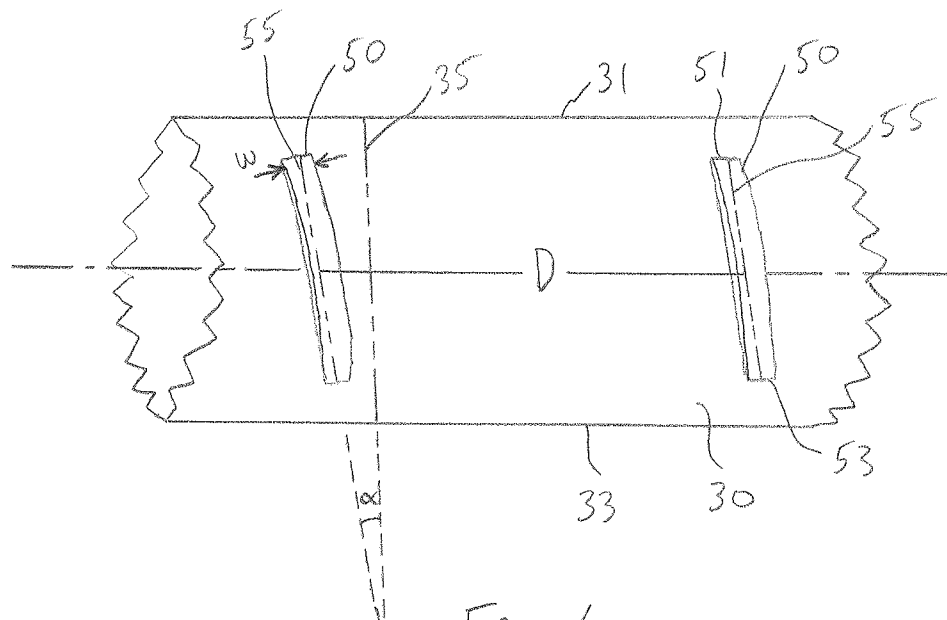


Fig. 6

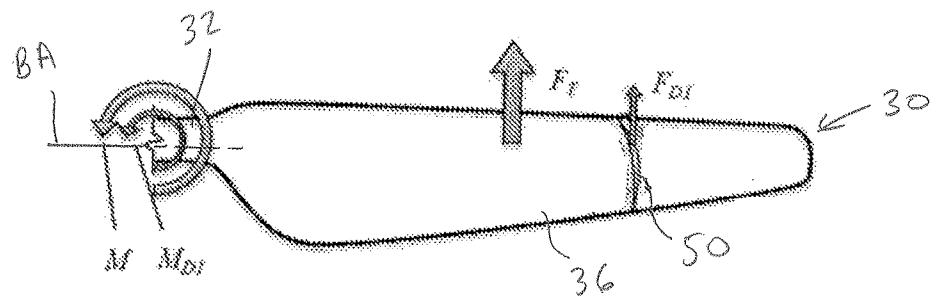


Fig. 7

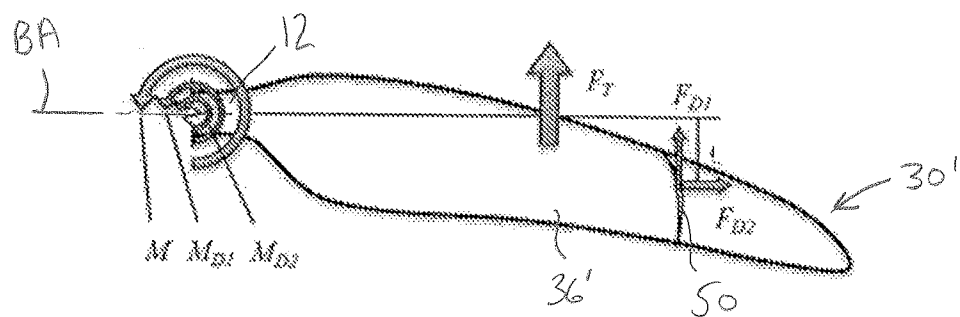


Fig 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/067643

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - F01D 5/14 (2015.01)

CPC - F01D 5/14 (2015.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - F01D 5/14 (2015.01)

CPC - F01D 5/14 (2015.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
USPC - 137/561A; 244/198; 416/235, 236R (keyword delimited)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase, Google Scholar.

Search terms used: airfoil, blade, flow, deflector, protrusion, wind, turbine, double, tape, rivet

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013/0224037 A1 (SIMPSON et al) 29 August 2013 (29.08.2013) entire document	1-13, 17, 18
--		-----
Y		14-16
Y	US 2013/0129520 A1 (ENEVOLDSEN et al) 23 May 2013 (23.05.2013) entire document	14
Y	US 2012/0269644 A1 (ENEVOLDSEN et al) 25 October 2012 (25.10.2012) entire document	15
Y	US 2011/0223033 A1 (WANG et al) 15 September 2011 (15.09.2011) entire document	16

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

01 February 2015

Date of mailing of the international search report

24 FEB 2015

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774