

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum
Internationales Büro



(43) Internationales Veröffentlichungsdatum
17. Juli 2003 (17.07.2003)

PCT

(10) Internationale Veröffentlichungsnummer
WO 2003/056990 A1

(51) Internationale Patentklassifikation⁷: **A47J 37/10**

(21) Internationales Aktenzeichen: PCT/DE2002/004680

(22) Internationales Anmeldedatum:
20. Dezember 2002 (20.12.2002)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
102 00 752.7 10. Januar 2002 (10.01.2002) DE

(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von US): **ELO STAHLWAREN KARL GRÜNEWALD &**

SOHN GMBH & CO. KG [DE/DE]; Dalberger Str. 20, 55595 Spabrücken (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): **GRÜNEWALD, Marcus** [DE/DE]; Dalberger Strasse 20, 55595 Spabrücken (DE).

(74) Anwalt: **JENDRICKE, Susann**; Wilhelm-Leuschner-Strasse 4, 67547 Worms (DE).


(81) Bestimmungsstaaten (national): AU, CA, IL, JP, KR, PL, US, YU.

(84) Bestimmungsstaaten (regional): europäisches Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR).

[Fortsetzung auf der nächsten Seite]

(54) Title: COOKING UTENSIL

(54) Bezeichnung: KOCHGESCHIRR

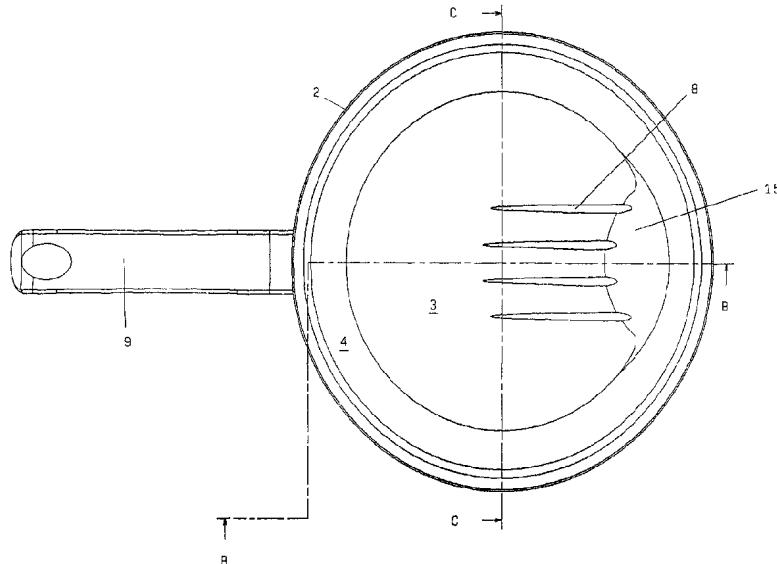

(57) **Abstract:** The invention relates to a cooking utensil, in particular for frying or cooking food without fat. Said utensil comprises a base (1) and a wall (2), said base (1) having a raised section (3) for supporting the food, in addition to a largely annular depression (4) surrounding the raised section (3). The kitchen utensil minimises the time the frying fat and other liquid, emanating from the food, remain on the raised section and facilitates cleaning, as the raised section (3) is convex or curved in such a way that the frying fat or other liquid can flow into the depression (4).

(57) **Zusammenfassung:** Es wird ein Kochgeschirr, insbesondere zum fettfreien Braten oder Garen von Brat- oder Gargut, mit einem Boden (1) und einer Wandung (2), wobei der Boden (1) einen erhöhten Abschnitt (3) zur Auflage des Brat- oder Gargutes und eine den erhöhten Abschnitt (3) umgebende, weitgehend ringförmige Vertiefung (4) aufweist, angegeben. Das Kochgeschirr minimiert eine Verweildauer von Bratfett und anderen Flüssigkeiten auf dem erhöhten Abschnitt, die aus dem Brat- oder Gargut austreten, und erleichtert die Reinigung, indem der erhöhte Abschnitt (3) konvex gebogen bzw. gewölbt ist, so dass Bratfett oder anderweitige Flüssigkeiten in die Vertiefung (4) abfließen können.

A1

WO 2003/056990

**Erklärungen gemäß Regel 4.17:**

- *hinsichtlich der Berechtigung des Anmelders, ein Patent zu beantragen und zu erhalten (Regel 4.17 Ziffer ii) für die folgenden Bestimmungsstaaten AU, CA, IL, JP, KR, PL, YU, europäisches Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR)*
- *hinsichtlich der Berechtigung des Anmelders, die Priorität einer früheren Anmeldung zu beanspruchen (Regel 4.17 Ziffer iii) für alle Bestimmungsstaaten*
- *Erfindererklärung (Regel 4.17 Ziffer iv) nur für US*

Veröffentlicht:

- *mit internationalem Recherchenbericht*
- *mit geänderten Ansprüchen*

Veröffentlichungsdatum der geänderten Ansprüche:

25. März 2004

Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.

CERTIFICATION OF TRANSLATION

"Cooking utensil - PCT/DE02/04680"

I, Samuel Larson, c/o Technisches Fachübersetzungsbüro,
Försterweg 33, A-2136 Laa/Thaya, Austria,
am the translator of the documents attached and certify that
the following is a true translation to the best of my knowledge
and belief.

Samuel Larson
Signature of translator

dated this 1st day of July 2004

COOKING UTENSIL

The present invention relates to a cooking utensil, particularly for fat-free frying or cooking of food to be fried or cooked, having a floor and a wall, the floor having an elevated section for placing the food to be fried or cooked and a largely annular depression enclosing the elevated section and the elevated section being curved and/or arched convexly, so that the frying fat or other liquids may drain into the depression.

The background for a cooking utensil of this type, which is typically provided as a pan having a handle, is low-fat food preparation for a calorie-conscious diet.

The teaching of the present patent application is based on related art which results from US 3,847,068. The pan disclosed therein has a floor having an elevated, convexly curved section on which the food is cooked or fried. The frying fat or other liquids may flow down into an annular depression. However, there may be cases in which it is necessary for the food to be wetted once again with oil or the cooking juices, whether to prevent sticking or to perform flavoring or moisturizing of the food. In the known pan, the peripheral depression is separated from the elevated section by an edge, so that returning liquid from the depression is very difficult, if possible at all.

A further cooking utensil is known, for example, from US 1,467,272. This is a pan having a peripheral depression and an elevated section. The elevated section defines a planar frying area which is enclosed by an interrupted edge. Frying fat may drain off via the interruptions. This pan has the disadvantage that the frying fat and/or the liquids coming out of the food must first collect on the planar frying area before they may drain off via the

interruptions. Therefore, an undesirable dwell time of the food in the fat results.

DE 296 05 888 U1 discloses a pan in which grooves extend over the entire pan floor. Furthermore, a trough is provided into which the grooves largely discharge and into which the fat runs. The depressions of the grooves are described as slanted toward the trough, while the elevations all have the same height and form a planar elevated section in relation to the trough. The cleaning problem because of the frying area structuring is disadvantageous in this pan. In addition, cold bridges to the food to be fried or cooked are formed by the grooves, which may have a disadvantageous effect on its preparation and/or preparation time. The grooves under discussion are also not suitable for returning frying fat because the food is positioned elevated on the elevations and wetting would not occur.

On the basis of US 3,847,068, as the related art which forms the species, the teaching of the present patent application is based on the object of specifying a cooking utensil of the type under discussion which allows return of frying fat and other liquids to the elevated section with a short dwell time.

The above object is achieved through the features of Claim 1. Accordingly, a cooking utensil of the type under discussion is designed in such a way that the elevated section has at least one groove which allows the temporary return of frying fat or other liquids from the depression to the elevated section.

Firstly, it has been recognized that a return of frying fat and other liquids to the elevated section to wet the food is desirable if necessary, but the returned liquid is to simultaneously have a short dwell time. According to the

present invention, at least one groove is provided between the depression and the elevated section, via which the liquid may be returned from the depression to the food and/or to the elevated section, but may then - because of the convex curve - promptly run off again on all sides.

Retaining the convex curve, which is known per se, having a lightly structured surface is advantageous in that a floor structure which is difficult to clean and, in addition, a longer collecting procedure of fat and liquid on the elevated section in the form of a planar frying area may be avoided. Frying fat or other liquids may drain into the depression in all directions. The convex curve is typically an elevated section which is circular in the top view, whose center forms the highest elevation. However, other shapes are also possible here, in consideration of geometrically divided or angular pans in particular, the highest elevation not necessarily having to lie in the center of the elevated section therein.

So that sticking because of a lack of sufficient frying fat may be prevented even better, the convex curve of the elevated section may be especially weakly pronounced. For example, the radius of the convex curve of the elevated section may be approximately 1400 mm to 4000 mm. Through the slight curvature, slow draining is achieved, the adhesion forces between the frying fat and the floor surface being overcome more slowly. In this way, enough frying fat is available for the food. The frying fat may be largely dispensed with when the pores of the food are closed and the danger of sticking is thus reduced and/or largely prevented anyway.

According to an especially preferred embodiment, the convex curve of the elevated section of the cooking utensil may first be implemented during the heating of the heating region and/or the burner. Since there is only a slight need

for convexity in order to cause the frying fat to drain off and this fat is also to act initially between the food to be fried and/or cooked, it is an enormous advantage if the frying fat initially remains on the elevated section and then, with increasing heating of the burner and increasing heating of the cooking utensil floor and expansion of the elevated section to form a curve connected therewith, begins to drain into the depression.

In order to offer no obstruction to the drainage of the frying fat and, in addition, to promote cleaning, the elevated section may pass into the depression largely continuously, without forming an edge. The depression is expediently curved concavely, the radius of the concave curve of the depression able to be approximately 13 mm to 15 mm.

If it is considered important that, after running off into the depression, frying fat or the liquid coming out of the food once again arrives between the food and the floor, the elevated section may have at least one groove. The groove discharges into the depression, so that the temporary return of frying fat or other liquids to the elevated section is made possible. So that no excess wetting with frying fat and other liquids has to occur, the groove may diverge in the direction of the depression, and/or converge in the direction of the food to be fried or cooked. Dosing - if desired - may thus be achieved. The groove may advantageously be positioned opposite from the pan handle, so that by lightly pressing down the pan handle, the return of the frying fat which has run off from the depression to the elevated section may be implemented.

For the design of the groove, it would be advantageous if it did not form any undercuts or edges, but rather fits continuously into the edgeless surface of the elevated section. In this case, the radius of the concave curve of

the groove, taking the converging and/or diverging path of the groove in the lengthwise direction into consideration, may be approximately 2 to 3 mm in section and the radius of the convex curves of the groove may be approximately 3 mm.

In consideration of returning frying fat under food of larger dimensions to be fried or cooked, multiple, particularly parallel grooves may be provided, the radii of the concave curve of the outer grooves able to be somewhat smaller than those of the inner grooves. The outer regions of the food to be fried or cooked are directly supplied on all sides - not only inside the groove - with frying fat flowing out of the inner region in the direction of the depression again because of the convex curve of the elevated section. The return of frying fat into the outer grooves may thus be kept more sparse. In order to allow the return of the collected frying fat under all of the food to be fried or cooked, the groove(s) may extend over more than half of the elevated section. It is only necessary for the highest elevation of the elevated section, which typically lies in the center, to be overcome in order to then cause drainage and wetting on all sides.

In order to have a reservoir available, from which a larger quantity of frying fat may be returned, the depression may have at least one expansion for collecting frying fat or other liquids. Multiple, for example, two to four, reservoirs and/or expansions may also be provided, which may be positioned radially at predetermined intervals. However, because of the simple lever movement on the pan handle, one single reservoir opposite the handle is preferable. Continuous collection of frying fat in the reservoir and/or in the expansion may be reinforced if the depression has a slope toward the expansion. In addition, the shape of the expansion may be edgeless and have rounded areas which fit into the homogeneous, smooth, and therefore easily cleanable surface of the floor of the cooking

utensil according to the present invention. In consideration of the return of the frying fat via the grooves described above, these grooves may discharge into the expansion. In an embodiment without grooves, the goal of the unguided frying fat return may also be achieved through the pivot motion. It is essential in any case that returned frying fat also runs back into the depression immediately because of the convexity of the elevated section. Besides the lowering of cholesterol, a further advantage of the drainage of the frying fat is that spraying up of hot fat may be largely avoided.

From the viewpoint of materials, the floor and the wall of the cooking utensil may be manufactured from aluminum, iron, stainless steel, or copper. In regard to manufacturing, it may be cast aluminum, cast iron, pressed aluminum, or stamped stainless steel. For a cooking utensil made of stainless steel, an antistick coating may be provided.

There are now various possibilities for advantageously implementing and refining the teaching of the present invention. For this purpose, reference is made to the claim subordinate to Claim 1 and, in addition, to the following explanation of two exemplary embodiments of the present invention on the basis of the drawing. Generally preferred designs and refinements of the teaching will also be explained in connection with the explanation of the exemplary embodiment of the present invention described. In the drawing:

Figure 1 shows a schematic illustration of a longitudinal section through a first exemplary embodiment of the cooking utensil according to the present invention,

Figure 2 shows a top view of a second exemplary embodiment of the cooking utensil according to the present invention,

Figure 3 shows a sectional illustration along the line B-B in Figure 2, and

Figure 4 shows a sectional illustration along the line C-C in Figure 2.

A cooking utensil in the form of a serving pan is shown in Figure 1 and a cooking utensil in the form of a pan having a handle for fat-free frying or cooking of food to be fried or cooked is shown in Figure 3, having a floor 1 and a wall 2, the floor 1 having an elevated section 3 for placing the food to be fried or cooked and a largely annular depression 4 which encloses the elevated section 3.

The elevated section 3 is curved and/or arched convexly, so that frying fat or other liquids may drain off into the depression 4.

Figures 1, 3, and 4 show that the convex curve of elevated section is very weakly pronounced. The second exemplary embodiment shown in Figure 3 provides that the radius 5 of the convex curve of the elevated section 3 is approximately 1400 mm to 4000 mm.

In the two selected exemplary embodiments, the convex curve of the elevated section 3 is shown in the direct - also in the non-heated - state and the elevated section 3 passes largely continuously into the depression 4 without forming an edge. The radius 6 at the transition from the elevated section 3 to the depression 4 is, as shown in the second exemplary embodiment, approximately 15 mm in the sectional illustration along the line C-C of Figure 2 in Figure 4 and approximately 5 to 6 mm in the sectional illustration along

the line B-B of Figure 2 in Figure 3. The depression 4 is curved concavely. The second exemplary embodiment of the cooking utensil according to the present invention provides a radius 7 of approximately 13 mm to 15 mm for the concave curve of the depression 4.

Figures 2 and 3 show that the elevated section 3 has four parallel grooves 8, which allow the temporary return of frying fat or other liquids to the elevated section 3. Since the grooves 8 are positioned diametrically opposing the pan handle 9, force may be exerted on the pan handle 9 in the direction of the arrow A to return the frying fat and/or other liquids from the food to be fried or cooked. The grooves 8 discharge into the depression 4, diverge in the direction of depression 4, and extend over more than half of the elevated section 3.

It may be seen from Figure 4 that the grooves 8 in the elevated section 3 are implemented so that no undercuts result and the elevated section 3 has a largely edgeless surface. The radius 10 of the concave curve of the two outer grooves 8 is 2.61 mm. The radius 11 of the concave curve of the two inner grooves 8 is 2.63 mm. The radius 13 of the convex curve of the grooves 8 is 3 mm. The rounded areas obtained in this way make cleaning easier. The radius 14 of the elevated section 3 is 2000 mm in the region between the outer groove 8 and the depression 4.

The depression 4 has an expansion 15, shown in Figures 2 and 3, for collecting frying fat or other liquids, into which the grooves 8 discharge. The expansion is also shaped largely without edges. The elevated section 3 passes into the expansion 15 with a somewhat stronger curve at a radius 16 of approximately 14 to 15 mm, via which a very flat curve having a radius 17 of 400 mm then forms in the direction of the wall 2. The radius 7 of the depression 4 is approximately 1.8 to 2 mm larger in the region of the

expansion 15 than the radius 7 in the normal region of the depression 4.

The cooking utensil according to the first exemplary embodiment is manufactured from copper. The cooking utensil according to the second exemplary embodiment is manufactured from stainless steel, an antistick coating being provided.

Reference is made to the general part of the description in regard to further features not shown in the figures.

Finally, it is to be noted that the teaching according to the present invention is not restricted to the exemplary embodiments described above.

LIST OF REFERENCE NUMBERS

- 1 floor
- 2 wall
- 3 elevated section
- 4 depression
- 5 radius of 3
- 6 radius between 3 and 4
- 7 radius of 4
- 8 groove
- 9 pan handle
- 10 radius of 8
- 11 radius of 8
- 13 radius of 8
- 14 radius of 3, between 8 and 4
- 15 expansion
- 16 radius of 3 to 15
- 17 radius of 15

A force direction

PATENT CLAIMS

What is claimed is:


1. A cooking utensil, particularly for fat-free frying or cooking of food to be fried or cooked, having a floor (1) and a wall (2), the floor (1) having an elevated section (3) for placing the food to be fried or cooked and a largely annular depression (4) enclosing the elevated section (3), and the elevated section (3) being curved and/or arched convexly, so that frying fat or other liquids may drain into the depression (4), characterized in that the elevated section (3) has at least one groove (8), which allows the temporary return of frying fat or other liquids from the depression (4) to the elevated section (3).
2. The cooking utensil according to Claim 1, characterized in that the convex curve of the elevated section (3) is weakly pronounced and the radius (5) of the convex curve of the elevated section (3) is approximately 1400 mm to 4000 mm.
3. The cooking utensil according to Claim 1 or 2, characterized in that the elevated section (3) forms the convex curve during the heating of the heating region and/or the burner below the cooking utensil.
4. The cooking utensil according to one of Claims 1 through 3, characterized in that the elevated section (3) passes into the depression (4) largely continuously, without forming an edge.
5. The cooking utensil according to one of Claims 1 through 4,

characterized in that the depression (4) is curved concavely and the radius (7) of the concave curve of the depression (4) is approximately 13 mm to 15 mm.

6. The cooking utensil according to one of Claims 1 through 5,
characterized in that the groove (8) discharges into the depression (4) and preferably diverges in the direction of the depression (4).
7. The cooking utensil according to one of Claims 1 through 6,
characterized in that the groove (8) in the elevated section (3) is implemented in such a way that no undercuts result and a largely edgeless surface of the elevated section (3) is provided.
8. The cooking utensil according to one of Claims 1 through 7,
characterized in that the radius (10, 11) of the concave curve of the groove (8) is approximately 2 to 3 mm and the radius (13) of the convex curves of the groove (8) is approximately 3 mm.
9. The cooking utensil according to one of Claims 1 through 8,
characterized in that multiple, particularly parallel grooves (8) are provided and the radii (10) of the concave curve of the outer grooves (8) are somewhat smaller than those of the inner grooves (8).
10. The cooking utensil according to one of Claims 1 through 9,
characterized in that the groove (8) extends over more than half of the elevated section (3).

11. The cooking utensil according to one of Claims 1 through 10, characterized in that the depression (4) has at least one expansion (15) for collecting frying fat or other liquids.
12. The cooking utensil according to Claim 11, characterized in that the depression has a slope toward the expansion.
13. The cooking utensil according to one of Claims 1 through 12 in connection with Claims 11 or 12, characterized in that the groove (8) discharges into the expansion (15).
14. The cooking utensil according to one of Claims 1 through 13, characterized in that the floor (1) and the wall (2) are manufactured from aluminum, iron, stainless steel, or copper.
15. The cooking utensil according to Claim 14, characterized in that cooking utensils made of stainless steel are sealed with an antistick coating.

Fig. 1

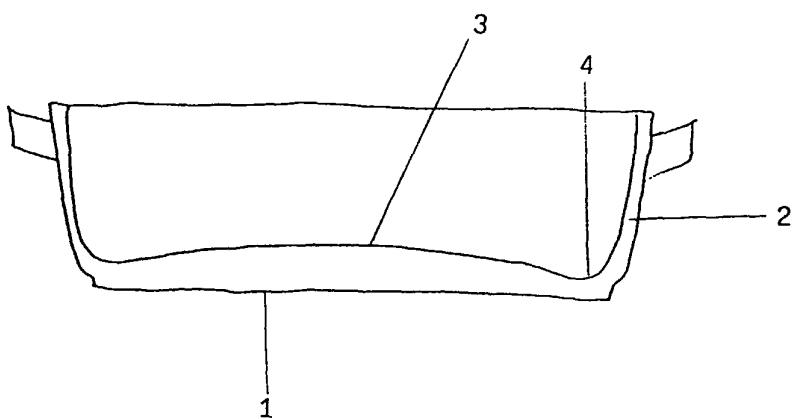

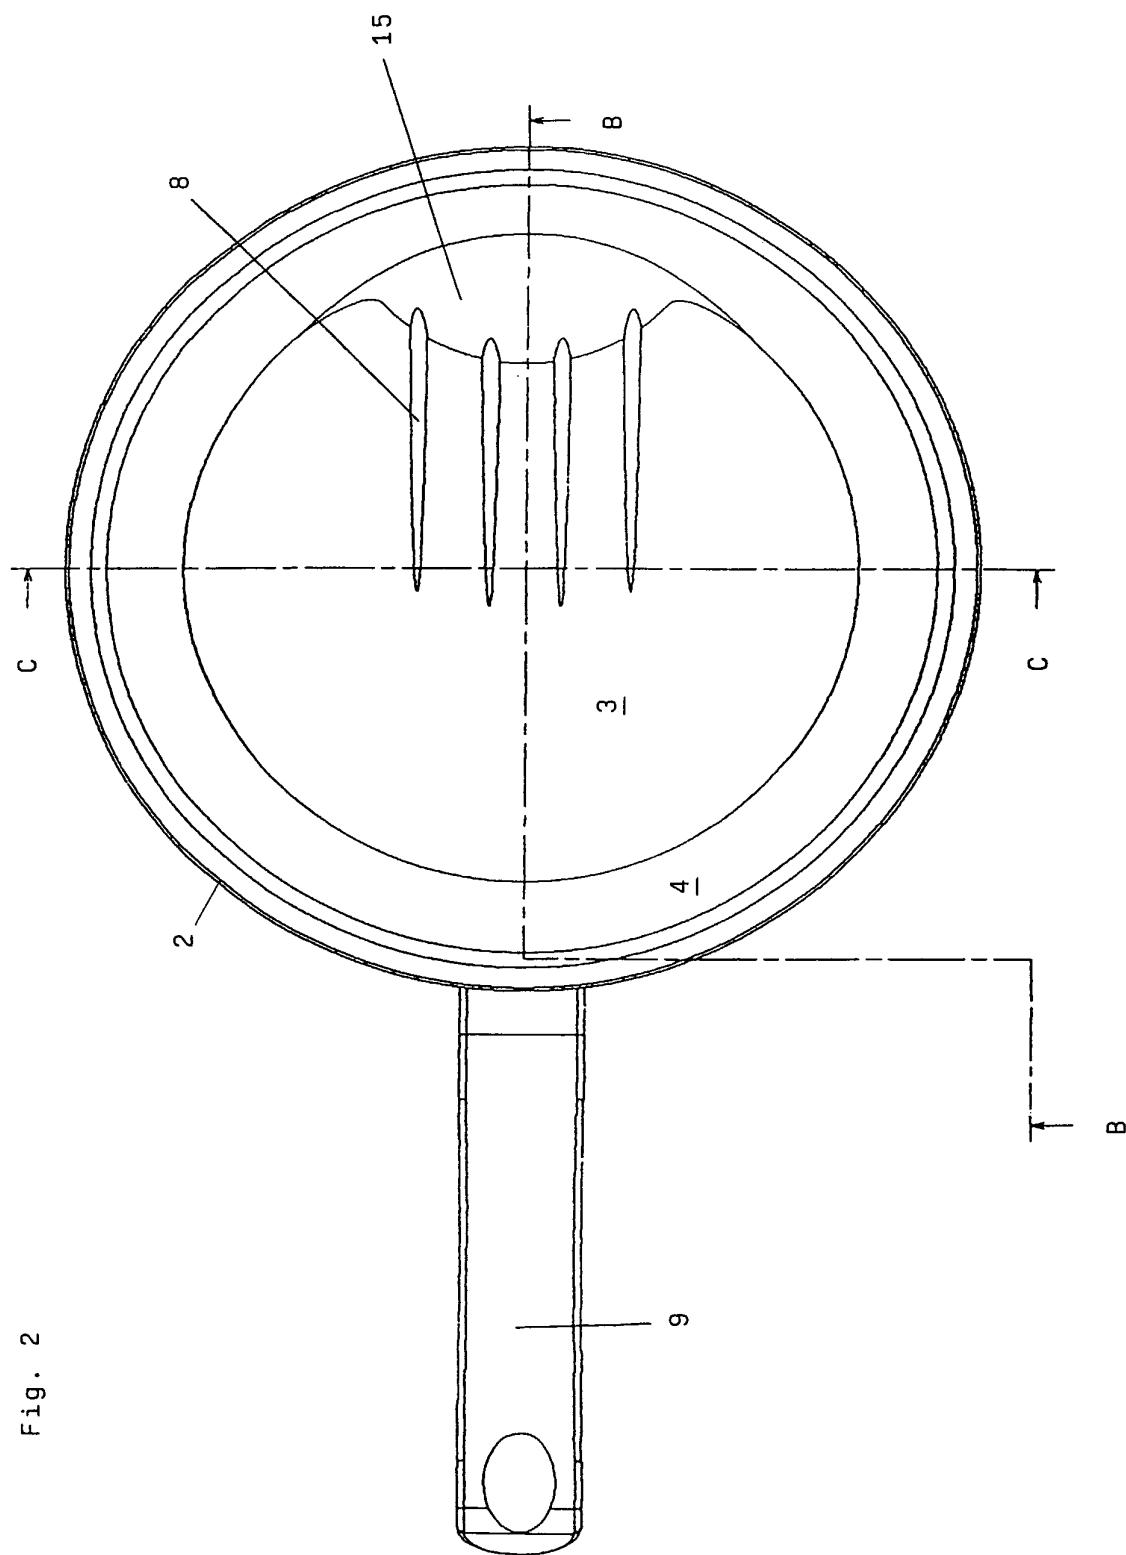
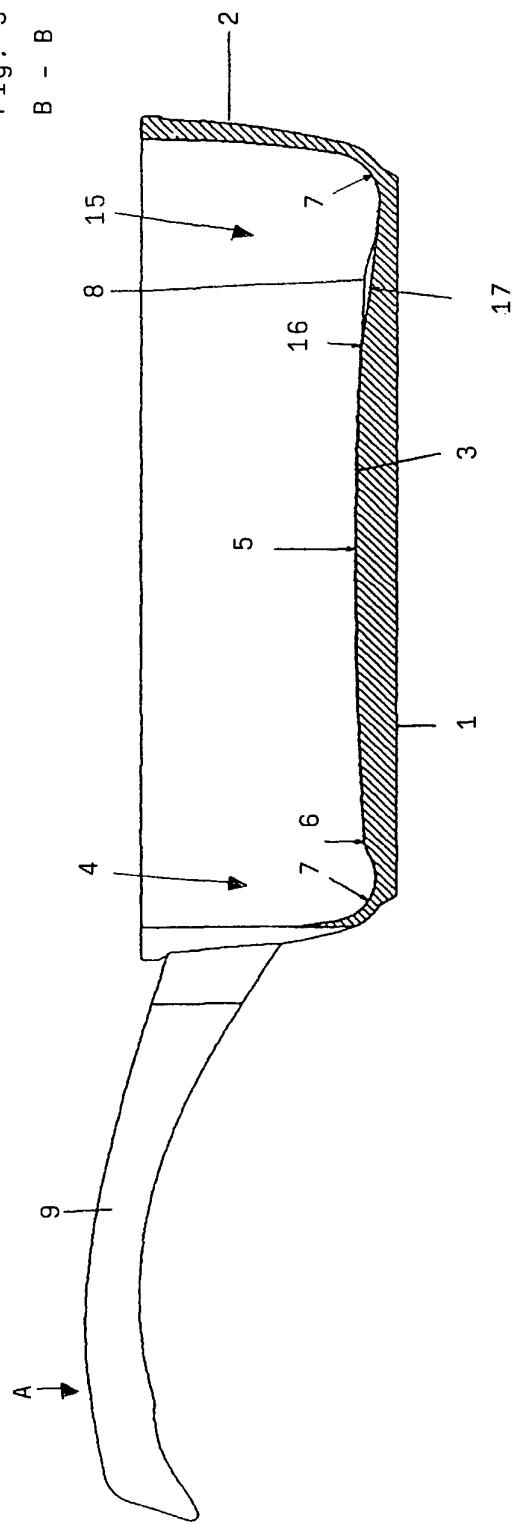


Fig. 2

Fig. 3
B - BFig. 4
C - C