

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
WO 2004/028638 A1

(51) International Patent Classification<sup>7</sup>: A62B 18/02, 18/08

(21) International Application Number: PCT/US2003/022368

(22) International Filing Date: 18 July 2003 (18.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 10/253,771 24 September 2002 (24.09.2002) US

(71) Applicant: KIMBERLY-CLARK WORLDWIDE, INC. [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).

(72) Inventors: GRIESBACH, Henry, L., III; 4479 Erskine Road, Clarkston, GA 30021 (US). HARRIS, Linda, G.; 1917 DeWinton Place, Lawrenceville, GA 30043 (US).

(74) Agents: STANO, Dana, E. et al.; KIMBERLY-CLARK WORLDWIDE, INC., 401 N. Lake St., Neenah, WI 54956 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

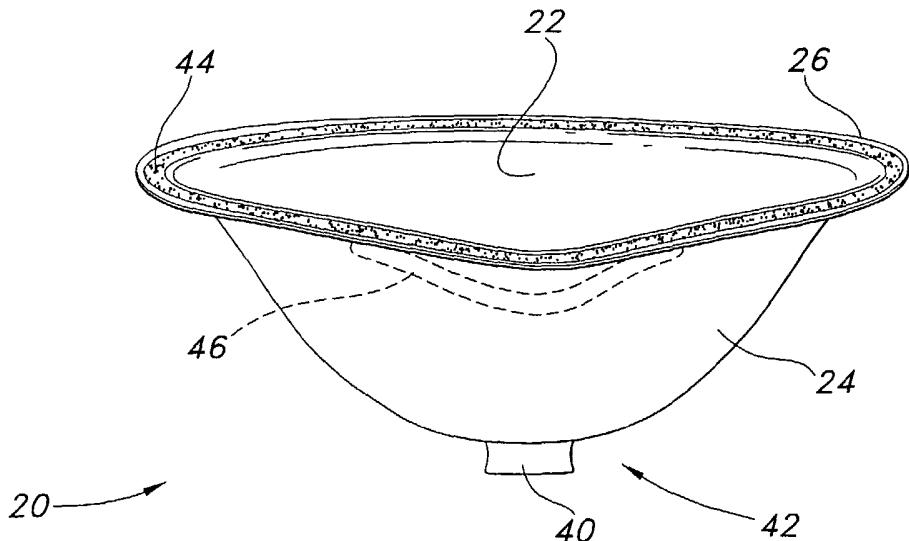
(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: EASY GRIPPING FACE MASK



WO 2004/028638 A1

(57) Abstract: A cup-shaped face mask sized to fit over the nose and mouth of a wearer is disclosed. The face mask includes an inside surface, an outside surface, and a tab disposed on and extending outwardly from the outside surface, where the tab is adapted for gripping.

## EASY GRIPPING FACE MASK

## BACKGROUND OF THE INVENTION

Disposable face masks have been manufactured for many years. In the medical 5 field, early masks were designed to protect patients from pathogens contained in the exhaled air of health care personnel. In recent years, it has likewise become important to protect the health care personnel from airborne pathogens emitted by patients.

During surgical procedures, health care personnel are often required to enter and 10 exit sterile environments to obtain equipment, supplies, and the like. Upon entry into an examination or surgical area, the health care worker dons a face mask for protection of himself and of the patient. However, face masks that are currently available require use of both hands to be properly donned. As a result, the worker may have to either place the supplies or equipment on a surface to properly don the mask, or may have to simply hold the mask in position while transporting the supplies.

15 There is currently a need for a face mask that is easy to don so that proper mask usage is encouraged. More particularly, a need exists for a face mask that may be donned with a single hand so the sterility of the examination or surgical environment is not compromised.

## 20 SUMMARY OF THE INVENTION

The present invention is generally directed to a face mask sized to fit over the nose and mouth of a wearer and easy to grip with a single hand for donning.

25 The present invention relates to a face mask having an inside surface, an outside surface, and a tab disposed on and extending outwardly from the outside surface, where the tab is adapted for gripping. The tab may be integral with the outside surface, or may be affixed to the outside surface. The inside surface includes a periphery that may have an adhesive material disposed on at least a portion thereof.

30 The present invention further relates to a stack of face masks, where the stack is formed from a plurality of shaped face masks. The masks include an inside surface having a periphery, an outside surface, and a tab disposed on and extending outwardly from the outside surface, where the tab is adapted for gripping. The masks are positioned in a nestled relation to one another, the inside surface of the mask being apposed to the outside surface of an adjacent mask, such that the tab maintains a distance between apposed masks so that the periphery of a mask does not contact the outside surface of 35 an apposed mask.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a side plan view of an exemplary cup shaped face mask donned by a wearer.

5 FIG. 2 is a perspective view of a cup shaped face mask having a folded edge periphery and an integral tab positioned so that the mask can be gripped with a single hand.

FIG. 3 is a broken-away side plan view of the folded edge periphery of the mask depicted in FIG. 2 taken along a line 2-2.

10 FIG. 4 is a perspective view of a cup shaped face mask having a flared edge periphery and a tab affixed so that the mask can be gripped with a single hand.

FIG. 5 is a side plan view of a plurality of face masks shown in FIG. 4 placed in a stacked configuration.

## DESCRIPTION OF THE INVENTION

15 The present invention relates to a face mask that is designed to be gripped with a single hand. The present invention further relates to a stack of such face masks. One embodiment of a face mask 20 is illustrated in FIG. 1. However, it should be understood that other embodiments are encompassed by the present invention.

20 The face mask 20 is generally sized to fit over the nose and mouth of a wearer, and includes an inside surface 22, i.e., the surface proximal to the face of the wearer, and an outside surface 24, i.e., the surface distal to the face of the wearer. The inside surface 22 includes a periphery 26 that is adapted to engage the face of the wearer when the mask is donned. The periphery 26 is generally a flange, and may be folded as in FIG.'s 2 and 3, flared as in FIG.'s 4 and 5, or any other configuration (not shown), provided that 25 the contact area with the face of the wearer is sufficient.

30 The present invention relates to any style or configuration of shaped face mask that is sufficiently rigid so that the mask may be gripped with a single hand without crushing or collapsing. As used herein, the term "shaped" means having a resilient structure that is able to retain its form and dimension. A shaped face mask may be dispensed and donned without crushing or collapsing. While sufficient rigidity is required for handling, the mask must also be somewhat flexible so that the periphery of the mask is able to substantially conform to the contours of the wearer's face. In some embodiments, the mask may be cup shaped as in FIG.'s 1, 2, 4, and 5. In other embodiments, the mask may be cone shaped (not shown). Various techniques may be used to increase the 35 rigidity of the mask. In some embodiments, the mask may be thermally molded or heat-

set to increase stiffness. In other embodiments, binder chemicals may be added to the materials prior to formation of the mask.

To facilitate gripping, the mask 20 of the present invention may include at least one tab 40 disposed on the outside surface 24, as depicted in FIG.'s 2, 4, and 5. The tab 40 extends outwardly from the outside surface 24 and is adapted to be gripped by the wearer for dispensing and donning. The tab 40 may be integral (FIG. 2) to the outside surface 24, i.e., it may be formed contemporaneously with the mask 20, so that the tab 40 is merely an extension of the outside surface 24 rather than a separate component affixed to the mask 20 during manufacturing or otherwise. The tab 40 may alternatively be a separate component (FIG. 4) that is affixed to the outside surface 24 of the mask 20. In such embodiments, the tab 40 may be affixed to the outside surface 24 by stitching, thermal bonding, adhesive bonding, or by any other appropriate means.

The tab 40 may be located at any point on the outside surface 24 of the mask 20. In some embodiments, the tab 40 may be positioned in a substantially central region 42 on the outside surface 24 (FIG.'s 2, 4, and 5). Such a point is generally distal to each point along the periphery 26. In this configuration, the tab 40 is positioned so that when the tab 40 is gripped, the mass of the mask 20 is substantially balanced in the wearer's hand, thereby stabilizing the mask 20 for donning.

The tab may be formed from any suitable material, such as an elastic material (e.g. a polymer), inelastic material, a nonwoven, knit, ribbon, cloth, wire, and so forth. As used herein, the term "elastic" refers to the ability of a material to recover its size and shape after deformation. As used herein, the term "inelastic" refers to the inability of a material to recover its size and shape after deformation. In some embodiments, the tab is formed from the same material selected to form the outside surface of the mask. The tab 25 may, where desired, be substantially impervious to fluids. Alternately, the tab may be impervious to liquids. In some embodiments, the tab is formed from a filtration material such as those described below.

The tab is generally sized to allow gripping with two or more fingers of a single hand. The tab may have any shape, including rectangular, circular, oval, trapezoidal, star, 30 flared, tapered, or otherwise. In some embodiments, the tab has a projected area of at least about 10 mm<sup>2</sup> (0.0001 m<sup>2</sup>). As used herein, the term "projected area" refers to the area of the tab that would project onto the outside surface of the mask. In other embodiments, the tab may have a projected area of at least about 20 mm<sup>2</sup> (0.002 m<sup>2</sup>).

The tab 40 generally extends outwardly from the outside surface 24 a sufficient 35 distance Z (FIG. 2) so that the wearer of the mask 20 may grip the tab 40 between two or more fingers of a single hand. In some embodiments, the tab 40 may extend outwardly

from the outside surface 24 at least 5 mm (0.005 m). In other embodiments, the tab 40 may extend outwardly from the outside surface 24 at least about 8 mm (0.008 m). In yet other embodiments, the tab 40 may extend outwardly at least about 10 mm (0.01 m) from the outside surface 24. In some embodiments, the tab 40 may extend outwardly from the outside surface 24 a maximum distance of about 25 mm (0.025 m).

5 The tab may be tailored to suit the gripping characteristics of particular types of wearers. In some embodiments, the tab may be substantially rigid, so that a wearer can grip the tab without causing it to collapse. In other embodiments, the tab may be substantially deformable so that a wearer is able to compress the tab between two or 10 more fingers when gripping it.

The presence of the tab on the outside surface of the mask enables the wearer to grasp the mask with a single hand, usually between the thumb and one or more fingers. The wearer is then able to bring the mask into contact with his or her face so that the periphery may be positioned in a comfortable location. In some embodiments, such as 15 those shown in FIG.'s 2 and 4, an adhesive material 44 may be applied to at least a portion the periphery 26 to enhance comfort, fit, efficacy, and so forth. As used herein, the term "adhesive" refers to the property of any material that allows the material to bond together substrates by surface attachment. In such embodiments, the mask may be donned with a single hand, thereby providing a significant advantage over many 20 commercially available masks that require use of two hands to properly position and secure the mask on the wearer's face. Any adhesive material used must be suitable for application to the skin.

Certain polysiloxane adhesives are believed suitable for use with the present invention. One such adhesive material is described in U.S. Patent No. 5,618,281 to 25 Betrabet et al., incorporated herein by reference in its entirety. Other suitable adhesive materials include those described in U.S. Patent No. 5,658,270 to Lichstein, incorporated herein by reference in its entirety. However, it is contemplated that other suitable pressure-sensitive adhesive materials known in the art may be used with the present invention.

30 Alternatively, a temperature-sensitive adhesive material that is substantially nontacky at or below about 25°C that becomes tacky upon contact with skin may be used. As used herein, the term "substantially nontacky" refers to a substance that exhibits a tack of less than about 5 g/cm<sup>2</sup> of force as measured by ASTM D2979. As used herein, the term "tacky" refers to a substance that exhibits a tack of at least about 10 g/cm<sup>2</sup> of 35 force as measured by ASTM D2979. In this test, the tack value is expressed as grams of force required to remove the end of a stainless steel rod 5.0 mm in diameter from the

surface of an adhesive material coating at a speed of 10 mm per second to which it has been adhered for 1.0 second. Suitable adhesive materials have a narrow melting transition range to ensure a rapid change from a substantially nontacky state to a tacky state. By way of example only, suitable temperature-sensitive adhesive materials are 5 provided by U.S. Patent No. 5,156,911 to Stewart, incorporated herein by reference in its entirety. However, it is contemplated that other suitable temperature-sensitive adhesive materials known to those of skill in the art may be used with the present invention.

The face mask may also incorporate any combination of known features, such as 10 visors or shields, beard covers, etc. Ear loops may also be attached to the mask proximal to the periphery so that if the medical personnel is required to remain in the sterile environment for an extended period of time, the worker is able to don the ear loops to further secure the mask to the face (not shown). The mask may also include an 15 elongated malleable member 46 as shown in FIG.'s 1, 2, 4, and 5 disposed proximal to at least a portion of the periphery 26 for configuring the mask 20 to closely fit the contours of 20 the nose and cheeks of the wearer. The malleable member 46 may be made of any malleable material including, but not limited to, metal wire or an aluminum band. In some 25 embodiments, the malleable member 46 may be disposed between the inside surface 22 and the outside surface 24.

The present invention also contemplates positioning a plurality of masks described 20 above in a stacked configuration as depicted in FIG. 5. The masks 20 and 50, for example, are positioned in a nestled relation to one another with the inside surface 22 of one mask 20 being apposed to the outside surface 24' of an adjacent mask 50. As used herein, the term "apposed" refers to a juxtaposed or proximal relation. The presence of 25 the tab 40 on the outside surface 24 of the mask 20 creates and maintains a distance D3 between apposed masks 20 and 50 so that the periphery 26 of one mask 20 does not contact the outside surface 24' of an adjacent mask 50. In some embodiments, a 30 distance D3 of at least 3 mm (0.003 m) is maintained. In other embodiments, a distance D3 of at least about 5 mm (0.005 m) is maintained. In yet other embodiments, a distance D3 of at least about 8 mm (0.008 m) is maintained. In still other embodiments, a distance D3 of at least about 10 mm (0.01 m) is maintained.

As stated above, some mask embodiments may include an adhesive material on 35 at least a portion of the periphery. Due to the presence of the tab on the outside surface and the distance maintained thereby, such masks may be placed in a stacked configuration without having the adhesive material contact the outside surface of the apposed mask. Thus, in some embodiments, there may not be a need for a release

paper to be used in conjunction with the adhesive material. Thus, the wearer may easily remove a mask from the stack and don it with a single hand.

The face mask of the present invention may be formed from a variety of materials and fabrics, such as woven reusable fabrics and nonwoven disposable fabrics or webs.

5 As used herein, the term "nonwoven fabric" or "nonwoven web" or "nonwoven material" means a web having a structure of individual fibers or threads that are randomly interlaid, but not in an identifiable manner or pattern as in a knitted fabric. Nonwoven fabrics or webs have been formed from many processes, for example, meltblowing processes, spunbonding processes, and bonded carded web processes.

10 As used herein, the term "spunbond" or "spunbond fibers" or "spunbonded fibers" refers to small diameter fibers that are formed by extruding molten thermoplastic material as filaments from a plurality of fine, usually circular capillaries of a spinneret with the diameter of the extruded filaments then being rapidly reduced, for example, as in U.S. Patent 4,340,563 to Appel et al., and U.S. Patent 3,692,618 to Dorschner et al., U.S. Patent 15 3,802,817 to Matsuki et al., U.S. Patents 3,338,992 and 3,341,394 to Kinney, U.S. Patent 3,502,763 to Hartman, and U.S. Patent 3,542,615 to Dobo et al.

As used herein, the term "meltblown" or "meltblown fibers" means fibers formed by extruding a molten thermoplastic material through a plurality of fine, usually circular, die capillaries as molten threads or filaments into converging high velocity, usually hot, gas 20 (e.g. air) streams that attenuate the filaments of molten thermoplastic material to reduce their diameter, which may be to microfiber diameter. Thereafter, the meltblown fibers are carried by the high velocity gas stream and are deposited on a collecting surface to form a web of randomly disbursed meltblown fibers. Such a process is disclosed, for example, in U.S. Patent 3,849,241 to Butin et al.

25 The face mask may be formed from a single layer of material or a composite of multiple layers. In the case of multiple layers, the layers are generally positioned in a juxtaposed or surface-to-surface relationship and all or a portion of the layers may be bound to adjacent layers. The multiple layers of a composite may be joined to form a multilayer laminate by various methods, including but not limited to adhesive bonding, 30 thermal bonding, or ultrasonic bonding. One composite material suitable for use with the present invention is a spunbond/meltblown/spunbond (SMS) laminate. An SMS laminate may be made by sequentially depositing onto a moving forming belt first a spunbond fabric layer, then a meltblown fabric layer and last another spunbond layer and then bonding the laminate in a manner described below. Alternatively, the fabric layers may 35 be made individually, collected in rolls, and combined in a separate bonding step. Multilayer laminates may have multiple meltblown layers or multiple spunbond layers in

many different configurations and may include materials other than nonwovens. Examples of such other materials include wovens, films, foam/film laminates and combinations thereof, for example, a spunbond/film/spunbond (SFS) laminate. Examples of other composite materials suitable for use in the present invention include, but are not limited to, those described in U.S. Patent 4,041,203 to Brock et al., U.S. Patent 5,169,706 to Collier, et al., U.S. Patent 5,145,727 to Potts et al., U.S. Patent 5,178,931 to Perkins et al., U.S. Patent No. 4,350,888 to Bornslaeger, and U.S. Patent 5,188,885 to Timmons et al., which are all incorporated herein by reference.

The face mask of the present invention may include a layer of material, for example, a nonwoven material, suitable for filtration. The filtration material may be made from a meltblown nonwoven web and, in some embodiments, may be subject to electret treating. As used herein, the term "electret" or "electret treating" refers to a treatment that imparts a charge to a dielectric material, such as a polyolefin. The charge includes layers of positive or negative charges trapped at or near the surface of the polymer, or charge clouds stored in the bulk of the polymer. The charge also includes polarization charges that are frozen in alignment of the dipoles of the molecules. Methods of subjecting a material to electret treating are well known by those skilled in the art. These methods include, for example, thermal, liquid-contact, electron beam, and corona discharge methods. One particular technique of subjecting a material to electret treating is disclosed in U.S. Patent No. 5,401,466, the contents of which is herein incorporated in its entirety by reference. This technique involves subjecting a material to a pair of electrical fields wherein the electrical fields have opposite polarities. Electret treatment results in a charge being applied to the filtration medium that further increases filtration efficiency by drawing particles to be filtered toward the filter by virtue of their electrical charge. Electret treatment can be carried out by a number of different techniques. One technique is described in U.S. Patent No. 5,401,446 to Tsai et al. assigned to the University of Tennessee Research Corporation and incorporated herein by reference in its entirety. Other methods of electret treatment are known in the art, such as that described in U.S. Patent Nos. 4,215,682 to Kubik et al., 4,375,718 to Wadsworth, 4,592,815 to Nakao and 4,850,659 to Ando, incorporated herein by reference in their entirety.

Alternatively, the mask may include a layer of expanded polytetrafluoroethylene (PTFE) membrane for filtration, such as those manufactured by W. L. Gore & Associates. A more complete description of the construction and operation of such materials can be found in U.S. Patent No. 3,953,566 to Gore and U.S. Patent No. 4,187,390 to Gore, incorporated herein by reference in their entirety.

The minimum filtration efficiency requirements differ for various applications. The filtration efficiency of the face mask may be expressed in terms of its sodium chloride (NaCl) efficiency. The NaCl efficiency measures the ability of a fabric or web to prevent the passage of small particles (about 0.1 micron) through it. A higher efficiency is 5 generally more desirable and indicates a greater ability to remove particles. The NaCl efficiency may be measured by an automated filter tester. One such apparatus is available from TSI, Inc., P.O. Box 64394, 500 Cardigan Rd, St. Paul, Minnesota 55164, designated as the Model 8110 Automated Filter Tester (AFT). The Model 8110 AFT measures pressure differential and particle filtration characteristics for air filtration media. 10 The AFT utilizes a compressed air nebulizer to generate a submicron aerosol of sodium chloride particles that serve as the challenge aerosol for measuring filter performance. The characteristic size of the particles used in these measurements is 0.1 micron. Typical air flow rates are between 31 liters per minute and 33 liters per minute. The AFT test is performed on a sample area of about 140 cm<sup>2</sup>. The performance or efficiency of a filter 15 medium is expressed as the percentage of sodium chloride particles that penetrate the filter, penetration being defined as transmission of a particle through the filter medium. The transmitted particles are detected downstream from the filter using a light scattering technique. The percent penetration (% P) reflects the ratio of the downstream particle count to the upstream particle count. In some embodiments, the mask may have a NaCl 20 efficiency above 80 percent. In some other embodiments, the mask may have a higher filtration efficiency, for example, from about 95 percent to about 99.997 percent. In some embodiments, the maximum pressure differential through the mask may be less than 5 millimeters of water (mm H<sub>2</sub>O).

Where present, the filtration layer may also be required to attain a desired 25 bacterial filtration efficiency (BFE). The BFE is a measure of the ability of a material to prevent the passage of bacteria through it. Face masks for medical applications may require a BFE of greater than or equal to about 96%. BFE may be measured according to military specification MIL-M-36954C, 4.4.1.1.1 and 4.4.1.2. The BFE is expressed as a percentage with a maximum efficiency of 100%. The BFE of a material may be 30 measured, for instance, by Nelson Laboratories of Salt Lake City, Utah.

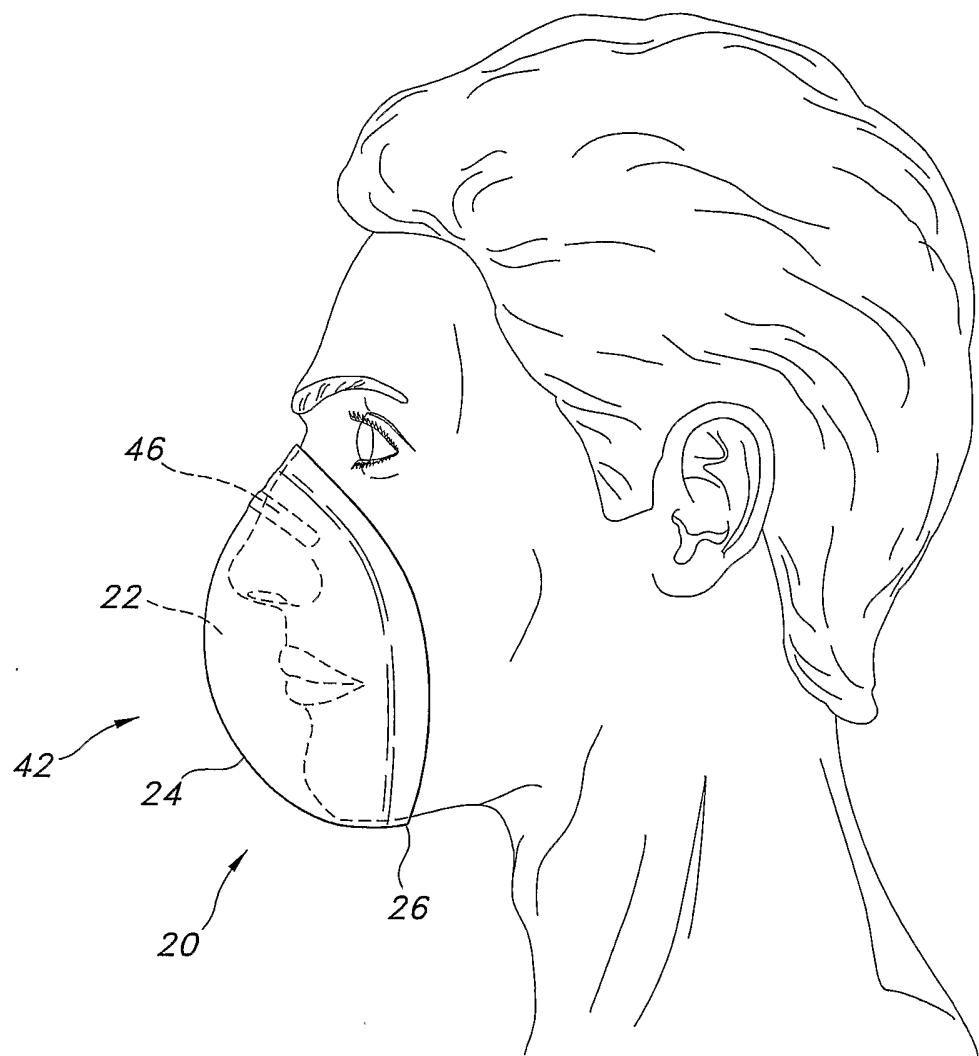
The invention may be embodied in other specific forms without departing from the scope and spirit of the inventive characteristics thereof. The present embodiments therefore are to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by the foregoing 35 description, and all changes which come within the meaning and range of equivalency of the claims are therefore intended to be embraced therein.

## CLAIMS

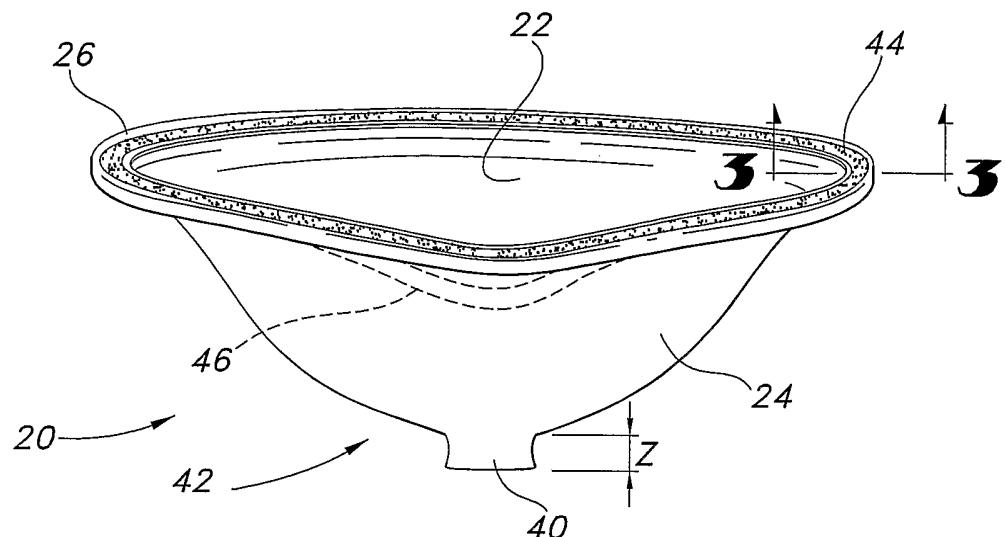
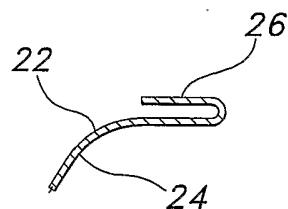
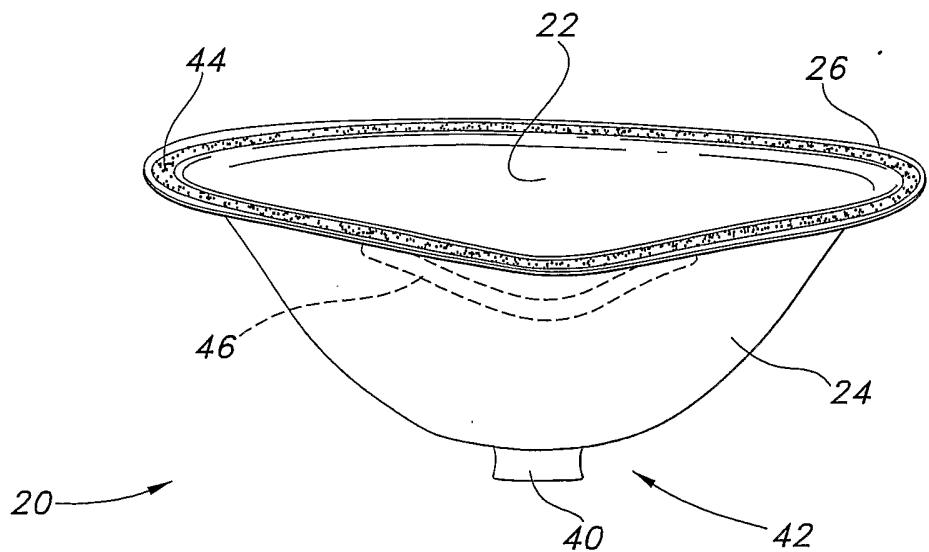
1. A face mask comprising:
  - an inside surface;
  - an outside surface; and
- 5 a tab disposed on and extending outwardly from the outside surface, wherein the tab is adapted for gripping.
2. The mask of claim 1, wherein the tab is integral with the outside surface.
- 10 3. The mask of claim 1, wherein the tab is affixed to the outside surface.
4. The mask of claim 1, the tab extending outwardly at least 5 millimeters from the outside surface.
- 15 5. The mask of claim 1, the tab extending outwardly at least about 8 millimeters from the outside surface.
6. The mask of claim 1, the tab extending outwardly at least about 10 millimeters from the outside surface.
- 20 7. The mask of claim 1, the tab extending outwardly a maximum of about 25 millimeters from the outside surface.
8. The mask of claim 1, wherein the tab is substantially rigid.
- 25 9. The mask of claim 1, wherein the tab is substantially deformable.
10. The mask of claim 1, wherein the tab is substantially impervious to fluids.
- 30 11. The mask of claim 1, wherein the tab is sized to allow gripping with a single hand.
12. The mask of claim 1, the inside surface having a periphery with an adhesive material disposed on at least a portion thereof.
- 35 13. The mask of claim 1, wherein the tab is disposed in a substantially central location on the outside surface.

14. The mask of claim 1, wherein the mask is cup shaped.
15. The mask of claim 1, wherein the tab has a projected area of at least about 10 mm<sup>2</sup>.  
5
16. A stack of face masks comprising:  
a plurality of shaped face masks having an inside surface with a periphery, an outside surface, and a tab disposed on and extending outwardly from the outside surface, the tab being adapted for gripping,  
10 wherein the masks are positioned in a nestled relation to one another, the inside surface of a mask being apposed to the outside surface of an adjacent mask, the tab maintaining a distance between apposed masks such that the periphery of a mask does not contact the outside surface of an apposed mask.
- 15 17. The stack of claim 16, wherein the distance between apposed masks is at least 3 millimeters.
18. The stack of claim 16, wherein the distance between apposed masks is at least about 5 millimeters.  
20
19. The stack of claim 16, wherein the distance between apposed masks is at least about 8 millimeters.
20. The stack of claim 16, wherein the distance between apposed masks is at least  
25 about 10 millimeters.
21. The stack of claim 16, wherein the tab is disposed in a substantially central location on the outside surface.

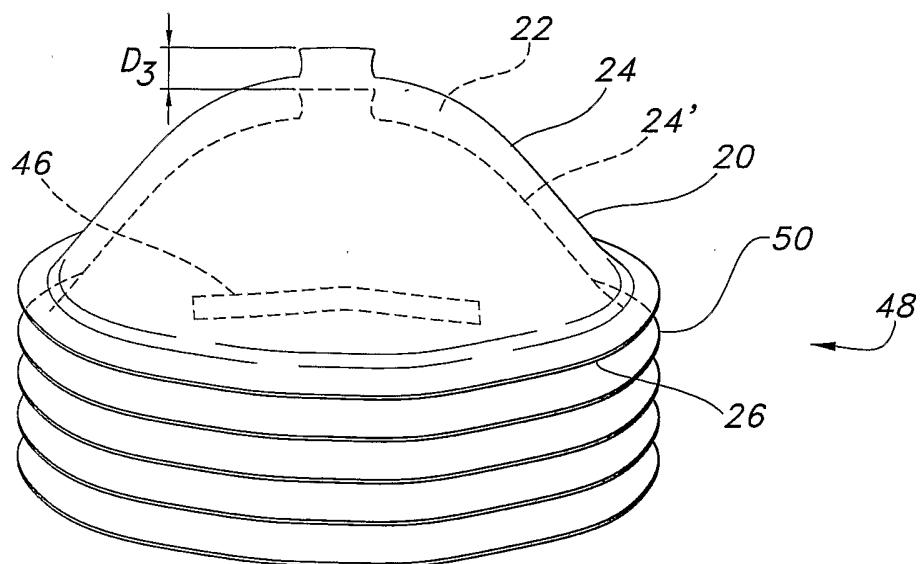
1/3

**FIG 1**

2/3

**FIG. 2****FIG. 3****FIG. 4**

3/3

**FIG. 5**

**INTERNATIONAL SEARCH REPORT**

International Application No  
PCT/US 03/22368

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC 7 A62B18/02 A62B18/08

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A62B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category <sup>o</sup>	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 873 972 A (MAGIDSON MARK ET AL) 17 October 1989 (1989-10-17)  the whole document -----	1,3-8, 10,11, 13-15
X	US 6 102 040 A (TAYEBI AMAD ET AL) 15 August 2000 (2000-08-15)  the whole document -----	1,4-8, 10,11, 13-15

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

<sup>o</sup> Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

22 October 2003

Date of mailing of the international search report

30/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Neiller, F

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International Application No

PCT/US 03/22368

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 4873972	A 17-10-1989	NONE		
US 6102040	A 15-08-2000	US 5673690 A		07-10-1997
		AU 709676 B2		02-09-1999
		AU 2345697 A		17-10-1997
		BR 9708251 A		04-01-2000
		CN 1214617 A		21-04-1999
		EP 0906037 A1		07-04-1999
		JP 2000507461 T		20-06-2000
		WO 9735492 A1		02-10-1997