

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/100455 A1

(51) International Patent Classification⁷: **H04L 12/417**

(21) International Application Number:
PCT/IB2004/001326

(22) International Filing Date: 28 April 2004 (28.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03101235.4 5 May 2003 (05.05.2003) EP

(71) Applicant (for DE only): **PHILIPS INTELLECTUAL
PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-
damm 94, 20099 Hamburg (DE).

(71) Applicant (for all designated States except DE, US):
KONINKLIJKE PHILIPS ELECTRONICS N.V.
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven
(NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FUHRMANN, Pe-
ter** [DE/DE]; c/o Philips Intellectual Property & Standards
GmbH, Weissshausstr. 2, 52066 Aachen (DE). **ZINKE,
Manfred** [DE/DE]; c/o Philips Intellectual Property &
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).


(74) Agent: **VOLMER, Georg**; Philips Intellectual Property &
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: ERROR DETECTION AND SUPPRESSION IN A TDMA-BASED NETWORK NODE

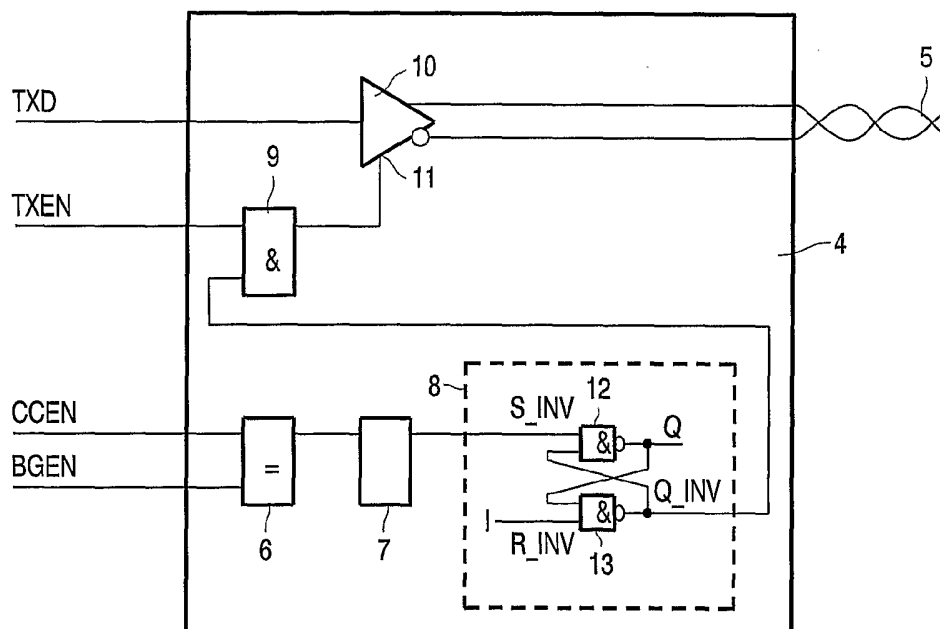

(57) Abstract: A network node (1) with a communication unit (2), which is provided for the implementation of a communication protocol for the purpose of communication with other network nodes via a communication medium (5), and with a bus monitor (3), which, mutually independently, each implement an access time schedule contained in a configuration data record, and which each make available, in accordance with the access time schedule, a release signal for a bus driver (4) provided in the network node (1), which evaluates these two signals and, in the event that the two release signals do not coincide, blocks the access of the network node (1) to the communication medium (5).



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

ERROR DETECTION AND SUPPRESSION IN A TDMA-BASED NETWORK NODE

The invention relates to a network node with a communication unit, which is provided for the implementation of a communication protocol for the purpose of the communication of the network node with other network nodes via a communication medium, and with a bus monitor.

5 Communication systems with multiple network nodes are frequently designed to be time-triggered. In systems of this kind, an individually, exclusively assigned time slot is in each case provided for the exchange of messages between various network nodes. As a result, the collision-free exchange of messages in error-free operation is ensured. This method is generally known as the TDMA (Time Division Multiple Access) method. A
10 configuration of this kind is frequently provided for the exchange of messages in safety-critical applications, for instance in motor vehicles.

 By means of a corresponding configuration of the bus monitor, the latter can, in accordance with the access time schedule, determine time slots for which a transmission involving the particular network node is permitted. For the remaining time periods, the
15 network node is blocked on the transmission side. It can thereby be prevented that a defectively-operating network node transmits at times at which no transmission time slot is assigned to it, i.e. at which it should not have transmitted.

 It is thereby possible to prevent a defectively-transmitting network node of this kind from blocking a network.

20 In some applications, however, there is a requirement not just to prevent a defectively-operating network node from accessing the network outside of the time slots assigned to it, but also to detect that the node is operating defectively. To this end, the bus monitors of network nodes are, in known systems, designed in such a way that an error-detection function is also realized within them. The bus monitor hereby compares the
25 occurrence of a transmission request by the communication unit with the current position in the own access schedule. If it is established by the bus monitor that a transmission request is present at a time for which the access time schedule of the assigned network node does not specify any transmission, the bus monitor communicates this error state to a higher-order control unit. In addition, the system may be designed in such a way that the access of the

network node to the network is blocked on the transmission side as a result of a discrepancy between the access time schedules of the communication unit and the bus monitor having been established by the bus monitor.

5 In these circumstances, simply from the fact that the communication unit passes on the control signal indicating a transmission request to both the bus driver and the bus monitor, many different vulnerable points open up for possible impairment of the system behavior resulting from the influence of errors.

10 For monitoring purposes, the bus monitor uses the control signal of the communication unit that is also passed on to the bus driver. If the bus monitor is operating defectively, this control signal may itself be faulty, and a defective transmission request may be routed by the bus monitor to the bus driver, leading to the activation of the bus driver, i.e. to media access.

15 It must further be ensured, in the case of a bus monitor that itself takes on part of the error detection, that the bus monitor performs its function at all times, or at least that a function failure is detected.

20 It is an object of the invention to specify a network node of the above-mentioned type in which, in addition to error suppression, error detection also takes place as reliably as possible.

This object is achieved in accordance with the invention by means of the features as claimed in claim 1:

25 A network node with a communication unit, which is provided for the implementation of a communication protocol for the purpose of communication with other network nodes via a communication medium, and with a bus monitor, which, mutually independently, each implement an identical access time schedule contained in a configuration data record, and which each make available, in accordance with the access time schedule, a release signal for a bus driver provided in the network node, which evaluates these two signals and, in the event that the release signals do not coincide, blocks the access of the
30 network node to the communication medium.

In the network node in accordance with the invention, a communication unit, a bus driver and a bus monitor are provided. The communication unit serves for implementing a communication protocol, in accordance with which the communication with other network nodes that are coupled together via a communication medium is possible. The bus monitor

represents an independent entity, which makes available a second item of information concerning the access time schedule. In addition to its function as a physical network connection, the bus driver constitutes a third entity for consistency checking between the access behavior of the communication unit and the bus monitor.

5 In the network node in accordance with the invention, the communication unit and the bus monitor, which are both externally configurable, are loaded with a configuration data record. From the configuration data record can be derived, *inter alia*, an access time schedule, which specifies, for the network node in which the communication unit and the bus monitor are provided, time slots in which this network node may access the communication
10 medium. During the remainder of the time, the network node may not access the communication medium, i.e. may not transmit.

This mechanism is provided in order to ensure that only one network node is ever active in a network at a particular time, i.e. occupying the communication medium with a transmission procedure.

15 The access schedule contained in the configuration data record is implemented in both the communication unit and the bus monitor, independently of each other. By contrast with the solution known from the prior art, both the communication unit and the bus monitor, independently of each other, supply a release signal, which indicates the times at which the network node in which the two units are provided may be active, i.e. may transmit, in
20 accordance with the access time schedule. These two release signals are always redundant, as a result of which an additional error security is achieved.

The evaluation of the two release signals is undertaken in the bus driver to which these two signals are made available. The bus driver evaluates both signals. Assuming that the network node is operating correctly, the release signals should always be both active
25 or both non-active. In this case, no error state exists. If, however, the two release signals do not match, an error state exists. In this case, the bus driver blocks the access of the network node to the communication medium.

Through this concept of the network node in accordance with the invention, the component within the network node, namely the bus driver, which also undertakes the
30 physical interfacing of the network node with the communication medium, is also included in the error detection. The network node in accordance with the invention thus detects a defective access in the bus driver, which is the location within the network node at which the appropriate measures must also be initiated in the event of an error. It is thereby ensured that, in the event of an error, even if the communication unit or the bus monitor are operating

defectively, the original function of error detection and treatment, i.e. the blocking of any access by the network node to the communication medium, is safeguarded.

In accordance with an embodiment of the invention as claimed in claim 2, the communication unit can supply, in addition to the above-described release signal, a
5 transmission request signal to the bus driver, which activates its transmission stage only if no blockage is present as a result of the evaluation of the two release signals. Access to the communication medium is thereby in fact only initiated if a transmission request by the communication unit is also present. A transmission request of this kind can, however, lead to activation of the transmission stages only if the evaluation of the two release signals has
10 revealed no errors.

The two release signals can advantageously, as provided in accordance with a further embodiment of the invention as claimed in claim 3, be coded inversely to one another. The influence of a common mode error can hereby be suppressed for the error detection. The release signals are further checked in the bus driver for the consistency of the release
15 information contained within them, wherein the special coding now has to be observed.

As a result of the implementation of the access time schedule in two different units, small time shifts or jitters may occur. In order to exclude influences of this kind during error detection, in accordance with a further embodiment of the invention as claimed in claim 4, a low-pass filter is used during the evaluation of the two release signals to suppress short-
20 term differences between the two release signals, so that differences of this kind do not lead to error detection.

In accordance with a further embodiment of the invention as claimed in claim 5, a low-pass filter of this kind may, advantageously, be of configurable design in order that the permitted offset of the two release signals, or their jitter, can be configurable.

25 In accordance with a further embodiment of the invention as claimed in claims 6 and 7, the detection of state generated in the bus driver may be signaled to the outside, for example to a higher-order control unit of the network node in question. An error-state detection of this kind, signaled to the outside, may advantageously also be resettable from the outside in order to put the network node back into operation.

30 The above-described network node may advantageously be provided in a network in which multiple network nodes communicate with each other via the communication medium. An individual access time schedule is then provided for each network node, so that only one network node at a time has active access to the communication medium, i.e. is able to transmit.

A network of this kind may advantageously, in accordance with a further embodiment of the invention as claimed in claim 10, be designed in such a way that it is equipped with redundant network channels. In this case, a bus monitor and a bus driver are assigned to each network channel in each network node, so that error detection can take place individually for each transmission channel.

The invention will be further described with reference to examples of embodiments shown in the drawings, to which, however, the invention is not restricted.

Fig. 1 shows a block circuit diagram of a network node in accordance with the invention.

Fig. 2 shows a circuit diagram of a bus driver of the network node as shown in Fig. 1.

Fig. 1 shows a block circuit diagram of a network node 1 in accordance with the invention, with a communication unit 2. In addition to the communication unit 2, a bus monitor 3 is provided.

Both the communication unit 2 and the bus monitor 3 are configurable from outside with configuration data records.

A bus driver 4 is also provided, by means of which access to a communication medium 5 is possible. Via the communication medium 5, the network node 1 may be coupled with other network nodes, not shown in the Figure.

The communication unit 2 is primarily provided in order to implement a communication protocol. A communication protocol of this kind controls the nature of the communication of the network node 1 with other network nodes via the transmission medium 5.

In a communication protocol of this kind, it may be, for example, that only specific time slots are provided for each network node in which it can access the communication medium 5. Outside of these time slots, the network node is not allowed to actively access the communication medium 5, i.e. outside of the times assigned to it in accordance with the access time schedule, the network node is not able to occupy the communication medium 5 with a transmission activity.

This access time schedule is contained, within the network node 1 in accordance with the invention, in a configuration data record which has been sent externally to both the communication unit 2 and the bus monitor 3. The communication unit 2 and the bus monitor 3 implement this access time schedule independently of one another, i.e. for each current moment, they establish whether or not the network node 1 may actively access the transmission medium 5. Both the communication unit 2 and the bus monitor 3 supply corresponding release signals to the bus driver 4. Only if these release signals match is it ensured that the network node 1 is able to access the communication medium 5 in accordance with the access time schedule. If, on the other hand, the two release signals are not identical, the bus driver 4 blocks the access of the network node to the communication medium 5, since an error is present in this case. An error of this kind may have various causes; what is crucial for the bus driver is that it is no longer ensured that the communication unit 2 and the independent bus monitor 3 are supplying consistent release information.

As the bus driver 4 is the unit in the network node 1 that directly accesses the communication medium 5, it is ensured by this embodiment of the network node that the unit having direct access to the communication medium 5 undertakes both the error detection and also blocks access in the event of an error. Further error sources are thereby excluded during error detection by the communication or interaction between multiple units.

Fig. 2 shows as an embodiment example, a detailed circuit diagram of the bus driver 4 of the network node 1 as shown in Fig. 1.

Provided in the bus monitor 4, as shown in Fig. 2, is a comparison stage 6, to which, on the one hand, the release signal BGEN supplied by the bus monitor 3, not shown in Fig. 2, is sent. Further sent to the comparison stage 6 is the release signal CCEN of the communication unit 2 as shown in Fig. 1.

Because the communication unit 2 and the bus monitor 3 of the network node 1 as shown in Fig. 1 may possibly operate with small time displacements, or because jitter may possibly occur in their release signals BGEN and CCEN, an error may, in the short term, be signaled in the output signal of the comparison stage 6 despite the fact that no error in fact exists. In order to exclude time-displacement or jitter influences of this kind, connected downstream of the comparison stage 6 is a low-pass filter 7, which suppresses these short-term erroneous error messages. The low-pass filter 7 may advantageously be of variable design in respect of its filtering function, in order to be able to undertake adaptation to different possible time displacements or jitters.

Having been filtered by the low-pass filter, the output signal of the low-pass filter 7 arrives at an error-state machine 8, which essentially comprises a flip-flop comprising two inverting AND gates 12 and 13 (known as an asynchronous RS flip-flop). Supplied to the 'set' input (S_INV) of the flip-flop is the low-pass-filtered output signal of the low-pass filter

5 7.

If states signaling an error occur in the output signal of the low-pass signal 7, the error-state machine 8, or, specifically, the flip-flop provided within it, is set.

Referred to the effects on the error-state machine 8, the output signal supplied by the comparison stage 6 of the bus driver 4 as shown in Fig. 2 is always inactive (logic level '1') when these two release signals are identical. In this case, there is no error. If a discrepancy is established between the two release signals BGEN and CCEN, the output signal of the comparison stage 6, referred to the effects on the error-state machine 8, is activated (logic level '0'), i.e. it signals an error.

For this embodiment example, it is assumed that the starting state (initial state) of the error-state machine 8 is such that a logic level '1' is present at the output Q_INV, i.e. no error has been detected. In an actual circuit realization, this must be ensured for an asynchronous flip-flop by appropriate activation of the reset input (R_INV), which is not shown in Fig. 2.

In the embodiment example shown in Fig. 2, the inverted output Q_INV of the error-state machine 8 is evaluated and sent to an input of an AND gate 9. Sent to the other input of the AND gate 9 is a transmission-request signal TXEN supplied by the communication unit 2 of the network node as shown in Fig. 1. Since the output signal of the error-state machine 8 is inverted, this signal has a high (logic '1') level in the error-free state, i.e. the transmission-request signal TXEN reaches the output of the AND gate 9. If, on the other hand, a case of error exists, the output signal of the error-state machine 8 has a low (logic '0') level, so that any transmission-request signals occurring are suppressed.

As a result, an activation level (logic '1') occurs at the output of the AND gate 9 only if, on the one hand, no error is present, but, on the other, the transmission-request signal TXEN signals that transmission is to take place. This signal arrives at a control input 11 of a transmission amplifier 10.

Sent to the transmission amplifier 10 on the input side is a data signal TXD, which is to be transmitted. To this end, the transmission amplifier is equipped with, for the differential line transmission, for example, a non-inverting and an inverting output, coupled with two lines of the communication medium 5.

On the basis of the above-described interrelationships, therefore, a transmission of data by the transmission amplifier 10 can take place only if no error is present and, on the other hand, a transmission request is given by the communication unit 2.

Owing to the design of the network node on the one hand and the error
5 evaluation in the bus driver 4 of the network node 1 on the other, it is achieved that, in the particular unit of the network node 1 by means of which the active access to the communication medium takes place, namely in the bus driver 4, error evaluation also takes place. It is thereby directly in this unit that the error detection and the measure for
10 suppression of further error propagation take place. In addition, owing to the independent implementation of the access time schedule in the communication unit 2 and the bus monitor 3, a redundancy is achieved in the evaluation.

CLAIMS:

1. A network node (1) with a communication unit (2), which is provided for the implementation of a communication protocol for the purpose of communication with other network nodes via a communication medium (5), and with a bus monitor (3), which, mutually independently, each implement an access time schedule contained in a configuration data record, and which each make available, in accordance with the access time schedule, a release signal for a bus driver (4) provided in the network node (1), which evaluates these two signals and, in the event that the two release signals do not coincide, blocks the access of the network node (1) to the communication medium (5).
2. A network node as claimed in claim 1, characterized in that the communication unit (2) supplies, in addition, a transmission request signal to the bus driver (4), as a function of which the bus driver (4) activates its transmission stage (10) if no blockage of access to the communication medium (5) is present.
3. A network node as claimed in claim 1, characterized in that the release signals of the communication unit (2) and the bus monitor (3) are coded inversely to one another.
4. A network node as claimed in claim 1, characterized in that the evaluation of the two release signals is undertaken in the bus driver (4) under the influence of a low-pass filter (7).
5. A network node as claimed in claim 4, characterized in that the low-pass filter (7) is of configurable design.
6. A network node as claimed in claim 1, characterized in that error-state detection generated in the bus driver (4) is resettable from the outside.
7. A network node as claimed in claim 1, characterized in that error-state detection generated in the bus driver (4) is signaled to the outside.

8. A network node as claimed in claim 1, characterized in that the bus monitor (3) and the bus driver (4) are integrated into one unit.

9. A network with network nodes as claimed in any one of claims 1 to 8, wherein
5 the network nodes (1) communicate with each other via the communication medium (5).

10. A network as claimed in claim 9, in which redundant network channels are provided, wherein a bus monitor (3) and a bus driver (4) are assigned to each network channel in each network node (1).

10

11. A bus driver (4) for a network node (1), which is provided for communication with other network nodes via a communication medium (5), wherein the bus driver evaluates two release signals for equality of the release information made available to it by two separate units (2, 3) provided in the network node, which, mutually independently, each
15 implement an access time schedule, and wherein, in the event that the release signals do not coincide, the bus driver blocks the access of the network node (1) to the communication medium (5).

1/1

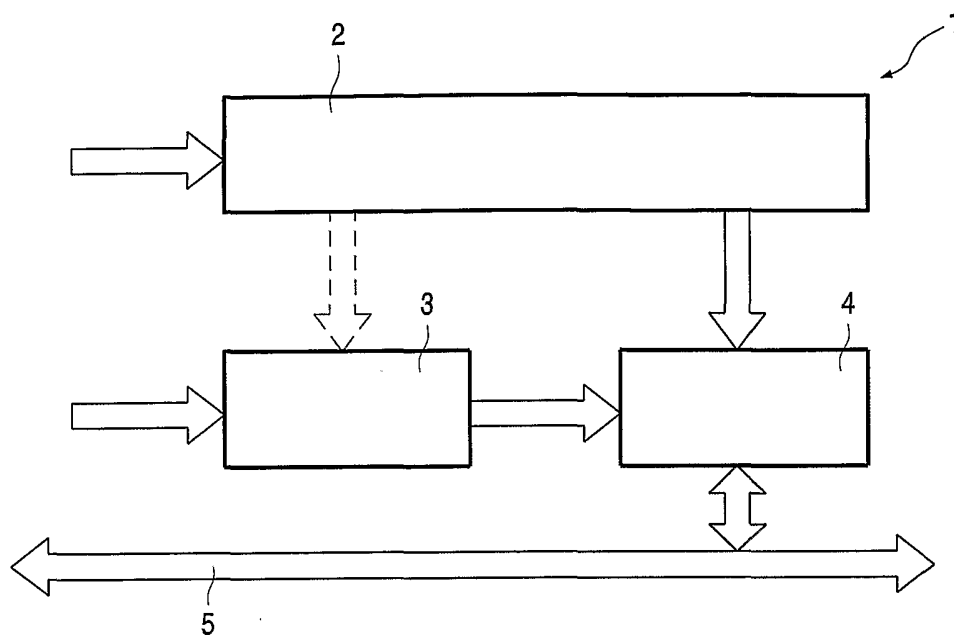


FIG. 1

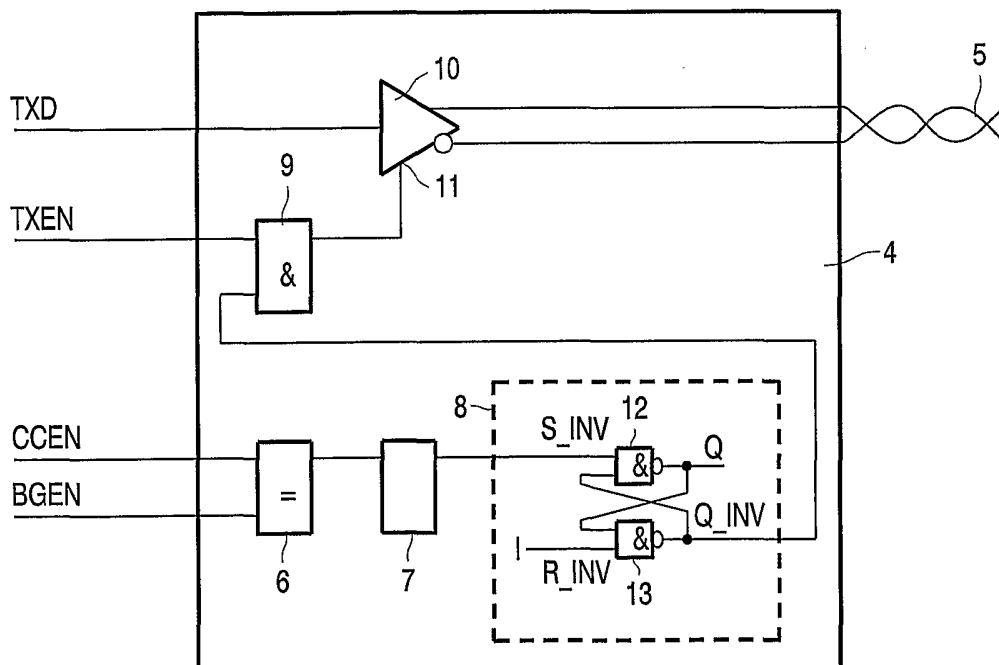


FIG. 2

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2004/001326

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L12/417

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/067873 A1 (ZINKE MANFRED ET AL) 10 April 2003 (2003-04-10) paragraphs '0007! - '0012! paragraphs '0039! - '0044!; figure 6 -----	1,2,6-9, 11
X	TEMPLE C: "Avoiding the babbling-idiot failure in a time-triggered communication system" FAULT-TOLERANT COMPUTING, 1998. DIGEST OF PAPERS. TWENTY-EIGHTH ANNUAL INTERNATIONAL SYMPOSIUM ON MUNICH, GERMANY 23-25 JUNE 1998, LOS ALAMITOS, CA, USA, IEEE COMPUT. SOC, US, 23 June 1998 (1998-06-23), pages 218-227, XP010291298 ISBN: 0-8186-8470-4 chapters 2.3,2.4,3,3.1,3.2,3.6 ----- -/-	1,6-9,11

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

19 August 2004

Date of mailing of the international search report

25/08/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kreppel, J

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2004/001326

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01/13230 A (FTS COMPUTERTECHNIK GES M B H ; KOPETZ GEORG (AT); KOPETZ HERMANN (AT)) 22 February 2001 (2001-02-22) page 2, paragraph 1 page 4, line 9 - page 5, paragraph 1; figures 1-3 -----	1-11
A	EP 1 280 024 A (BAYERISCHE MOTOREN WERKE AG ; BOSCH GMBH ROBERT (DE); DAIMLER CHRYSLER) 29 January 2003 (2003-01-29) paragraphs '0013! - '0016! paragraph '0038!; figure 3 -----	1-11
A	DE 199 50 433 A (PHILIPS CORP INTELLECTUAL PTY) 26 April 2001 (2001-04-26) column 5, line 61 - column 7, line 2; figure 4 -----	1-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB2004/001326

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2003067873	A1	10-04-2003	DE 10144070 A1	27-03-2003
			CN 1417983 A	14-05-2003
			EP 1292071 A2	12-03-2003
			JP 2003198498 A	11-07-2003
WO 0113230	A	22-02-2001	AT 407582 B	25-04-2001
			AT 139599 A	15-08-2000
			WO 0113230 A1	22-02-2001
			AT 237841 T	15-05-2003
			AU 5952400 A	13-03-2001
			DE 50001819 D1	22-05-2003
			EP 1222542 A1	17-07-2002
			JP 2003507790 T	25-02-2003
EP 1280024	A	29-01-2003	EP 1280024 A1	29-01-2003
			DE 20121466 U1	27-02-2003
			WO 03010611 A1	06-02-2003
DE 19950433	A	26-04-2001	DE 19950433 A1	26-04-2001
			WO 0130028 A2	26-04-2001
			EP 1145503 A2	17-10-2001
			JP 2003512769 T	02-04-2003