



(22) Date de dépôt/Filing Date: 2007/01/17

(41) Mise à la disp. pub./Open to Public Insp.: 2007/08/10

(45) Date de délivrance/Issue Date: 2010/07/20

(30) Priorité/Priority: 2006/02/10 (EP EP06101526.9)

(51) Cl.Int./Int.Cl. *H04L 12/28* (2006.01),
H04L 12/12 (2006.01), *H04L 29/12* (2006.01)


(72) Inventeurs/Inventors:
WANG, JAMES, CA;
RAWLINS, RUDY, CA

(73) Propriétaire/Owner:
RESEARCH IN MOTION LIMITED, CA

(74) Agent: MCCARTHY TETRAULT LLP

(54) Titre : METHODE ET SYSTEME POUR CONSERVER L'ENERGIE DE BATTERIE DANS DES DISPOSITIFS SANS
FIL FONCTIONNANT DANS UN RESEAU LOCAL SANS FIL

(54) Title: METHOD AND SYSTEM FOR CONSERVING BATTERY POWER IN WIRELESS DEVICES OPERATING IN A
WIRELESS LOCAL AREA NETWORK

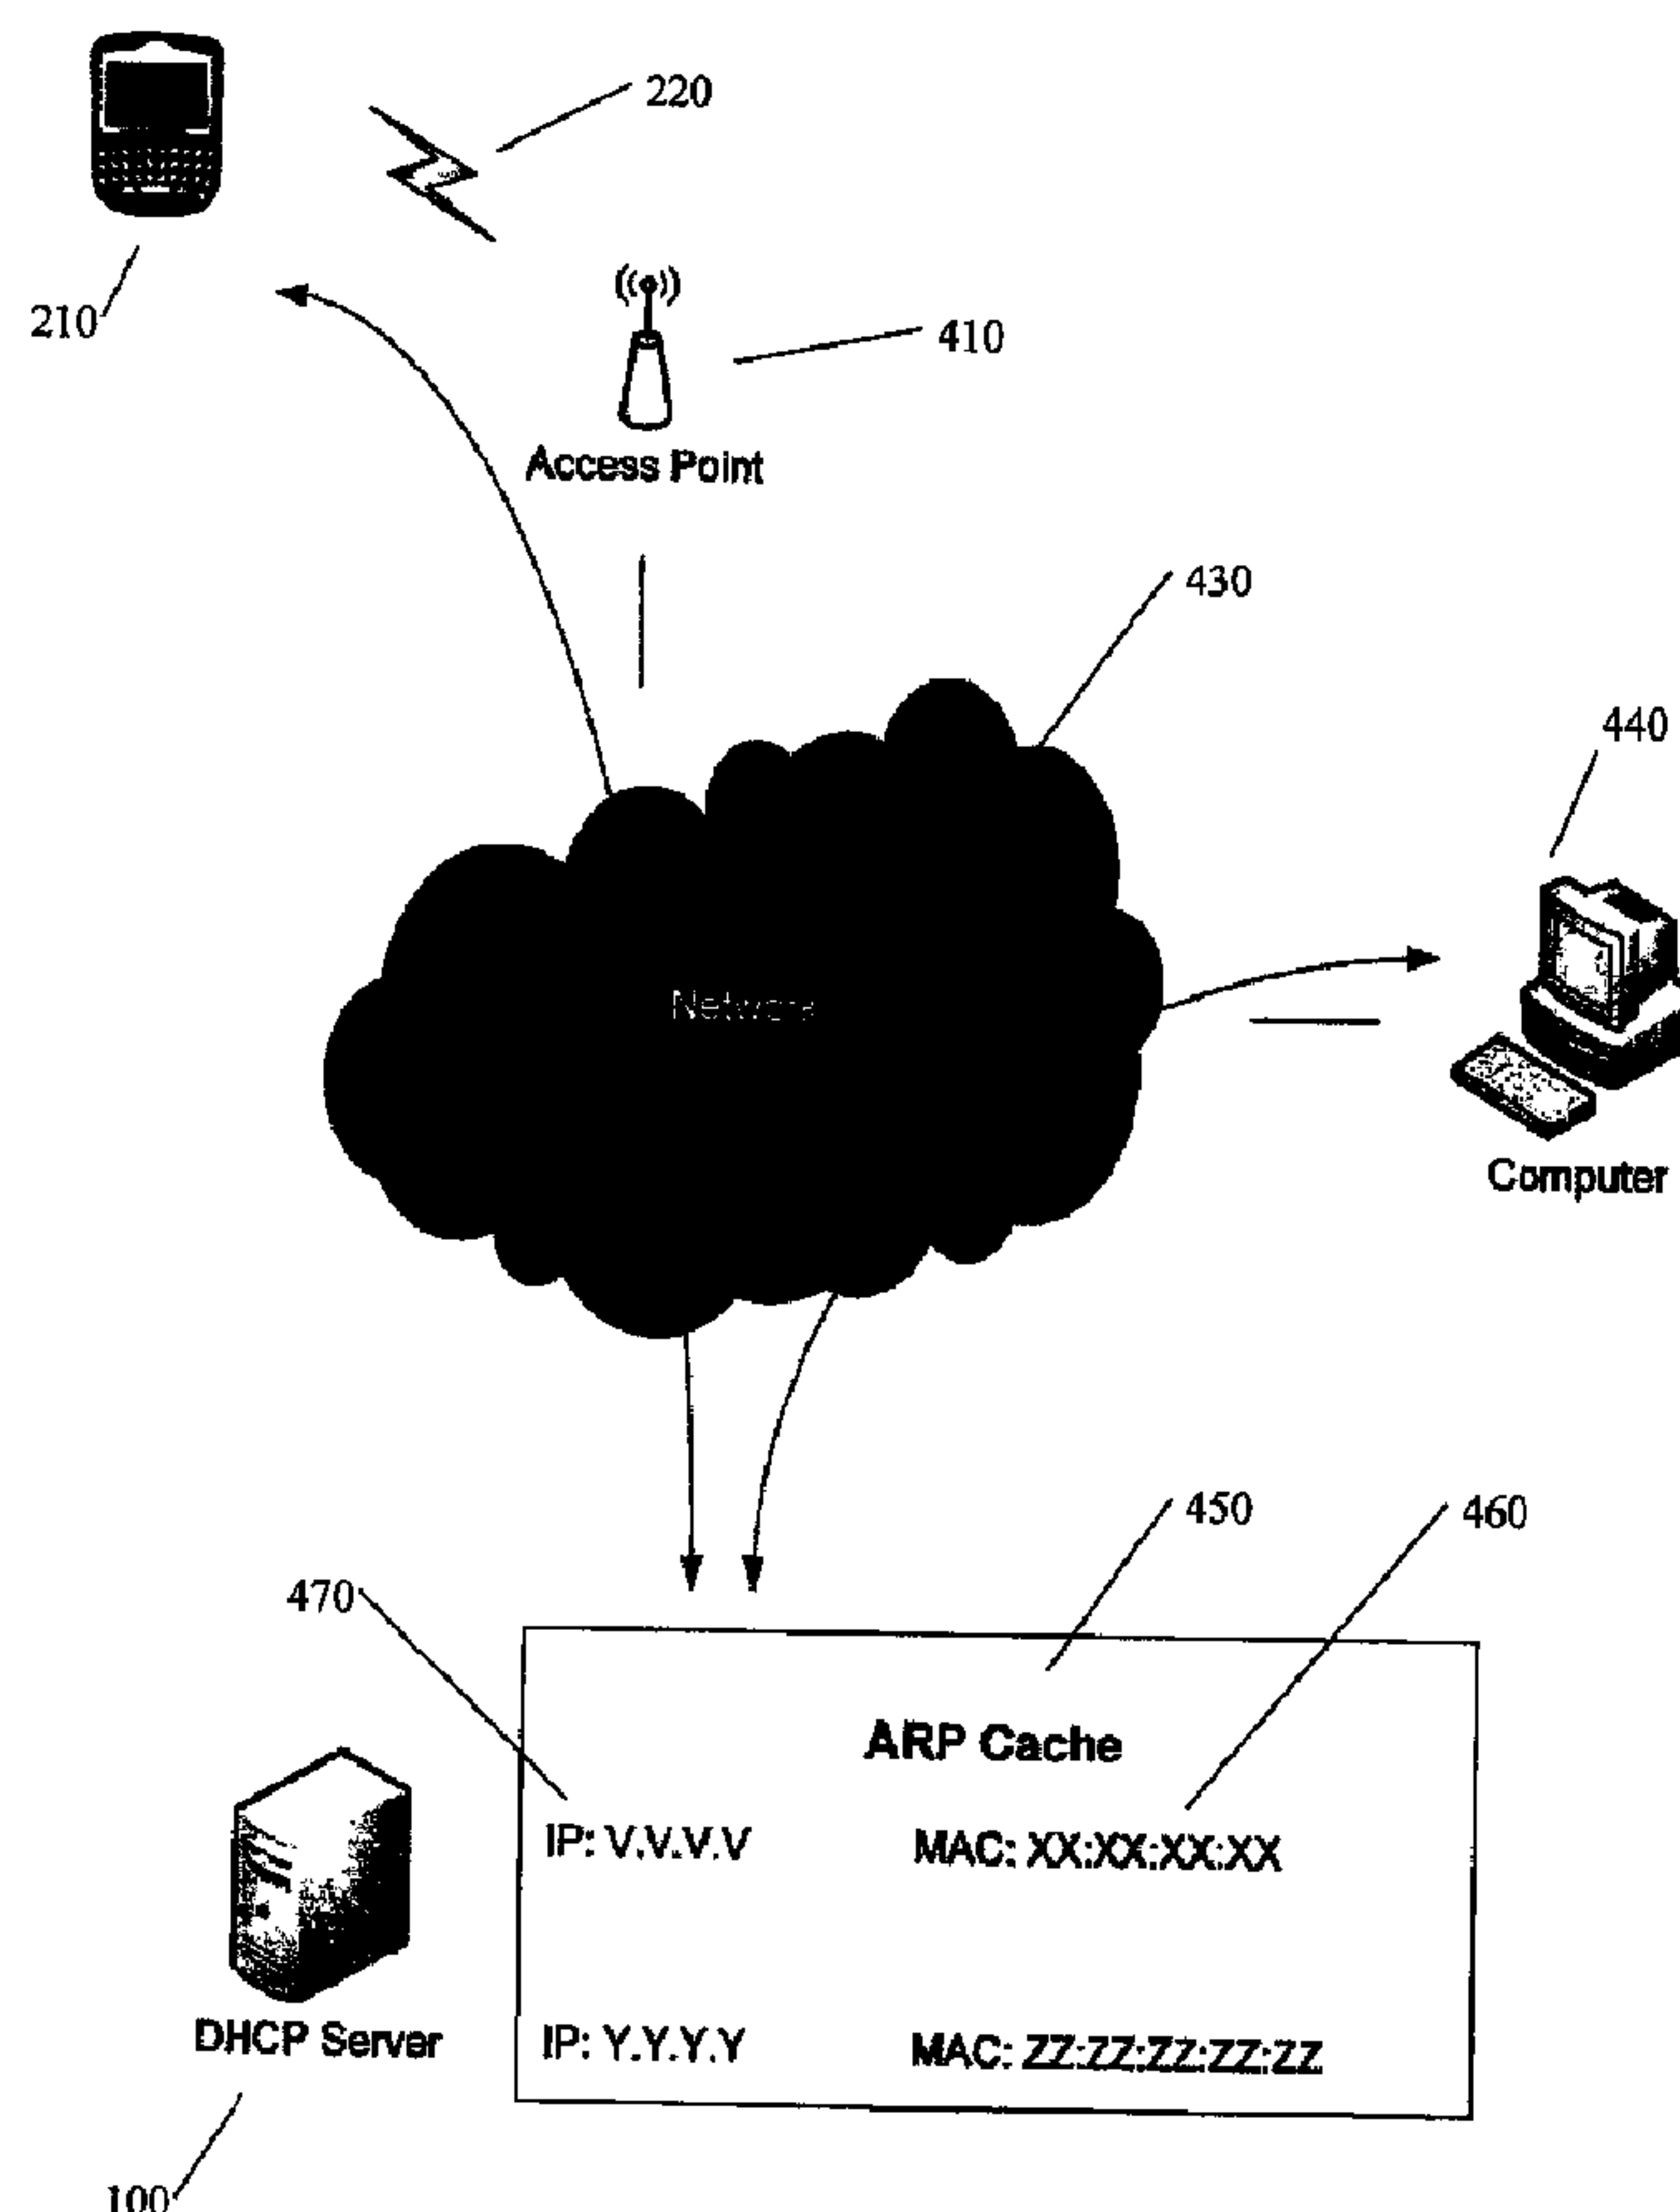

(57) Abrégé/Abstract:

A method for conserving battery power in a wireless device coupled through an access point to a server in a network, the server being coupled to at least one client in the network, each of the wireless device, the at least one client, and the access point having a

(57) **Abrégé(suite)/Abstract(continued):**

respective hardware address, the method comprising: receiving at the server through the access point a message indicative of the wireless device joining the network and providing the hardware address of the wireless device; updating a list of hardware addresses for clients in the network to include the hardware address of the wireless device, the list including a respective Internet Protocol ("IP") address for each hardware address; and, sending from the server to at least one of the wireless device, the at least one client, and the access point, the updated list of hardware addresses to thereby reduce a number of request messages broadcast on the network for information that is contained in the updated list that the wireless device need leave a sleep mode to process.

ABSTRACT

A method for conserving battery power in a wireless device coupled through an access point to a server in a network, the server being coupled to at least one client in the network, each of the wireless device, the at least one client, and the access point having a
5 respective hardware address, the method comprising: receiving at the server through the access point a message indicative of the wireless device joining the network and providing the hardware address of the wireless device; updating a list of hardware addresses for clients in the network to include the hardware address of the wireless device, the list including a respective Internet Protocol ("IP") address for each hardware address; and,
10 sending from the server to at least one of the wireless device, the at least one client, and the access point, the updated list of hardware addresses to thereby reduce a number of request messages broadcast on the network for information that is contained in the updated list that the wireless device need leave a sleep mode to process.

**METHOD AND SYSTEM FOR CONSERVING BATTERY POWER IN
WIRELESS DEVICES OPERATING IN A WIRELESS LOCAL AREA
NETWORK**

- 5 **[0001]** This application relates to the field of wireless communications between wireless and other devices, and more specifically, to a method and system for conserving battery power in wireless devices operating in a wireless local area network.
- 10 **[0002]** Current wireless mobile communication devices include microprocessors, memory, soundcards, and run one or more software applications in addition to providing for voice communications. Examples of software applications used in these wireless devices include micro-browsers, address books, email clients, instant messaging (“IM”) clients, and wavetable instruments. Additionally, wireless devices have access to a plurality of services via the Internet. A wireless device may, for example, be used to browse web sites on the Internet, to transmit and receive graphics, and to execute
- 15 streaming audio and/or video applications. The transfer of Internet content to and from wireless device is typically facilitated by the Wireless Application Protocol (“WAP”), which integrates the Internet and other networks with wireless network platforms. Such wireless devices may operate on a cellular network, on a wireless local area network (“WLAN”), or on both of these types of networks.
- 20 **[0003]** With respect to WLANs, the term “Wi-Fi” (“Wireless Fidelity”) pertains to certain types of WLANs that use specifications in the Institute of Electrical and Electronics Engineers (“IEEE”) 802.11 family. The term Wi-Fi was created by an organization called the Wi-Fi Alliance, which oversees tests that certify product interoperability. The particular specification under which a Wi-Fi network operates is called the “flavour” of
- 25 the network. Wi-Fi has gained acceptance in many businesses, office buildings, agencies, schools, and homes as an alternative to a wired local area network (“LAN”). All the 802.11 specifications use the Ethernet protocol and Carrier Sense Multiple Access with Collision Avoidance (“CSMA/CA”) for path sharing. The original modulation used in 802.11 was phase-shift keying (“PSK”). However, other schemes, such as complementary
- 30 code keying (“CCK”), are used in some of the newer specifications. The newer modulation methods provide higher data speed and reduced vulnerability to interference. In addition, to improve security, entities running a WLAN often use security safeguards such as encryption or a virtual private network (“VPN”).

[0004] In a WLAN, an “access point” is a station that transmits and receives data (sometimes referred to as a transceiver). An access point connects users to other users within the network and also can serve as the point of interconnection between the WLAN and a wired LAN. Each access point can serve multiple users within a defined network area. As users move beyond the range of one access point (i.e., when they roam), they are automatically handed over to the next one. A small WLAN may only require a single access point. The number of access points required increases as a function of the number of network users and the physical size of the network. The access point is typically an IEEE 802.11 (i.e., Wi-Fi) radio receiver/transmitter (or transceiver) and functions as a gateway or bridge between a WLAN and a wired LAN.

[0005] Now, the Address Resolution Protocol (“ARP”) is a protocol for mapping an Internet Protocol (“IP”) address to a physical machine address that is recognized in the local network. For example, in IP Version 4 (“IPv4”), an address is 32 bits long. In an Ethernet local area network, however, addresses for attached devices are 48 bits long. The physical machine address is also known as a Media Access Control or “MAC” address. A table or list, usually called the ARP cache, is used to maintain a correlation between each MAC address and its corresponding IP address. ARP provides the protocol rules for making this correlation and providing address conversion in both directions. Thus, the term “address resolution” refers to the process of finding an address of a computer in a network. The address is “resolved” using a protocol in which a piece of information is sent by a client process executing on a local computer to a server process executing on a remote computer. The information received by the server allows the server to uniquely identify the network system for which the address was required and therefore to provide the required address. The address resolution procedure is completed when the client receives a response from the server containing the required address. To reduce the number of address resolution requests, a client normally caches resolved addresses for a (short) period of time. The ARP cache is of a finite size, and would become full of incomplete and obsolete entries for computers that are not in use if it was allowed to grow without check. The ARP cache is therefore periodically flushed of all entries. This deletes unused entries and frees space in the cache. It also removes any unsuccessful attempts to contact computers which are not currently running. So, when a first computer tries to contact a second computer on the same network, and if no previous IP datagrams have been received from this second computer, ARP must first be used to identify the MAC address

of the second computer. Accordingly, an ARP request message is broadcast on the network and is received by all computers on the network, including the second computer. Only the second computer responds to the ARP request, the other computers on the network discard the request. The second computer forms an ARP response message which
5 is unicast to the address of the first computer.

[0006] In particular, when a packet destined for a device on a network is to be sent, the originating device asks the ARP program to find a physical host or MAC address that matches the IP address. The ARP program looks in the ARP cache and, if it finds the address, provides it so that the packet can be converted to the right packet length and
10 format and sent to the device. If no entry is found for the IP address, ARP broadcasts a request packet in a special format to all the devices on the network to see if one device knows that it has that IP address associated with it. A device that recognizes the IP address as its own returns a reply so indicating. ARP updates the ARP cache for future reference and the packet is sent to the MAC address of the device that replied.

[0007] For reference, in a LAN or other network, the MAC (Media Access Control) address is a device's unique hardware number. On an Ethernet LAN, for example, it is the same as an Ethernet address. When a device is connected to the Internet, a correspondence table or list (e.g., an ARP cache) relates the IP address to the computer's physical MAC address on the LAN. The MAC address is used by the MAC sublayer of the Data-Link
20 Layer ("DLC") of telecommunication protocols. There is a different MAC sublayer for each physical device type.

[0008] Wireless devices are typically battery operated. As such, conserving battery power is important as doing so allows the wireless device to operate for an extended period of time. To conserve battery power, the wireless device will typically enter a "sleep mode"
25 when it is not actively participating in a communication. During this sleep mode the wireless device will still monitor activity on the WLAN to determine if it should "wake up" and enter into a communication.

[0009] One problem with wireless devices operating in a WLAN is that when an ARP request is broadcast on the WLAN, the wireless devices must wake up and process the
30 ARP request. When a wireless device wakes up it consumes battery power which may reduce battery life. However, each ARP request is generally meant for only one wireless device on the WLAN and not all wireless devices. Consequently, battery power is wasted in those wireless devices for which the ARP request is not meant.

[0010] A need therefore exists for an improved method and system for conserving battery power in wireless devices operating in a wireless local area network. Accordingly, a solution that addresses, at least in part, the above and other shortcomings is desired.

[0011] In the following description, details are set forth to provide an understanding of the application. In some instances, certain software, circuits, structures and techniques have not been described or shown in detail in order not to obscure the application.

Embodiments of the present application may be implemented in any computer programming language provided that the operating system of the data processing system provides the facilities that may support the requirements of the application. Any

limitations presented would be a result of a particular type of operating system or computer programming language and would not be a limitation of the present application.

[0012] According to one embodiment, there is preferably provided a method for conserving battery power in a wireless device coupled through an access point to a server in a network, the server being coupled to at least one client in the network, each of the wireless device, the at least one client, and the access point having a respective hardware address, the method comprising: receiving at the server through the access point a message indicative of the wireless device joining the network and providing the hardware address of the wireless device; updating a list of hardware addresses for clients in the network to include the hardware address of the wireless device, the list including a respective Internet Protocol (“IP”) address for each hardware address; and, sending from the server to at least one of the wireless device, the at least one client, and the access point, the updated list of hardware addresses to thereby reduce a number of request messages broadcast on the network for information that is contained in the updated list that the wireless device need leave a sleep mode to process.

[0013] The method may further include assigning an IP address to the wireless device.

Each hardware address may be a Media Access Control (“MAC”) address. The list may be an Address Resolution Protocol (“ARP”) cache and each request message may be an ARP request message. The server may be a Dynamic Host Configuration Protocol (“DHCP”) server. The wireless device may be coupled to the access point through a wireless local area network (“WLAN”). The network may be a local area network (“LAN”). The WLAN may be a subnetwork of the network. The access point may include a gateway to the subnetwork. The server may include the access point. The method may further include the server periodically updating the list by sending a unicast request for information message

to one of the wireless device, the at least one client, and the access point. The access point may replace the request messages broadcast on the network with a unicast request for information sent to one of the wireless device and the at least one client. The method may further include receiving at the server from the wireless device a request for the updated
5 list. And, the list may be updated by the access point.

[0014] In accordance with further aspects of the present application there are preferably provided apparatus such as a data processing system and a wireless device, methods for adapting these, as well as articles of manufacture such as a computer readable medium having program instructions recorded therein for practising the method of the application.

10

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] Features and advantages of the embodiments of the present application will become apparent from the following detailed description, taken in combination with the appended drawings, in which:

15 **[0016]** FIG. 1 is a block diagram illustrating a data processing system adapted for implementing an embodiment of the application;

[0017] FIG. 2 is a block diagram illustrating a wireless device and a wireless communications system adapted for implementing an embodiment of the application;

[0018] FIG. 3 is a block diagram illustrating a memory of the wireless device of FIG. 2;

20 **[0019]** FIG. 4 is a block diagram illustrating a wireless local area network ("WLAN") coupled to a wired LAN in accordance with an embodiment of the application; and,

[0020] FIG. 5 is a flow chart illustrating operations of software modules within the memory of a server (or data processing system) for conserving battery power in a wireless device coupled through an access point to the server in a network, the server being
25 coupled to at least one client in the network, each of the wireless device, the at least one client, and the access point having a respective hardware address, in accordance with an embodiment of the application.

[0021] It will be noted that throughout the appended drawings, like features are identified by like reference numerals.

30

DESCRIPTION OF PREFERRED EMBODIMENTS

[0022] FIG. 1 is a block diagram illustrating a data processing system **100** adapted for implementing an embodiment of the application. The data processing system **100** includes

an input device **110**, a central processing unit or CPU **120**, memory **130**, a display **140**, and an interface **150**. The input device **110** may include a keyboard, mouse, trackball, remote control, or similar device. The CPU **120** may include dedicated coprocessors and memory devices. The memory **130** may include RAM, ROM, or disk devices. The display
5 **140** may include a computer screen, terminal device, or a hardcopy producing output device such as a printer or plotter. And, the interface **150** may include a network connection including an Internet connection and a wireless network **220** connection (see FIG. 2). The data processing system **100** is adapted for communicating with wireless devices **210** over a wireless network **220**.

10 **[0023]** The data processing system **100** may be a server system or a personal computer ("PC") system. The CPU **120** of the system **100** is operatively coupled to memory **130** which stores an operating system (not shown), such as IBM Corporation's OS/2™, UNIX, etc., for general management of the system **100**. The interface **150** may be used for communicating to external data processing systems (e.g., client **440** in FIG. 4) through a
15 network (such as the Internet) or wireless network **220** (see FIG. 2). Examples of suitable platforms for the system **100** include iSeries™ servers and ThinkCentre™ personal computers available from IBM Corporation. The system **100** may include application server software (not shown), such as WebLogic® Server available from BEA Systems, Inc., for developing and managing distributed applications.

20 **[0024]** The data processing system **100** may include a database system **160** for storing and accessing programming information. The database system **160** may include a database management system ("DBMS") and a database and is stored in the memory **130** of the data processing system **100**.

[0025] The data processing system **100** includes computer executable programmed
25 instructions for directing the system **100** to implement the embodiments of the present application. The programmed instructions may be embodied in one or more software modules **170** resident in the memory **130** of the data processing system **100**. Alternatively, the programmed instructions may be embodied on a computer readable medium (such as a CD disk or floppy disk) which may be used for transporting the programmed instructions
30 to the memory **130** of the data processing system **100**. Alternatively, the programmed instructions may be embedded in a computer-readable signal or signal-bearing medium that is uploaded to a network by a vendor or supplier of the programmed instructions, and

this signal or signal-bearing medium may be downloaded through the interface **150** to the data processing system **100** from the network by end users or potential buyers.

[0026] The CPU **120** of the system **100** is typically coupled to one or more devices **110** for receiving user commands or queries and for displaying the results of these commands or queries to the user on a display **140**. As mentioned, the memory **130** may include a variety of storage devices including internal memory and external mass storage typically arranged in a hierarchy of storage as understood to those skilled in the art.

[0027] A user may interact with the data processing system **100** and its software modules **170** using a graphical user interface ("GUI") **180**. The GUI **180** may be web-based and may be used for monitoring, managing, and accessing the data processing system **100**. GUIs are supported by common operating systems and provide a display format which enables a user to choose commands, execute application programs, manage computer files, and perform other functions by selecting pictorial representations known as icons, or items from a menu through use of an input or pointing device such as a mouse **110**. In general, a GUI is used to convey information to and receive commands from users and generally includes a variety of GUI objects or controls, including icons, toolbars, drop-down menus, text, dialog boxes, buttons, and the like. A user typically interacts with a GUI **180** presented on a display **140** by using an input or pointing device (e.g., a mouse) **110** to position a pointer or cursor **190** over an object **191** and by "clicking" on the object **191**.

[0028] Typically, a GUI based system presents application, system status, and other information to the user in "windows" appearing on the display **140**. A window **192** is a more or less rectangular area within the display **140** in which a user may view an application or a document. Such a window **192** may be open, closed, displayed full screen, reduced to an icon, increased or reduced in size, or moved to different areas of the display **140**. Multiple windows may be displayed simultaneously, such as: windows included within other windows, windows overlapping other windows, or windows tiled within the display area.

[0029] FIG. 2 is a block diagram illustrating a wireless device **210** and a wireless network **220** adapted for implementing an embodiment of the application. The wireless network **220** includes antenna, base stations, and supporting radio equipment, known to those of ordinary skill in the art, for supporting wireless communications between the wireless device **210** and the data processing system **100**. The wireless network **220** may be coupled to a wireless network gateway (e.g., access point **410** in FIG. 4) and to a wide area

network (e.g., wired LAN **430** in FIG. 4) to which the data processing system **100** may be coupled through its interface **150**.

[0030] The wireless device **210** is a two-way communication device having voice and/or advanced data communication capabilities, including the capability to communicate with other computer systems **100**. Depending on the functionality provided by the device **210**, it may be referred to as a data messaging device, a two-way pager, a cellular telephone with data messaging capabilities, a wireless Internet appliance, a data communication device (with or without telephony capabilities), a Wi-Fi device, or a WLAN device. The device **210** may communicate with any one of a plurality of fixed transceiver stations (e.g., access point **410** in FIG. 4) within its geographic coverage area.

[0031] The wireless device **210** will normally incorporate a communication subsystem **111**, which includes a RF receiver, a RF transmitter, and associated components, such as one or more (preferably embedded or internal) antenna elements, local oscillators (“LOs”), and a processing module such as a digital signal processor (“DSP”) (all not shown). As will be apparent to those skilled in the field of communications, the particular design of the communication subsystem **111** depends on the communication network **220** in which the device **210** is intended to operate.

[0032] Cellular network access may be associated with a subscriber or user of the device **210** and therefore the device **210** typically has a Subscriber Identity Module (or “SIM” card) **162** to be inserted in a SIM interface (“IF”) **164** in order to operate on the network (e.g., a GSM network).

[0033] The device **210** is a battery-powered device so it also includes a battery IF **154** for receiving one or more rechargeable batteries **156**. Such a battery **156** provides electrical power to most if not all electrical circuitry in the device **210**, and the battery IF **154** provides for a mechanical and electrical connection for it. The battery IF **154** is coupled to a regulator (not shown) which provides power to the circuitry of the device **210**.

[0034] The wireless device **210** includes a microprocessor **138** which controls overall operation of the device **210**. Communication functions, including at least data and voice communications, are performed through the communication subsystem **111**. The microprocessor **138** also interacts with additional device subsystems such as a display **122**, a flash memory **124** or other persistent store, a random access memory (“RAM”) **126**, auxiliary input/output (“I/O”) subsystems **128**, a serial port (e.g., a universal serial bus (“USB”) port) **131**, a keyboard **132**, a clickable thumbwheel (not shown), a speaker **134**, a

microphone **136**, a short-range communications subsystem **141**, and any other device subsystems generally designated at **142**. Some of the subsystems shown in FIG. 2 perform communication-related functions, whereas other subsystems may provide “resident” or on-device functions. Notably, some subsystems, such as the keyboard **132**, display **122**, and clickable thumbwheel, for example, may be used for both communication-related functions, such as entering a text message for transmission over a communication network, and device-resident functions such as a calculator or task list. Operating system software used by the microprocessor **138** is preferably stored in a persistent store such as the flash memory **124**, which may alternatively be a read-only memory (“ROM”) or similar storage element (not shown). Those skilled in the art will appreciate that the operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile store such as RAM **126**.

[0035] The microprocessor **138**, in addition to its operating system functions, preferably enables execution of software applications on the device **210**. A predetermined set of applications which control basic device operations, including at least data and voice communication applications, will normally be installed on the device **210** during its manufacture. A preferred application that may be loaded onto the device **210** may be a personal information manager (“PIM”) application having the ability to organize and manage data items relating to the user such as, but not limited to, instant messaging (“IM”), email, calendar events, voice mails, appointments, and task items. Naturally, one or more memory stores are available on the device **210** and SIM **162** to facilitate storage of PIM data items and other information.

[0036] The PIM application preferably has the ability to send and receive data items via the wireless network **220**. In a preferred embodiment, PIM data items are seamlessly integrated, synchronized, and updated via the wireless network, with the wireless device user’s corresponding data items stored and/or associated with a host computer system such as the data processing system **100** (or server **100** in FIG. 4) thereby creating a mirrored host computer on the device **210** with respect to such items. This is especially advantageous where the host computer system is the wireless device user’s office computer system. Additional applications may also be loaded onto the device **210** through the network **220**, the auxiliary I/O subsystem **128**, the serial port **131**, the short-range communications subsystem **141**, or any other suitable subsystem **142**, and installed by a user in RAM **126** or preferably in a non-volatile store (not shown) for execution by the

microprocessor **138**. Such flexibility in application installation increases the functionality of the device **210** and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic commerce functions and other such financial transactions to be performed using the wireless device **210**.

[0037] In a data communication mode, a received signal such as a text message, an email message, or web page download will be processed by the communication subsystem **111** and input to the microprocessor **138**. The microprocessor **138** will preferably further process the signal for output to the display **122** and/or to the auxiliary I/O device **128**. A user of the wireless device **210** may also compose data items, such as email messages, for example, using the keyboard **132** in conjunction with the display **122**, the clickable thumbwheel, and possibly the auxiliary I/O device **128**. The keyboard **132** is preferably a complete alphanumeric keyboard and/or a telephone-type keypad. These composed items may be transmitted over a communication network **220** through the communication subsystem **111** or the short range communication subsystem **141**.

[0038] For voice communications, the overall operation of the wireless device **210** is substantially similar, except that the received signals would be output to the speaker **134** and signals for transmission would be generated by the microphone **136**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on the device **210**. Although voice or audio signal output is preferably accomplished primarily through the speaker **134**, the display **122** may also be used to provide, for example, an indication of the identity of a calling party, duration of a voice call, or other voice call related information.

[0039] The serial port **131** shown in FIG. 2 is normally implemented in a personal digital assistant (“PDA”)-type communication device for which synchronization with a user’s desktop computer is a desirable, albeit optional, component. The serial port **131** enables a user to set preferences through an external device or software application and extends the capabilities of the device **210** by providing for information or software downloads to the device **210** other than through a wireless communication network **220**. The alternate download path may, for example, be used to load an encryption key onto the device **210** through a direct and thus reliable and trusted connection to thereby provide secure device communication.

[0040] The short-range communications subsystem **141** shown in FIG. 2 is an additional optional component which provides for communication between the device **210** and different systems or devices, which need not necessarily be similar devices. For example, the subsystem **141** may include an infrared device and associated circuits and components, or a Bluetooth™ communication module to provide for communication with similarly-enabled systems and devices. (Bluetooth™ is a registered trademark of Bluetooth SIG, Inc.)

[0041] FIG. 3 is a block diagram illustrating a memory **201** of the wireless device **210** of FIG. 2. The memory **201** has various software components for controlling the device **210** and may include flash memory **124**, RAM **126**, or ROM (not shown), for example. In accordance with an embodiment of the invention, the wireless device **210** is intended to be a multi-tasking wireless communications device configured for sending and receiving data items and for making and receiving voice calls. To provide a user-friendly environment to control the operation of the device **210**, an operating system (“O/S”) **202** resident on the device **210** provides a basic set of operations for supporting various applications typically operable through a graphical user interface (“GUI”) **204**. For example, the O/S **202** provides basic input/output system features to obtain input from the auxiliary I/O **128**, the keyboard **132**, the clickable thumbwheel, and the like, and for facilitating output to the user. Though not shown, one or more applications for managing communications or for providing personal digital assistant like functions may also be included. In accordance with an embodiment of the application, there are provided software modules **206** for facilitating the conservation of battery **156** power for the wireless device **210** as will be described below.

[0042] Thus, the wireless device **210** includes computer executable programmed instructions for directing the device **210** to implement the embodiments of the present application. The programmed instructions may be embodied in one or more software modules **206** resident in the memory **201** of the wireless device **210**. Alternatively, the programmed instructions may be embodied on a computer readable medium (such as a CD disk or floppy disk) which may be used for transporting the programmed instructions to the memory of the wireless device **210**. Alternatively, the programmed instructions may be embedded in a computer-readable signal or signal-bearing medium that is uploaded to a network by a vendor or supplier of the programmed instructions, and this signal or signal-

bearing medium may be downloaded through an interface **111**, **131**, **141** to the wireless device **210** from the network by end users or potential buyers.

[0043] FIG. 4 is a block diagram illustrating a wireless local area network (“WLAN”) **220** coupled to a wired LAN **430** in accordance with an embodiment of the application. One or
5 more wireless devices **210**, each adapted for WLAN operation, communicate over the wireless network **220** to one or more WLAN access points **410**. The access point **410** is typically an IEEE 802.11 (i.e., Wi-Fi) radio receiver/transmitter (or transceiver) and functions as a gateway or bridge between the WLAN **220** and the wired LAN **430**. For security, each access point **410** may be communicatively coupled to the wired LAN **430**
10 through a firewall and/or VPN (not shown).

[0044] On the wired LAN side of the optional firewall/VPN is at least one data processing system **100** configured to operate as a Dynamic Host Configuration Protocol (“DHCP”) server. The DHCP server **100** may be coupled to one or more client devices or computers **440**. The DHCP server **100** and each client **440** may be located at the enterprise customer
15 premises or they may be remote from each other. The client **440** may have a hardware configuration similar to that of the DHCP server **100**.

[0045] In general, the DHCP server **100** is not tied into the cellular network directly. However, to provide cellular telephone services such as email service, etc., the wireless devices **210** may have access to email enterprise server (not shown) located on the wired
20 LAN **430**. The email enterprise server may have a hardware configuration similar to that of the DHCP server **100**. Accordingly, the wireless device **210** may be a simple Wi-Fi device or it may be a more sophisticated device include both Wi-Fi and cellular functionality.

[0046] Thus, a user of a wireless device **210** may engage in a communication (i.e., voice, data, etc.) with other wireless device **210** users or with the user of a wired client **440**, all
25 through the WLAN or wireless network **220** coupled through the access point **410** to the DHCP server **100** and the wired LAN **430**.

[0047] As mentioned above, an access point **410** is a station that transmits and receives data (sometimes referred to as a transceiver). The access point **410** connects users **210** to
30 other users **440** within the network **220**, **430** and also can serve as the point of interconnection between the WLAN **220** and a wired LAN **430**. Each access point **410** can serve multiple users **210** within a defined network area. As users move beyond the range of one access point (i.e., when they roam), they are automatically handed over to the next

one. A small WLAN may only require a single access point. The number of access points required increases as a function of the number of network users and the physical size of the network. The access point is typically an IEEE 802.11 (i.e., Wi-Fi) radio receiver/transmitter (or transceiver) and functions as a gateway or bridge between a
5 WLAN **220** and a wired LAN **430**.

[0048] Also as mentioned above, the Address Resolution Protocol (“ARP”) is a protocol for mapping an Internet Protocol (“IP”) address to a physical machine address that is recognized in the local network. For example, in IP Version 4, an address is 32 bits long. In an Ethernet local area network, however, addresses for attached devices are 48 bits
10 long. The physical machine address is also known as a Media Access Control or “MAC” address. A table or list, usually called the ARP cache **450**, is used to maintain a correlation between each MAC address **460** and its corresponding IP address **470**. ARP provides the protocol rules for making this correlation and providing address conversion in both directions.

[0049] In particular, when a packet destined for a wireless device **210** on a WLAN **220** is to be sent, the originating device (e.g., **440**, **210**) asks the ARP program to find a physical host or MAC address **460** that matches the IP address **470**. The ARP program looks in the ARP cache **450** and, if it finds the address, provides it so that the packet can be converted to the right packet length and format and sent to the device **210**. If no entry **460** is found
20 for the IP address **470**, ARP broadcasts a request packet in a special format to all the devices **210** on the WLAN **220** to see if one device **210** knows whether it has that IP address **470** associated with it. A device **210** that recognizes the IP address **470** as its own returns a reply so indicating. ARP updates the ARP cache **450** for future reference and the packet is sent to the MAC address **460** of the device that replied.

[0050] Also as mentioned above, in a LAN or other network, the MAC (Media Access Control) address **460** is a device's unique hardware number. On an Ethernet LAN, for example, it is the same as an Ethernet address. When a device is connected to the Internet, a correspondence table or list (e.g., an ARP cache **450**) relates the IP address **470** to the device's physical MAC address **460** on the LAN. The MAC address **460** is used by the
30 MAC sublayer of the Data-Link Layer (“DLC”) of telecommunication protocols. There is a different MAC sublayer for each physical device type.

[0051] ARP requests are almost always broadcast to all clients on a network including the target client. A typical broadcast ARP request has an address to “ALL” (e.g.,

“255.255.255.255” in IPv4) and asks for the MAC address of a target device. It should be noted that, in general, each client **210, 440** maintains a cache of successful ARP requests. This allows the client to avoid processing another ARP request for MAC address that it has recently used. Also, in addition to the IP address **470** and MAC address **460** fields, the
5 ARP cache **450** may also include an age field (not shown) indicating the age of the record in seconds. When a record in the ARP cache **450** reaches a predetermined age, it is renewed with another request.

[0052] Now, the DHCP server **100** supports the Dynamic Host Configuration Protocol (“DHCP”). DHCP is a communications protocol that lets network administrators centrally
10 manage and automate the assignment of IP addresses **470** in an enterprise's network **220, 430**. Using the IP, each device **210, 440** that can connect to the Internet needs a unique IP address, which is assigned when an Internet connection is created for a specific device. Without DHCP, the IP address must be entered manually at each device in an enterprise and a new IP address must be entered each time a device moves to a new location on the
15 network. DHCP lets a network administrator supervise and distribute IP addresses from a central point and automatically sends a new IP address when a device is plugged into a different place in the network.

[0053] DHCP uses the concept of a “lease” or amount of time that a given IP address **470** will be valid for a device **210, 440**. The lease time can vary depending on how long a user
20 is likely to require the Internet connection at a particular location. Using very short leases, DHCP can dynamically reconfigure networks in which there are more devices than there are available IP addresses. The protocol also supports static addresses for devices that need a permanent IP address, such as Web servers. A DHCP client is a program that is located in (and perhaps downloaded to) each device **210, 440** so that it can be configured
25 by the DHCP server **100**.

[0054] Now, the present application provides a system and method for conserving power in wireless devices **210** operating in a WLAN **220**. As mentioned above, wireless devices **210** are typically battery **156** operated. As such, conserving battery power is important as doing so allows the wireless device **210** to operate for an extended period of time. To
30 conserve battery power, the wireless device **210** will typically enter a “sleep mode” when it is not actively participating in a communication. During this sleep mode the wireless device **210** will still monitor activity on the WLAN **220** to determine if it should “wake up” and enter into a communication. One problem with wireless devices **210** operating in

a WLAN **220** is that when an ARP request is broadcast on the WLAN **220**, the wireless devices **210** must wake up and process the ARP request. When a wireless device **210** wakes up it consumes battery power which may reduce battery **156** life. However, each ARP request is generally meant for only one wireless device **210** on the WLAN **220** and not all wireless devices. Consequently, battery power is wasted in those wireless devices **210** for which the ARP request is not meant.

[0055] According to one embodiment, to conserve battery power in wireless devices **210** in the WLAN **220**, wireless devices **210** and clients **440** that join the network **220**, **430** are provided with a pre-compiled MAC address list. This reduces the number of ARP request broadcasts and hence allows wireless devices **210** to conserve battery power. In particular, a reduction in the number of broadcast ARP requests that a wireless device **210** must process leads to a reduction in battery power consumption as the wireless device **210** may remain in sleep mode longer. According to one embodiment, the DHCP server **100** (or access point **410**) sends out its latest ARP cache. Accordingly, the pre-compiled MAC address list is an instance of the ARP cache containing the IP $\leftrightarrow$ MAC listing.

[0056] According to one embodiment, the ARP cache **450** is stored in the memory **130** of the DHCP server **100**. When a device **210**, **440** joins the network **220**, **430** and receives an IP address **470** from the DHCP server **100**, the device **210**, **440** can then request the pre-compiled MAC address list from the ARP cache **450** of the DHCP server **100**.

[0057] At a minimum, the DHCP server **100** may provide the MAC address of any subnet gateway associated with the device **210**, **440** as this MAC address is fairly static and is the most likely address that a client **210**, **440** would use. While all clients **210**, **430** joining the network **220**, **230** should receive the pre-compiled MAC address list as this will result in a reduction in the number of overall ARP request broadcasts, significant battery power will be conserved if the MAC address list contains just the MAC address of any subnet gateways in the network **220**, **430**.

[0058] For reference, a subnet (short for "subnetwork") is an identifiably separate part of an enterprise's network. Typically, a subnet may represent all the devices at one geographic location, in one building, or on the same WLAN or LAN. Having an enterprise's network divided into subnets allows it to be connected to the Internet with a single shared network address. Without subnets, an enterprise could get multiple connections to the Internet, one for each of its physically separate subnetworks, but this would require an unnecessary use of the limited number of network numbers the Internet

has to assign. It would also require that Internet routing tables on gateways outside the enterprise would need to know about and have to manage routing that could and should be handled within the enterprise. For example, the WLAN 220 in FIG. 4 may be considered as a subnet of the network 220, 430.

5 **[0059]** For further reference, a gateway is a network device that acts as an entrance to another network. In the network for an enterprise, a server acting as a gateway often also acts as a proxy server and a firewall server. A gateway is often associated with both a router, which knows where to direct a given packet of data that arrives at the gateway, and a switch, which furnishes the actual path in and out of the gateway for a given packet.

10 Thus, a subnet gateway is a gateway that acts as an entrance to a subnet of a network.

[0060] Now, a WLAN gateway or subnet gateway is a device through which all WLAN traffic passes en route to a wired network 430. The gateway doesn't have to be physically placed between an access point 410 and the wired network 430, but it must be on the same IP subnet as the access point 410 it is managing. The WLAN gateway may be

15 incorporated in an access point 410. The gateway enforces policies regarding security, access control, encryption, and quality of service, etc. Thus, a WLAN gateway may function to restrict data packets to a specific area of a network based on their destination address in order to avoid excessive traffic.

[0061] According to one embodiment, the access point 410 may be included in the server
20 100.

[0062] According to another embodiment, the ARP cache 450 is stored in the memory (not shown) of the access point 410. In this embodiment, a wireless client 210 joining the network 220, 430 requests the MAC address list after authentication and association has been performed. A wireless device or client 210 usually authenticates itself to an access
25 point 410 by providing an identification ("ID") to prove that it can access the network 220, 430. The details of the authentication process depend on the type of authentication required by the network. Association is the process by which the wireless device or client 210 introduces itself to the access point 410 and includes negotiation with respect to speed of transmissions, sleep time, type of authentication required for entry, etc. This
30 embodiment is advantageous as it allows legacy devices running the current ARP protocol to conserve battery power.

[0063] According to another embodiment, the DHCP server 100 updates its ARP cache 450 periodically by sending a unicast ARP request to the respective device 210. This is

done to maintain the liveliness of the ARP cache **450**. The advantage of using a unicast transmission is that by doing so no other wireless device in the network need be awoken during the ARP request.

[0064] According to another embodiment, the access point **410** may replace any broadcast
5 ARP request to a known device **210** with a unicast ARP request. This embodiment is advantageous in cases where the access point **410** is not party to a proxy ARP setup. In addition, if the broadcast ARP request is for a device **440** on the wired network **430**, the access point **410** may restrict the broadcast ARP request to just a broadcast on the wired network **430**.

10 **[0065]** According to another embodiment, a wireless device **210** that has accepted its ARP cache from the DHCP server **100**, will always return to that server **100** for a updated ARP cache, rather than by maintaining the liveliness of its ARP cache by broadcasting ARP requests. Any IP address **470** not in that ARP cache **450** will be assumed to be set
15 statically and a broadcast request will be sent. In the case where the access point **410** replaces broadcast ARP requests to a known device **210** with a unicast ARP request, the access point **410** will redirect that broadcast ARP request to the correct wireless device **210**.

[0066] According to another embodiment, the access point **410** may build an ARP cache **450** from association and packet inspection for dynamic and static IP addresses. This may
20 be similar to an ARP cache **450** built by the proxy DHCP server **100**. In this case, the access point **410** will proxy the ARP request for static and dynamic IP addresses, in much the same way as described above in the case where the access point **410** replaces broadcast ARP requests to a known device **210** with a unicast ARP request.

[0067] The application provides several advantages over prior methods. For example, the
25 application provides for the conservation of battery power by the sharing of ARP cache information between wireless and other devices in a network.

[0068] The above described method may be summarized with the aid of a flowchart. FIG.
5 is a flow chart illustrating operations **500** of software modules **170** within the memory **130** of a server **100** (or data processing system **100**) for conserving battery power in a
30 wireless device **210** coupled through an access point **410** to the server **100** in a network **430**, the server **100** being coupled to at least one client **440** in the network **430**, each of the wireless device **210**, the at least one client **440**, and the access point **410** having a respective hardware address **460**, in accordance with an embodiment of the application.

[0069] At step **501**, the operations **500** start.

[0070] At step **502**, a message indicative of the wireless device joining the network **430** and providing the hardware address **460** of the wireless device **210** is received at the server **100** through the access point **410**.

5 **[0071]** At step **503**, a list of hardware addresses **460** for clients **210**, **410**, **440** in the network **430** is updated to include the hardware address **460** of the wireless device **210**, the list **450** including a respective Internet Protocol (“IP”) address **470** for each hardware address **460**.

10 **[0072]** At step **504**, the updated list of hardware addresses **450** is sent from the server **100** to at least one of the wireless device **210**, the at least one client **440**, and the access point **410** to thereby reduce a number of request messages broadcast on the network **430** for information **460**, **470** that is contained in the updated list that the wireless device **210** need leave a sleep mode to process.

[0073] At step **505**, the operations **500** end.

15 **[0074]** The method may further include assigning an IP address **470** to the wireless device **210**. Each hardware address **460** may be a Media Access Control (“MAC”) address. The list may be an Address Resolution Protocol (“ARP”) cache **450** and each request message may be an ARP request message. The server **100** may be a Dynamic Host Configuration Protocol (“DHCP”) server. The wireless device **210** may be coupled to the access point
20 **410** through a wireless local area network (“WLAN”) **220**. The network **430** may be a local area network (“LAN”). The WLAN **220** may be a subnetwork of the network **430**. The access point **410** may include a gateway to the subnetwork **220**. The server **100** may include the access point **410**. The method may further include the server **100** periodically updating the list **450** by sending a unicast request for information message to one of the
25 wireless device **210**, the at least one client **440**, and the access point **410**. The access point **410** may replace the request messages broadcast on the network **220**, **430** with a unicast request for information sent to one of the wireless device **210** and the at least one client **440**. The method may further include receiving at the server **100** from the wireless device **210** a request for the updated list **450**. And, the list **450** may be updated by the access
30 point **410**.

[0075] The above described method is generally performed by the data processing system **100**. However, according to an alternate embodiment, the method can be performed by the wireless device **210** and/or by the access point **410**.

[0076] While embodiments of this application are primarily discussed as a method, a person of ordinary skill in the art will understand that the apparatus discussed above with reference to a wireless device **210** and a data processing system **100**, may be programmed to enable the practice of the method of these embodiments. Moreover, an article of
5 manufacture for use with a wireless device **210** or data processing system **100**, such as a pre-recorded storage device or other similar computer readable medium including program instructions recorded thereon, may direct the wireless device **210** or data processing system **100** to facilitate the practice of the method of these embodiments. It is understood that such apparatus and articles of manufacture also come within the scope of the
10 application.

[0077] The embodiments of the application described above are intended to be exemplary only. Those skilled in this art will understand that various modifications of detail may be made to these embodiments, all of which come within the scope of the application.

Claims:

1. A method for conserving battery power in a wireless device coupled through an access point to a server in a network, the server being coupled to at least one client in the network, each of the wireless device, the at least one client, and the access point having a respective hardware address, the method comprising:
 - receiving at the server through the access point a message indicative of the wireless device joining the network and providing the hardware address of the wireless device;
 - 10 updating a list of hardware addresses for clients in the network to comprise the hardware address of the wireless device, the list comprising a respective Internet Protocol ("IP") address for each hardware address; and,
 - sending from the server to at least one of the wireless device, the at least one client, and the access point, the updated list of hardware addresses to thereby reduce a number of request messages broadcast on the network for information that is
15 contained in the updated list that the wireless device need leave a sleep mode to process.
2. The method of claim 1 and further comprising assigning an IP address to the
20 wireless device.
3. The method of claim 1 or claim 2 wherein each hardware address is a Media Access Control ("MAC") address.
- 25 4. The method of any one of claims 1 to 3 wherein the list is an Address Resolution Protocol ("ARP") cache and each request message is an ARP request message.
5. The method of any one of claims 1 to 4 wherein the server is a Dynamic Host Configuration Protocol ("DHCP") server.
30
6. The method of any one of claims 1 to 5 wherein the wireless device is coupled to the access point through a wireless local area network ("WLAN").

7. The method of claim 6 wherein the network is a local area network ("LAN").

8. The method of claim 7 wherein the WLAN is a subnetwork of the network.

5 9. The method of claim 8 wherein the access point comprises a gateway to the subnetwork.

10. The method of claim 9 wherein the server comprises the access point.

10 11. The method of any one of claims 1 to 10 and further comprising the server periodically updating the list by sending a unicast request for information message to one of the wireless device, the at least one client, and the access point.

12. The method of any one of claim 1 to 10 wherein the access point replaces the
15 request messages broadcast on the network with a unicast request for information sent to one of the wireless device and the at least one client.

13. The method of any one of claims 1 to 12 and further comprising receiving at the server from the wireless device a request for the updated list.

20

14. The method of any one of claims 1 to 13 wherein the list is updated by the access point.

15. A system for conserving battery power in a wireless device coupled through an
25 access point in a network to the system, the system being coupled to at least one client in the network, each of the wireless device, the at least one client, and the access point having a respective hardware address, the system comprising:

a processor coupled to the network; and,

a program executed by the processor, the program comprising:

30 a module for receiving through the access point a message indicative of the wireless device joining the network and providing the hardware address of the wireless device;

a module for updating a list of hardware addresses for clients in the network to comprise the hardware address of the wireless device, the list comprising a respective Internet Protocol (“IP”) address for each hardware address; and, a module for sending to at least one of the wireless device, the at least one client, and the access point, the updated list of hardware addresses to thereby reduce a number of request messages broadcast on the network for information that is contained in the updated list that the wireless device need leave a sleep mode to process.

16. The system of claim 15 and further comprising a module for assigning an IP address to the wireless device.

17. The system of claim 15 or claim 16 wherein each hardware address is a Media Access Control (“MAC”) address.

18. The system of any one of claims 15 to 17 wherein the list is an Address Resolution Protocol (“ARP”) cache and each request message is an ARP request message.

19. The system of any one of claims 15 to 18 wherein the system is a Dynamic Host Configuration Protocol (“DHCP”) server.

20. The system of any one of claims 15 to 19 wherein the wireless device is coupled to the access point through a wireless local area network (“WLAN”).


21. The system of claim 20 wherein the network is a local area network (“LAN”).

22. The system of claim 21 wherein the WLAN is a subnetwork of the network.

23. The system of claim 22 wherein the access point comprises a gateway to the subnetwork.

24. The system of claim 23 wherein the system comprises the access point.

25. The system of any one of claims 15 to 24 and further comprising a module for periodically updating the list by sending a unicast request for information message to one of the wireless device, the at least one client, and the access point.
- 5 26. The system of any one of claims 15 to 24 wherein the access point replaces the request messages broadcast on the network with a unicast request for information sent to one of the wireless device and the at least one client.
27. The system of any one of claims 15 to 26 and further comprising a module for
10 receiving from the wireless device a request for the updated list.
28. The system of any one of claims 15 to 27 wherein the list is updated by the access point.
- 15 29. A computer program product for directing a system to conserve battery power in a wireless device coupled through an access point in a network to the system, the system being coupled to at least one client in the network, each of the wireless device, the at least one client, and the access point having a respective hardware address, the computer program product comprising a computer readable medium storing computer executable
20 code for causing the system to implement the method of any one of claims 1 to 14.
30. A communications system comprising at least one mobile device and the system of any one of claims 15 to 28 for conserving battery power in the at least one wireless device coupled through an access point to a server in a network, the server being coupled to at
25 least one client in the network, each of the wireless device, the at least one client, and the access point having a respective hardware address.

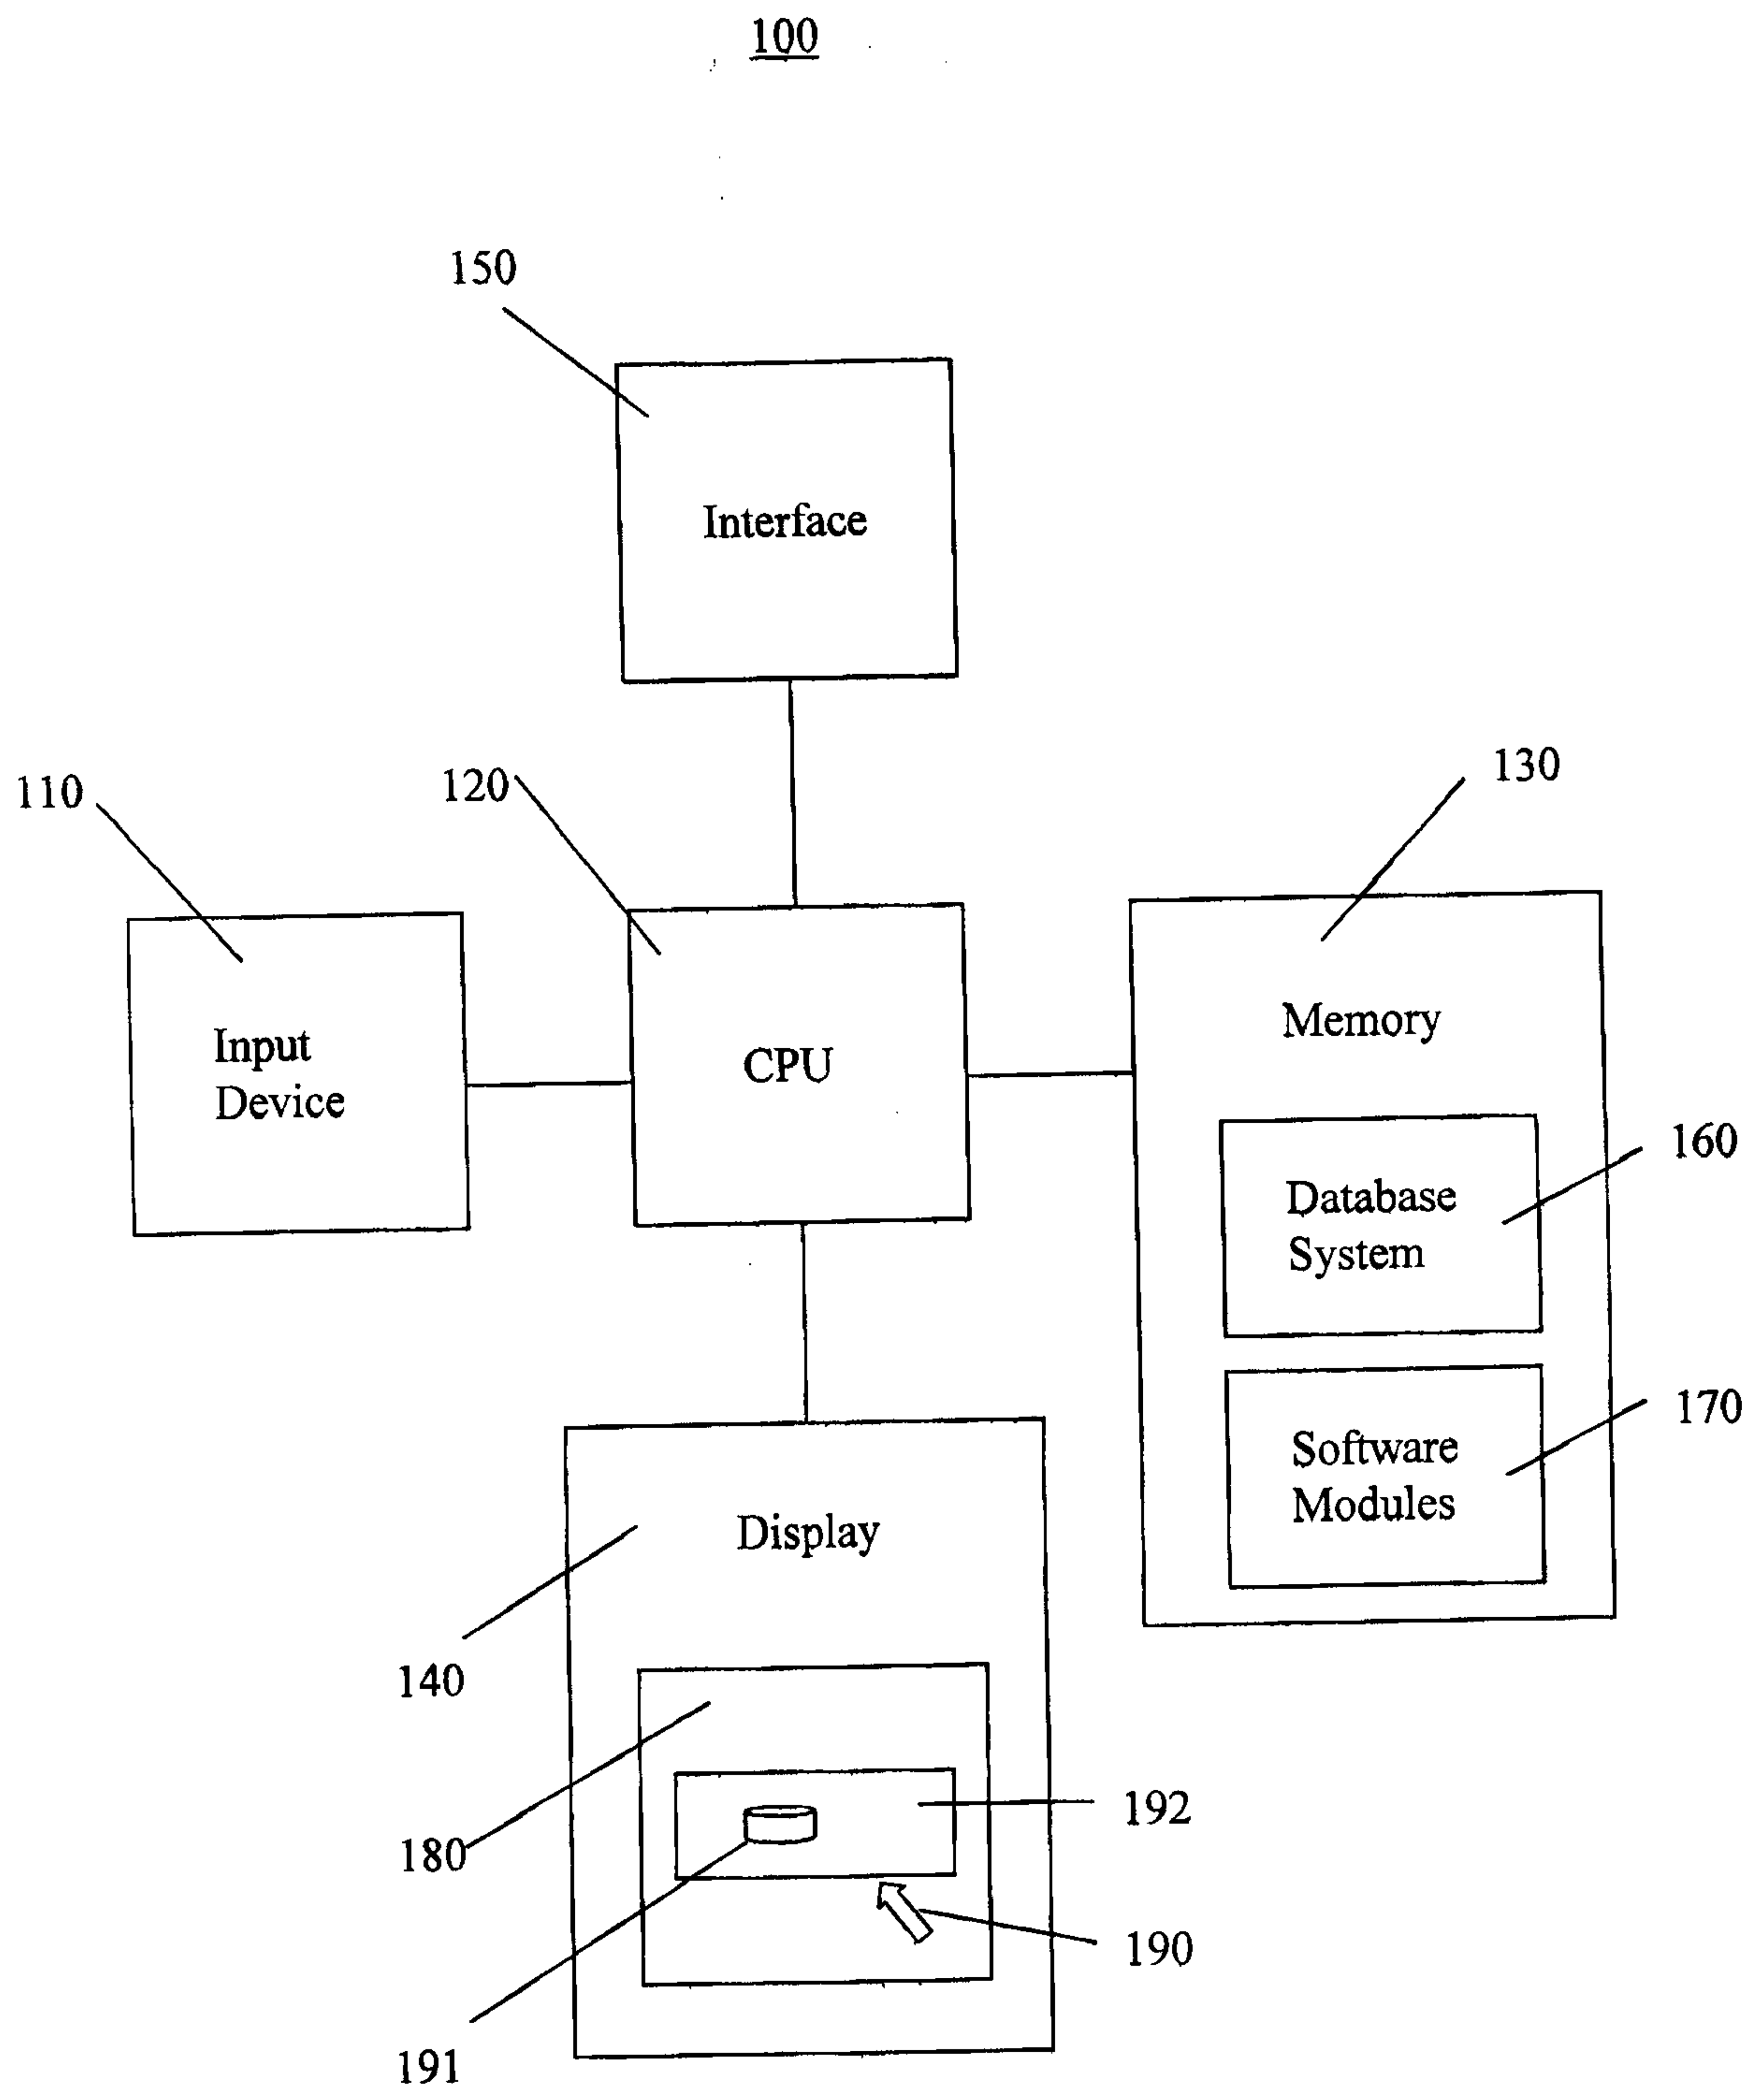**FIG. 1**

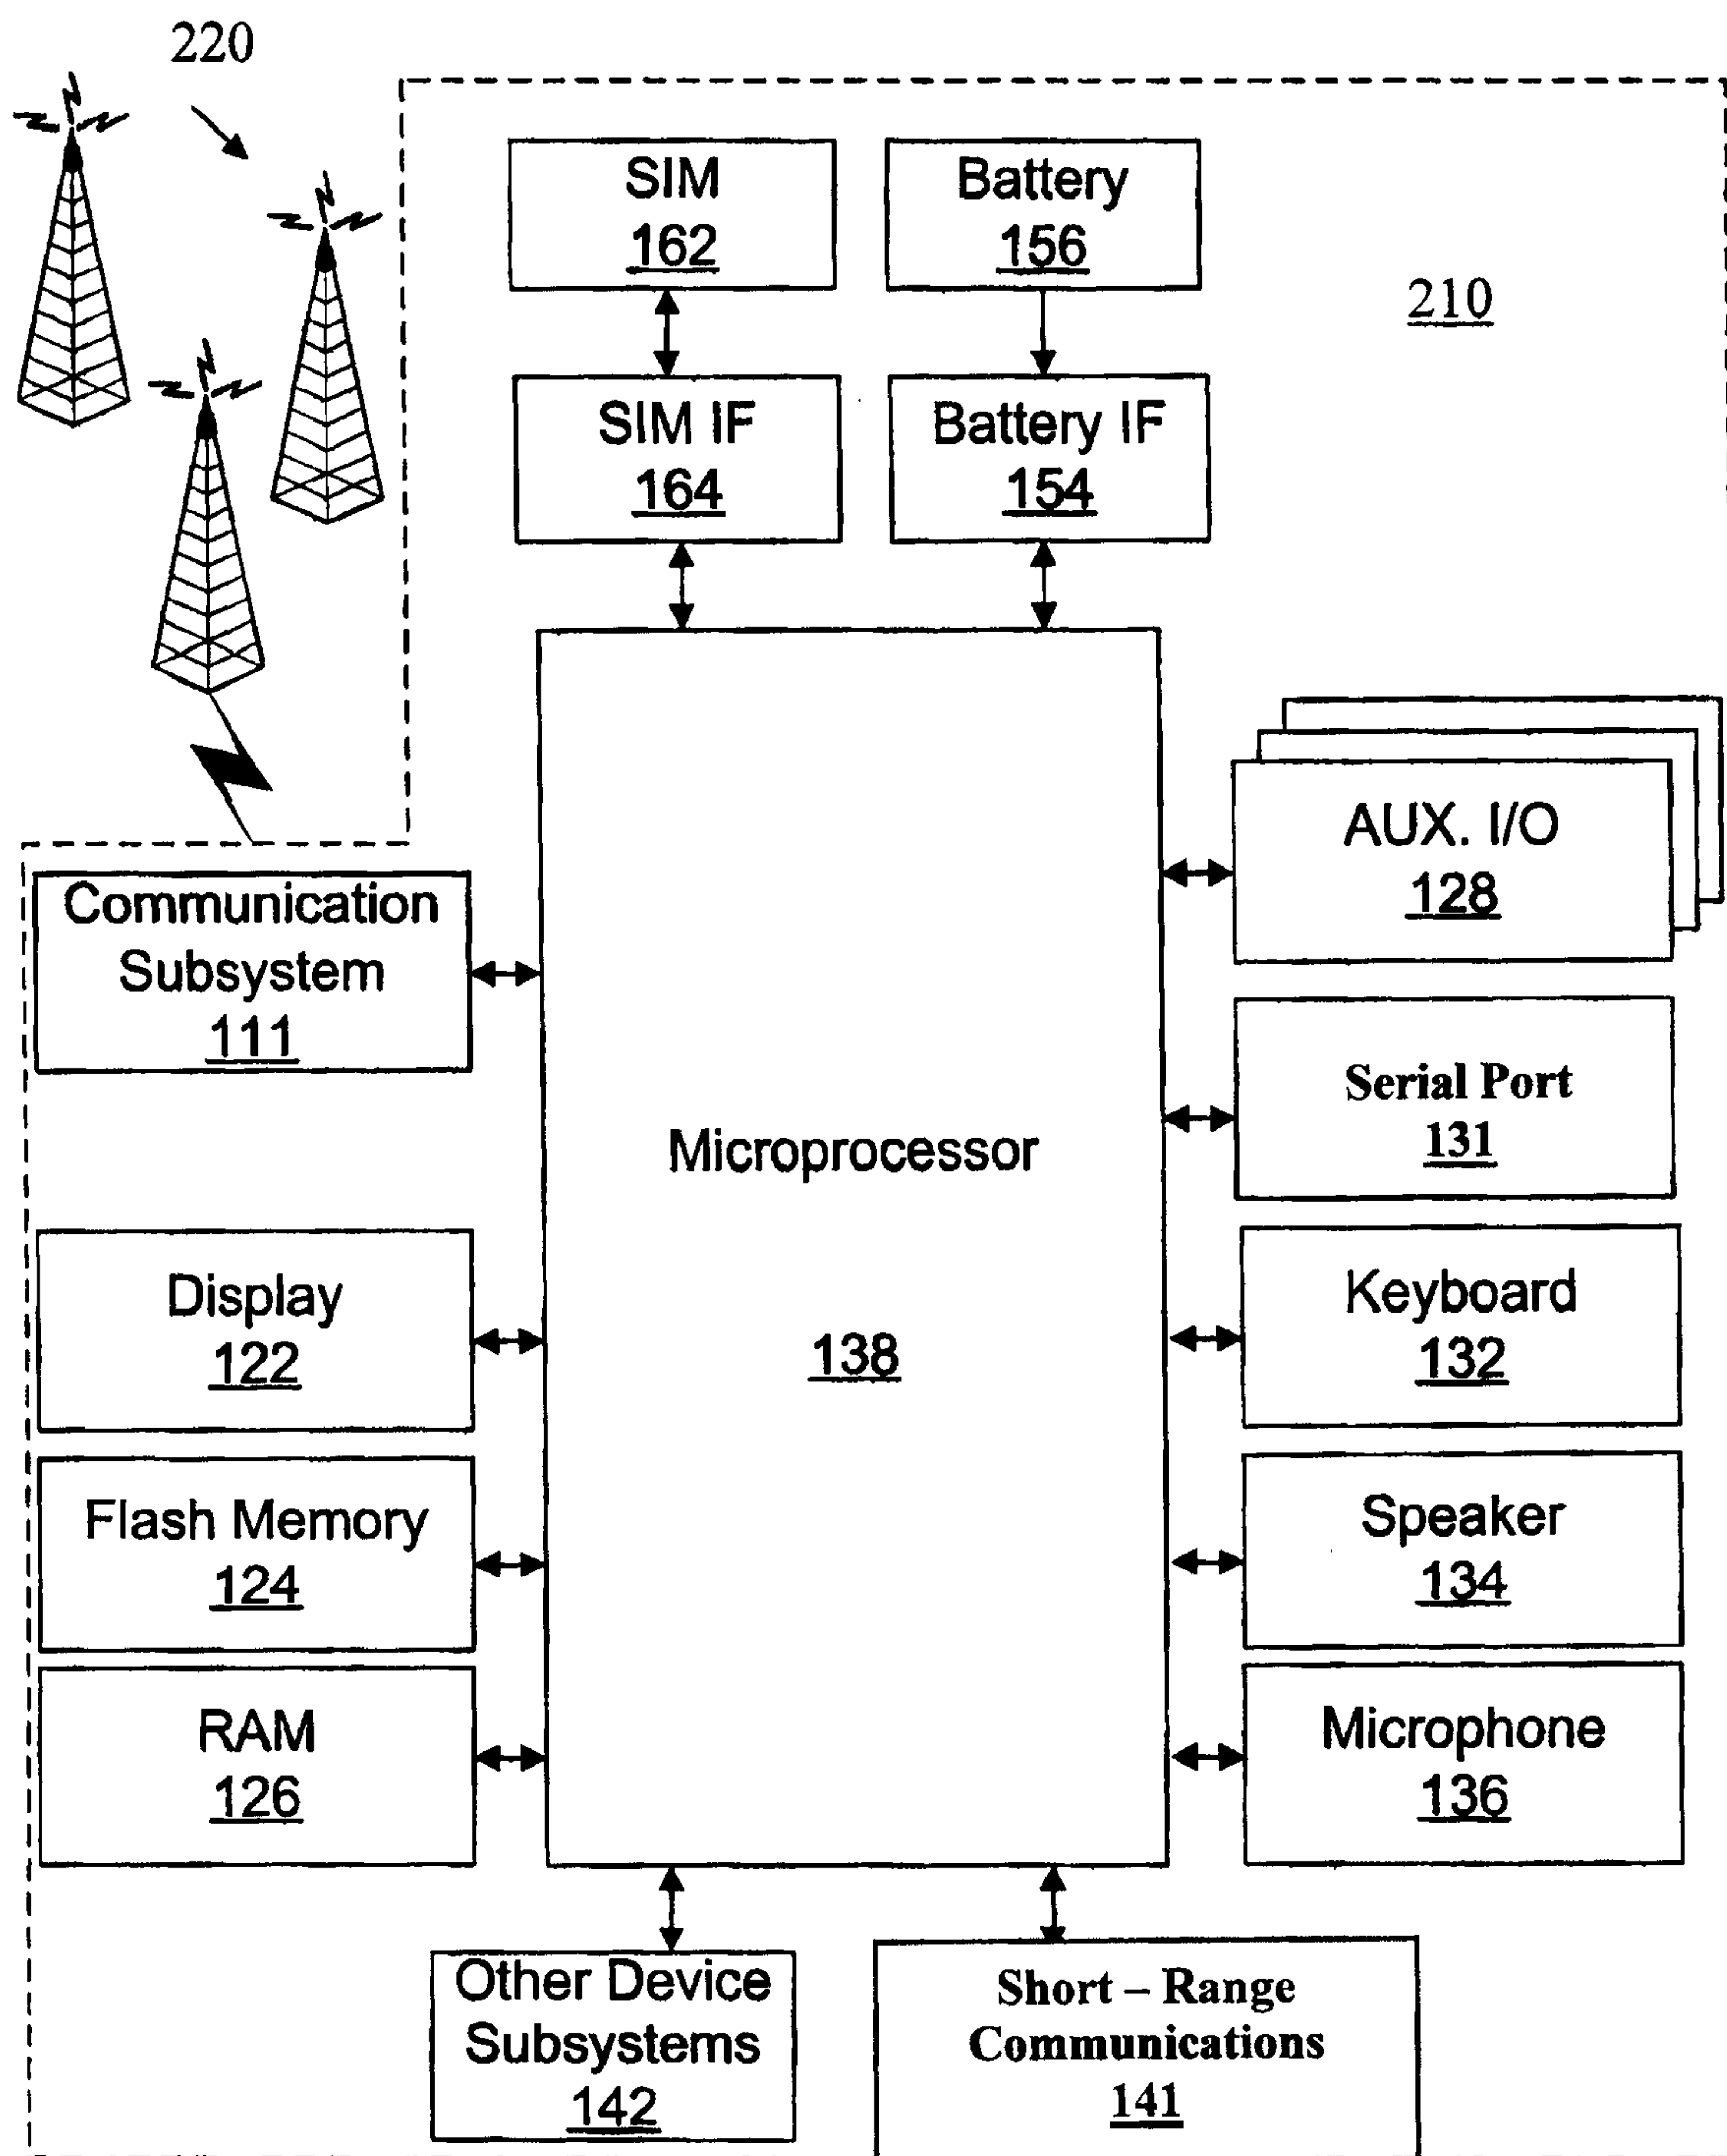


FIG. 2

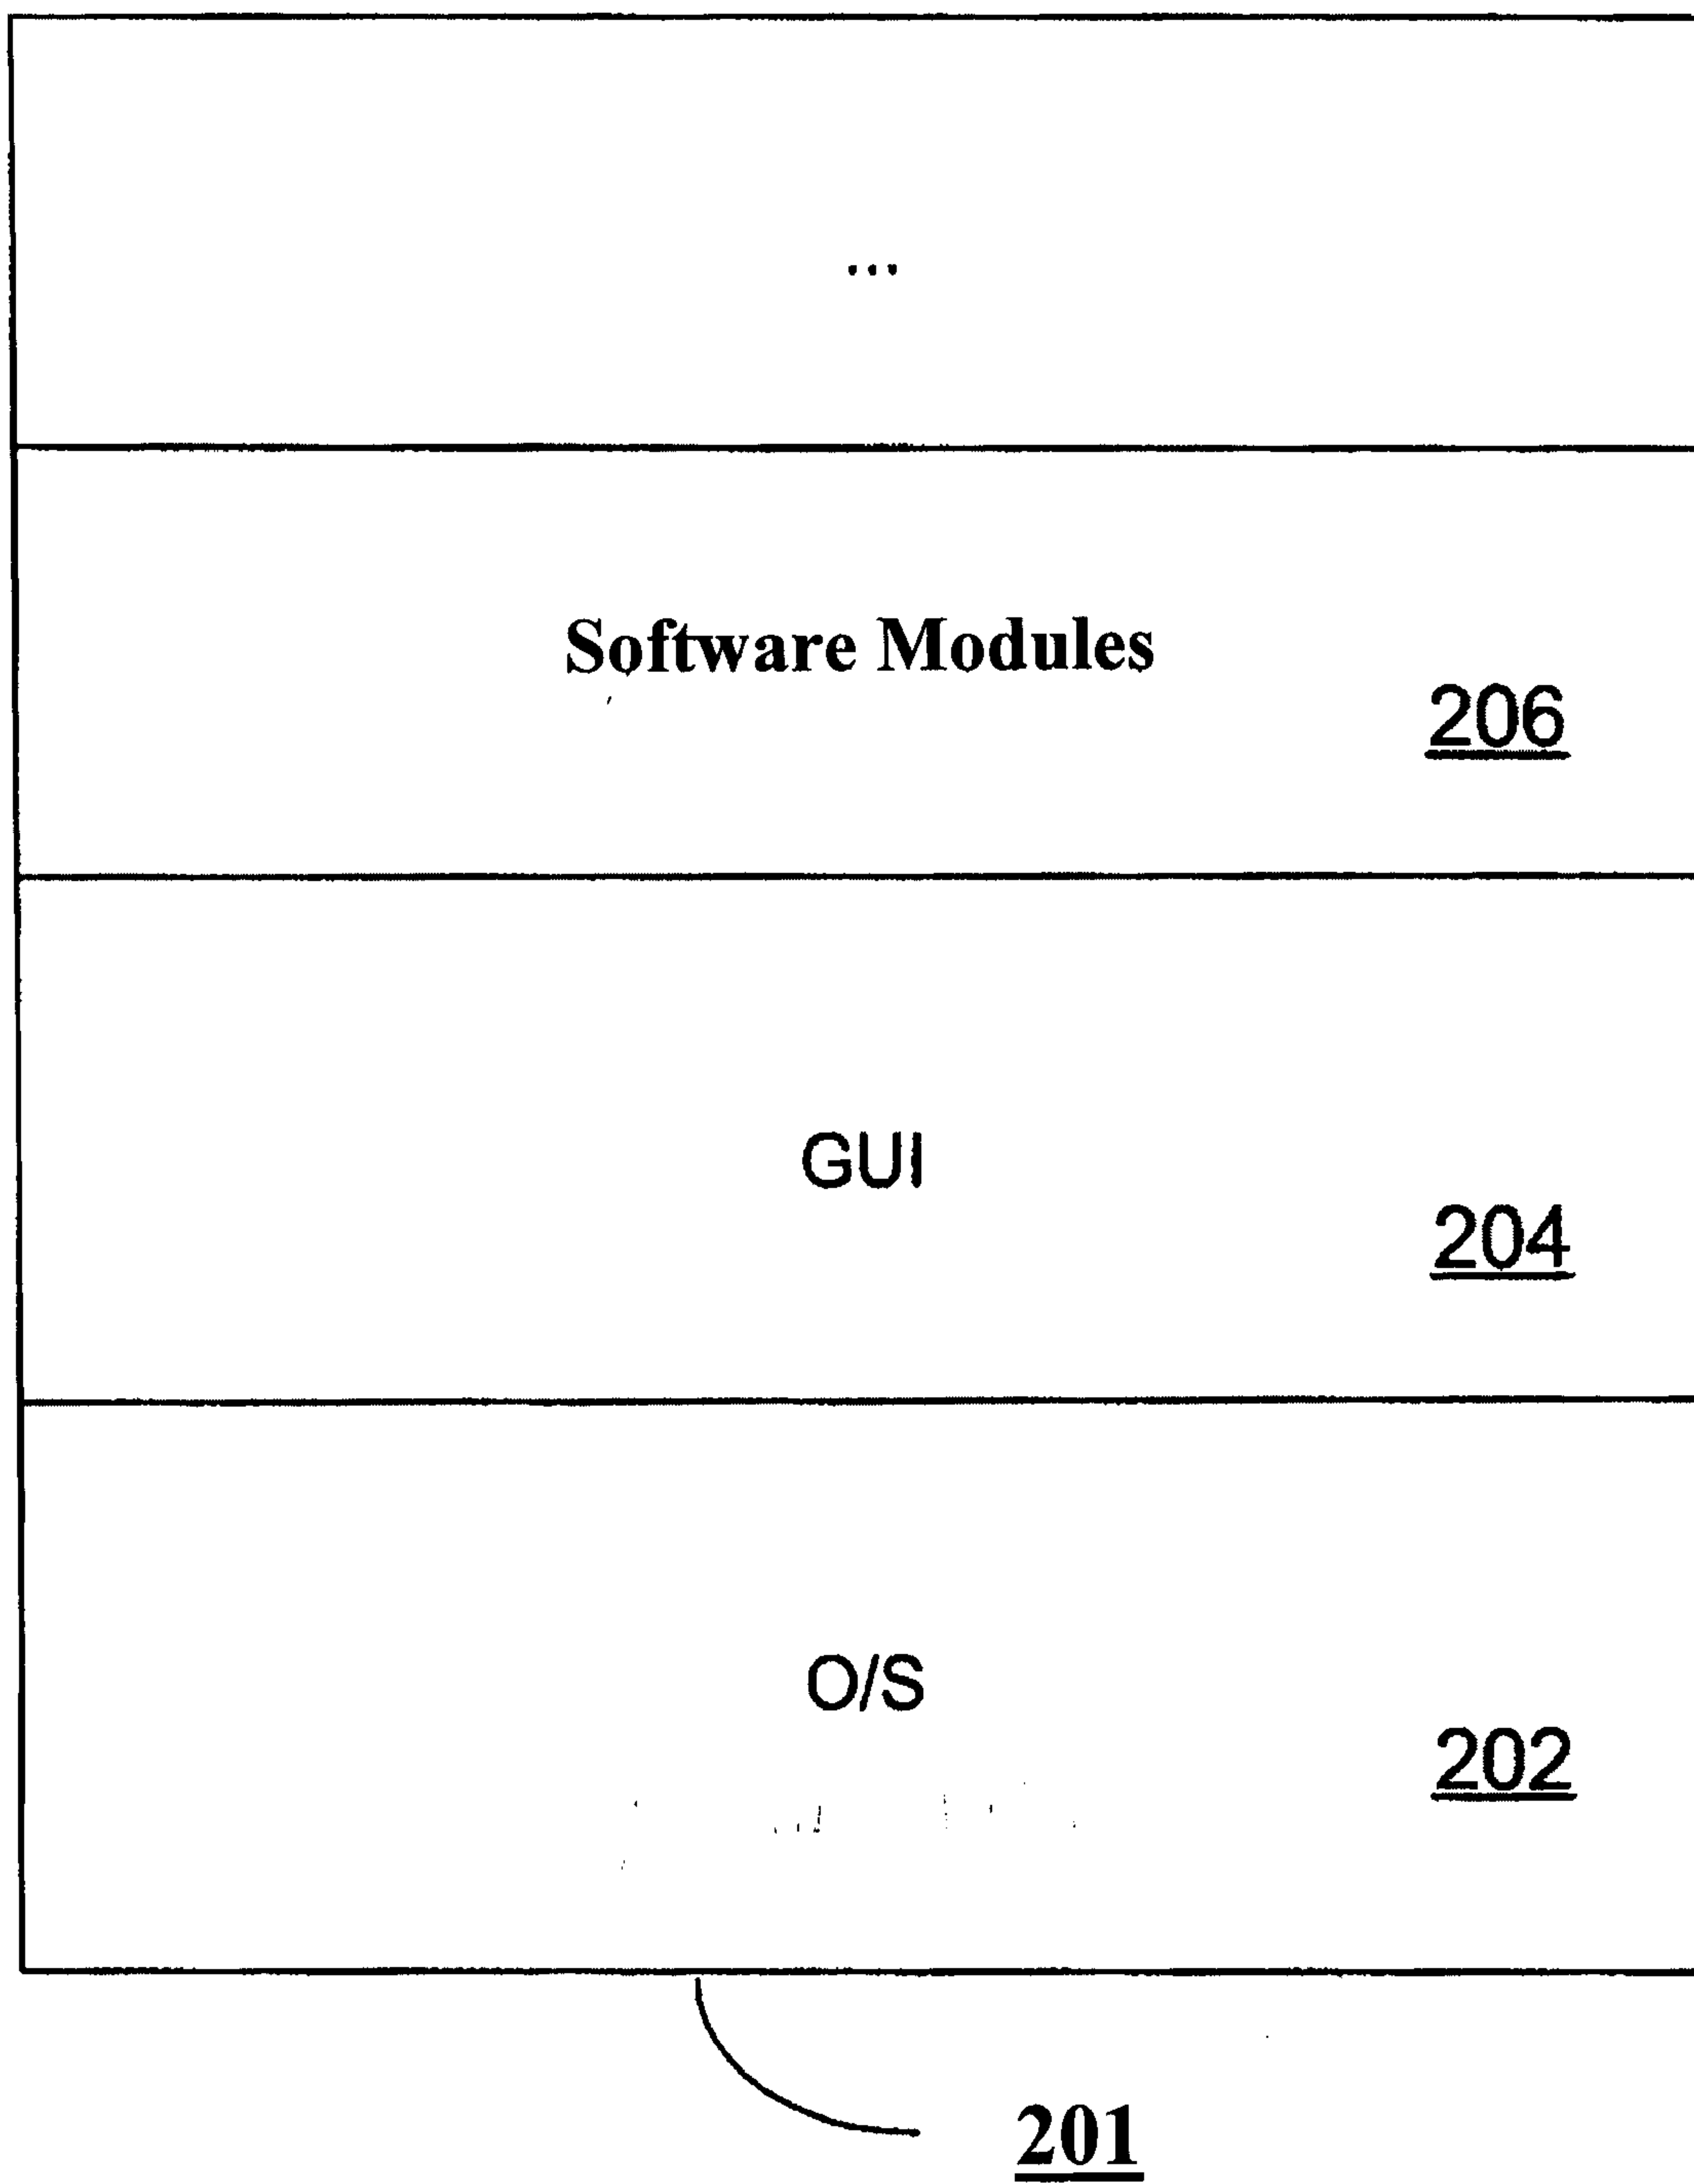


FIG. 3

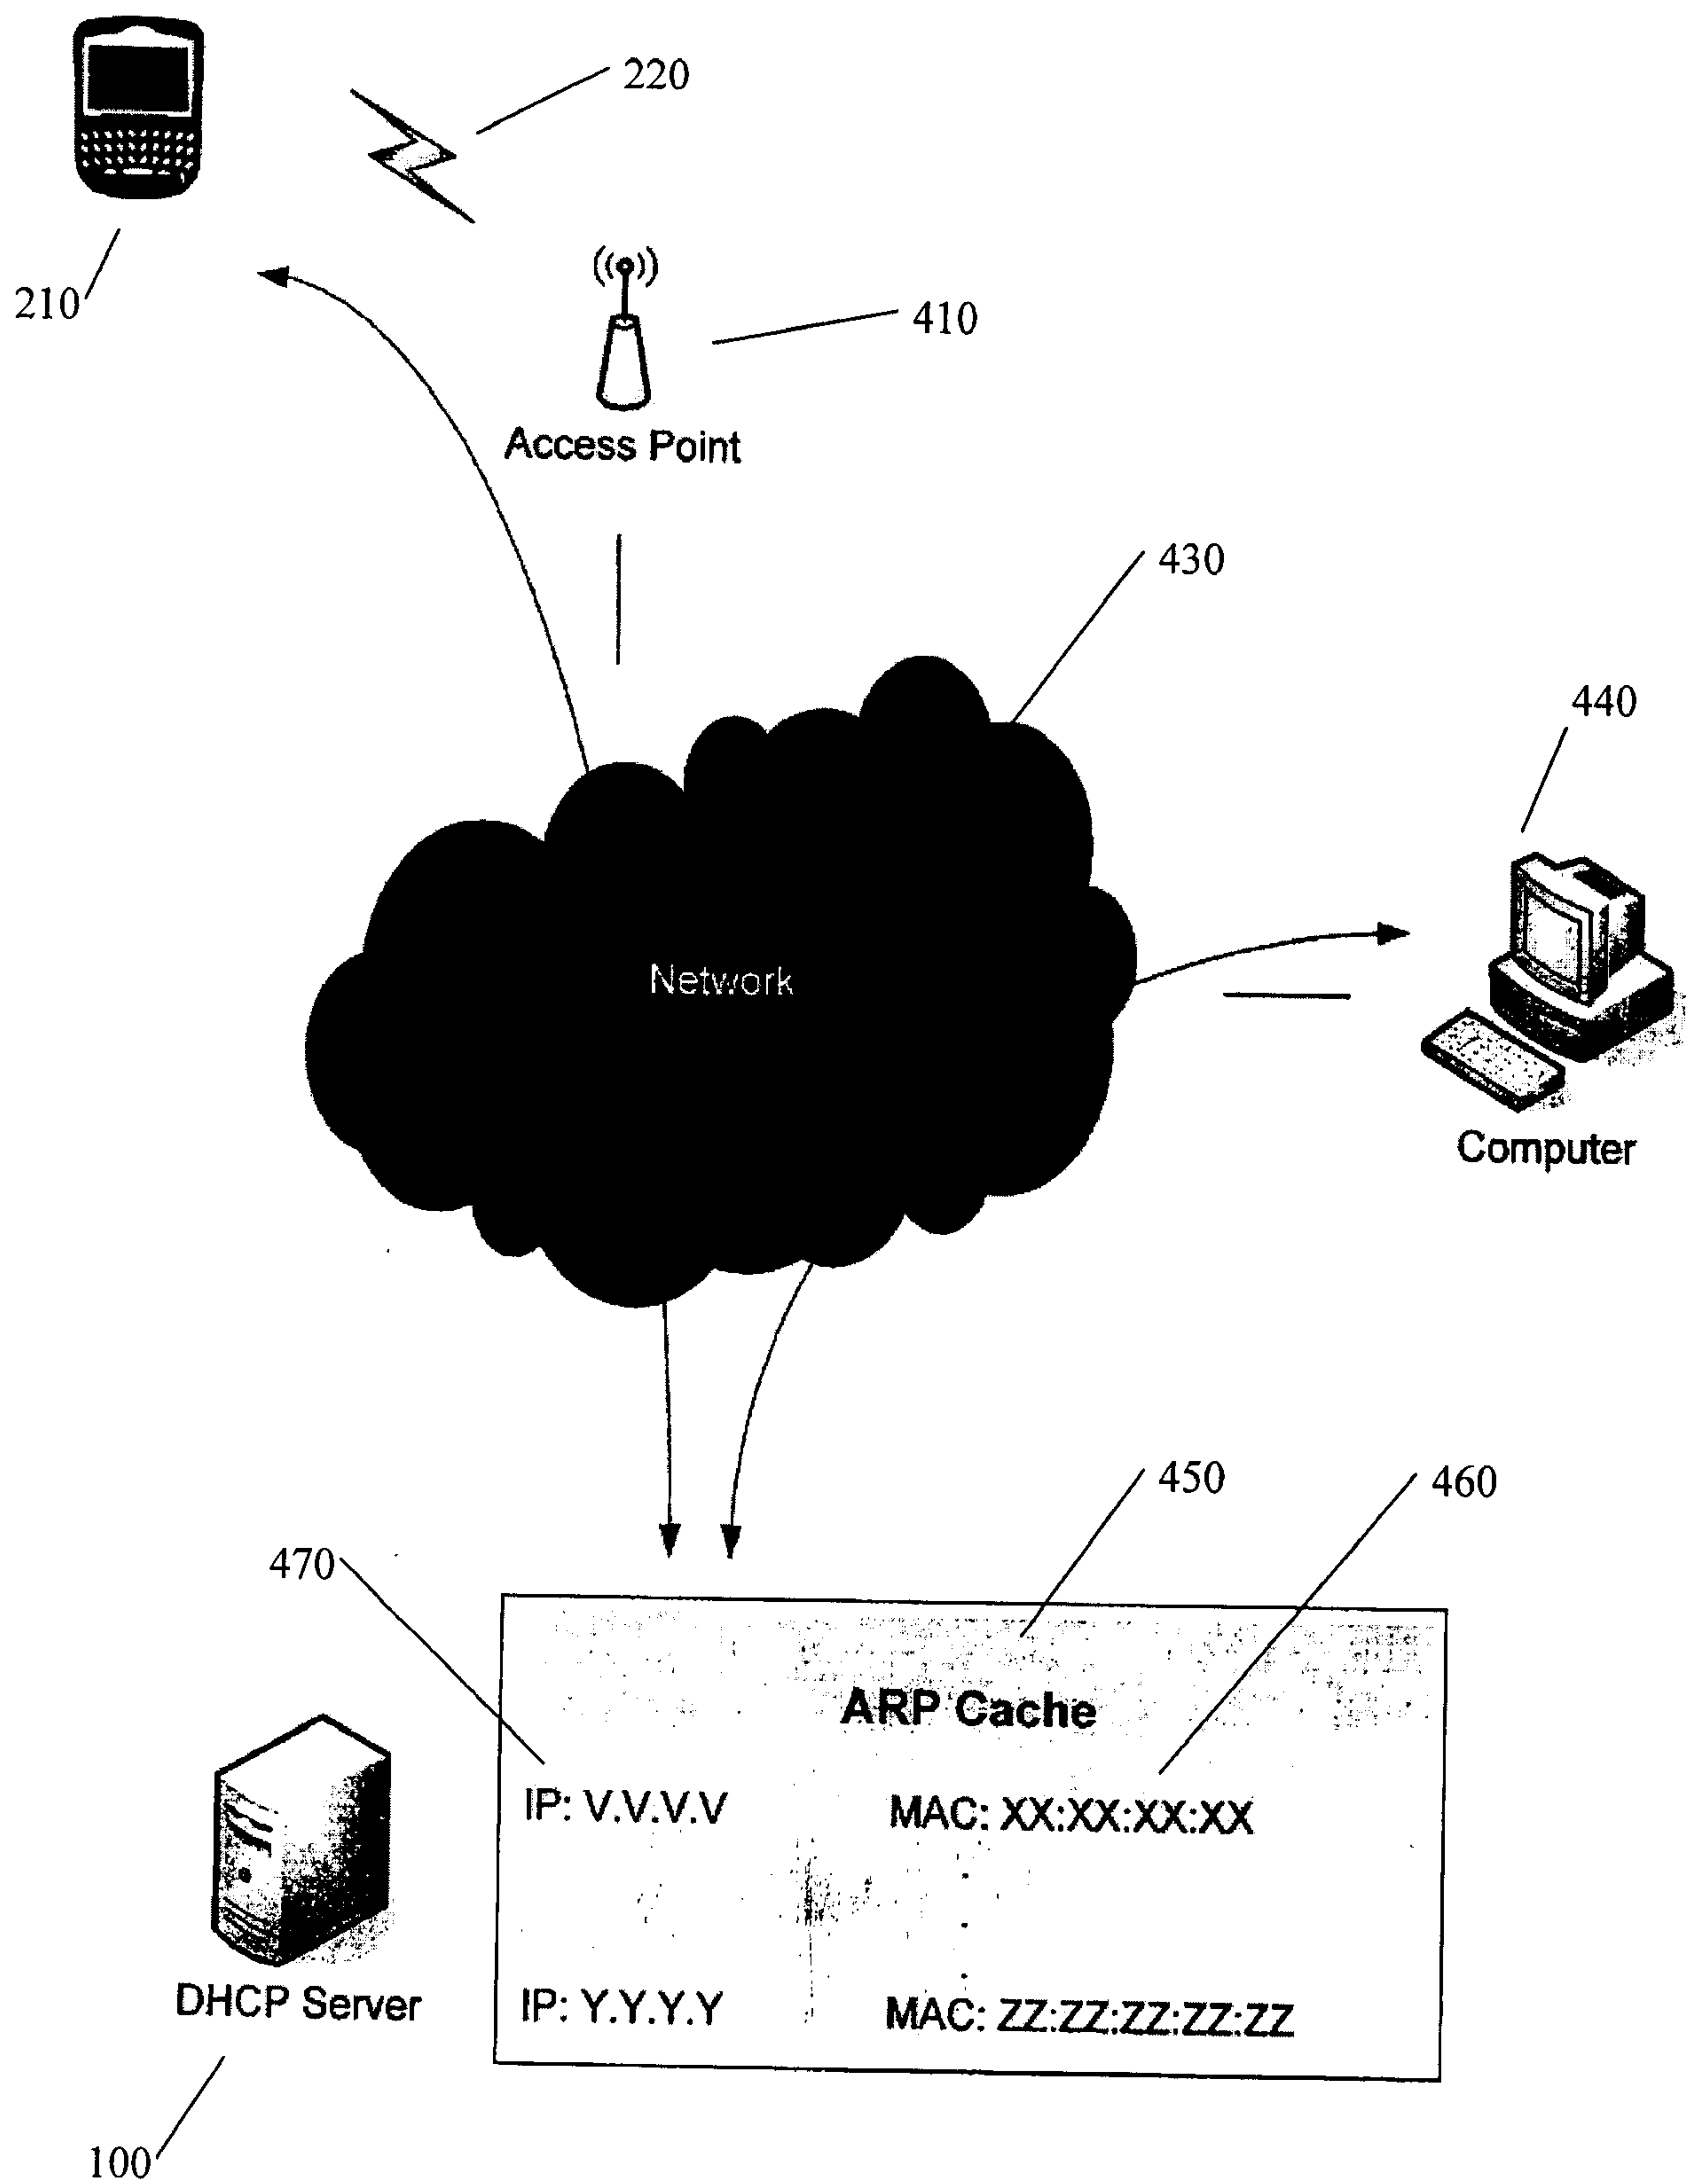


FIG. 4

