United States Patent [19]

Lloyd, III et al.

[11] **3,835,800**

[45] **Sept. 17, 1974**

[54] **TWIN HULL SEMI-SUBMERSIBLE DERRICK BARGE**

[75] Inventors: **Samuel Harry Lloyd, III,** Mill Valley; **Yorman Goren,** Los Angeles, both of Calif.

[73] Assignee: **Santa Fe Drilling Company,** Santa Fe Spring, Calif.

[22] Filed: **July 9, 1971**

[21] Appl. No.: **161,865**

Related U.S. Application Data

[63] Continuation of Ser. No. 705,175, Feb. 13, 1968, abandoned.

[52] **U.S. Cl.** ..... **114/.5 R,** 114/61, 212/3

[51] **Int. Cl.** **B63b 35/02,** B63b 27/10

[58] **Field of Search** ..... 114/.5 D, .5 R, 43.5, 61; 61/46.5; 212/3

[56] **References Cited**

UNITED STATES PATENTS

2,375,286	5/1945	Creed	114/43.5
2,731,741	1/1956	Kaufmann	114/.5 D
2,973,046	2/1961	McLean et al.	114/.5 D UX
3,273,526	9/1966	Glosten	114/.5 D
3,447,502	6/1969	Leopold	114/61
3,490,406	1/1970	O'Reilly et al.	114/.5 D

FOREIGN PATENTS OR APPLICATIONS

753,585	4/1933	France	212/3

OTHER PUBLICATIONS

National Science Foundation; Project Mohole Six Column Platform Design, April 1963.

The Society of Naval Architects and Marine Engineers, Vol. 73, 1965, pages 50–99.

Primary Examiner—George E. A. Halvosa
Assistant Examiner—Charles E. Frankfort
Attorney, Agent, or Firm—LeBlanc & Shur

[57] **ABSTRACT**

The derrick barge comprises a pair of laterally spaced elongated hulls having a plurality of upstanding columns spaced therealong supporting a working platform and a heavy duty derrick or crane in spaced relation above the hulls. The hulls bouyantly support the vessel including its deck load in the floating condition with the hulls having freeboard. The hulls have ballast compartments to submerge the hulls and portions of the stabilizing columns to a distance of approximately one-half the effective height of the stabilizing columns to maintain the vessel in a semisubmerged floating condition with the platform and derrick elevated above the waterline. However, the vessel also may be ballasted or deballasted to submerge or emerge to a greater or lesser extent from the semisubmerged condition such that the distance between the mean water surface and either the underside of the deck or top side of the hull is not less than 0.75 of the mean wave height. The columns stabilize the vessel in the semisubmerged condition about roll and pitch axes. The heavy duty derrick is located adjacent the stern portion of the vessel with its vertical axis of rotation intersecting the vessel centerline. This novel twin hull column stabilized derrick barge arrangement has excellent motion minimizing characteristics under wave action in operations at sea.

60 Claims, 14 Drawing Figures



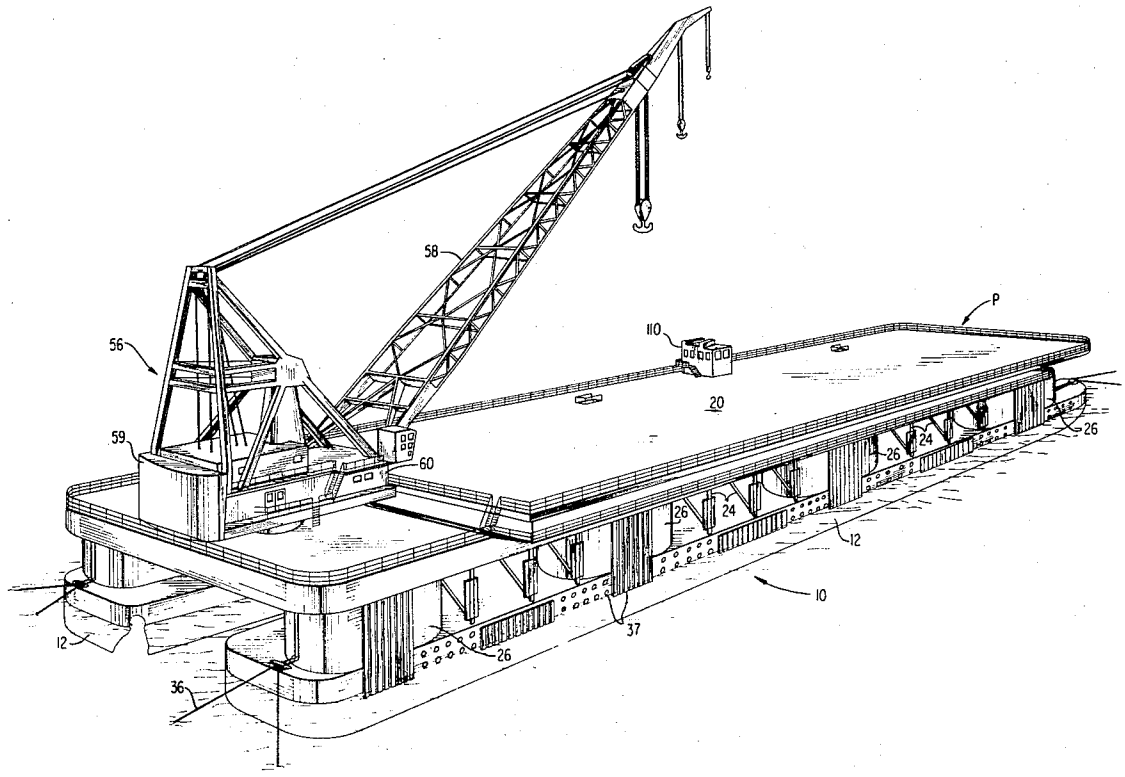


FIG. 1

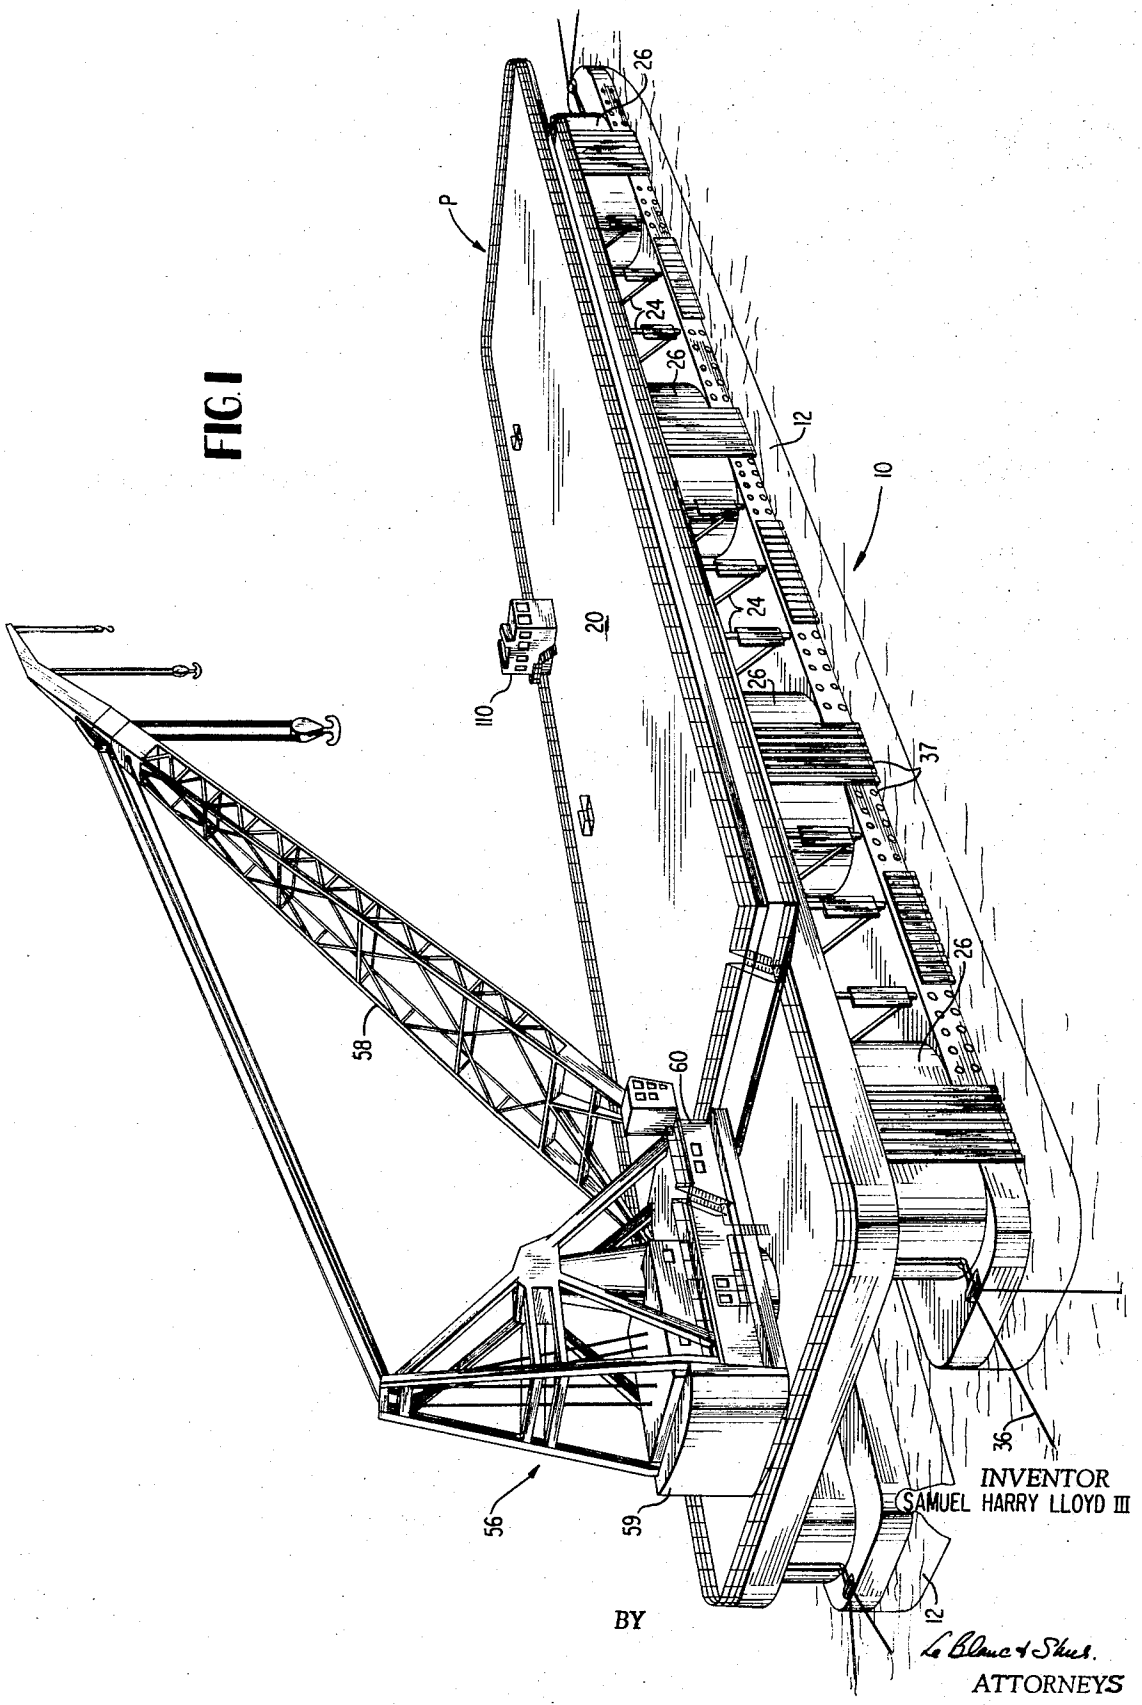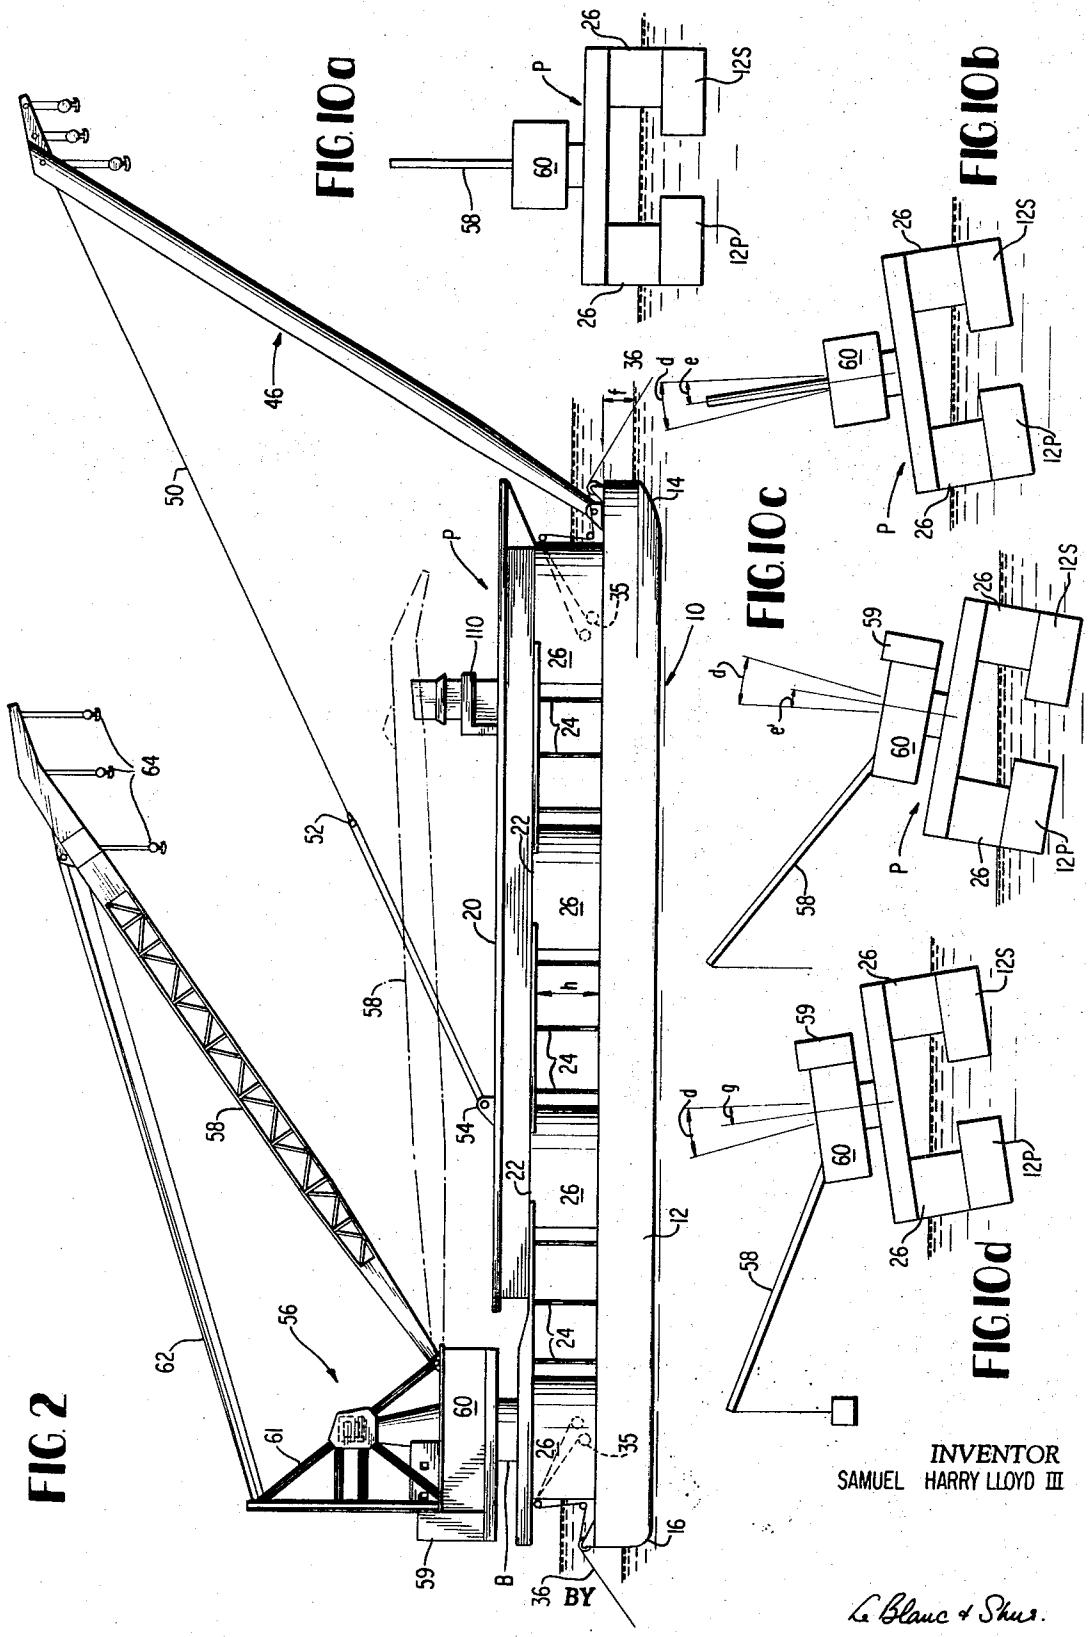

INVENTOR
SAMUEL HARRY LLOYD III

BY
LeBlanc & Shur.
ATTORNEYS


FIG. 10a
FIG. 10b
FIG. 10c
FIG. 10d
FIG. 2
INVENTOR
SAMUEL HARRY LLOYD III
BY
LeBlanc & Shur.
ATTORNEYS

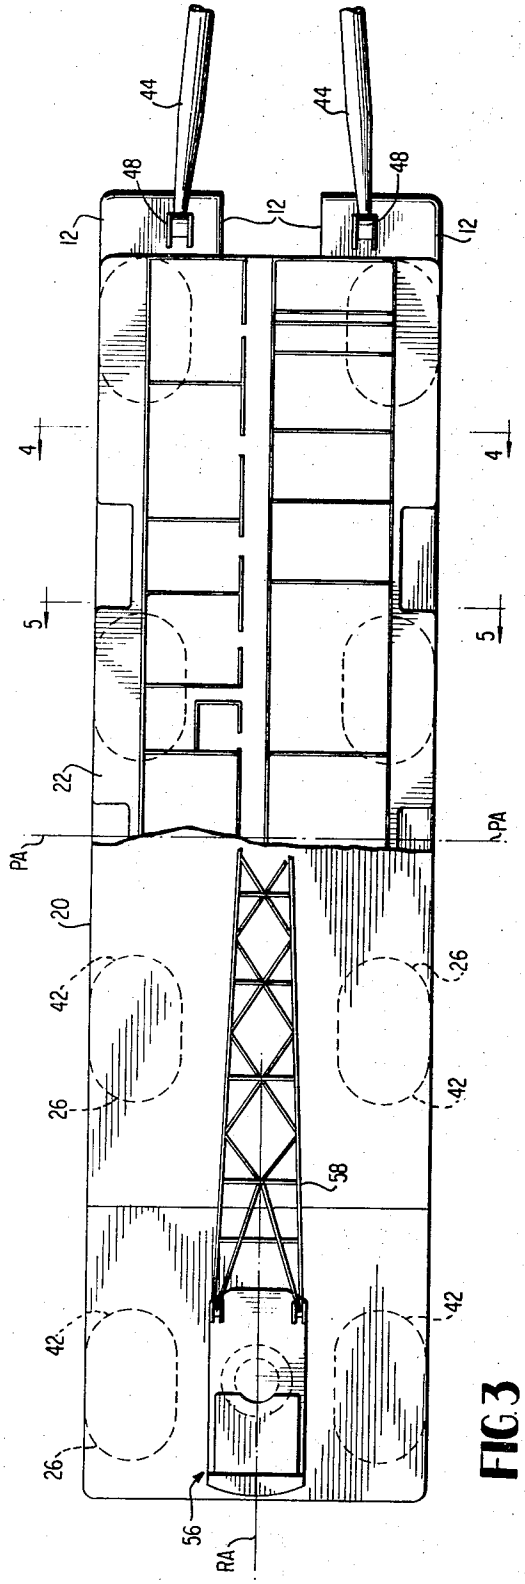


FIG. 3

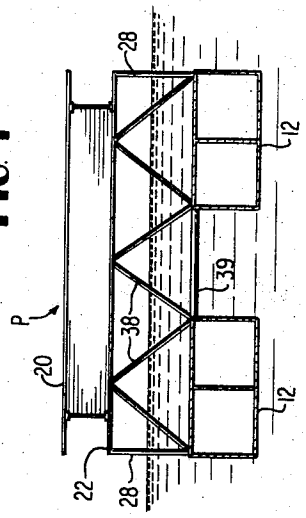


FIG. 4

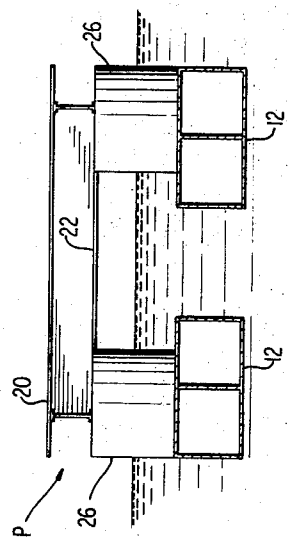


FIG. 5


INVENTOR
SAMUEL HARRY LLOYD III

BY

Le Blanc & Shur.

ATTORNEYS

FIG 6

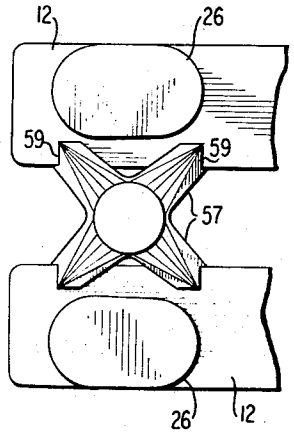

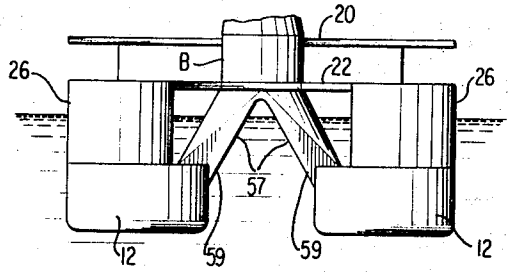


FIG 7

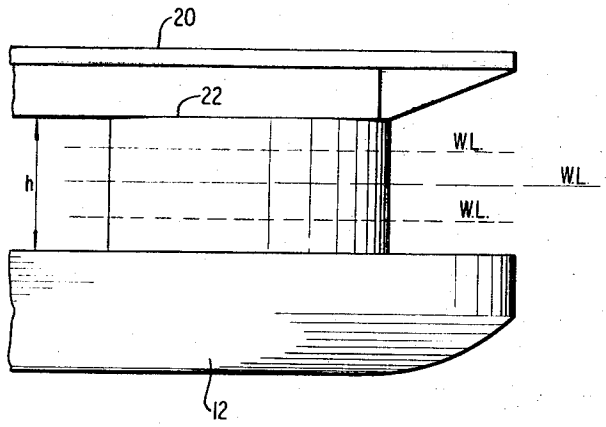


FIG 9

INVENTOR
SAMUEL HARRY LLOYD III

BY

LeBlanc & Shaw.
ATTORNEYS

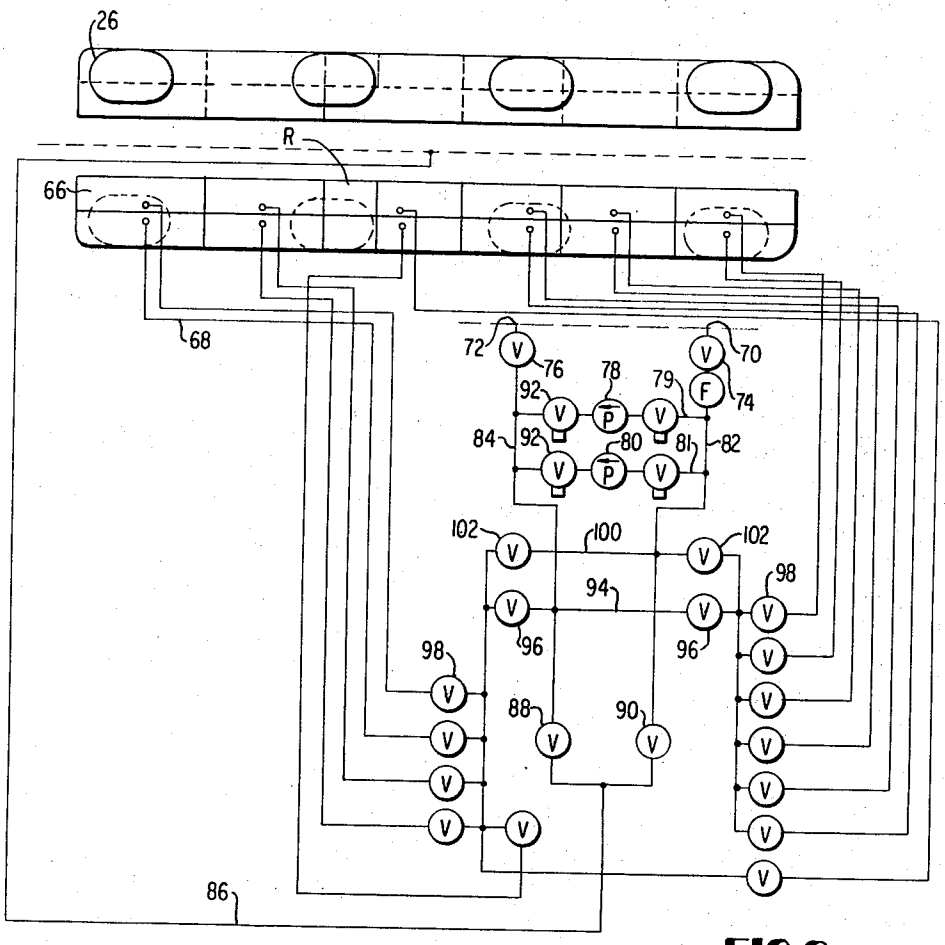


FIG. 8

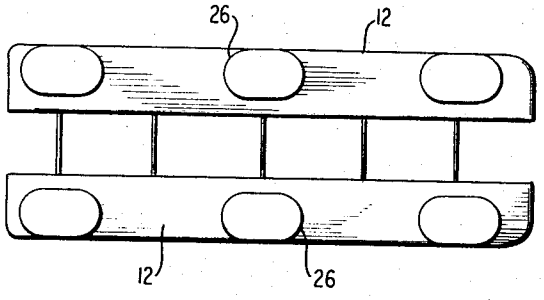


FIG. 11

INVENTOR
SAMUEL HARRY LLOYD III

BY

LeBlanc & Shur.

ATTORNEYS

TWIN HULL SEMI-SUBMERSIBLE DERRICK BARGE

The present application is a continuation of copending application Ser. No. 705,175 filed Feb. 13, 1968, now abandoned, for Twin Hull Semisubmersible Derrick Barge.

BACKGROUND OF THE INVENTION

This invention relates to a twin hull, semisubmersible floating vessel and more specifically to a semisubmersible barge mounting a heavy duty derrick or crane for use in offshore, particularly deep water, construction including, for example the erection and dismantling of oil drilling and production platforms as well as other offshore lifting and transfer functions.

Offshore activities, such as current attempts to drill and exploit oil wells at sea, have led to the development and construction of various special purpose marine structures capable of operations in the offshore environment over extended periods of time. For example, one such structure employed in offshore oil drilling operations comprises a fixed, self-contained drilling platform erected on piles driven into the sea floor, with the platform mounting a drilling rig, auxiliary equipment and crew's quarters. A variation of the foregoing structure provides a somewhat smaller platform similarly erected on piles and having a drilling rig located thereon, the auxiliary equipment and crew being located on a tender tied alongside.

To erect structures in the offshore environment as well as to dismantle the same as in the case of discontinued oil drilling and production platforms and other structures, barges mounting heavy duty derricks or cranes have been employed to lift, transfer and set into place the parts forming such structures. For example, current methods of offshore construction, particularly the construction of oil drilling and production platforms, employ such barges to drive piles at the construction site on which the platform is mounted. Present practice provides for the assembly on land of the component parts of the platforms to form subassemblies which are then loaded aboard derrick or crane barges for transport to the construction site. At the site, these barges provide a work deck from which the subassemblies are offloaded by the heavy duty derricks or cranes mounted on the barges and assembled to form the completed structure.

Present derrick or crane barges employed for this purpose comprise single hull surface floating vessels which are either towed or self-propelled to and anchored at the construction site. Platform erecting and dismantling operations conducted from barges of this type are, however, highly restricted by sea state conditions, since excessive vessel motion in heave, pitch and roll precludes crane or derrick operations. For example, surface floating derrick or crane barges currently employed for offshore construction can operate in sea states having wave heights up to about 5 feet or in special cases 6 feet. The wave action against the vessel caused by sea states having wave heights in excess of these limits normally causes excessive vessel motion precluding derrick or crane operations. Construction operations utilizing present day barges are thus normally halted when these high sea state conditions are encountered and are resumed only when the sea state subsides to within the above-noted limits.

The main problems that present day vessels of this type encounter are (1) their natural period in roll, pitch and heave is inherently low and (2) their GM (distance between center of gravity and metacenter GM) is inherently high. The low natural periods are more apt to be close to the period of the waves thus causing motion amplification. The high GM values result in abrupt correcting motions when the vessels are submitted to roll or pitch excitations. This may damgage the equipment, bring about structural or wire failures of the derrick due to excessive acceleration forces and cause discomfort to personnel.

Accordingly, it is a primary object of the present invention to provide a derrick barge or crane barge which minimizes the above-discussed and other shortcomings of prior vessels employed for like purposes and provides various advantages in construction, mode of operation and result over prior vessels. [The terms "derrick" or "crane" are employed hereinafter interchangeably and the vessel or barge mounting either one or the other is herein referred to as a derrick barge.]

It is another object of the present invention to provide a twin hull, semisubmersible barge mounting a heavy duty derrick for offshore construction work.

It is still another object of the present invention to provide a semisubmersible twin hull derrick barge which, particularly when in floating semisubmerged condition, has the characteristic of minimizing vessel motion due to excitation forces caused by wave action (hereinafter called "motion minimizing characteristics"). It is a related object to provide such a derrick barge affording improved motion minimizing characteristics in vessel pitch, roll and heave as well as minimizing sideslip and surge.

It is yet another object of the invention to provide a derrick barge comprising a platform and a derrick mounted in spaced relation above a pair of hulls and which can be selectively ballasted or deballasted from its normal semisubmerged floating condition to obtain even better motion minimizing characteristics when the period of the waves is the same or close to the natural period of the vessel, thereby tending to produce vessel motion amplification.

It is another related object of the present invention to provide a twin hull semisubmersible derrick barge having long natural periods in roll, pitch and heave and a lower GM in the semisubmerged condition as compared with its GM in the surface floating condition (low draft).

It is a further object of the present invention to provide a semisubmersible derrick barge having rapid mobility in transit, the ability to carry large deck loads in the surface floating condition and a beam providing for transit of the barge through the Panama Canal.

It is a still further object of the present invention to provide, in a barge mounting a heavy duty derrick, a method of coordinating operation of the derrick and the ballasting of the barge as to enable operation of the derrick when its permissible slew angle would otherwise be exceeded, and also to maintain heel angle of the vessel within limits acceptable for comfort of the crew.

These and other related objects and advantages of the present invention will become more apparent from the following specification, claims and appended drawings wherein:

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a twin hull semisubmerged derrick barge constructed in accordance with the present invention;

FIG. 2 is a side elevational view of the derrick barge with the waterline being illustrated relative to the barge in both the surface and semisubmerged floating conditions;

FIG. 3 is a plan view of the derrick barge with portions broken out for ease of illustration;

FIG. 4 is a cross-sectional view thereof taken on lines 4—4 in FIG. 3;

FIG. 5 is a cross-sectional view thereof taken on lines 5—5 in FIG. 3;

FIG. 6 is a fragmentary plan view of the barge with portions broken away, illustrating the derrick support structure;

FIG. 7 is an aft end elevational view thereof illustrating the derrick support structure;

FIG. 8 is a schematic plan view of the hulls of the derrick barge illustrating a ballast system therefor;

FIG. 9 is a fragmentary side elevational view of the derrick barge illustrating the operating limits when in the semisubmerged floating condition;

FIGS. 10*a*–10*d* are schematic aft end elevational views of the derrick barge hereof illustrating the various angular positions thereof in exaggerated form when operating the derrick to pick up load with the crane to beam; and using ballast transfer.

FIG. 11 is a diagrammatic horizontal cross-sectional view between deck and hull illustrating another embodiment of the derrick barge hereof.

DESCRIPTION OF A PREFERRED EMBODIMENT

Referring to the drawings, particularly FIGS. 1 and 2, there is shown a semisubmersible derrick barge or vessel generally indicated at 10 comprising a pair of transversely spaced, elongated hulls 12 extending in spaced parallel relation and providing sufficient displacement to support vessel 10 in the floating condition with the hulls having freeboard indicated at f in FIG. 2. [Each hull 12 has a substantially rectangular cross section as seen in FIGS. 4 and 5, an arcuate bow portion 14 and a round stern bottom portion 16. Hulls 12 are thus sufficiently streamlined in shape to minimize resistance to towing when vessel 10 is entirely supported by hulls 12 in the floating condition.]

A platform P comprising a main deck 20 and a lower deck 22 is supported a predetermined height above hulls 12 by support structure including a plurality of longitudinally spaced, transversely extending truss formations generally indicated at 24 and a plurality of longitudinally spaced pairs of transversely spaced stabilizing columns 26 hereinafter referred to as columns. A plurality of truss formations 24 are longitudinally spaced between longitudinally spaced pairs of columns 26 and each truss includes as best seen in FIG. 4 two outermost support members 28 upstanding from each hull 12 to the outer edges of lower deck 22. Each truss 24 includes a plurality of diagonally and transversely extending beams 38 secured between hulls 12 and lower deck 22 providing for platform P. Trusses 24 include transversely extending, horizontal cross braces 39 joining the upper inner sides of hulls 12. Similar diagonally and transversely extending truss formations 40 connect between hulls 12 in the area between columns 26 as seen in FIG. 5.

As discussed more fully hereinafter, the support structure also includes stabilizing columns 26 extending upwardly from the upper surface of hulls 12 to platform P an effective height *h* (FIG. 2) which may be equal to and preferably greater than the maximum anticipated wave height, the vertical distance between wave crest and trough. In the preferred embodiment, four pairs of columns 26 are equally longitudinally spaced one from the other along hulls 12 with the column arrangement on each hull being symmetrical with respect to the other hull. As shown by the dashed lines in FIG. 3, columns 26 preferably are generally oblong shaped with longitudinally elongated vertical sides and semicylindrical fore and aft vertical end sections 42. It will be understood, however, that columns 26 may have circular, square or other cross-sectional configurations as desired. Use of columns 26 provides motion minimizing characteristics when the vessel is in the floating semisubmerged condition. Stabilizing columns 26 are preferably constant in cross-sectional area throughout their effective length. It will be understood that either or both the upper and lower ends of the columns may be reduced in cross section, for example, to form frustro-conical sections, to provide mechanical connection between the columns and the hulls and platform which do not substantially affect the effective height or make the latter subject thereto.

As seen in FIG. 2, the lower ends of the legs 44 of a shear leg generally indicated at 46 are pivotally mounted to bow portions of hulls 12 as at 48. The vertical inclination of shear leg 46 is controlled by a hoist cable 50 connected to a block, not shown, located at the upper end of shear leg 46 and to a pulley block 52 at its lower end which connects with a power-driven drum apparatus 54 whereby the inclination of shear leg 46 may be selectively altered.

A heavy duty derrick or crane, generally indicated at 56 and hereinafter referred to as derrick, comprises a boom 58 and a housing 60, derrick 56 being pivotally mounted on a support structure including girders extending upwardly from stern portions of hulls 12 locating the base structure B of derrick 56 at a level coincident with lower deck 22 of platform P. As seen in FIGS. 6 and 7, the support girders may comprise four inwardly and upwardly directed columns formed by girders 57 with foot or base portions 59 of each lateral pair of girder columns 57 being secured to the inboard sides of stern portions of hulls 12. The upper ends of girder columns 57 converge to support a base structure B on which derrick 56 may be rotated. Obviously, other types of supporting structures may be formed and the foregoing is considered exemplary only.

It will be understood that derrick 56 is secured to the vessel such that the pivotal axis thereof extends vertically when the vessel lies in calm water, i.e., its equilibrium position. Also, the derrick is mounted such that the pivotal axis thereof lies in the vertical plane intersecting the horizontal centerline of the vessel whereby the weight of the derrick is equally distributed to each of hulls 12. The crane 56 more particularly comprises a counterweight 59, a mast structure 61 carrying tackle 62 and load blocks and hooks 64 arranged in a conventional manner. A Dutch pintle crane, known to the art, is preferably employed herein, but it will be understood that derrick 56 may comprise any commercially avail-

able heavy duty crane. For example, a tub type crane may be employed. In the preferred form hereof, a crane having a capacity of 500 tons in slewing is provided.

Columns **26,** in the preferred form, are disposed along outboard portions of hulls **12** as shown in FIGS. **3** and **5.** The outboard sides of columns **26** are in vertical alignment with and form continuations of the outboard sides of the associated hulls. The displacement and stability requirements of columns **26** are such that their longitudinal axes preferably are spaced laterally outwardly of the centerline of the hulls. The centroids of the water plane areas defined by the cross sections of the columns **26** are located an extended distance from the centerline of the vessel on opposite sides thereof to develop large moments of inertia of the water plane areas about the roll axis.

As seen in FIG. **2,** anchor winches **35** are disposed in the forward and stern pairs of columns **26** and carry anchor lines **36** disposed about suitable mooring pulleys. Lines **36** carry anchors, not show, whereby vessel **10** can be moored at the construction site. Also, as seen in FIG. **1,** suitable fenders **37** may be provided hulls **12** and columns **26.**

As seen in FIG. **8,** hulls **12** are each divided into compartments **66** forming a plurality of ballast chambers for submerging and refloating the vessel, and it will be understood that any number of compartments **66** may be provided as desired to perform the intended ballasting function. While only the starboard hull and ballast system therefor is illustrated in FIG. **8,** it will be understood that the port hull is similarly arranged and ballasted but on the opposite hand. Also, the port hull and bilge system therefor is illustrated in FIG. **8,** and it will be understood that the starboard hull is similarly arranged and of the opposite hand. Ballast chambers **66** are selectively and independently ballasted and deballasted whereby the vessel may be submerged with the platform P remaining substantially level throughout the submergence thereof and any attitude deviation of the vessel in both heel and trim may be corrected during submergence and retention of the vessel at the semisubmerged depth. Ballast chambers **66** may also be selectively and independently or dependently ballasted and deballasted when the vessel is semisubmerged to provide a transverse vessel inclination about its heel axis to enhance the comfort, safety and effectiveness of the operating personnel and to assist derrick operations when necessary and in a manner described hereinafter. To these ends, a plurality of conduits **68** extend from a pump room PR in each of hulls **12** in opposite longitudinal directions to the several ballast compartments **66,** there being multiple compartments in the forward and aft portions, respectively, of each hull.

Pump room PR is provided with a sea-suction inlet indicated at **70** and an overboard discharge indicated at **72** controlled by suitable power operated gate valves **74** and **76** respectively, the hull side being indicated by the dashed lines in FIG. **8.** A pair of pumps **78** and **80** are connected in parallel via lines **79** and **81** respectively across conduits **82** and **84,** conduit **82** connecting with inlet **70** and conduit **84** connecting with discharge **72.** Conduits **82** and **84** connect with a conduit **86** and it will be seen that, with valves **88** and **90** closed, pumps **78** and **80** suction sea water through inlet **70** past suitable valves **92** located in the parallel pump lines **79** and **81,** and into conduit **84** which, with valves **76** closed, communicates with a main ballast conduit **94.** Opposite ends of main conduit **94** are connected in parallel with ballast conduits **68** through a pair of power operated valves **96** located on opposite sides of feed conduit **84,** ballast conduits **68** each having a suitable power operated valve **98.** Thus, with valves **74, 92, 96** and **98** open and valve **76** closed, the **12** ballast compartments may be simultaneously ballasted with sea water at an equal rate to maintain the platform substantially level when the vessel is being submerged or the valves **98** may be selectively operated to control the ballasting of the individual compartments **66** whereby the trim of the vessel may be corrected or altered during submergence, retention of the vessel in the semisubmerged condition, and during operation of derrick **56** as hereinafter described. Line **86** is used to transfer ballast between one hull and the other.

Conduit **82** connects with a deballasting conduit **100** having suitable power operated valves **102** on opposite sides of the connection, opposite ends of deballasting conduit **100** connecting across ballasting conduit **94** between valves **96** and the first of the parallel connected conduits **68.** To refloat the vessel with the hulls **12** having freeboard, valves **74** and **96** are closed and valves **76** and **102** are opened. Pumps **78** and **80** operated to pump water in the same direction as before and accordingly suction main deballasting conduit **100** via conduit **82,** thereby suctioning ballast conduits **68** and withdrawing ballast water from compartments **66** via conduits **68, 100** and **82,** the pump lines **79** and **81,** open valve **76** and outlet **72.** With all of valves **98** open, compartments **66** may be simultaneously deballasted as desired to effect refloatation of the vessel to the surface floating condition with hulls **12** having freeboard f. Selected operation of valves **98** with valves **76** and **102** open and valve **74** closed deballasts selected compartments **66** as desired to alter the attitude of the vessel about the heel and trim axes an to assist in the operation of derrick **56** when necessary as hereinafter described. It is thus readily seen that compartments **66** may be simultaneously ballasted and deballasted or selectively ballasted and deballasted or having ballast transferred between the port and starboard hulls by selected operation of the various valves and that this can be accomplished when the vessel is in any operating condition, for example, floating with the hulls having freeboard, semisubmerged floating or any intermediate position during submerging or refloating operations wherein the attitude of the vessel about heel and trim axes is to be altered. Note also that the various valves, conduits, etc. of the foregoing ballast system are provided each hull **12** whereby one or both hulls may be ballasted or deballasted alone or together, or ballast transferred.

It is a significant feature of the present invention that vessel **10** can be towed or self-propelled, by means not shown, between work sites at speeds in the order of **8** to **10** knots providing the present vessel with a mobility heretofore unavailable in prior semisubmersible type vessels (with the exception of the vessel disclosed in U.S. Patent No. 3,616,773, dated November 2, 1971. To this end, hulls **12** have a displacement when deballasted to support the entire weight of the vessel, including derrick **56,** crew, auxiliary equipment and the like as well as a heavy deck load, with the hulls **12** having freeboard *f.* When in the latter surface floating condition, vessel **10** has the great righting stability and decreased roll angles characteristic of a twin hull type

vessel. It will be seen that the support structure for platform **20** including truss formations **24** and stabilizing columns **26** are disposed above the waterline and accordingly do not present a frontal area to the water to offer resistance to passage therethrough. In the floating condition, only twin hulls **12** displace water and the substantially streamline shape thereof as well as the absence of support structure in contact with the water permit movement of the vessel at significantly higher speeds than heretofore possible with prior semisubmersible vessels (with the exception of the vessel disclosed in U.S. Patent No. 3,616,733, dated November 2, 1971.

When vessel **10** reaches the work or construction site for the purpose of erecting or dismantling a marine structure such as an oil drilling or production platform or other offshore marine structure, anchors, not shown, are deployed to maintain vessel **10** in proper position. It is understood that a dynamic position keeping system could be employed in lieu of the conventional anchoring system mentioned herein.

For normal wave conditions and with the vessel in the surface floating condition with hulls **12** having freeboard *f*, derrick **56** could be operated to lift and transfer loads up to its full tonnage capacity when servicing adjacent structure. In moderate or heavier sea states, for example wave heights in excess of 5 or 6 feet, servicing operations with a conventional derrick barge would at this point cease because of excessive vessel motions in roll, pitch and heave and not be continued until a sea state prevailed which would preclude such vessel motions. However, a semisubmersible vessel constructed in accordance with the present invention can continue to perform its function even in sea states having wave heights exceeding 5 or 6 feet in a manner as will now be described.

When vessel **10** is at the work site and derrick operations in the semisubmerged condition are to be conducted, hulls **12** are ballasted preferably by simultaneously ballasting the compartments **66** in each hull in the previously described manner to submerge hulls **12** below the waterline. Vessel **10** is preferably submerged to the extent that columns **26** are submerged for approximately half their effective height *h*, thereby locating the mean waterline above the upper surfaces of hulls **12** at a distance of approximately half the distance between lower deck **22** and the upper surface of hulls **12.** The displacement of the submerged portions of columns **26** and the residual displacement of hulls **12** are adequate to maintain the vessel in the floating semisubmerged condition at such predetermined height. In this manner, the maximum anticipated wave is prevented from acting against hulls **12** and platform P and acts only on the columns **26** and in the open frame area between the hulls and the platform. This reduces the adverse effect of wave action on the vessel which now has excellent motion minimizing characteristics in the floating semisubmerged condition. When the vessel is in the semisubmerged condition, anchor lines **36** are made taut to maintain the vessel in proper servicing position relative to the construction site.

It will be noted that the primary purpose of the semisubmersible vessel is to minimize vessel motion due to wave action. Ideally, this is accomplished by submerging the vessel to approximately one-half the effective height of columns **26** thus precluding wave action against the deck structure as well as the hull structure so that only the exposed columns **26** and trusses **24** between platform P and hulls **12** are exposed to the wave action. The present semisubmersible derrick barge can accordingly operate efficiently in much higher sea states than derrick barges of known types, for example, in sea states having waves 11 and 12 feet in height or higher. (Of course, there is an upper limit as to the wave height in which even the present semisubmersible barge can operate efficiently, and beyond that derrick operations must be suspended until the sea subsides.) However, even when this semisubmersible vessel is operating within design limits in the semisubmerged condition with motion minimizing characteristics afforded by the described vessel construction, there is some vessel response to wave action, i.e., the wave action against columns **26** and trusses **24.** Because of this, when the natural period of the ship is the same as or close to the period of the waves according to existent sea conditions, there is amplification of vessel motion which may become so excessive as to interfere with derrick operations, even though the vessel is semisubmerged to the usual operating condition wherein the mean waterline is at approximately one-half the effective height h of stabilizing columns **26.** It is thus necessary and desirous to alter the motion of the vessel when such motion amplification occurs and this can be accomplished by either ballasting or deballasting the vessel within certain predetermined limits to submerge or emerge the vessel to a greater or lesser extent from the ideal submergence which locates the mean water surface one-half the effective height h. The maximum variation of submergence of the vessel from the ideal submergence by ballasting or deballasting the vessel is, however, limited to distances within a range which do not reorient the vessel to a position wherein wave action against the vessel causes excessive impact. Thus, to preclude excessive vessel motion and impact caused by the interaction of vessel and wave motion, the maximum variation, i.e., submergence or emergence of vessel **10** as by ballasting or deballasting, respectively, from the ideal submergence of one-half h, is such that the distance between the mean water surface and either the underside of the lower deck **22** or the top side of hulls **12** is not less than **0.75** of the mean wave height. FIG. **9** illustrates a pair of permissible mean waterlines relative to the vessel for a particular wave height under this criteria. The preferred variation from the ideal submergence provides for deballasting the vessels such that there is less splash against the lower deck **22.** In addition to ballasting and deballasting the natural period of the vessel in pitch and roll may be varied by redistribution of the ballast within the vessel. This can be accomplished through ballast transfer between compartments, toward or away from, the ship's extremities, as the conditions may necessitate, i.e., transversely or longitudinally of the vessel. In this manner, all vessel motions caused by wave action can be minimized.

It is a significant feature hereof that the foregoing vessel has optimal stability characteristics in the floating submerged condition. The columns are designed to provide a large water plane area at all the aforementioned depths of submergence to afford an adequate righting moment to return the vessel to a level position. The vessel is designed such that there are long periods of roll, pitch ahd heave. Particularly, the columns provide a roll sufficiently slow as to preclude tossing about of operating personnel on platform P and a roll rate suf-

ficiently fast to provide adequate stability about the roll axis. The vessel attitude about heel and trim axes can be corrected by selected ballasting of compartments **66.** The stability characteristics and motion minimizing characteristics thus afforded the vessel are optimum for a vessel of the foregoing construction.

Since the displacement of hulls **12** is considerably larger than the displacement of the submerged portions of columns **26,** the lifting of a like load when the crane is similarly oriented in the floating and semisubmerged conditions causes the vessel to roll to a greater load induced heel angle in the semisubmerged condition than in the floating condition. The operational capacity of crane **56** when vessel **10** is semisubmerged is thus limited to predetermined values expressed in the net moment caused by load W so as to preclude excessive load induced heel angles. It has been found statistically that the vast majority of marine construction operations of the type contemplated herein require a crane lifting capacity of 250 tons or less. The capacity of the present derrick in the preferred form is 500 tons slewing and 800 tons fixed and this capability is fully obtained when the vessel lies in the surface floating (low draft) condition. The vessel is configured, i.e., the hulls and columns are designed and located to maintain the vessel within a permissible range of heel angles when operating in the semisubmerged condition for loads up to 250 tons disposed at a maximum predetermined radius normal to the vessel centerline. The range of weights and distances thereof from the centerline of the vessel, i.e., the operating limits of the derrick barge in the semisubmerged condition, are dependent upon the physical configuration of the vessel's hulls and columns and in an illustrative preferred embodiment hereof, vessel **10** has an overall length of 400 feet at hulls **12** with each hull having a beam of 38 feet and an inside spacing of 30 feet one from the other, providing an overall hull beam of 106 feet. The effective height h of the stabilizing columns **26** is 23.0 feet. The centroids of bottles **26** are equally spaced **39** feet from the vessel's longitudinal centerline. The pairs of columns **26** are longitudinally spaced one from the other 63.25 feet with the bow pair of columns being spaced 19.75 feet from the bow of hulls **12.** The length of each column **26** is 46 feet and the width is 28 feet with the ends thereof being formed cylindrical in shape providing an overall area of approximately 1119.5 square feet per column.

To refloat the vessel, the anchor lines, not shown, are loosened or the anchors shipped aboard and ballast compartments **66** are pumped to evacuate the water therein as hereinbefore described. The combined hull displacement and the submerged column displacement is sufficient to raise the vessel to the surface floating condition with hulls **12** having freeboard indicated as *f* in FIG. **2,** the stabilizing columns **26** acting continuously to stabilize the vessel during refloating operations.

The vessel is self-contained in that crew's quarters, auxiliary equipment, and the like are all on board and can provide these facilities to the serviced vessel or structure, as well as to auxiliary accompanying vessels. Particularly, the crew's quarters are located on lower deck **22** leaving ample space on main deck **20** for locating other heavy equipment and carrying large deck loads. Auxiliary equipment, crew's quarters, etc. may be located within columns **26** in addition to being located on platform P. As seen in FIGS. **1** and **2,** a control house **110** is disposed on main deck **20** adjacent the foreward end and port side of vessel **10** and a boom rest is provided for boom **58** while vessel **10** is in transit.

It will be noted that the vessel may be ballasted in the semisubmerged condition to compensate for and minimize transverse inclinations about the heel axis caused by crane operations. For example, slewing of crane **56** in either the loaded or unloaded conditions induces an inclination about the heel axis of the vessel due to the asymmetrical location of the load and/or counterweight. For those derrick barges employing a crane having a small permissible heeling angle *d* (the angle between true vertical and the vertical axis of rotation of the crane) beyond which the crane will not rotate, such induced heel angle in combination with the dynamic rolling characteristics of the vessel may provide a total inclination of vessel **10** exceeding the permissible crane angle *d* thereby precluding derrick operations.

Accordingly, to provide for the comfort and safety of the operating personnel and to retain crane slewing capability wherein the latter described cranes are employed, the vessel may be ballasted in a predetermined manner in accordance with the rotational movement of the crane to maintain the vessel heel angle within predetermined limits. To this end and referring to FIGS. **10***a–d* wherein vessel **10** is illustrated in the onloading semisubmerged floating condition, the port hull **12P** may be ballasted to incline the vessel from the even keel crane to aft position illustrated in FIG. **10***a* to the ballasted condition illustrated in FIG. **10***b* providing a heel angle *e*. To pick up a load W off the port side, the unloaded crane is slewed to the port side and counterweight **59** causes the vessel to incline about its heel axis in the opposite direction assuming a heel angle of *e'*. A load W may then be picked up by means of load blocks **64** whereupon the vessel inclines counterclockwise about its heel axis to the position illustrated in FIG. **10***d* assuming a heel angle *g*. Note that the ballast, ballasted counterweight and ballasted load induced heel angles *e*, *e'* and *g* respectively incline the vessel to smaller heel angles than would otherwise be the case if the vessel were not ballasted in the foregoing manner. Such induced angles also lie within the permissible heeling angle *d* where such cranes are employed whereby slewing capability is retained. To offload the vessel, i.e., to transfer load W from the vessel to a point outboard thereof, the operation is reversed and, of course, onloading or offloading may be conducted from either the port or starboard sides of the vessel with the port or starboard hull being ballasted as the case may be. The above illustrates one set of conditions. The ballast system may assist in any case where loads should be balanced and heel angles reduced. Also, when employing shear leg **46** near or at its full capacity of 2000 tons, compartments **66** located in the stern portion of the vessel may be ballasted to offset and minimize the load induced trim angle.

While the preferred form of the vessel described herein provides an even number of pairs of columns on opposite sides of the pitch and roll axes in a generally symmetrical relation thereabout, an odd number of pairs of columns can be provided as illustrated in FIG. **10.** It is seen in this form that a pair of columns are spaced on opposite sides of the pitch axes adjacent fore and aft portions of the vessel with a central pair located such that the pitch axis preferably intersects the same,

the columns being symmetrically arranged on opposite sides of the roll axis.

Certain basic principles are employed in the construction of the present vessel:

1. A pair of elongated, laterally spaced hulls **12** in substantially parallel relation are employed to provide greater towing speeds as well as high stability.

2. The hulls have sufficient displacement to float the vessel having a large deck load and a heavy duty crane of the aforementioned type with the hulls having freeboard.

3. The hulls are compartmented for ballasting and selected compartments in both hulls may be ballasted and deballasted to submerge the vessel and to induce predetermined heel or trim angles in the semisubmerged condition. Ballast may also be transferred between the hulls.

4. The vessel should have at least four stabilizing columns **26,** with half of the columns being disposed on each hull on opposite sides of the roll axis RA. When six columns are provided, a first and second pair of such columns are located on opposite sides of the pitch axis PA (passing through the center of flotation), with the third middle pair of such columns located adjacent or intersected by the pitch axis. When eight stabilizing columns are employed, the same number of pairs are located generally symmetrically on opposite sides of and spaced from the pitch axis.

4*b*. More specifically, if an odd number of pairs of stabilizing columns are employed, the middle pair should be adjacent the pitch axis PA and the other pairs of columns should be disposed in equal numbers on opposite sides of the pitch axis PA and in a generally symmetrical relation; whereas when an even number of pairs of stabilizing columns are employed, the same number of pairs are located on the opposite sides of the pitch axis PA in a generally symmetrical relation thereto.

5. To stabilize the vessel, each of the columns **26** should have a predetermined area which is constant in cross section throughout the effective height thereof.

6. The stabilizing columns **26** are constructed so that their lower halves provide a combined displacement together with the residual displacement of the partially ballasted hulls **12** so as to float the vessel in a semisubmerged condition.

7. The effective height of the stabilizing bottles **26,** which is defined by the distance h between the upper surfaces of hulls **12** and the underside of platform P, may be equal to and preferably greater than the maximum anticipated wave height from crest to trough, such height being substantially unaffected by any slight changes in configuration for the mechanical connection between the columns and either of the hulls and platform.

8. The vessel is ballasted to a submergence of approximately one-half the effective height of the stabilizing columns to maintain the vessel in a semisubmerged floating condition. To minimize vessel motion amplification under such conditions when necessary, ballast is redistributed and/or the vessel is ballasted to submerge or emerge to a greater or lesser extent from the ideal semisubmerged condition such that the distance between the mean water surface and either the underside of the deck or top side of the hull is not less than 0.75 of the mean wave height, i.e., the effective height h is at least equal to and preferably greater than 1.5 times the mean wave height.

9. When semisubmerged and inclined about the heel axis in the load and/or ballast induced condition, the stabilizing columns provide righting moments about the roll axis RA in proportion to their cross sectional area and the square of their distance from the roll axis.

10. The hulls **12** in the semisubmerged floating condition can be selectively ballasted to compensate for and minimize crane induced vessel inclination providing for increased comfort and effectiveness of the operating personnel and retaining crane slewing capability in those instances where cranes having small permissible heeling angles are employed.

11. When shear leg **46** operates at or near its capacity, the stern portion of the vessel may be ballasted to minimize excessive shear leg load induced trim angles.

SUMMARY OF CONSTRUCTION AND OPERATION

Thus, the present invention provides a twin hull, semisubmersible derrick barge having a plurality of spaced connecting members including upstanding stabilizing columns **26** fixed at their lower ends to a pair of laterally spaced, elongated parallel hulls **12.** The members support a platform P including crew's quarters and machinery spaces, and a heavy duty crane above hulls **12** a distance at least as great as the effective height *h* of columns **26.** The spaced hulls are compartmented to provide ballast tanks **66** which are deballasted when the semisubmersible is towed to and from work sites to provide sufficient hull displacement to support the semisubmersible vessel (including the heavy duty crane, crew's quarters, machinery spaces and deck load) with the hulls having freeboard. At the work site and with mild sea conditions, the crane may be operated in the usual manner lifting and transferring loads up to its capacity, in this instance 500 tons slewing and 800 tons fixed or the shear leg may be operated to its maximum lift capacity, in this case 2000 tons. Upon encountering heavy seas, tanks **66** are ballasted to submerge the hulls normally to a distance about one-half the effective height of stabilizing columns **26** which is about one-half the height of the maximum anticipated wave whereby platform P and the derrick remain supported above the maximum anticipated wave height. The displacement required to support the vessel in the semisubmerged floating condition is provided by the hulls and portions of the stabilizing columns **26,** the vessel in this condition being otherwise unsupported. The hulls and bottles are configured and located to provide excellent motion minimizing characteristics under wave action in the semisubmerged condition. When vessel and wave motion interact to amplify the vessel motion in the semisubmerged condition, the vessel may be ballasted or deballasted to a greater or lesser extent from the ideal semisubmerged condition, i.e., one-half the effective height of columns **26,** such that the distance between either the underside of the deck or top side of the hull is not less than 0.75 of the mean wave height.

The ability of the present semisubmersible vessel to provide a substantially stable and limited motion floating base in the semisubmerged condition for various wave states is highly significant as it permits operation of the vessel's derrick in heavy sea states whereas prior

derrick barges are incapable of derrick operations due to excessive vessel motion. By submerging the twin hulls to half the effective height of columns **26** or within the foregoing limits to preclude vessel motion amplification, wave action against hulls **12** and work platform P is substantially eliminated, and waves act only against the relatively small area of the columns, open support structure and framework between work platform P and hulls **12** and the derrick support structure, thus minimizing vessel motion due to wave action. The hulls **12** may also be selectively ballasted to counter derrick induced heel angles, thereby minimizing transverse inclinations of the vessel and enhancing the safety, comfort and effectiveness of the operating personnel. The columns are located such that the hydrodynamic forces act to establish righting moments proportional to the volumetric displacement of the submerged portions of the stabilizing columns about the roll and pitch axes to locate and maintain the metacenter above the center of gravity of the vessel for all of the foregoing floating semisubmerged positions of the vessel.

When the construction work is completed, compartments **66** are deballasted to refloat the vessel with hulls **12** having freeboard *f*. The boom **58** is positioned in a substantially horizontal position resting on the boom rest and the vessel is ready for transit in the surface floating condition to other construction sites.

It will be appreciated that the foregoing described vessel may be employed in virtually any type of marine construction operation and is in no way limited to the erection and dismantling of offshore drilling and production platforms. For example, the present vessel may be employed to lay pipe, build bridges, construct offshore oil storage tanks, and the like, and may even be employed in the construction of other vessels.

This invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof.

What is claimed and desired to be secured by United States Letters Patent is:

1. A column stabilized semi-submersible derrick barge comprising:

a pair of elongated hulls disposed in spaced side-by-side relation;

a working platform spaced above said hulls a predetermined height;

means for supporting said platform in fixed spaced relation above said hulls including columns connected to said hulls and said platform;

the distance between the extremities of said barge along the longitudinal centerline of said barge being substantially greater than the distance between the extremities of said barge along the transverse centerline of said barge;

a heavy duty crane located adjacent one end of said barge and mounted for rotation about a substantially vertical axis, said crane having a rated capacity and a boom of sufficient length capable of performing lifting operations off both barge beams and off the end of the barge adjacent to which said crane is mounted;

said hulls having ballast compartments for ballasting said barge to alter its draft between a low draft hull supported floating condition and a high draft semi-submerged column stabilized floating condition;

said columns having predetermined cross-sectional areas and being located on the hulls to provide righting moments about the pitch and roll axes of said barge when in high draft condition;

the area of said columns, the number thereof and the distance of said columns from the longitudinal and transverse centerlines of said barge being such as to provide a greater righting moment about the transverse pitch axis than the righting moment about the longitudinal roll axis when said barge is in high draft semi-submerged condition.

2. A derrick barge according to claim **1** wherein:

said crane load capacity and boom outreach length are such that when said crane is rotated in high draft condition of the barge with load and outreach of predetermined values the resultant moment with respect to the roll axis causes substantial heel of said barge about said axis which if uncorrected would exceed the maximum slew limiting angle of said crane;

said barge having ballast means for counteracting such angle of heel caused by such crane operations to provide a counter-righting moment for said barge about its roll axis sufficient to maintain the angle of heel of the barge during crane operations within said slew limiting angle of said crane.

3. A derrick barge according to claim **2** wherein:

said ballast means is operable to transfer ballast from one hull to the other hull in a manner to achieve said counter-righting moment to maintain the heel of said barge within the crane slew limiting angle, with said ballast being transferable as the crane slews during load operating conditions.

4. A derrick barge according to claim **2** wherein:

said ballast means is operable to transfer ballast between said hulls in relation to the moment caused by operation of said crane to provide sufficient counter-righting moment to maintain the heel of said barge within the predetermined crane slew limiting angle.

5. A derrick barge according to claim **2** further including:

ballast means for counteracting the angle of trim caused when said crane boom extends outwardly away from the end of said barge in the direction of the barge's longitudinal axis with load and boom outreach of high magnitude causing a high resultant moment with respect to the pitch axis of said barge so that the latter mentioned ballast means may provide a counter-moment for reducing the angle of trim of the barge about its pitch axis.

6. A derrick barge according to claim **1** wherein:

at least one column on each hull is located adjacent the end of said barge at substantially the same longitudinal position at which said crane is mounted and at a distance from the transverse centerline of said barge at least substantially the same as the distance between said transverse centerline and the crane's axis of rotation.

7. A derrick barge according to claim **1** further including:

additional structural support means adjacent said crane for increased support of said heavy duty crane both in unloaded and loaded condition.

8. A derrick barge according to claim **7** wherein:

said additional structural support means includes support members directly connecting between the

base of said crane and each of said pair of hulls for at least partially structurally supporting said crane from said hulls.

9. A derrick barge according to claim **1** wherein:

at least one of said columns on each of said hulls has a cross section whereby the column dimension extending in the direction of the barge roll axis is greater than the transverse dimension of the column.

10. A derrick barge according to claim **1** further including:

a plurality of longitudinally spaced structural means for reinforcing the structural relationship of said hulls, platform and columns.

11. A derrick barge according to claim **1** including:

additional structural supporting means adjacent said crane for increased support of said heavy duty crane in loaded and unloaded operations;

a plurality of longitudinally spaced structural members for reinforcing the structural relationship of said hulls, platform, and columns;

said structural members including substantially transversely extending members interconnecting said hulls adjacent the uppermost portions of said hulls and restraining said hulls against lateral displacement relative to one another;

at least one column on each hull being located adjacent the end of the barge at substantially the same longitudinal position at which said crane is mounted at a distance from the transverse centerline of said barge at least substantially the same as the distance between said transverse centerline and the crane's axis of rotation.

12. A derrick barge according to claim **1** wherein:

there are at least three columns connecting with each of said hulls and with said platform, said columns being located at spaced intervals along each of the hulls;

at least one column on each hull being located adjacent the end of said barge at substantially the same longitudinal position at which said crane is mounted and at a distance from the transverse barge centerline at least substantially the same as the distance between said transverse barge centerline and the crane axis of rotation, another of said columns on each hull being located adjacent the opposite end of the barge, with at least one additional column at an intermediate position on each hull;

a plurality of longitudinally spaced structural means reinforcing the structural relationship of the hulls, platform and columns;

said structural means including substantially transversely extending members interconnecting said hulls adjacent the uppermost portions thereof and restraining said hulls against lateral displacement relative to one another;

said barge including additional structural support means adjacent said heavy duty crane for increased support of said heavy duty crane both in unloaded and loaded condition.

13. A derrick barge according to claim **1** wherein:

said barge is elongated so that it has a length to width ratio such that the barge length is at least a plural number of times as great as the barge width.

14. A derrick barge according to claim **13** wherein:

the barge's length to width ratio is approximately 400 to 100.

15. A derrick barge according to claim **13** wherein:

the boom of the crane is of such length that it reaches beyond the transverse centerline of the barge when the crane boom is disposed in a rest position.

16. A derrick barge according to claim **13** wherein:

the boom of the crane is of such length that the end of the boom reaches to adjacent the end of said barge opposite the end at which said crane is mounted when said boom is disposed in the rest position.

17. A derrick barge according to claim **1** wherein:

said crane has a predetermined angle of inclination from the crane's normal substantially vertical axis of rotation beyond which said crane cannot slew;

the configurations, areas and locations of said columns being such as to provide the barge in high draft semisubmerged condition with stabilizing characteristics with respect to inclination about the roll and pitch axes for enabling the barge to maintain an attitude keeping the axis of rotation of said crane within said predetermined slew limiting angle for predetermined magnitudes of load and boom outreach.

18. A derrick barge according to claim **1** wherein:

the upper and lower surfaces of each of said hulls have a non-streamlined configuration to provide increased added mass and thereby increased resistance to movement of said hulls through water in a vertical direction when said barge is in said high draft column stabilized semisubmerged condition;

said crane having a predetermined angle of inclination from said crane's normal substantially vertical axis beyond which said crane cannot slew;

the configurations, areas and locations of said columns being such as to provide the barge in high draft semisubmerged condition with stabilizing characteristics with respect to inclination about the roll and pitch axes sufficient for enabling the barge to maintain an attitude keeping the axis of rotation of said crane within said predetermined slew limiting angle for predetermined magnitudes of load and boom outreach;

the crane load capacity and boom outreach length being such that when the crane is rotated in high draft condition of the barge with load and outreach of predetermined values the resultant moment with respect to the roll axis causes substantial heel of said barge about said roll axis which if uncorrected would exceed the maximum slew limiting angle of said crane;

said barge having ballast means for counteracting excessive angle of heel caused by such crane operation with beam outreach to provide a counterrighting moment for said barge about its roll axis sufficient to maintain the angle of heel of said barge during crane operations within said slew limiting angle of said crane;

a plurality of longitudinally spaced structural means reinforcing the structural relationship of said hulls,

platform and columns with said structural means including substantially transversely extending members interconnecting said hulls adjacent the uppermost portions of said hulls and restraining said hulls against lateral displacement relative to one another;

said vessel including additional structural supporting means adjacent said crane for increased support of the heavy duty crane in both loaded and unloaded condition.

19. A column stabilized semi-submersible derrick barge comprising:

a pair of elongated hulls disposed in spaced side-by-side relation;

a working platform spaced above said hulls a predetermined height;

means for supporting said platform in fixed spaced relation above said hulls including columns connected to said hulls and said platform;

the distance between the extremities of the barge along its longitudinal centerline being substantially greater than the distance between the extremities of the barge along its transverse centerline;

a heavy duty crane located adjacent one end of said barge and mounted for rotation about a substantially vertical axis, said crane having a rated capacity and a boom of sufficient length capable of performing lifting operations off both barge beams and off the end of said barge adjacent to which it is mounted;

said barge hulls having ballast compartments for ballasting said barge to alter its draft between a low draft hull supported floating condition and a high draft semisubmerged column stabilized floating condition;

said crane having a predetermined angle of inclination from said crane's normal substantially vertical axis of rotation beyond which said crane cannot slew;

the configurations, areas and locations of said columns being such as to provide the barge in high draft condition with stabilizing characteristics with respect to inclination about the roll and pitch axes sufficient for enabling the barge to maintain an attitude keeping the axis of rotation of said crane within said predetermined crane slew limiting angle for predetermined magnitudes of load and boom outreach;

a plurality of longitudinally spaced structural means reinforcing the structural relationship of said hulls, platform and columns;

said structural means including substantially transversely extending members interconnecting said hulls adjacent the uppermost portions thereof and restraining said hulls against lateral displacement relative to one another.

20. A derrick barge according to claim **19** wherein:

the crane load capacity and boom outreach length are such that when the crane is rotated in the high draft condition of the barge with load and outreach of predetermined values the resultant moment with respect to the roll axis causes substantial heel of said barge about said axis which if uncorrected would exceed the maximum slew limiting angle of said crane;

said barge having ballast means for counteracting excessive angle of heel caused by such crane operations with boom outreach to provide a counter-righting moment for the barge about its roll axis sufficient to maintain the angle of heel of said barge during crane operations within said slew limiting angle of said crane.

21. A derrick barge according to claim **19** wherein:

at least one column on each said hull is located adjacent the end of the barge at substantially the same longitudinal position at which said crane is mounted and at a distance from the transverse centerline of said barge at least substantially the same as the distance between said transverse barge centerline and the crane axis of rotation.

22. A derrick barge according to claim **19** including:

additional structural supporting means adjacent said crane for increased support of said heavy duty crane both in loaded and unloaded condition.

23. A derrick barge according to claim **19** wherein:

at least one of the columns on each said hull has a longitudinal dimension greater than its transverse dimension whereby the cross-sectional dimension of each such column is greater in length than in width.

24. A derrick barge according to claim **19** wherein:

the area of said columns, the number thereof, and the distance of said columns from the longitudinal and transverse centerlines of said barge are such as to provide a greater righting moment about the transverse pitch axis than the righting moment about the longitudinal roll axis when said barge is in high draft semi-submerged condition.

25. A derrick barge according to claim **19** wherein:

the upper and lower surfaces of each hull have a non-streamlined configuration such as to provide increased added mass providing higher resistance to movement of the hulls and portions thereof through the water in a vertical direction when said barge is in high draft semi-submerged condition;

the area of said columns, the number thereof, and the distance of said columns from the longitudinal and transverse centerlines of said barge being such as to provide a greater righting moment about the transverse pitch axis than the righting moment about the longitudinal roll axis when said barge is in high draft semi-submerged condition.

26. A derrick barge according to claim **25** wherein:

each hull is of generally rectangular cross section with the longer axis of the hull cross section extending in like direction as the transverse barge centerline.

27. A derrick barge according to claim **19** wherein:

there are at least three columns connecting with each of said hulls and with said platform, said columns being located at spaced intervals along each of the hulls;

at least one column on each hull being located adjacent the end of said barge at substantially the same longitudinal position at which said crane is

mounted and at a distance from the transverse barge centerline at least substantially the same as the distance between said transverse barge centerline and the crane axis of rotation, another of said columns on each hull being located adjacent the opposite end of the barge, with at least one additional column at an intermediate position on each hull;

said barge including additional structural support means adjacent said heavy duty crane for increased support of said heavy duty crane both in unloaded and loaded condition.

28. A column stabilized semi-submersible derrick barge comprising:

a pair of elongated hulls disposed in spaced side-by-side relation;

a working platform spaced above the hulls a predetermined height;

means supporting the platform in fixed spaced relation above the hulls and including columns connected to the hulls and the platform;

the distance between the extremities of the barge along its longitudinal centerline being substantially greater than the distance between the extremities of the barge along its transverse centerline;

a heavy duty crane located adjacent one end of said barge and mounted for rotation about a substantially vertical axis, said crane having a rated capacity and a boom of sufficient length capable of performing lifting operations off both barge beams and off the end of said barge adjacent to which it is mounted;

said barge hulls having ballast compartments for ballasting the barge to alter its draft between a low draft hull supported floating condition and a high draft semisubmerged column stabilized floating condition;

said columns having predetermined cross-sectional areas and being located to provide righting moments about pitch and roll axes, when said vessel lies in high draft condition;

the upper and lower surfaces of each said hull having a non-streamlined configuration to provide increased added mass to provide higher resistance to movement of the hulls and portions thereof through the water in vertical direction when said barge lies in high draft condition;

the area of said columns, the number thereof, and the distance of said columns from the longitudinal and transverse centerlines of the barge being such as to provide a greater righting moment about the transverse pitch axis than the righting moment about the longitudinal roll axis when said barge lies in high draft semi-submerged condition;

a plurality of longitudinally spaced structural means reinforcing the structural relationship of the hulls, platform and columns;

said structural means including substantially transversely extending members interconnecting the hulls adjacent the uppermost portions thereof and restraining said hulls against lateral displacement relative to one another.

29. A derrick barge according to claim **28** wherein:

said crane has a predetermined angle of inclination from the crane's normal substantially vertical axis of rotation beyond which said crane cannot slew;

the configurations, areas and locations of said columns being such as to provide the barge in high draft semi-submerged condition with stabilizing characteristics with respect to inclination about the roll and pitch axes for enabling the barge to maintain an attitude keeping the axis of rotation of said crane within said predetermined crane slew limiting angle for predetermined magnitudes of load and boom outreach;

said barge having ballast means for counteracting excessive angle of heel caused by crane operation with beam outreach to provide a counter-righting moment for said barge about its roll axis sufficient to maintain the angle of heel of the barge during crane operations within said slew limiting angle of said crane.

30. A derrick barge according to claim **29** wherein:

said ballast means is operable to transfer ballast from one hull into the other hull in a manner to achieve said counter-righting moment to maintain the heel of said barge within said crane slew limiting angle, with said ballast being transferable as said crane slews during load operating conditions.

31. A derrick barge according to claim **29** wherein:

said ballast means is operable to transfer ballast between said hulls in relation to the moment caused by operation of said crane to provide sufficient counter-righting moment to maintain the heel of said barge within the slew limiting angle of said crane.

32. A derrick barge according to claim **29** further including:

ballast means for counteracting the angle of trim caused when said crane boom extends outwardly away from the end of said barge in the direction of said barge's longitudinal axis with load and boom outreach of high magnitude causing a high resultant moment with respect to the pitch axis so that the latter ballast means may provide a counter moment for reducing the angle of trim of said barge about its pitch axis.

33. A derrick barge according to claim **28** wherein:

at least one of said columns on each said hull has a cross section whereby the column dimension in direction of the barge longitudinal axis is greater than the transverse dimension of such column.

34. A derrick barge according to claim **28** wherein:

the cross section of each hull is generally rectangular with the longer axis of the hull cross section extending in like direction as the barge's transverse centerline.

35. A derrick barge according to claim **28** wherein:

at least three columns connect with each of said hulls and with said platform, said columns being located at spaced intervals along each of the hulls;

at least one column on each said hull being located adjacent the end of said barge at substantially the same longitudinal position at which said crane is mounted and at a distance from the transverse centerline at least substantially the same as the dis-

tance between the transverse barge centerline and the crane axis of rotation, another of said columns on each hull being located adjacent the opposite end of the barge, with at least one additional column at an intermediate position on each hull.

36. A derrick barge according to claim **35** wherein:

the upper and lower surfaces of each hull are substantially planar for at least most of their length and substantially perpendicular to a vertical plane through the barge's longitudinal axis.

37. A derrick barge according to claim **28** wherein:

said barge is elongated so that it has a length to width ratio such that the barge length is at least a plural number of times as great as the barge width.

38. A derrick barge according to claim **37** wherein:

the boom of the crane is of such length that the end of the boom reaches to adjacent the end of said barge opposite the end at which said crane is mounted when said boom is disposed in the rest position.

39. A derrick barge according to claim **28** wherein:

each of said hulls has a streamlined bow portion for minimizing resistance to movement through water in the low draft condition.

40. A column stabilized semi-submersible barge comprising:

a pair of elongated hulls disposed in spaced side-by-side relation;

a working platform spaced above said hulls a predetermined height;

means for supporting the platform in fixed spaced relation above the hulls and including at least three columns connecting with each of the hulls and with said platform;

the distance between the extremities of the platform along the barge's longitudinal centerline being substantially greater than the distance between the extremities of the platform along the barge's transverse centerline, with the barge length being at least a plural number of times as great as the barge width;

means located adjacent one end of said platform for mounting a heavy duty crane which rotates about a substantially vertical axis and has a rated capacity and a boom of sufficient length capable of performing lifting operations off at least one beam of the barge and off said end of said barge adjacent which said crane mounting means is located;

said hulls having ballast compartments for ballasting the barge to alter its draft between a low draft hull supported floating condition and a high draft semi-submerged column stabilized floating condition;

said columns having predetermined cross-sectional areas and being located on said hulls to provide righting moments about pitch and roll axes of said barge when in high draft semi-submerged condition;

the area of said columns, the number thereof, and the distance of the columns from the longitudinal and transverse centerline of the barge being such as to provide a greater righting moment about the transverse pitch axis than the righting moment about the longitudinal roll axis when the barge is in high draft semi-submerged condition;

the upper and lower surfaces of each said hull having a non-streamlined configuration to provide increased added mass providing higher resistance to movement of the hulls through the water in vertical direction when said barge is in said high draft semi-submerged condition;

at least one column on each said hull being located adjacent the end of said barge at substantially the same longitudinal position of said crane mounting means and located at a distance from the transverse centerline of said barge at least substantially the same as the distance between said transverse centerline and the center of said crane mounting means, another of said columns on each hull being located adjacent the opposite end of the barge, with at least one additional column at an intermediate position on each hull;

said structural means including substantially transversely extending members interconnecting said hulls adjacent the uppermost portions thereof and restraining said hulls against lateral displacement relative to one another;

said barge including additional structural supporting means adjacent said mounting means for increased support of the crane when mounted and operated on said barge.

41. A barge according to claim **40** wherein:

said additional structural supporting means includes support members directly connected between said crane mounting means and said hulls for at least partially structurally supporting said mounting means and the crane when mounted and operated on said latter means.

42. A barge according to claim **40** wherein:

at least one of the columns on each said hull has a cross section with longitudnally extending dimension greater than its transversely extending dimension.

43. A barge according to claim **40** wherein:

the centroid of the cross-section of at least one column on each hull lies outboard of the longitudinal centerline of the associated hull.

44. A barge according to claim **40** wherein:

said barge has ballast means for counteracting angle of heel caused by operation of a crane having a slew limiting angle and disposed on said mounting means so as to provide a counter-righting moment for said barge about its roll axis sufficient to maintain the angle of heel of the barge during crane operations within the slew limiting angle of such crane;

said ballast means being operable to transfer ballast from one hull to the other hull in a manner to achieve such counter-righting moment to maintain the heel of said barge within said slew limiting angle, with said ballast being transferable as such crane slews during load operating conditions.

45. A barge according to claim **44** further including:

ballast means operable for counteracting the angle of trim caused by operation of a crane on said mounting means with its boom extending outwardly away from the end of said barge in the direction of the barge's longitudinal axis so that the lattermentioned ballast means may provide a counter-

moment for reducing the angle of trim of the barge about its pitch axis.

46. A column stabilized semisubmersible derrick barge comprising

a pair of elongated hulls disposed in spaced side by side substantially parallel relation with each hull having substantially parallel planar top and bottom horizontal surfaces disposed substantially perpendicular to a vertical plane through the longitudinal centerline of the barge and extending substantially the length of each hull, with the transverse horizontal dimension of each hull being greater than its vertical dimension;

a working platform spaced above said hulls a predetermined height;

means for supporting said platform in fixed spaced relation above said hulls including at least three columns connecting with each of said hulls and said platform and located at spaced intervals along said hulls;

the distance between the extremities of said barge along the barge's longitudinal centerline being substantially greater than the distance between the extremities of said barge along the barge's transverse centerline, with the barge length being at least a plural number of times as great as the barge width;

a heavy duty crane located adjacent one end of said barge and mounted for rotation about a substantially vertical axis, said crane having a rated capacity and a boom of sufficient length capable of performing lifting operations off both barge beams and off the end of the barge adjacent to which said crane is mounted, the boom of said crane being of such length that it reaches beyond the transverse centerline of the barge when the crane boom is disposed in a rest position, and said crane having a predetermined angle of inclination from the crane's normal substantially vertical axis of rotation beyond which said crane cannot slew;

at least one column on each hull being located adjacent the end of said barge at substantially the same longitudinal position at which said crane is mounted and at a distance from the transverse barge centerline at least substantially the same as the distance between said transverse barge centerline and the crane axis of rotation, another of said columns on each hull being located adjacent the opposite end of the barge, with at least one additional column at an intermediate position on each hull;

a plurality of longitudinally spaced structural means reinforcing the structural relationship of the hulls, platform and columns;

said barge including additional structural supporting means adjacent the crane for increased support of the heavy duty crane in both loaded and unloaded condition;

said hulls having ballast compartments for ballasting said barge to alter its draft between a low draft hull supported floating condition and a high draft semi-submerged column stabilized floating condition;

said columns having predetermined cross-sectional areas and being located on the hulls to provide righting moments about the pitch and roll axes of said barge when in high draft semi-submerged condition;

the area of said columns, the number thereof and the distance of said columns from the longitudinal and transverse centerlines of said barge being such as to provide a greater righting moment about the transverse pitch axis than the righting moment about the longitudinal roll axis when said barge is in high draft semi-submerged condition;

the configurations, areas and locations of said columns being such as to provide the barge in high draft semisubmerged condition with stabilizing characteristics with respect to inclination about the roll and pitch axes for enabling the barge to maintain an attitude keeping the axis of rotation of said crane within said predetermined crane slew limiting angle;

said barge having ballast means for counteracting excessive angle of heel caused by crane operation with beam outreach to provide a counter righting moment for said barge about its roll axis sufficient to maintain the angle of heel of the barge during crane operations within the slew limiting angle of said crane;

additional ballast means for counteracting the angle of trim caused when said crane boom extends outwardly away from the end of said barge in the direction of said barge's longitudinal axis with load and boom outreach of high magnitude causing a high resultant moment with respect to the pitch axis so that the latter ballast means may provide a countermoment for reducing the angle of trim of said barge about its pitch axis.

47. A barge according to claim **46** wherein said ballast means is operable to transfer ballast from one hull to the other hull in a manner to achieve said counter-righting moment to maintain the heel of said barge within the crane's slew limiting angle, with said ballast being transferable as the crane slews during load operating conditions.

48. A barge according to claim **46** wherein said structural reinforcing means includes substantially transversely extending members interconnecting said hulls adjacent the uppermost portions thereof and restraining said hulls against lateral displacement relative to one another.

49. A barge according to claim **46** wherein said structural support means adjacent the crane includes support members directly connected between the base of said crane and said hulls for at least partially structurally supporting said crane from said hulls.

50. A barge according to claim **46** wherein:

the barge's length-to-width ratio is approximately 400 to 100.

51. A derrick barge according to claim **46** having at least eight stabilizing columns and wherein:

there are at least four columns connecting with each of said hulls and with said platform, with at least one pair of columns on each hull located adjacent opposite ends of said barge as above-stated and with at least one additional pair of columns at two intermediate positions on each hull.

52. A derrick barge according to claim **51** wherein the last-mentioned pair of additional columns are longitudinally positioned on each hull so that the centroid of each of said latter columns is located on opposite sides of the barge's transverse pitch axis.

53. A derrick barge according to claim **46** wherein:

at least one of said columns on each of said hulls has a cross section whereby the column dimension extending in the direction of the barge roll axis is greater than the transverse dimension of the column.

54. A derrick barge according to claim **46** wherein:

each of said hulls has a streamlined bow portion for minimizing resistance to movement through water in the low draft condition.

55. A column stabilized semi-submersible derrick barge comprising:

a pair of elongated hulls disposed in spaced side by side substantially parallel relation with each hull having a substantially right quadrilateral cross section with substantially planar top and bottom horizontal surfaces disposed substantially perpendicular to a vertical plane through the longitudinal centerline of the barge, and extending substantially the length of each hull;

a working platform spaced above said hulls a predetermined height;

means for supporting said platform in fixed spaced relation above said hulls including at least three columns connecting with each of said hulls and said platform and located at spaced intervals along said hulls;

the distance between the extremities of said barge and its platform along the barge's longitudinal centerline being substantially greater than the distance between the extremities of said barge and its platform along the barge's transverse centerline, with the barge length being at least a plural number of times as great as the barge width;

a heavy duty crane located adjacent one end of said barge and mounted for rotation about a substantially vertical axis, said crane being mounted and having a rated capacity and a boom of sufficient length capable of performing lifting operations off at least one beam and one end of the barge, with the boom of said crane being of such length that it reaches beyond the transverse centerline of the barge when the crane boom is disposed in a rest position;

said crane having a predetermined angle of inclination from the crane's normal substantially vertical axis of rotation beyond which said crane cannot slew;

at least one column on each hull being located adjacent the end of said barge at substantially the same longitudinal position at which said crane is mounted and at a distance from the transverse barge centerline at least substantially the same as the distance between said transverse barge centerline and the crane axis of rotation, another of said columns on each hull being located adjacent the opposite end of the barge, with at least one additional column at an intermediate position on each hull;

a plurality of longitudinally spaced structural means reinforcing the structural relationship of the hulls, platform and columns;

said structural reinforcing means including substantially transversely extending members interconnecting said hulls adjacent the uppermost portions thereof and restraining said hulls against lateral displacement relative to one another;

said barge including additional structural supporting means adjacent the crane for increased support of the heavy duty crane in both loaded and unloaded condition, such means including support members directly connected between the base of said crane and said hulls for at least partially structurally supporting said crane from said hulls;

said hulls having ballast compartments for ballasting said barge to alter its draft between a low draft hull supported floating condition and a high draft semi-submerged column stabilized floating condition;

said columns having predetermined cross-sectional areas and being located on the hulls to provide righting moments about the pitch and roll axes of said barge when in high draft semi-submerged condition;

the area of said columns, the number thereof and the distance of said columns from the longitudinal and transverse centerlines of said barge being such as to provide a greater righting moment about the transverse pitch axis than the righting moment about the longitudinal roll axis when said barge is in high draft semi-submerged condition;

the configurations, areas and locations of said columns being such as to provide the barge in high draft semisubmerged condition with stabilizing characteristics with respect to inclination about the roll and pitch axes for enabling the barge to maintain an attitude keeping the axis of rotation of said crane within said predetermined crane slew limiting angle;

said barge having ballast mens for counteracting excessive angle of heel caused by crane operation with beam outreach to provide a counter righting moment for said barge about its roll axis sufficient to maintain the angle of heel of the barge during crane operations within the slew limiting angle of said crane, said ballast means being operable to transfer ballast from one hull to the other hull in a manner to achieve said counter-righting moment as the crane slews during load operating conditions;

additional ballast means for counteracting the angle of trim caused when said crane boom extends outwardly away from the end of said barge in the direction of said barge's longitudinal axis with load and boom outreach of high magnitude causing a high resultant moment with respect to the pitch axis so that the latter ballast means may provide a countermoment for reducing the angle of trim of said barge about its pitch axis.

56. A barge according to claim **55,** wherein:

the barge's length-to-width ratio is approximately 400 to 100.

57. A method for transferring loads between horizontally spaced locations utilizing a variable draft derrick barge of the type characterized by a pair of spaced elongated hulls, a working platform spaced above the hulls a predetermined height at least equal to the height of the maximum anticipated wave, a derrick having a generally vertically extending axis of rotation substantially coincident with the centerline of the barge, and a plurality of stabilizing columns connecting between the hulls and the platform and upstanding from the hulls a distance at least equal to said predetermined height comprising the steps of:

moving the barge in a low draft condition with the hulls having freeboard to a work site; ballasting the

barge to respectively submerge the hulls and portions of the columns below the waterline to provide a high draft floating condition with the mean waterline located a distance above the hulls at substantially one-half the height of said stabilizing columns, lifting a load at one location, slewing the derrick and the load carried thereby to transfer the load from said one location to another location, depositing the load at said other location, the steps of lifting, slewing and depositing being performed when the barge lies in said high draft floating condition, and deballasting the barge to return the barge to the low draft condition with the hulls having freeboard.

58. A method of claim **57** including the step of ballasting and deballasting the barge to vary its submergence when in the high draft floating condition such that the distance between the mean waterline and either the underside of the platform or the topside of the hulls is not less than 0.75 of the mean wave height for wave heights less than the maximum anticipated wave to preclude amplification of barge motion due to interaction of wave and barge motions.

59. A method according to claim **57** wherein each of said hulls includes a plurality of ballast compartments and including the further step of selectively ballasting the compartments in each of the hulls to alter the natural period of the barge about at least one of its pitch and roll axes.

60. The method according to claim **57** wherein the derrick includes an elongated boom and a counterweight and including the steps of ballasting one of the hulls to incline the barge to one side about its roll axis, slewing the derrick such that the boom lies outboard of the barge on said one side thereof whereby the counterweight inclines the barge about the roll axis in the opposite direction, and lifting the load on said one side thereof.

* * * * *

BEST AVAILABLE COPY

UNITED STATES PATENT OFFICE

CERTIFICATE OF CORRECTION

Patent No. 3,835,800 Dated September 17, 1974

Inventor(s) Samuel Harry Lloyd, III etal

It is certified that error appears in the above-identified patent and that said Letters Patent are hereby corrected as shown below:

Change ~~the~~ first name of the second inventor from "Yorman" to -- Yoram --.

Change the Assignee from "Santa Fe Drilling Company" to -- Santa Fe International Corporation --.

Column 2, line 9, "damgage" should read -- damage --.

Column 6, lines 24-25, "operated" should read -- operate --.

Column 6, line 37, "en" should read -- and --.

Column 8, line 65 "ahd" should read -- and --.

Column 21, Claim 40, line 36 "centerline" should read -- centerlines --.

Column 25, Claim 55, lines 44-45 "center-line should read -- centerline --.

BEST AVAILABLE COPY

BEST AVAILABLE COPY

UNITED STATES PATENT OFFICE

CERTIFICATE OF CORRECTION

Patent No. 3,835,800 Dated September 17, 1974

Inventor(s) Samuel Harry Lloyd, III et al.

It is certified that error appears in the above-identified patent and that said Letters Patent are hereby corrected as shown below:

Column 26, Claim 55, line 32 "mens" should read -- means --.

Signed and Sealed this

twenty-sixth Day of July 1977

[SEAL]

Attest:

RUTH C. MASON
Attesting Officer

C. MARSHALL DANN
Commissioner of Patents and Trademarks

BEST AVAILABLE COPY