

⑫

EUROPEAN PATENT APPLICATION

⑪ Application number: **84306310.8**

⑤① Int. Cl.⁴: **B 21 B 39/16**

⑫ Date of filing: **14.09.84**

③① Priority: **19.09.83 CA 436955**

⑦① Applicant: **FABRIS INDUSTRIAL MANUFACTURING LIMITED, 1216 South Service Road, Winona Ontario, LOR 2L0 (CA)**

④③ Date of publication of application: **05.06.85**
Bulletin 85/23



⑦② Inventor: **Fabris, Mario, 1216 South Service Road, Winona Ontario (CA)**

⑥④ Designated Contracting States: **AT BE CH DE FR GB IT LI LU NL SE**

⑦④ Representative: **Pratt, David Martin et al, Brookes & Martin High Holborn House 52/54 High Holborn, London. WC1V 6SE (GB)**

⑥④ **Roller entry guide.**

⑥⑦ A roller entry guide comprises a body with a pair of roller assemblies mounted on the body. The spacing between the assemblies is adjustable by a gear mechanism that induces relative longitudinal displacement between the body and the assemblies. Slides acting between the body and the assemblies produces a lateral component of movement to move the assemblies toward or away from each other whilst maintaining them parallel.

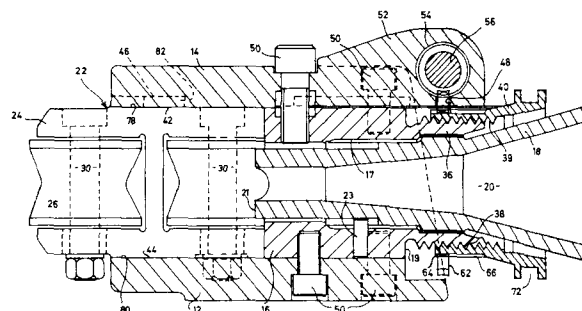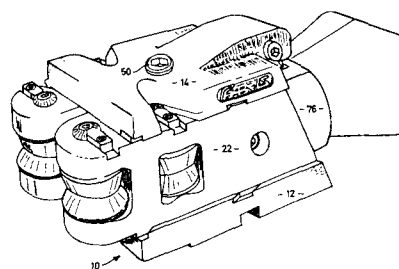

EP 0 143 523 A1

ROLLER ENTRY GUIDE

The present invention relates to roller entry guides and in particular to a roller entry guide that provides the possibility of adjustment during operation.

5 Roller entry guides are used on a rod mill to guide the rod into the next stage of the mill. Such guides conventionally have a tapering inlet chute that guides the rod between a set of rollers. The rollers then ensure that the rod is presented to the rolls in
10 the correct orientation.

 The roller entry guides are normally set up at the start of a production run so that the spacing between the rollers corresponds to the nominal diameter of the rod that will be passing between
15 them. It has been found however that variations in the stock size induce undue wear on the rollers and leads to frequent stoppages for adjustment and maintenance.

 Proposals have been made to bias the rollers against stops so that the rollers may swing out of the set position should an increase in stock diameter be encountered. Whilst this has been proposed for
20 rollers utilising two rolls it has not been possible to use it where the guide has four rollers arranged in pairs on opposite sides of the material. The use of
25 four rollers is preferred because of the increased stability it provides in operation but it is then essential that the pairs of rollers be maintained parallel to one another at all times. However, with
30 the currently available arrangements of four roller entry guides, any variation in material thickness requires a production run to be stopped for subsequent readjustment of the roller entry guides.

 It is therefore an object of the present
35 invention to provide a roller entry guide in which adjustment may be made whilst the material is passing through the roller entry guide to obviate or mitigate the above disadvantages.

According therefore to the present invention there is provided a roller entry guide to guide material along a longitudinal axis, said guide having a body, a pair of generally parallel roller assemblies moveably mounted on said body each of said roller assemblies being located on an opposite side of said longitudinal axis to define a passageway for material moving along said axis, adjustment means acting between said roller assembly and said body to induce relative movement therebetween and guide means acting between said roller assemblies and said body to guide said roller assemblies toward and away from said longitudinal axis and maintain said roller assemblies in a predetermined disposition relative to said longitudinal axis upon movement being induced by said adjusting means.

An embodiment of the invention will now be described by way of example only with reference to the accompanying drawings in which:-

Figure 1 is a general perspective view of a roller entry guide.

Figure 2 is a side view of the roller entry guide shown in Figure 1.

Figure 3 is an end elevation of the roller entry guide shown in figure 2 taken in the direction of arrow A in figure 2 with portions removed for clarity.

Figure 4 is a section on the line 4 - 4 of figure 3.

Figure 5 is a plan view, with the top plate removed and partly in section, of the roller entry guide shown in figure 2.

Figure 6 is a view of the underside of the top plate used on the guide shown in figures 1 to 5.

Referring now to the drawings, a roller entry guide 10 comprises a base plate 12 and a top plate 14 which are located on opposite faces of a body member generally designated 16 and secured thereto by set screws 50. The body member 16 is provided with a bore 17 that extends along the longitudinal axis of the guide 10 from a rear face 19 to a contoured nose 21. An inlet chute 18 having a throat 20 of progressively reducing cross section is threaded into the bore 17 and secured by set screws 23.

Projecting from the rear face 19 of the body 16 is an annular boss 36 that has a male thread 38 to cooperate with a female thread 39 of a collar 40. The rear portion of the collar 40 is flared to accommodate the inlet chute 18 and terminates in an outwardly directed circumferential groove 72.

The base plate 12 and top plate 14 project laterally and forwardly beyond the perimeter of body 16 to provide upper and lower opposed surfaces 42, 44 respectively. Each of the opposed surfaces 42, 44 of the plates 12, 14 is provided with guide means in the form of 4 grooves 46 arranged in pairs on opposite sides of the longitudinal axis. The grooves 46 in each pair are parallel to one another and are inclined to the longitudinal axis of the roller entry guide 10. The grooves 46 on opposite sides of the longitudinal axis are inclined at equal but opposite angles to the longitudinal axis to converge rearwardly toward the rear face 19 of body 16.

The top plate 14 is provided with an upstanding boss 52 that projects rearwardly from the top plate 14 and is provided with a transverse bore 54. Located in the bore 54 is a worm wheel 56 that is rotatably supported at opposite ends by bearings 58.

5 The worm wheel 56 is formed with a hexagonal recess 60
at each end to receive a standard hexagonal wrench. A
slot 48 is provided in the undersurface of boss 52 to
intersect the bore 54 and receive a ring gear 62 that
meshes with the worm wheel 56. The ring gear 62 is
provided with internal splines 64 that mesh with
external splines 66 provided on the outer surface of
the collar 40. The splines 64 - 66 are orientated
along the longitudinal axis of the roller entry guide
10 so that the collar 40 may move along the
longitudinal axis relative to the ring gear 62.
Longitudinal movement of the ring gear 62 is prevented
by opposed walls 68 of the slot 48 in the under
surface of the boss 52.

15 Located between the top plate, and base plate
14 - 12 are a pair of roller assemblies 22, each of
which comprises an arm 24 carrying a pair of rollers
26 spaced along the longitudinal axis of the arm 24.
Each of the rollers 26 is mounted on a vertical
20 spindle 30 and provided with conventional bearing
assemblies for rotation about a vertical axis.

Projecting rearwardly from each of the arms
24 is an extension 76 that is part circular in
cross-section to accommodate the collar 40 and allow
25 rotation of the collar about the longitudinal axis.
Each extension 74 terminates in a transversely
directed flange 74 that is received in the groove 72
of collar 40.

30 Upper and lower surfaces 78 - 80 respectively
of the roller arms 24 are each provided with a pair of
upstanding ribs 82 that are complimentary in shape to
the grooves 46 and co-operate with the grooves 46 so
that longitudinal displacement of the arms 24 induces
a corresponding lateral displacement. Each of the

rollers 26 is waisted so that opposed rollers 26
define a passage for rod passing through the chute 18
to the roll. For close control of the entry of the
rod into the roll of the mill the spacing between the
5 opposed surfaces of the rollers 26 should correspond
to the nominal diameter of the rod. The guide 10
permits adjustment of this spacing during passage of
the rod to accommodate minor variations in stock size.

Adjustment of the spacing between the rollers
10 26 is achieved by rotation of the worm wheel 56 in
the bore 54. Upon rotation of the worm wheel, the
ring gear 62 rotates about the longitudinal axis and
causes a corresponding rotation of the collar 40.
Such rotation causes intermeshing threads 38, 39
15 between the annular boss 36, and collar 40 to induce
longitudinal displacement of the collar 40. This
motion is transmitted to the the roller arms 27
through the flanges 74 to cause a corresponding
longitudinal displacement of the roller assemblies.
20 The co-operating grooves and ribs 82 cause the roller
assemblies to move laterally upon longitudinal
displacement and thereby alter the gap between the
rollers. However, because the roller arms 26 are
supported at two locations by the grooves, the two
25 arms remain parallel to one another so that the
spacing between the front and rear pairs of rollers 26
remains constant.

The disposition of the ribs and projections
ensures that adequate lateral support is provided for
30 the roller assemblies to resist the lateral forces
produced by the rod material passing through the
roller entry guide 10 whilst at the same time ensuring
that the sets of rollers remain parallel at all
times. The worm and wheel arrangement permits

adjustment of the roller entry guides from the side of the guide without interrupting the flow of material and can be used to either increase or decrease the space between the rollers depending upon the direction of rotation of the worm wheel.

5

CLAIMS:-

1. A roller entry guide to guide material along a longitudinal axis, said guide having a body, a pair of generally parallel roller assemblies moveably
5 mounted on said body each of said roller assemblies being located on an opposite side of said longitudinal axis to define a passageway for material moving along said axis, adjustment means acting between said roller assembly and said body to induce relative movement
10 therebetween and guide means acting between said roller assemblies and said body to guide said roller assemblies toward and away from said longitudinal axis and maintain said roller assemblies in a predetermined disposition relative to said longitudinal axis upon
15 movement being induced by said adjusting means.
2. A roller entry guide according to claim 1 wherein said guide means get to move said roller assemblies in a direction that is inclined to said longitudinal axis.
- 20 3. A roller entry guide according to claim 2 wherein each of said roller assemblies includes a pair of rollers, spaced apart along said longitudinal axis. the rollers of opposed assemblies defining an elongate passageway extending along said longitudinal axis and
25 said guide means acting to maintain the lateral spacing between said rollers uniform.
4. A roller entry guide according to claim 3 wherein said adjustment means acts to displace said arms along said longitudinal axis, said guide means
30 producing a lateral component of said movement.
5. A roller entry guide according to claim 4 wherein said guide means are cooperating slides.
6. A roller entry guide according to claim 5 wherein a plurality of slides act between said body
35 and each of said assemblies, said slides being spaced apart along said longitudinal axis to inhibit pivotal movement of said assembly relative to said body

7. A roller entry guide according to claim 6 wherein each of said slides includes a groove and a complimentary rib.

5 8. A roller entry guide according to claim 6 wherein said adjustment means includes a collar cooperating with each of said roller assemblies and connected to said body through interengaged threads, rotation of said collar relative to said body inducing longitudinal displacement of said collar relative to
10 said body and thereby induce longitudinal movement of said roller assemblies.

9. A roller entry guide according to claim 8 wherein rotation of said collar is induced by a worm and ring gear.

15 10. A roller entry guide according to claim 9 wherein said worm is mounted for rotation about a transverse axis and said ring gear is splined to said collar to permit relative longitudinal movement of said ring gear relative to said collar.

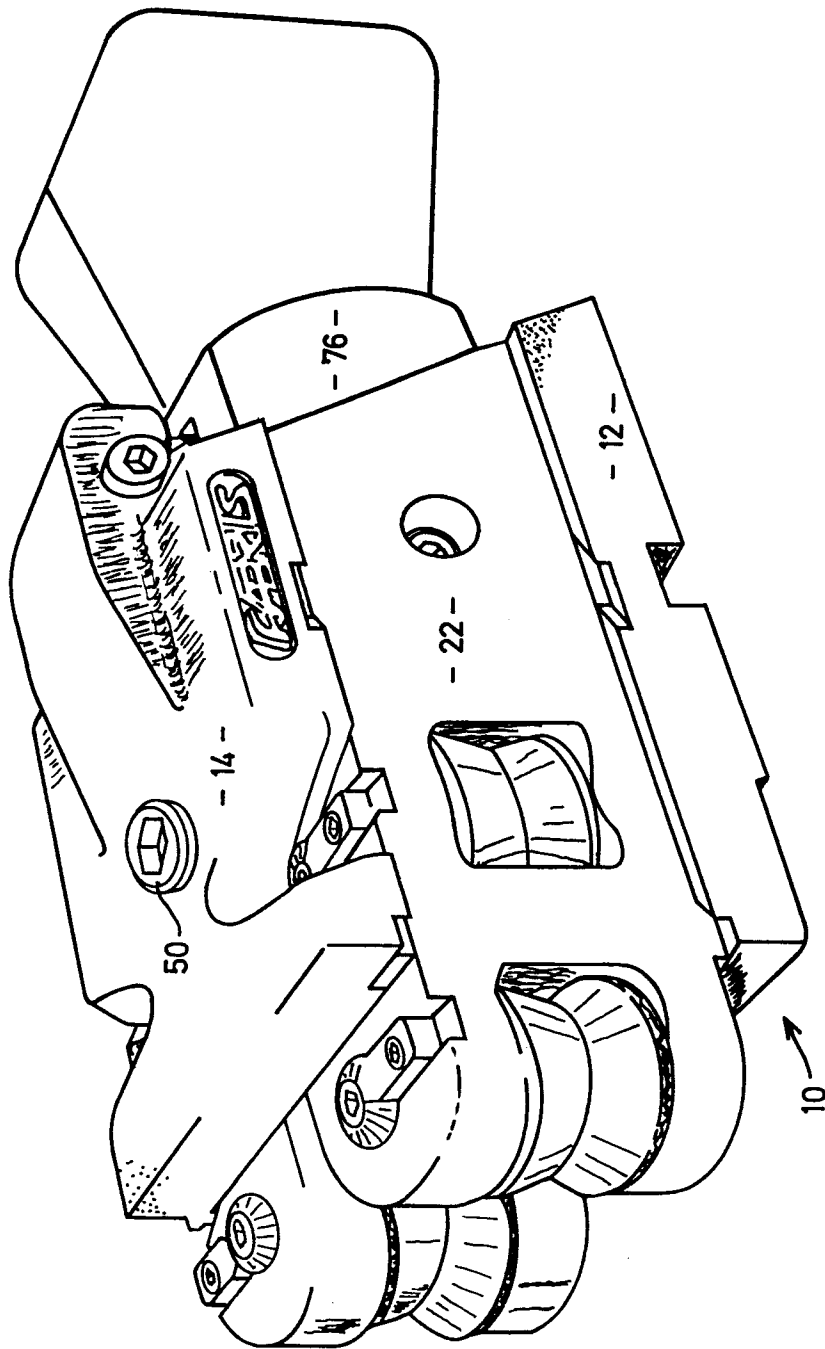


FIG. 1

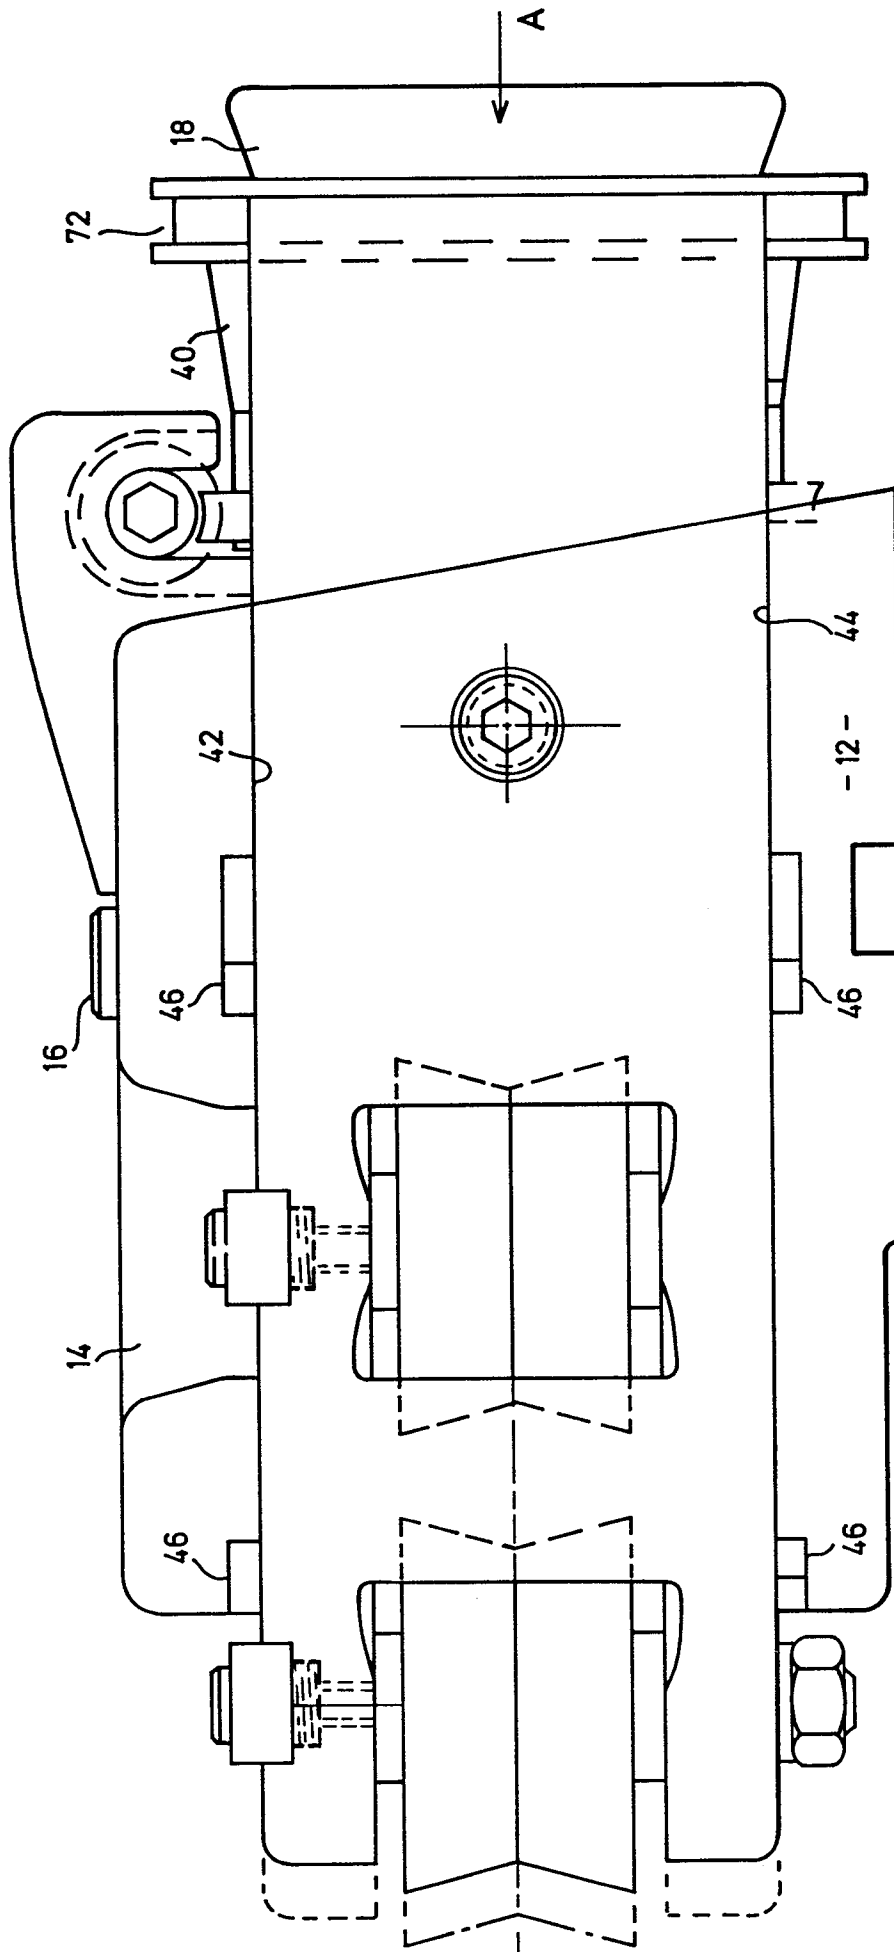
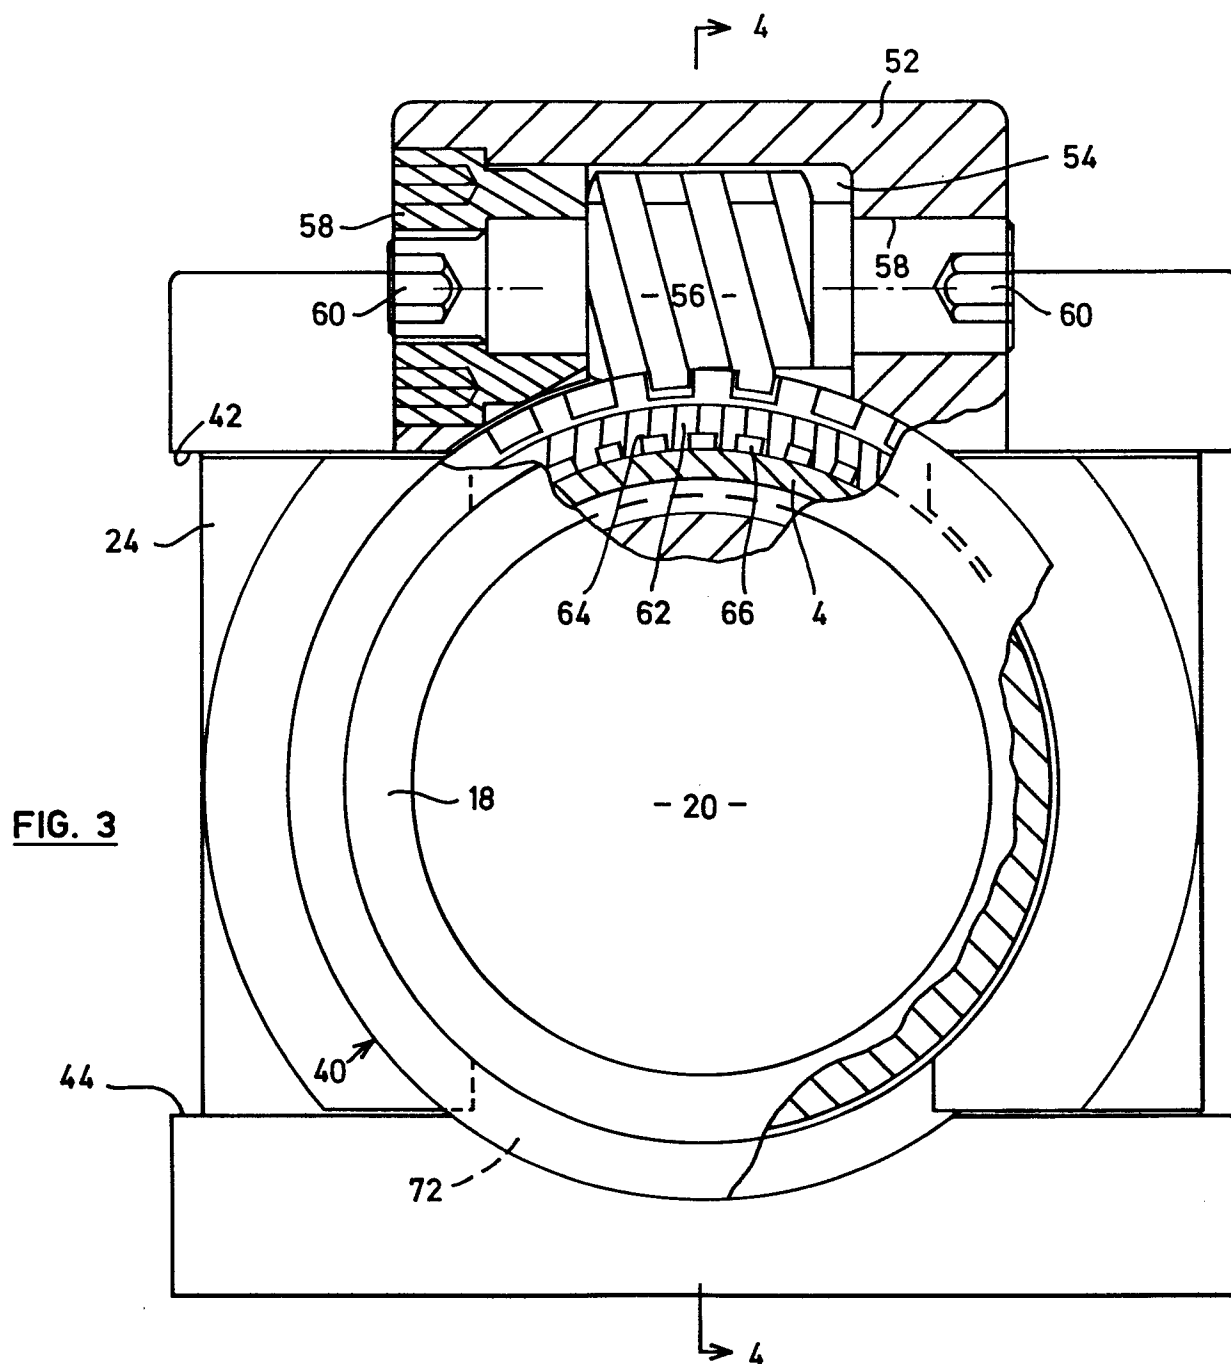


FIG. 2

0143523




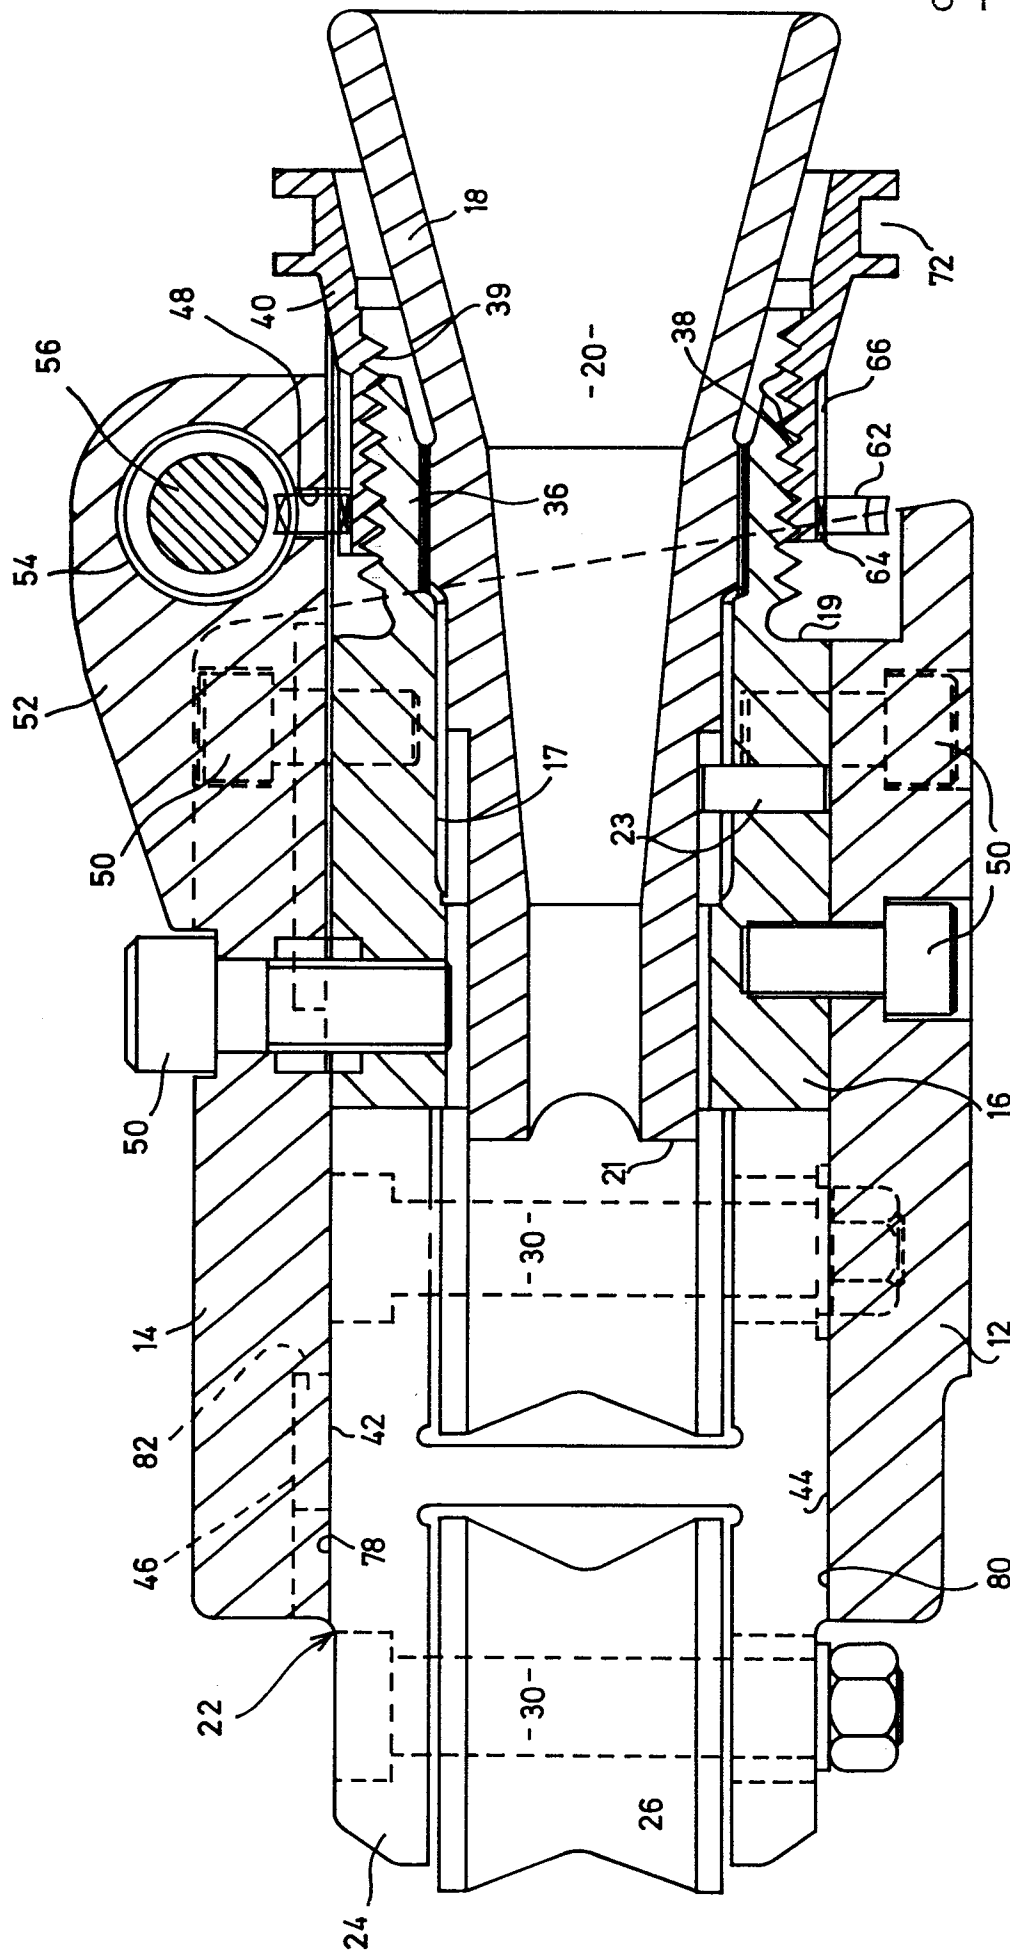


FIG. 4

FIG. 6

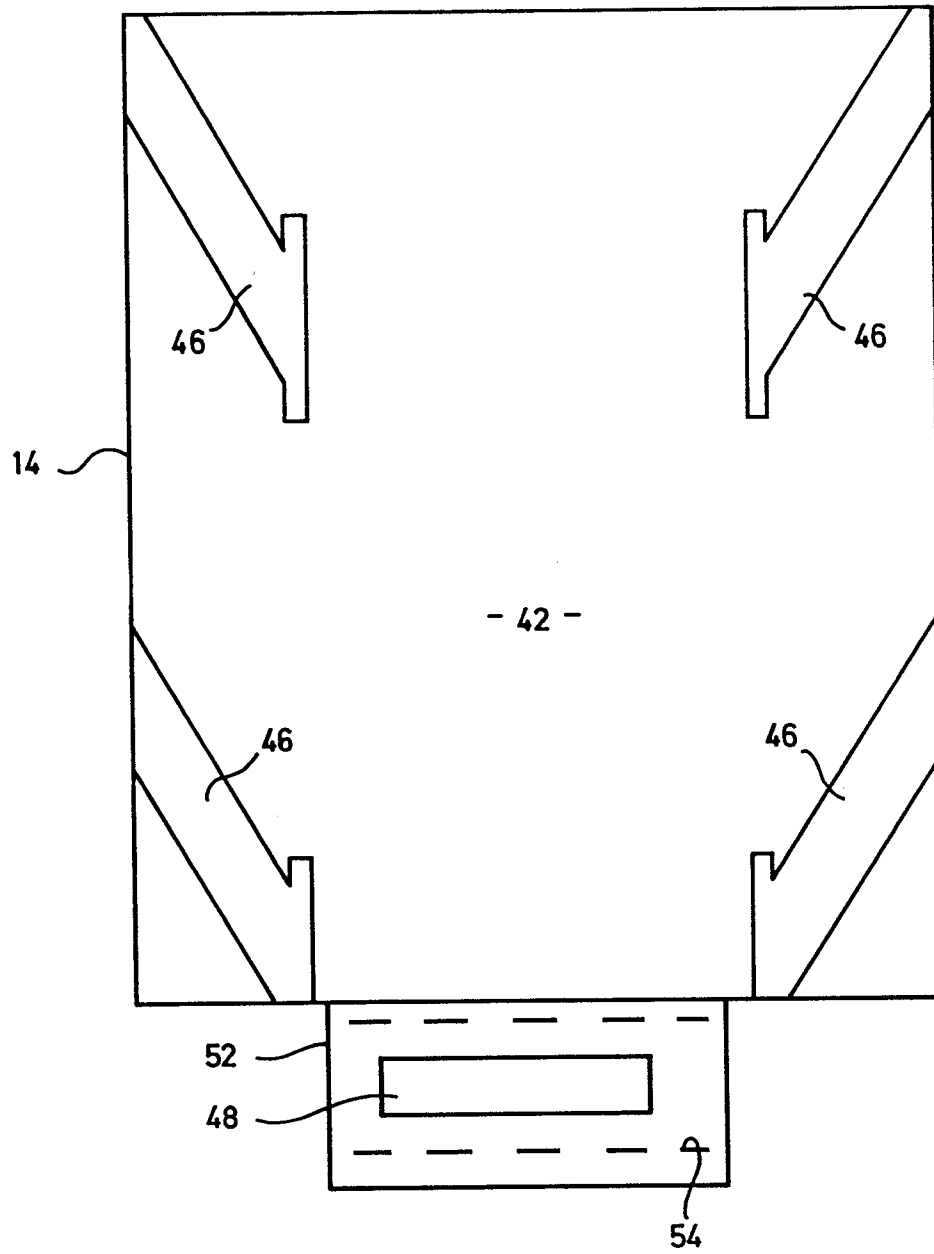

DOCUMENTS CONSIDERED TO BE RELEVANT			EP 84306310.8
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
P, X	EP - A2 - 0 103 667 (CENTRO-MORGARDSHAMMER GMBH) * Totality *	1	B 21 B 39/16
A	GB - A - 1 581 100 (INNOCENTI SANTEUSTACCHIO S.P.A.) * Page 2, lines 49-62; fig. 1-4 *	1, 3-6	
A	DE - B - 1 173 423 (KLÖCKNER-WERKE AG) * Column 1, lines 32-34; claim 1; fig. 1, 2 *	1, 4, 5, 7	
A	GB - A - 19 657 A.D. 1910 (RILEY) * Claims; fig. 1-3 *	1, 2, 4, 5, 7	TECHNICAL FIELDS SEARCHED (Int. Cl. 4)
A	US - A - 4 088 333 (NOBILE) * Fig. 7, 8 *	1, 2, 4, 5	B 21 B 39/00 B 21 C 1/00 B 23 B 31/00 F 16 H 19/00 F 16 H 25/00
A	US - A - 4 250 734 (TINSLEY) * Fig. 1, 3 *	2	
A	EP - A1 - 0 013 671 (KAISHA) * Abstract; fig. 2, 4 *	3, 9	
A	FR - A - 1 151 859 (CALUMET & HECLA; INC.) * Fig. 1 *	8	
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 17-12-1984	Examiner TROJAN
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	