


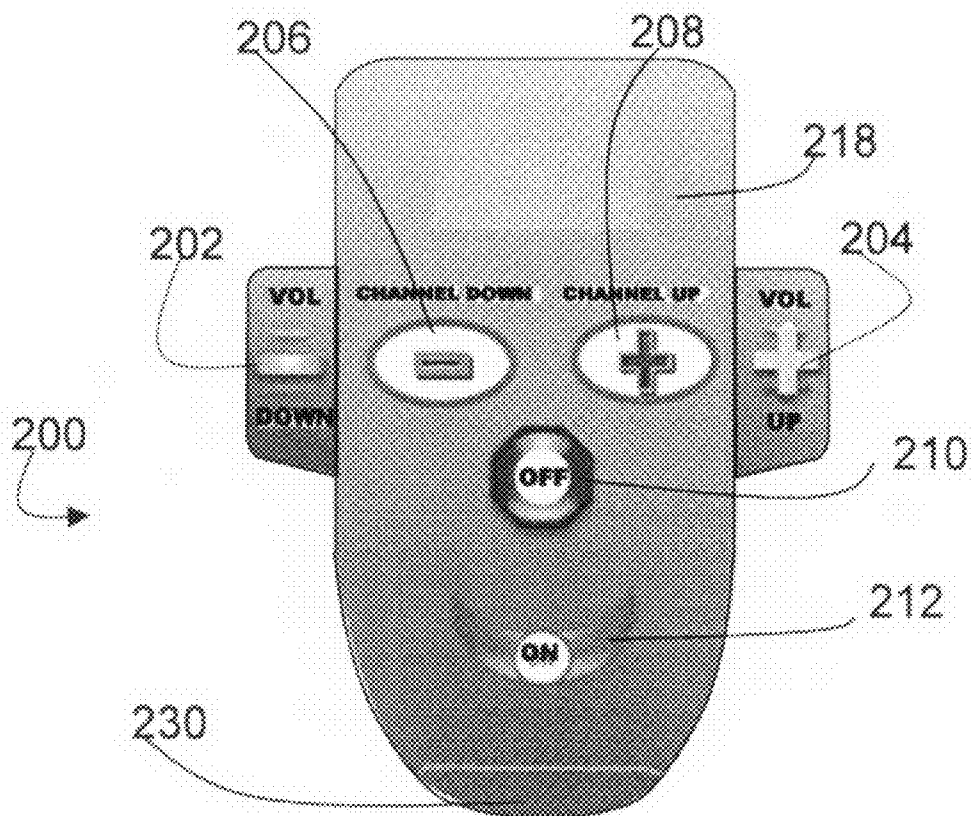

US 20080136700A1

(19) **United States**(12) **Patent Application Publication**
McRae(10) **Pub. No.: US 2008/0136700 A1**(43) **Pub. Date: Jun. 12, 2008**(54) **INTUITIVE BASED CONTROL ELEMENTS,
AND INTERFACES AND DEVICES USING
SAID INTUITIVE BASED CONTROL
ELEMENTS****Publication Classification**(51) **Int. Cl.**
G08C 19/12 (2006.01)(52) **U.S. Cl.** 341/176(76) **Inventor:** **Kimberly A. McRae**, Atlanta, GA
(US)**Correspondence Address:**
Ralph J. Crispino
PO Box 540
Somers, NY 10589(21) **Appl. No.:** **11/981,264**(22) **Filed:** **Oct. 31, 2007****Related U.S. Application Data**(63) Continuation of application No. 11/493,357, filed on
Jul. 25, 2006.(60) Provisional application No. 60/702,117, filed on Jul.
25, 2005.(57) **ABSTRACT**

The present invention relates to intuitive based control elements and interfaces and devices using said intuitive based control elements. In certain embodiments, machine interfaces such as remote control devices for operation of various devices are provided. More specifically, machine interfaces according to embodiments of the invention herein include one or more control elements in the form of shapes and/or positioned indicia to facilitate operation by users. Control elements provided herein having intuitive shapes and/or positions described above as associated with the man-machine interfaces may also be provided integral with various devices. For example, personal electronic devices, personal care devices, personal healthcare devices, communications devices and personal comfort devices may benefit from control elements having intuitive shapes and/or positions associated with the function as described herein.



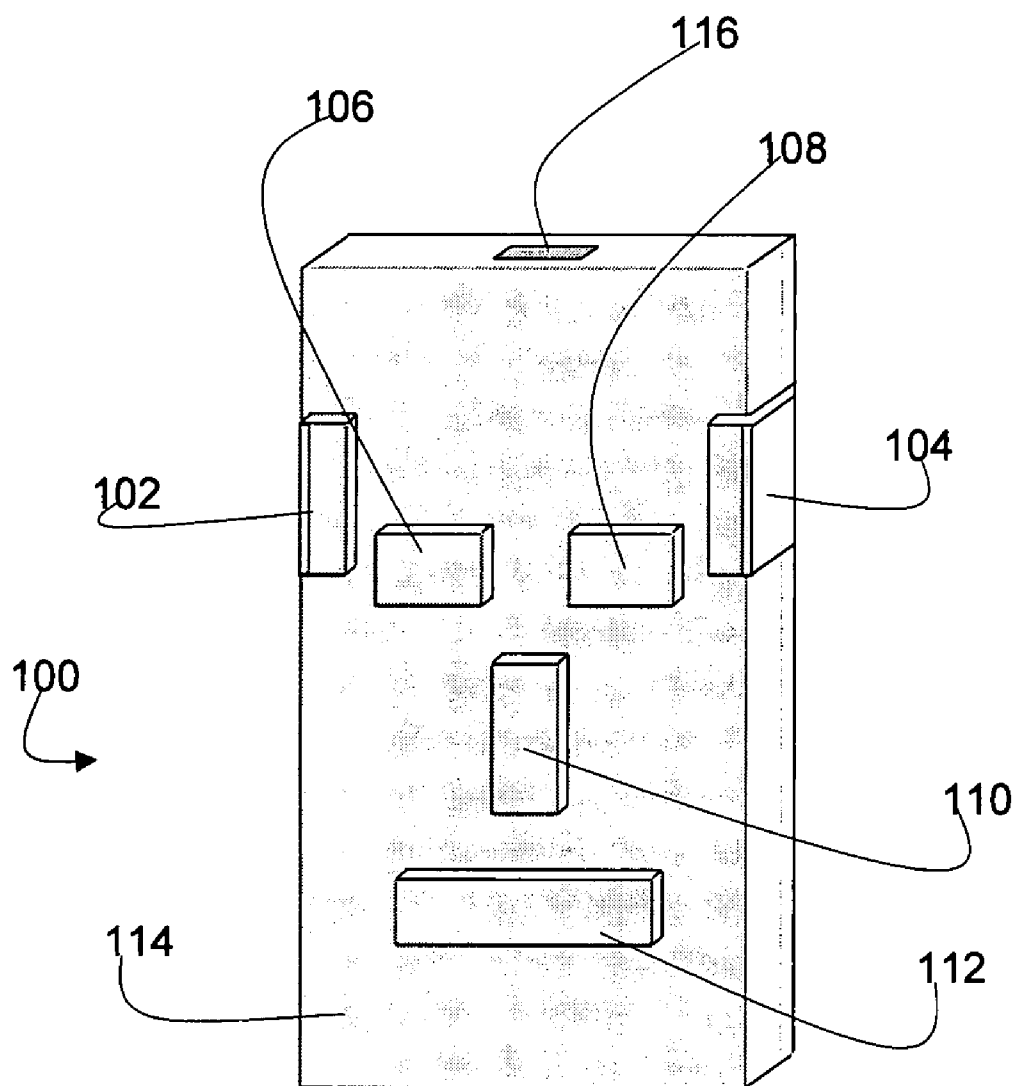


Figure 1

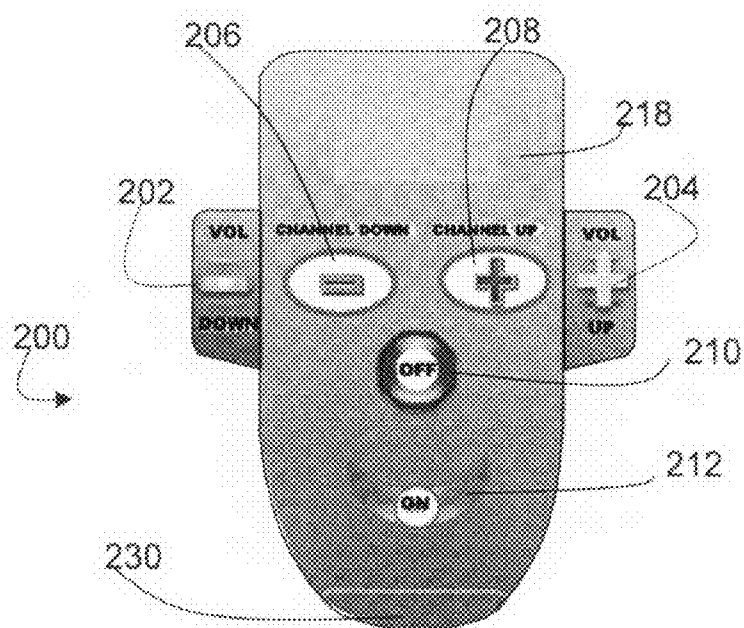


Figure 2A

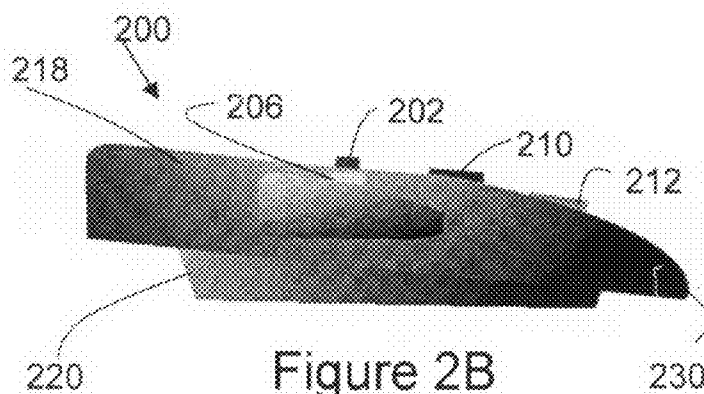


Figure 2B




Figure 2C

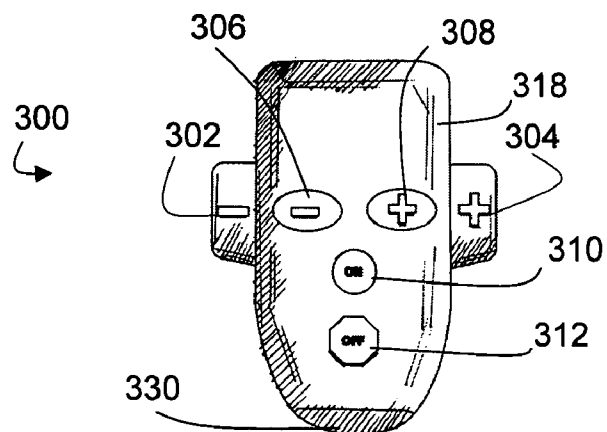


Figure 3A

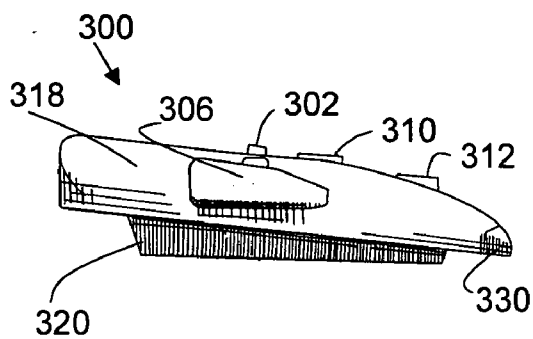


Figure 3B

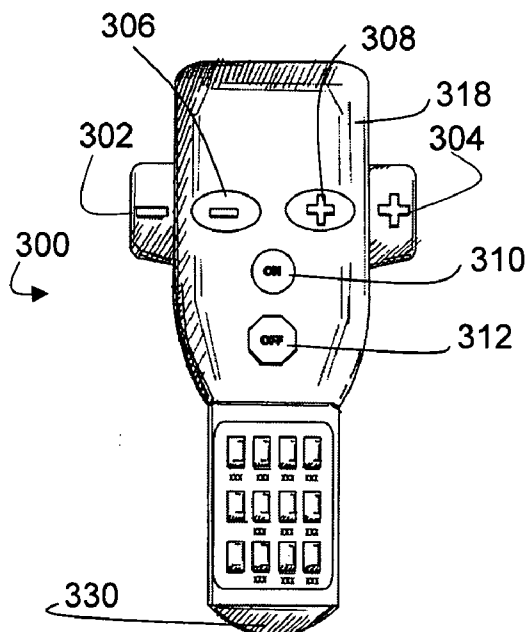


Figure 3C

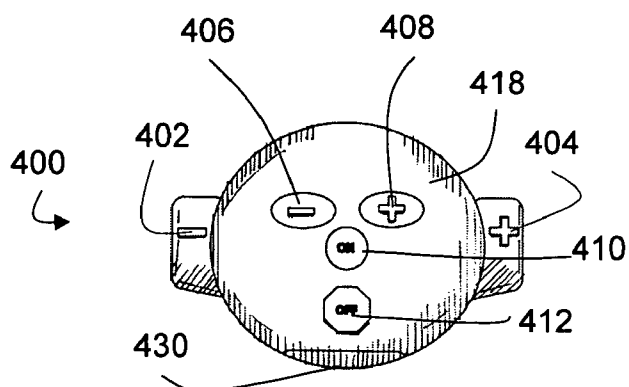


Figure 4A

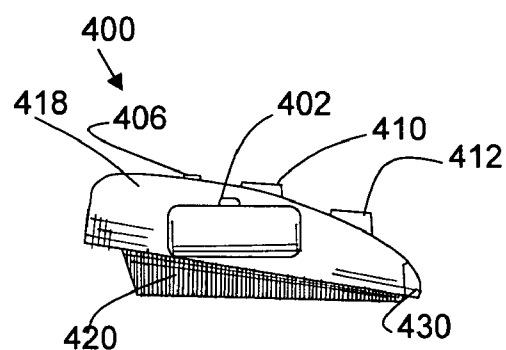


Figure 4B

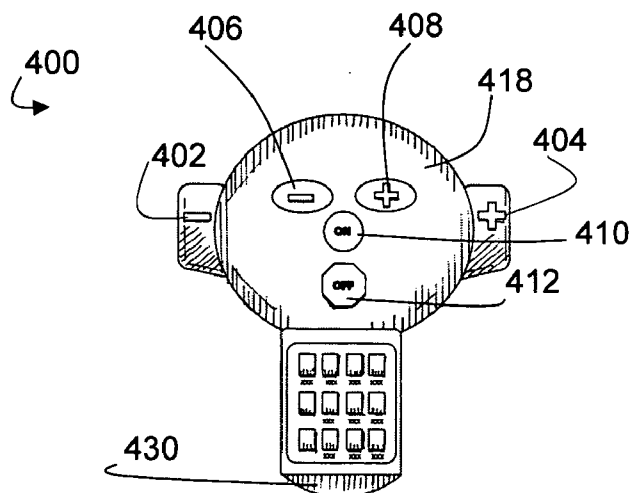


Figure 4C

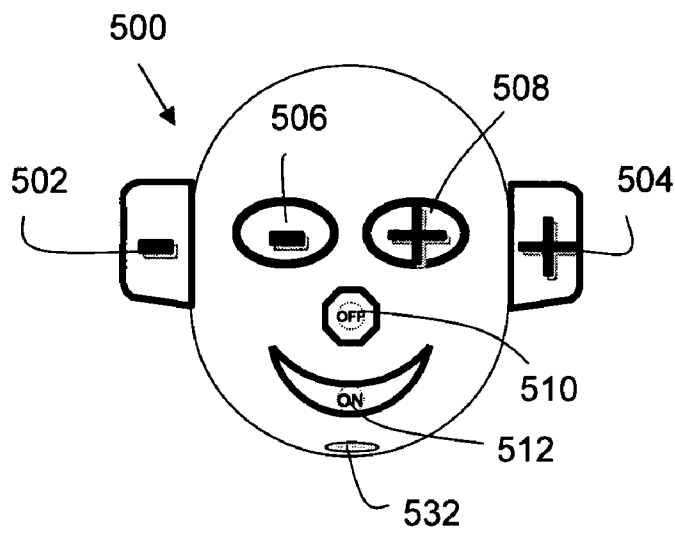


Figure 5A

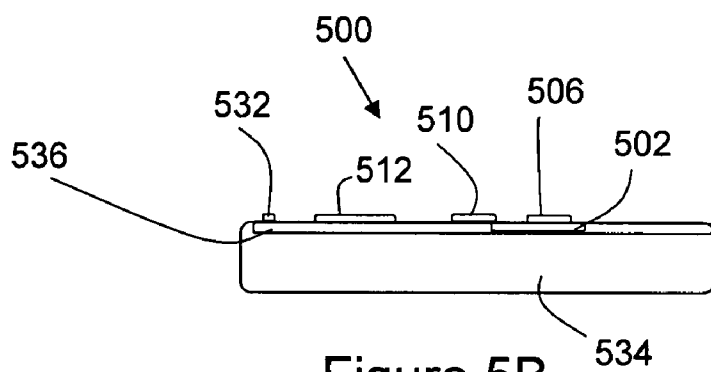


Figure 5B

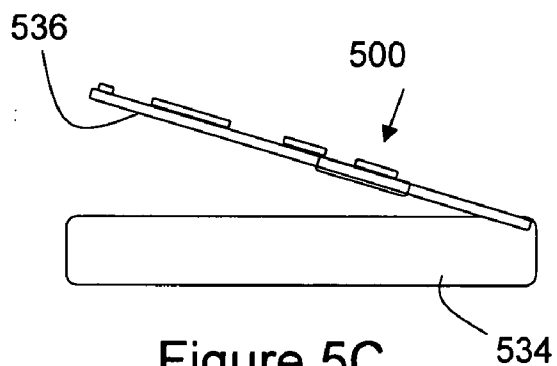
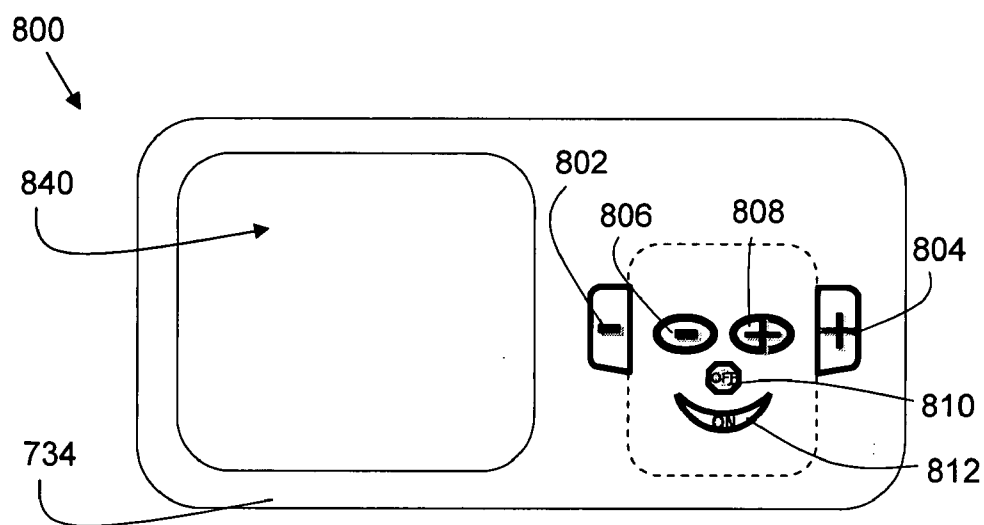
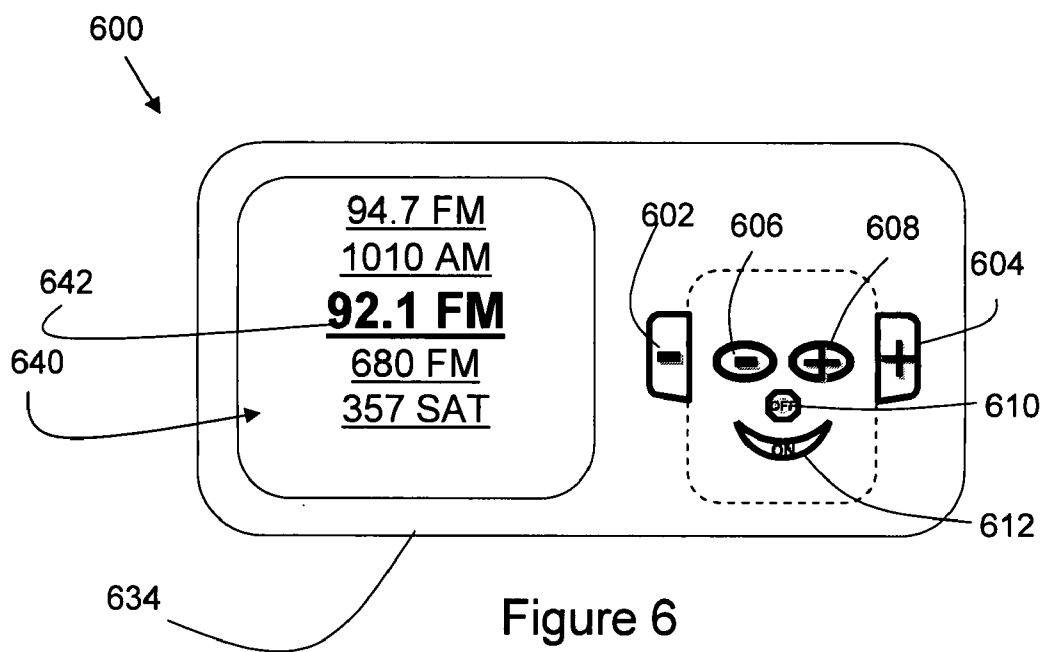


Figure 5C



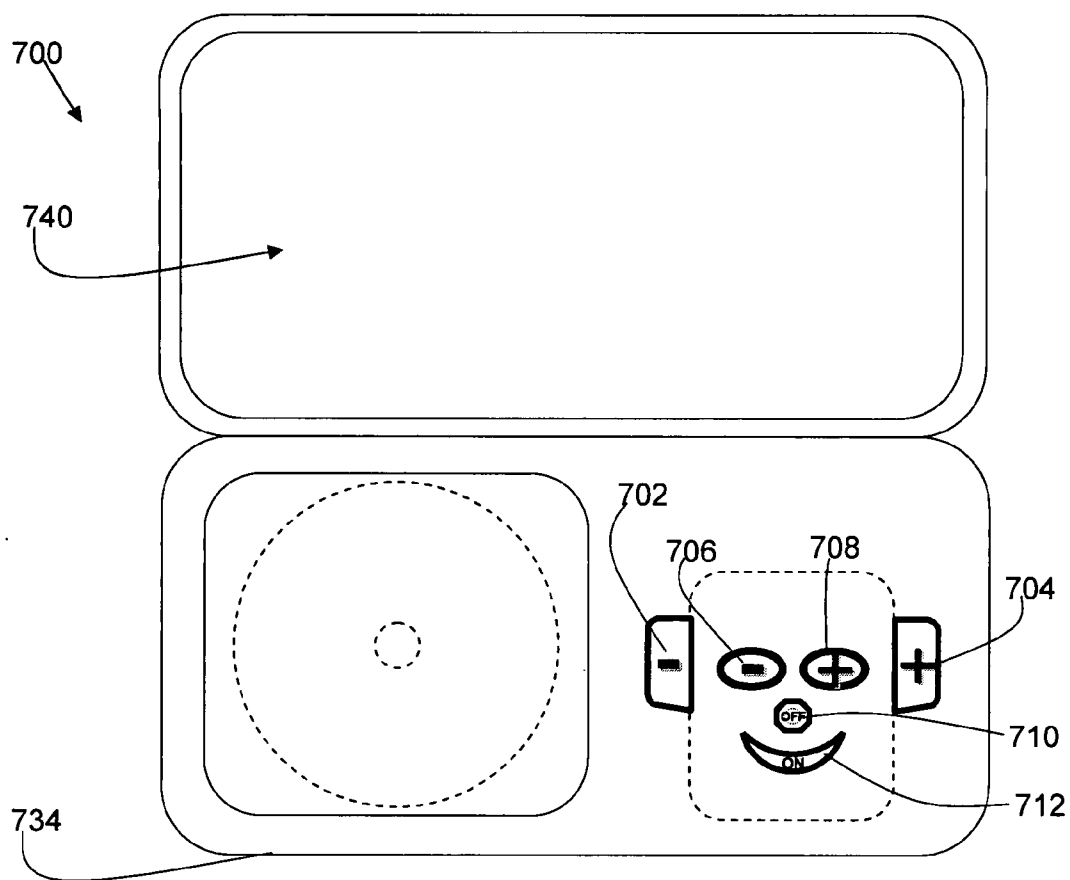


Figure 7

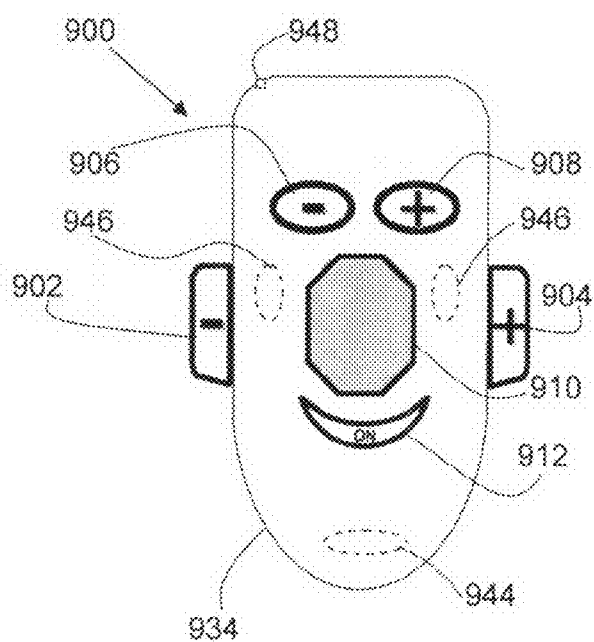


Figure 9A

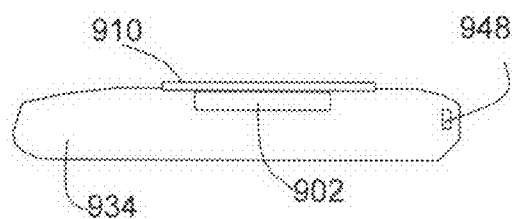


Figure 9B

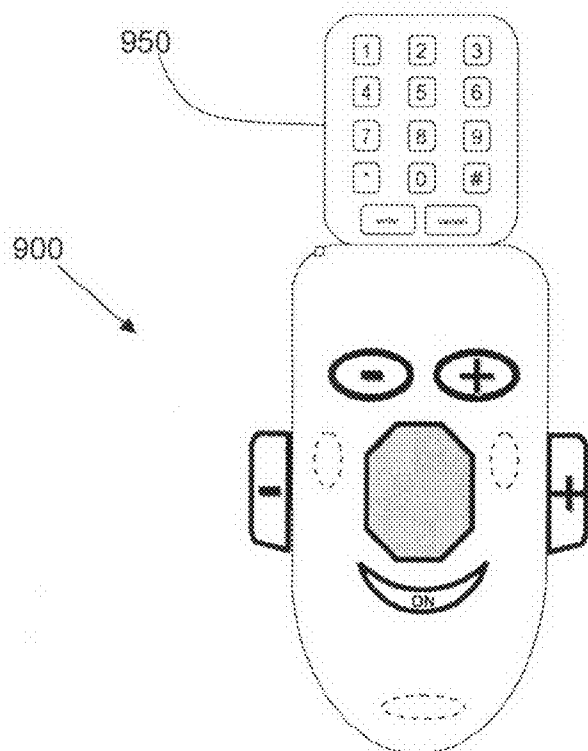


Figure 9C

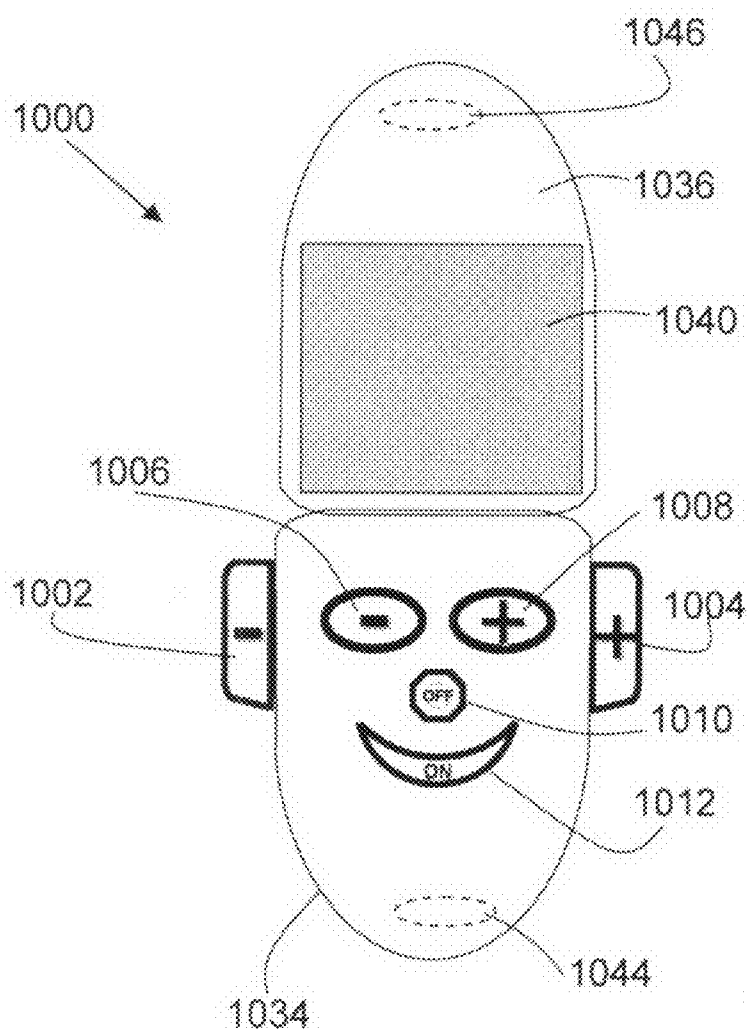


Figure 10A

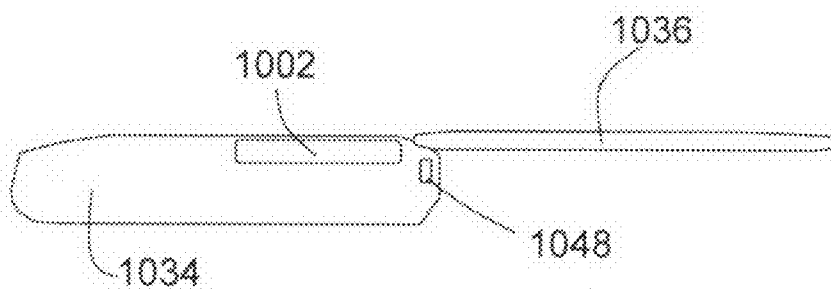


Figure 10B

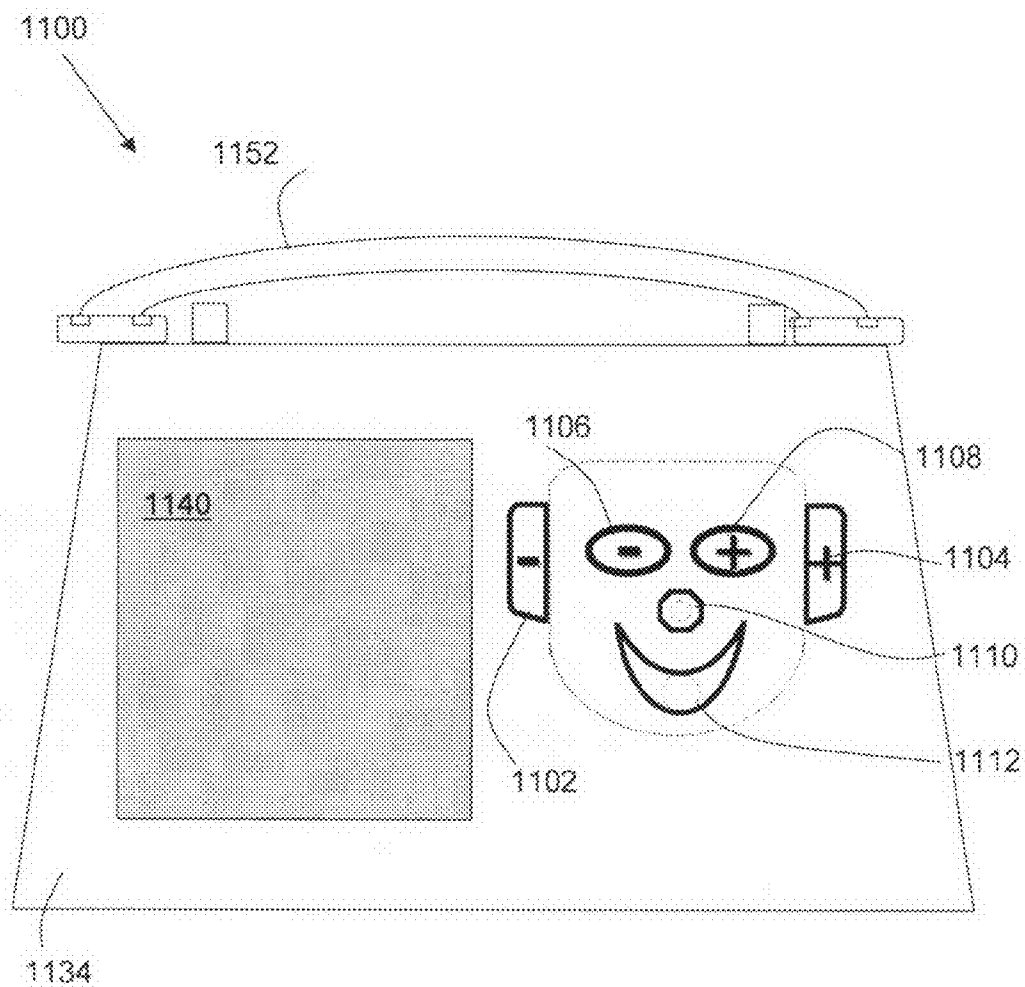


Figure 11

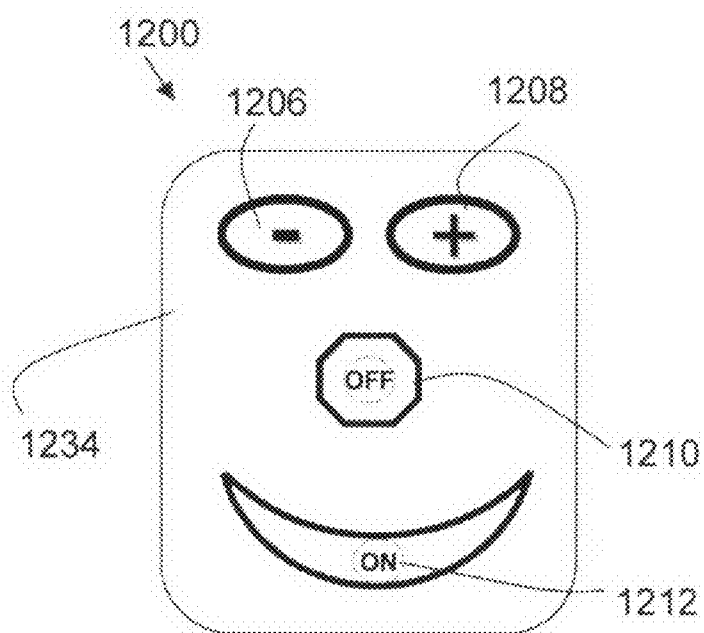


Figure 12

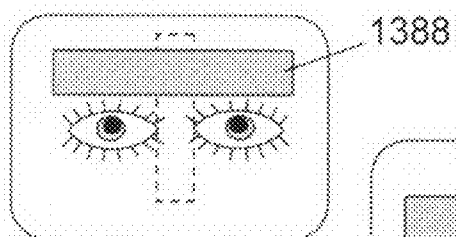


Figure 13A




Figure 13B




Figure 13C

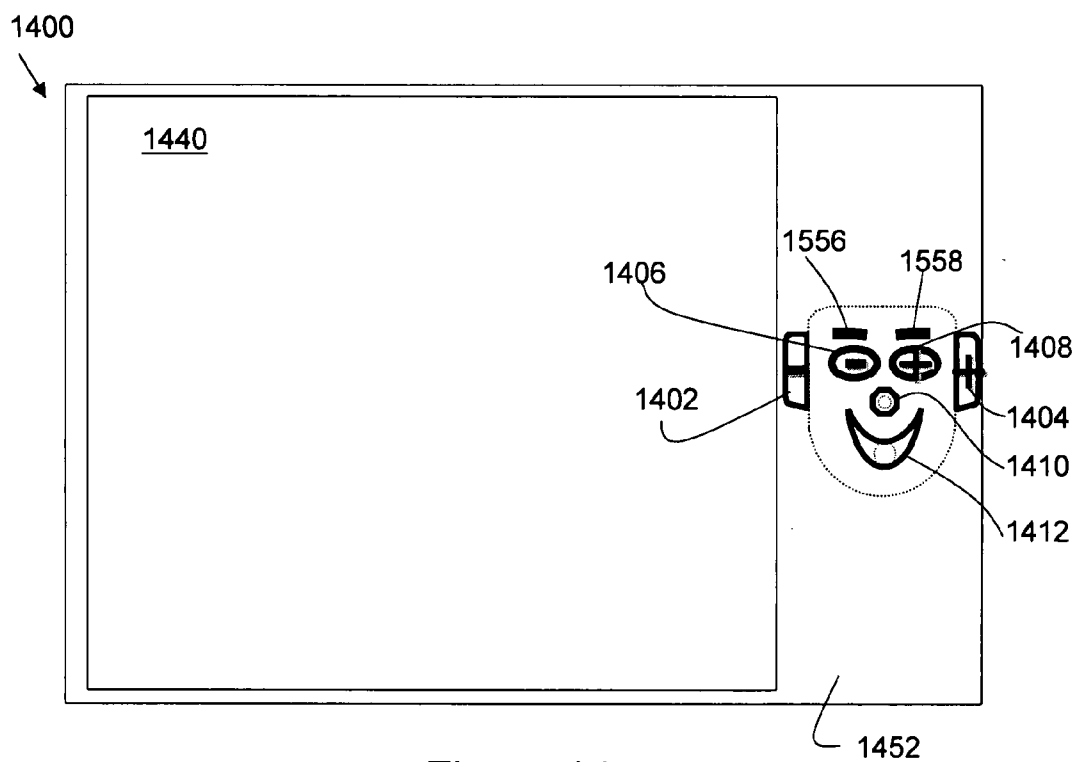


Figure 14

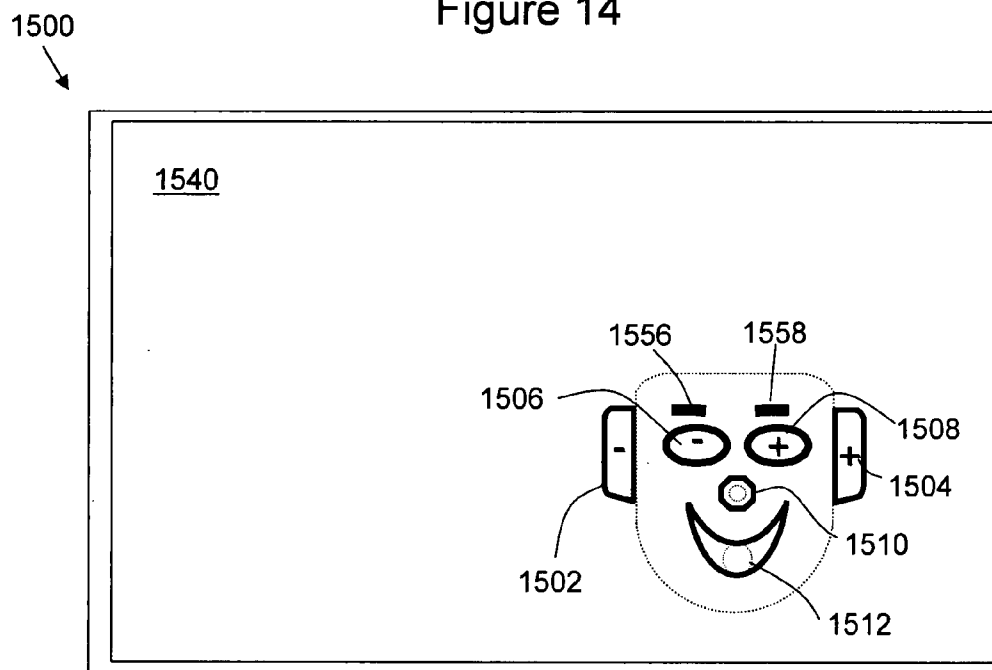


Figure 15

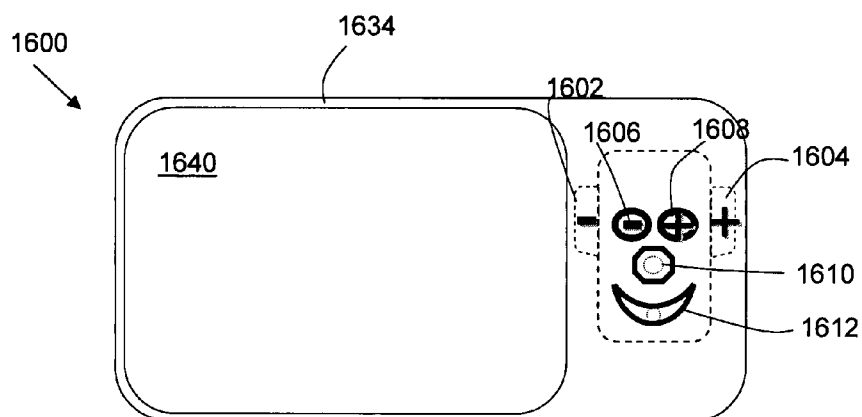


Figure 16

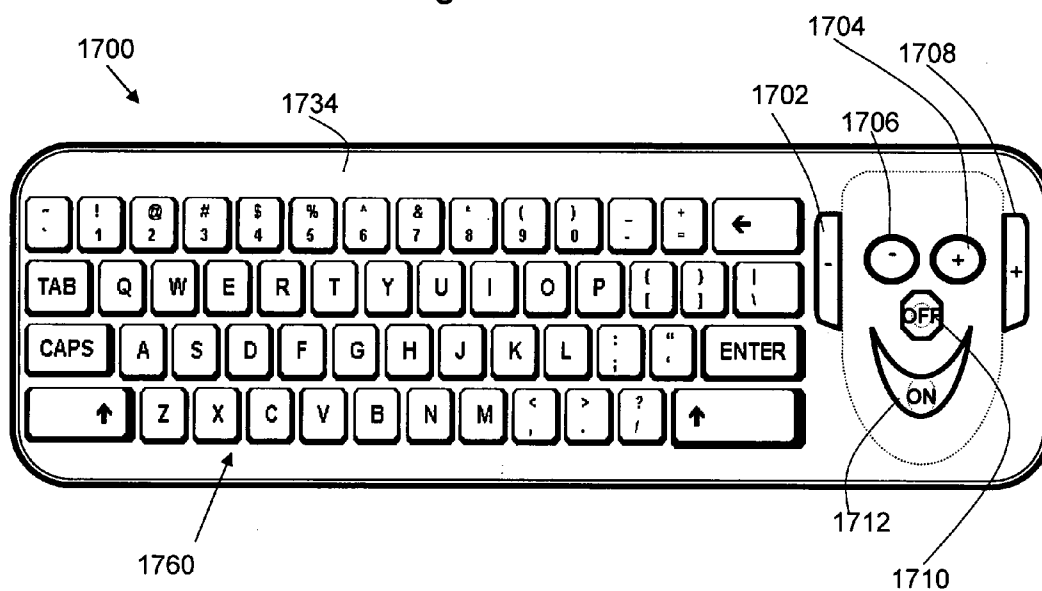


Figure 17

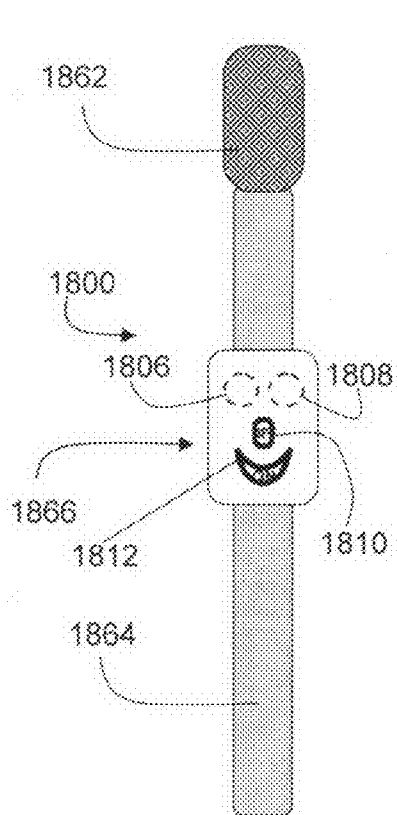


Figure 18A

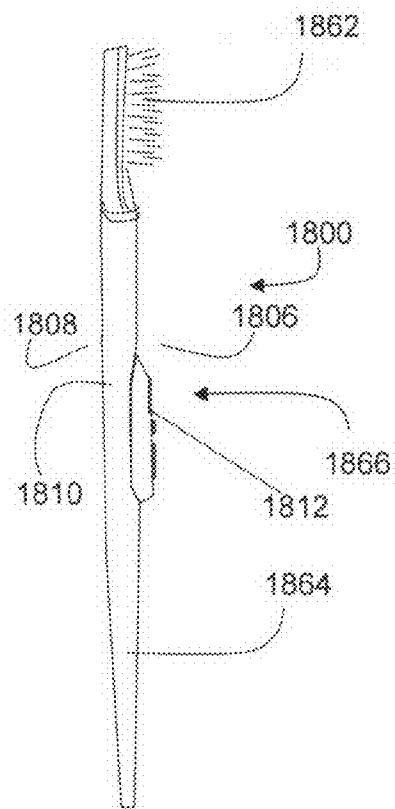


Figure 18B

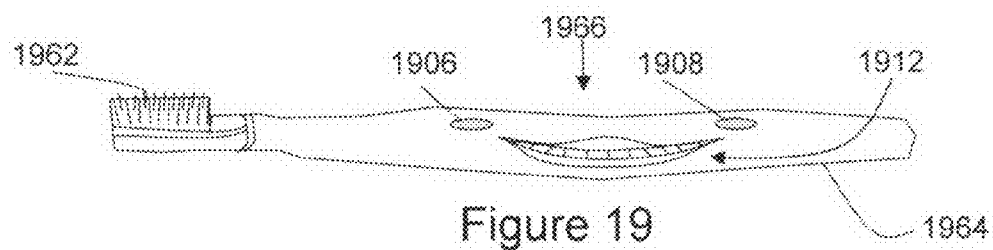


Figure 19

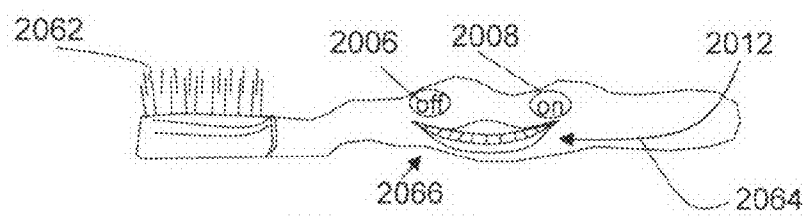
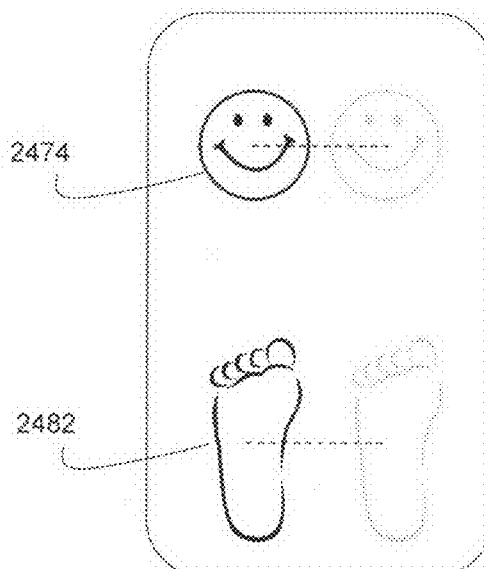
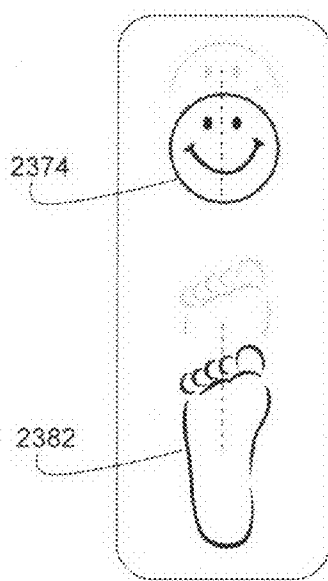
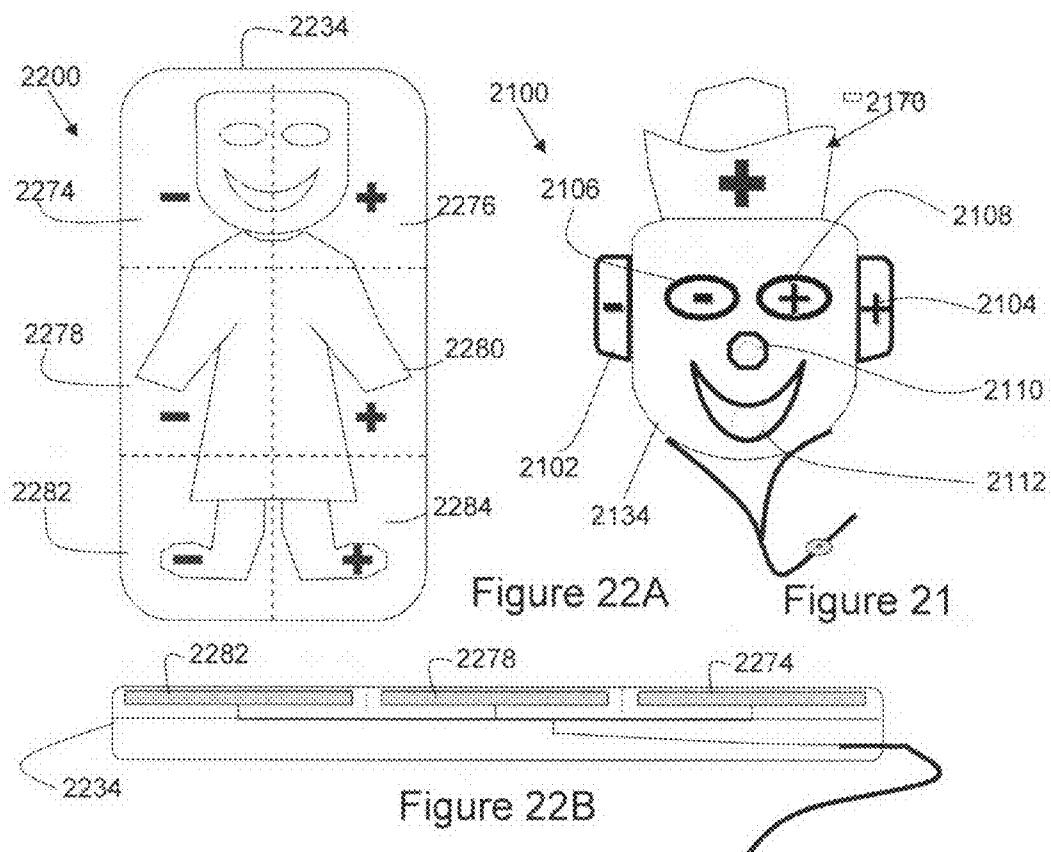
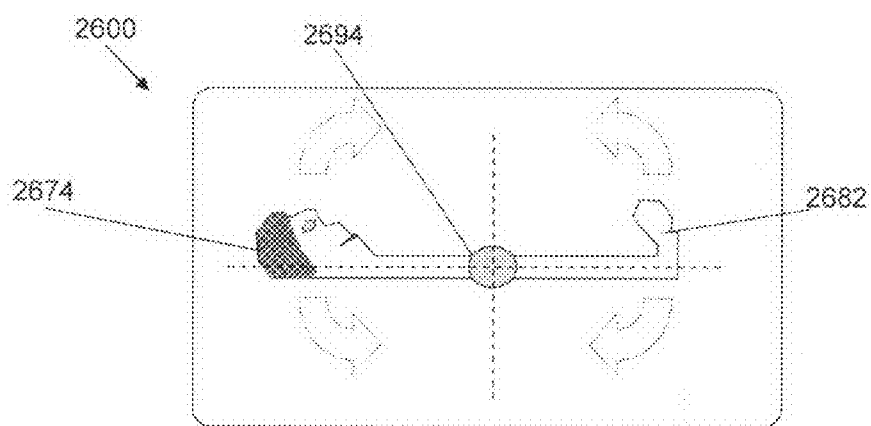
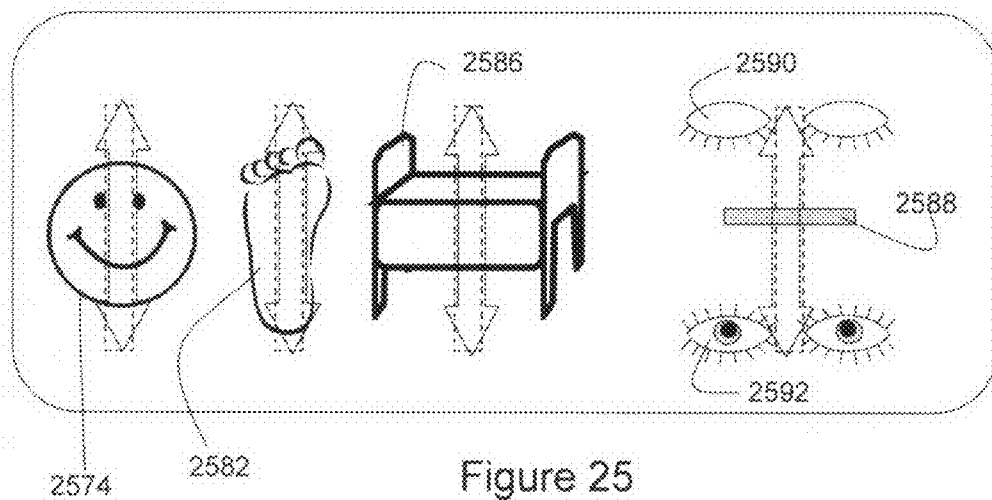
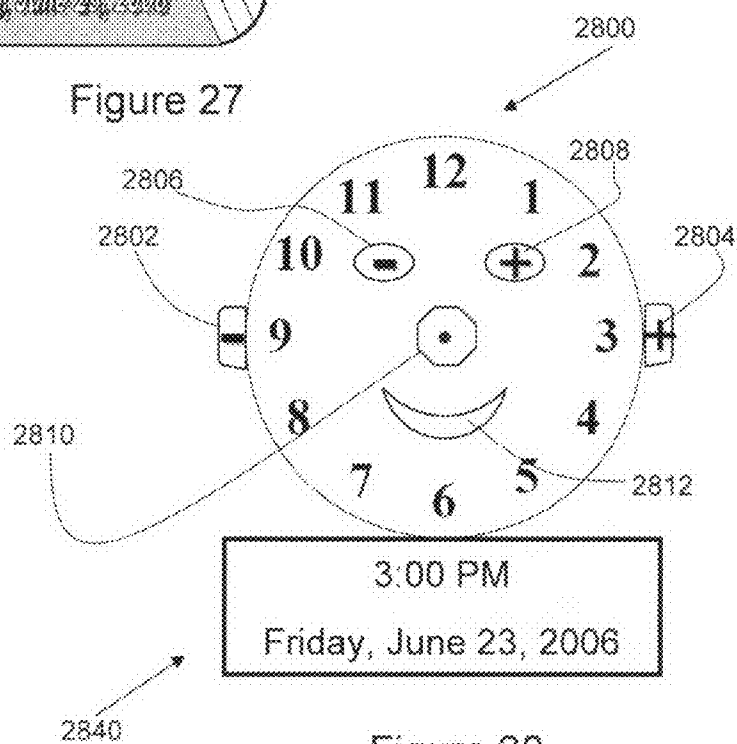
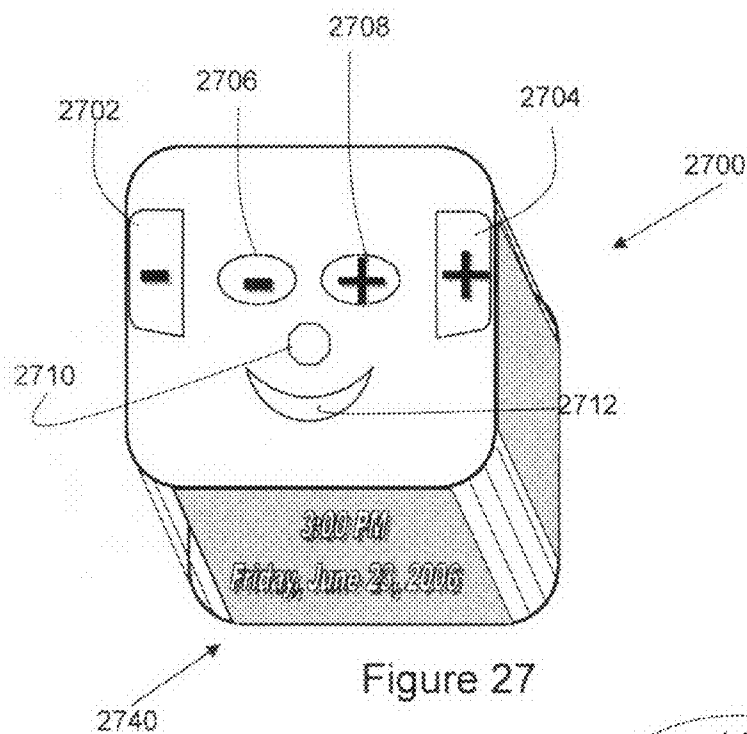


Figure 20







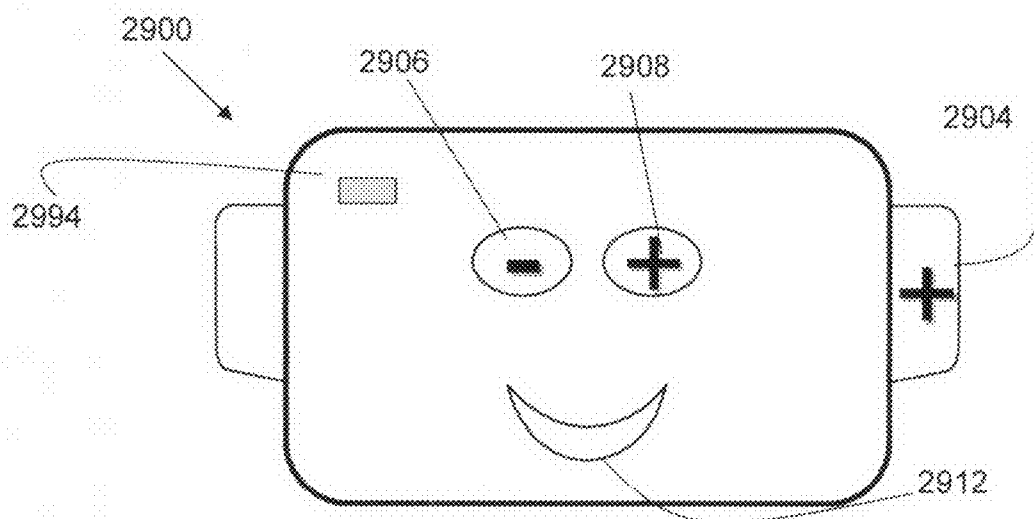


Figure 29A

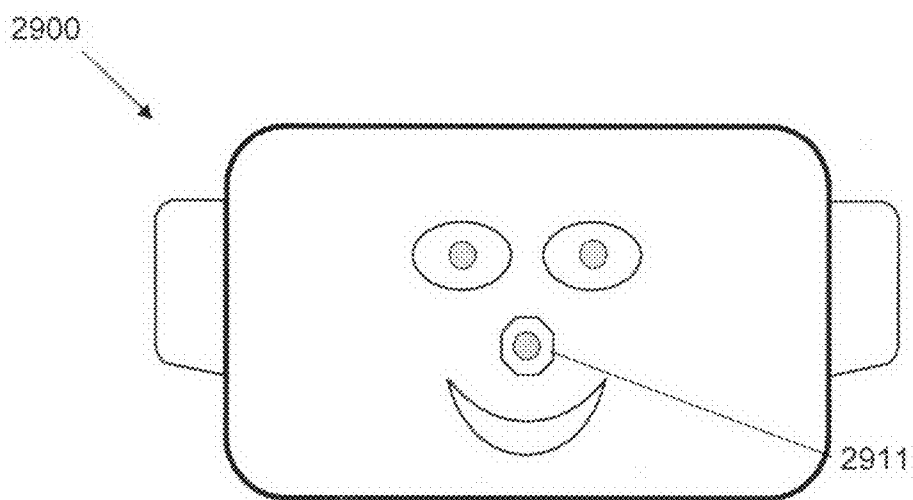


Figure 29B



Figure 30
(prior art)



Figure 31
(prior art)

INTUITIVE BASED CONTROL ELEMENTS, AND INTERFACES AND DEVICES USING SAID INTUITIVE BASED CONTROL ELEMENTS

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority under 35 USC 119 to U.S. Provisional Patent Application No. 60/702,117 filed on Jul. 25, 2005 entitled "Man-Machine Interface, or Remote Control, Having Convenient Operation Features", which is incorporated by reference herein.

BACKGROUND

[0002] 1. Field of the Invention

[0003] The present invention relates to intuitive based control elements, and interfaces and devices using said control elements.

[0004] 2. Description of the Related Art

[0005] Remote control units for televisions are used to control operations of various types of video systems, audio systems, computers, and other devices. Certain types of remote controls are created specific to a particular model unit, while other types of remote controls are universal and can be programmed for the majority of televisions or other devices available on the market today. Remote controls are used to change channels, volume control, on/off control and many other features that different televisions and other devices are equipped with today.

[0006] Remote control devices for television sets and other electronic devices fall into two broad categories: those which are hard wired to the appliance, and those which transmit an electromagnetic wave, usually in the infrared portion of the spectrum, which is received and decoded by the appliance. The infrared devices generally comprise a housing having one or more buttons or switches which serve as the user interface, one or more integrated circuits to translate the user command to a digital or binary signal, an infrared light emitting diode (LED) and associated driver circuitry, a power source (usually batteries), and, optionally, a visible LED to signal the user when the remote control unit has power and/or is transmitting.

[0007] Most available remote controls for televisions and other equipment have typically been housed in the form of rectangular slabs, or rectangular slabs with curved portions for design and to enlarge the keypad area. One face of the control typically includes plural control buttons, forming a keypad.

[0008] Examples of ergonomically shaped or multi-function remote control units include U.S. Des. Pat. No. 380,449 (shaped like an exercise grip, with or without knurls); U.S. Pat. No. 5,457,448 (round, weighted bottom provided so it always stands upright, with minimal number of keys); U.S. Pat. No. 5,481,256, (includes a scan function to scan channels); and International Patent WO 94/01844 (providing a keypad with geometrical shapes corresponding to the function or number). Further, various pistol shaped remote controls have been disclosed, e.g., in U.S. Pat. Nos. 6,573,854, 5,675,427, U.K. Patent No. 2,281,138.

[0009] Further, various user interface based remote control devices are known, including U.S. Pat. No. 6,762,773 (displaying stored icons sharing common visual characteristic with corresponding button on remote control); U.S. Pat. No.

6,292,210 (integrated remote control and phone user interface e.g. for telephone systems, employs user interface which includes graphical screens which can be configured by the user to appear as a picture-in-picture with a video broadcast program); U.S. Pat. No. 6,882,299 (discloses a graphical remote controller for multiple consumer devices including a touch screen based graphical display using title based descriptions to select the appropriate device); U.S. Pat. No. 5,545,857 (discloses a remote control employing a touch screen to reduce the number of keys of the remote controller)

[0010] One problem common with many of the above described remote controls is that they are difficult for certain individuals, including young children, elderly, those with severe arthritic or other physically debilitating conditions, or those with Alzheimer's disease, dementia, or other mentally debilitating conditions.

[0011] U.S. Pat. No. 6,369,799 discloses a computer pointer control device adapted for ease of use by handicapped individuals. The device includes a mating cradle that sits on top of a base having a track ball. The upper surface of the cradle support is shaped to accept the forearm of an operator. The operator can move the cursor up and down on the screen by pushing his or her arm outwardly or inwardly and can move the cursor left to right on the screen by rotating his or her arm in the cradle about its longitudinal axis.

[0012] Certain remote control devices are marketed towards individuals that have trouble with, or do not need, all of the functions available on a standard remote, such as the elderly, people with Alzheimer's Disease or Dementia, those who are cognitively or visually impaired, those who are physically disabled including arthritis sufferers, caregivers, children, or those who do not desire the complex functionality of typical remote controls. For example, referring to FIGS. 30 and 31, certain remote control devices are shown that exist today. These include a conventional Zenith® Universal Remote ZEN-SP, with an on/off button and a circular arrangement of arrow buttons, and the Weemote® 3 Sr. TV remote for adults, marketed by Fobis Technologies, Inc., Pinecrest, Fla. However, the inventor hereof has found that these devices, while promoted as a simple remote control that is customizable, still can be difficult for certain individuals to use.

[0013] While these devices and other remote control devices may be suitable for their intended purposes, there remains a need in the art for improved remote control devices, particularly for individuals with limited capabilities.

[0014] Other devices also suffer from drawbacks related to ease of use, particularly for the elderly, people with Alzheimer's Disease or Dementia, those who are cognitively or visually impaired, those who are physically disabled including arthritis sufferers, caregivers, children, or those who do not desire the complex functionality of typical device.

[0015] "The ability to recognize faces is a remarkable human feat Our ability to recognize faces is also little affected by the passage of time." (Freire, A., & Lee, K. (2001). *Face Recognition in 4-to 7-Year Olds: Processing of Configurable, Featural, and Paraphernalia Information. Journal of Experimental Child Psychology*, doi: 10.1006/jecp.2001.2639. "Evidence from fields as diverse as cognitive, evolutionary, and developmental psychology, as well as cognitive neuroscience, has increasingly pointed to the 'special' nature of face recognition. A critical examination of the literature supports the view that faces begin to be seen as a separate class of objects within the first 6 months of life. Not surprisingly, the neural systems that underlie face recognition

also come on line during this period of time.” Nelson, Charles (2001). *The Development and Neural Bases of Face Recognition. Infant and Child Development* 10.3-18 (2001).

[0016] The American Medical Association states that, “Between 15 and 18 months, your baby will enjoy language games that ask him to identify things, such as “Where’s your ear?” . . . At this age, your baby will begin symbolic play for the first time—he’ll imitate things he sees you do, and he’ll use objects for their intended purpose. He’ll attempt to brush his own hair with a hairbrush, or he’ll use the phone to “talk” to you . . . Your baby may be learning how things work and what things do.” *American Medical Association*. (1997). *Learning, Play and Your 1-2 Year Old*. Jul. 10, 2006, Medem: Medical Library.

[0017] Various design principles also are known as attempting to be a medium for simplicity in everyday life, such as the Principles of Universal Design and their guidelines, which state: “Universal Design is the design of all products and environments to be usable by everyone regardless of age, ability or situation. . . . As universal design performance is increased, so are usability, safety and marketability for all users.” *The Center for Universal Design, N. C. State University*. (2000). *Evaluating the Universal Design Performance of Products*. Jun. 20, 2006. *The Center for Universal Design*. “The intent of Universal Design is to simplify life for everyone by making products, communications, and the built environment more usable by as many people as possible at little or no extra cost. Universal design benefits people of all ages and abilities.” *The Center for Universal Design, N.C. State University*. (2000). *About Universal Design(UD)*. Jun. 20, 2006. *The Center for Universal Design*.

[0018] Improvements in quality of life for people with Alzheimer’s Disease or Dementia have been proposed based on the Montessori Educational Approach, created by Maria Montessori (1870-1952). “Montessori worked with underprivileged children who were labeled “unteachable.” “Her goal in working with these children was to improve their quality of life . . .” all “based on the abilities available to the children.” “The goal of the Montessori method is to create persons who are as independent as possible, able to make choices, and who are treated with respect and dignity. Montessori techniques have traditionally been used with children, but have proven effective when used with older adults. Montessori-Based Dementia Programming® enables older adults to interact positively with their environment and function at the highest level possible.”

[0019] “Our lives are defined by what we do. Everything we do, from the time we wake up, to the time we eat dinner . . . is an activity. A persons’ self-identity, self-esteem, and mood can be greatly influenced by the activities in one’s life and the success or failure experienced during these activities. This remains true even when one develops cognitive impairments.” Directions on using “the Montessori Method as a way to CREATE activities” include the following: “(use) materials (that) are familiar, aesthetically pleasing, and are often taken from the everyday environment; materials should be easily recognizable and visible; use of external cues and/or templates is common; the information needed for completing a task should be built into the materials; avoid unnecessary background clutter on materials to prevent distraction; materials should also be free of unimportant letters, numbers, words, and markings; activities should be an error-free source of success for clients . . . ; find and focus on the memories and abilities that are still intact; activities should have a clear

objective that is meaningful to the client.” *Myers Research Institute*, (2006). *Montessori-Based Dementia Programming®. Montessori-Based Dementia Programming Seminar and Workshop Materials: Camp, Cameron*.

[0020] In addition, the “First-In/Last-Out” Theory, is known, which states that “abilities that are acquired first in childhood remain for a long time in persons with dementia. Abilities that are acquired later in childhood are the first abilities lost in persons with dementia.” This theory is also known as Retrogenesis, and it “was first presented to the International Psychogeriatric Association on Aug. 16, 1999, by Dr. Barry Reisberg.” *Myers Research Institute*, (2006). *Montessori-Based Dementia Programming®. Montessori-Based Dementia Programming Seminar and Workshop Materials: Camp, Cameron*. “Clinical and neurological studies have compared the mental and physical stages of infant and child development to the reverse process of Alzheimer’s deterioration. These studies document that an Alzheimer’s patient with mental ability and habits similar to those of a 12-year-old child, will regress to levels of successively younger children and even infants.” *International Psychogeriatric Association, IPA Press Releases*, (1999). *Retrogenesis: landmark Alzheimer’s research adds scientific precision to the phrase*. Vancouver, B.C. *International Psychogeriatric Association*.

[0021] Employing aspects of various theories described above within everyday man-machine interfaces, including remote controls, video devices, audio devices, telephones, computers, clocks, household devices, personal care devices (e.g., toothbrush), light switches, or controls for any other of the multitude of ubiquitous devices, are unknown to the inventor hereof.

SUMMARY

[0022] The present invention relates to intuitive based control elements and interfaces and devices using said intuitive based control elements. In certain embodiments, machine interfaces such as remote control devices for operation of various devices are provided. More specifically, machine interfaces according to embodiments of the invention herein include one or more control elements in the form of shapes and/or positioned indicia to facilitate operation by users.

[0023] Control elements provided herein having intuitive shapes and/or positions described above as associated with the man-machine interfaces may also be provided integral with various devices. For example, personal electronic devices, personal care devices, personal healthcare devices, communications devices and personal comfort devices may benefit from control elements having intuitive shapes and/or positions associated with the function as described herein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] The foregoing summary as well as the following detailed description of preferred embodiments of the invention will be better understood when read in conjunction with the appended drawings. For the purpose of illustrating the invention, there is shown in the drawings embodiments which are presently preferred. It should be understood, however, that the invention is not limited to the precise arrangements and instrumentalities shown in the drawings, where:

[0025] FIG. 1 shows one example of an interface device such as a remote control according to certain embodiments of the present invention;

[0026] FIG. 2A shows a top view of another example of an interface device such as a remote control according to certain embodiments of the present invention

[0027] FIG. 2B shows a side view of the example shown in FIG. 2A;

[0028] FIG. 2C shows a top view of a master control device used in the example shown in FIG. 2A;

[0029] FIG. 3A shows a top view of another example of an interface device such as a remote control according to certain embodiments of the present invention;

[0030] FIG. 3B shows a side view of the example shown in FIG. 3A;

[0031] FIG. 3C shows a top view of a master control device extending from a main portion of the interface device shown in the example of FIG. 3A;

[0032] FIG. 4A shows a top view of another example of an interface device such as a remote control according to certain embodiments of the present invention;

[0033] FIG. 4B shows a side view of the example shown in FIG. 4A;

[0034] FIG. 4C shows a top view of a master control device extending from a main portion of the interface device shown in the example of FIG. 4A;

[0035] FIG. 5A shows a top view of an example of an audio device according to certain embodiments of the present invention;

[0036] FIG. 5B shows a side view of the example shown in FIG. 5A in the closed position;

[0037] FIG. 5C shows a side view of the example shown in FIG. 5A in the open position;

[0038] FIG. 6 shows a top view of another example of an audio device according to certain embodiments of the present invention;

[0039] FIG. 7 shows a portable video player according to certain embodiments of the present invention;

[0040] FIG. 8 shows another embodiment of a video player according to certain embodiments of the present invention;

[0041] FIG. 9A shows a front view of a telephone according to certain embodiments of the present invention;

[0042] FIG. 9B shows a side view of a telephone according to FIG. 9A;

[0043] FIG. 10A shows a front view of a telephone in an open state according to certain embodiments of the present invention;

[0044] FIG. 10B shows a side view of a telephone according to FIG. 10A

[0045] FIG. 11 shows a front view of another telephone according to certain embodiments of the present invention;

[0046] FIG. 12 shows a light switch according to certain embodiments of the present invention;

[0047] FIGS. 13A, 13B and 13C show another embodiment of a light switch according to certain embodiments of the present invention;

[0048] FIG. 14 shows a computer monitor according to certain embodiments of the present invention;

[0049] FIG. 15 shows another example of a computer monitor according to certain embodiments of the present invention;

[0050] FIG. 16 shows a picture frame device according to certain embodiments of the present invention;

[0051] FIG. 17 shows a keyboard device according to certain embodiments of the present invention;

[0052] FIGS. 18A and 18B show front and side views, respectively, of a toothbrush according to certain embodiments of the present invention;

[0053] FIG. 19 shows another toothbrush according to certain embodiments of the present invention;

[0054] FIG. 20 shows another toothbrush according to certain embodiments of the present invention;

[0055] FIG. 21 shows a control device for use in a hospital environment;

[0056] FIGS. 22A and 22B show a front view and side view, respectively, of one embodiment of a device for controlling operations of a hospital bed;

[0057] FIG. 23 shows another embodiment of a device for controlling operations of a hospital bed;

[0058] FIG. 24 shows another embodiment of a device for controlling operations of a hospital bed;

[0059] FIG. 25 shows another embodiment of a device for controlling operations of a hospital bed;

[0060] FIG. 26 shows another embodiment of a device for controlling operations of a hospital bed;

[0061] FIG. 27 shows an embodiment of a clock according to certain aspects of the present invention;

[0062] FIG. 28 shows another embodiment of a clock according to certain aspects of the present invention;

[0063] FIGS. 29A and 29B show an embodiment of a camera according to certain aspects of the present invention; and

[0064] FIGS. 30 and 31 show examples of prior art remote controls;

DETAILED DESCRIPTION

[0065] Referring now to FIG. 1, a man-machine interface 100 (e.g., in the form of a remote control) is provided. Man-machine interface 100 is configured, for example, in the form of a typical remote control, as a rectangular slab. However, in contrast to a conventional remote control, the man-machine interface is provided with control elements 102, 104, 106, 108, 110 and 112 positioned at intuitive locations upon the front surface 114 of the man-machine interface 100. This may be particularly useful for individuals with diminished mental and/or physical capability, or very young children, in that the remote control functionality may be simplified to the bare essential features, with control elements or buttons intuitively shaped and/or positioned upon the remote control device.

[0066] For example, as shown, control elements 102, 104 are in the position of ears, and may be pre-set or programmed to control audio functions such as volume. Also, as shown, control elements 106, 108 are in the position of eyes, and may be pre-set or programmed to control video functions such as channels, programs or files (e.g., on stored media), or other video functions. Control elements 110 and 112, shown in the position of a nose and a mouth, are optionally provided to control power on and off, or other pre-set or preprogrammed functions.

[0067] Each control element may be the same or different. The control elements are capable of actuation upon being depressed, rotated, twisted, pulled, slid, rubbed, touch-screen actuated, manipulated, or any combination of the foregoing actions. One or more control elements may be provided with scroll functionality, for example, similar to jog wheel functionality known on audio and video devices (for example, control elements in the position of and/or configuration of eyes may scroll as in a track ball application to perform the jog wheel function). Further, while certain embodiments herein depict a pair of corresponding elements (e.g., in the position

of and/or configuration of a pair of eyes or a pair of ears) that perform different functions (e.g., left eye to select an image or channel down, right eye to select an image or channel up), these functions may be reversed, or both control elements may be redundant, for example, wherein the control element in the position of and/or configuration of an eye may be rolled about a track or twisted like a dial to control image or channel selection, or wherein control elements in the position of and/or configuration of an ear may be twisted to increase or decrease volume.

[0068] As shown, the control elements are positioned at locations on the surface **114** of the man-machine interface **100** housing corresponding to various parts of the face including ears, eyes, nose and mouth. Other parts of the face may also be represented, including cheeks, chin, forehead, or top portions of a head. Further, other body parts including but not limited to arms, hands, legs, feet, chest or belly may be represented. Alternatively, or in combination with control elements in the position of certain facial parts, the control elements may be shaped in the form of a part of the face selected from the group consisting of ears, eyes, mouth, nose, cheek, and chin.

[0069] The control elements may be in various configurations and types. For example, they may protrude from the body of the man-machine interface **100** in various three dimensional configurations, or optionally may lie flush or be recessed for certain limited functions. Alternatively, the control elements may be pressure sensors, optical sensors, or heat sensors, in the form of touch pad or screen sensors. In still further alternatives, one or more of the control elements of man-machine interface **100** may be provided in the configuration of sliding controls, roller-ball controls, or other control capable of being manipulated.

[0070] Further, various control elements described herein may be of suitable color to further indicate the function, for example, green to turn something on, and red to turn something off. In further alternatives, various control elements described herein may include various lighting enhancement, for example, through a backlight, to indicate operation or other features.

[0071] The man-machine interface **100** includes a transmission sub-system (represented schematically with reference to a transmission element **116**) for transmitting a signal from the control elements to the device to be controlled. This may be any conventional circuitry or sub-systems for transmitting a signal upon actuation of control elements from the remote device to the device to be controlled. In certain embodiments, it may be desirable to include plural transmission elements and/or sub-systems to allow for multi-directional control of the device to be controlled, which is particularly well suited for people with cognitive disabilities. In particular, where the control elements are intuitively shaped and/or positioned upon the remote control device, the orientation of the device will not be significant to the user. The transmission sub-system may comprise a wireless transmission subsystem such as an IR transmission sub-system, a RF transmission sub-system or an optical transmission sub-system; or a wired sub-system for transmitting via wire signals to the device to be controlled.

[0072] The man-machine interface **100** may optionally include (not shown) a master control device disposed within at least a portion of said body and operably coupled to one or preferably all of the control elements. In this configuration, the transmission sub-system transmits a signal from said mas-

ter control panel to the device to be controlled. The master control device may include a self contained programmable control device.

[0073] The electronics and other transmitter circuitry for wireless or wired transmission of signals may be included in the master control device, or elsewhere in the man-machine interface **100**. For example, where the transmitter circuitry is included in the master control device, it may function independently as a man-machine interface or remote control.

[0074] The transmission sub-system may be pre-programmed for a certain device or brand of devices to be controlled, or may be programmable by the user or the user's caregiver. For example, the device may be programmed similar to a conventional "universal remote" control device. Alternatively, the man-machine interface herein may be programmable with a master control device described herein. In further embodiments, a computer interface is provided on the device to allow for programming, such as Internet-based programming or other software. The interface may be wired (e.g., a Universal serial bus, serial port connection, parallel port connection, IEEE 1394 connection (Firewire or iLink), ethernet connection) or wireless (e.g., wireless local area network, wireless broadband network, Bluetooth, cellular digital packet technology, wireless metropolitan networks, or other wireless connectivity) For example, in one example, the device may be programmed based on user, parent, guardian or caretaker selections of certain programmed stations within software or a web site displaying a list of stations to select from. Priority may be assigned to certain stations.

[0075] A master control device may be in the form of a cartridge or computer media. For example, the cartridge may be programmable upon interfacing with a computer device. The computer device may be dedicated to the man-machine interface **100** herein, or may be integrated in an existing computer device. The computer media may be selected from the group consisting of computer diskettes, flash memory devices, CD-ROMs, DVDs, magnetic hard drives, other forms of media, and combinations comprising at least one of the foregoing media forms.

[0076] A computer device to program the master control device described above may include typical personal computer including PC or Apple® based computer, portable computer, PDA, a dedicated computer device used specifically for the man-machine interface **100**, embedded computer system within the "machine" to be controlled, or any other suitable computer device, that is programmed with suitable software and/or firmware to control the functionality of the master control device.

[0077] The interfaces between the control elements of the man-machine interface **100** and the master device may be by suitable electronic, optical, IR, RF, or wired interface. Alternatively, or in combination, the man-machine interface **100** may include a suitable mechanical or electro-mechanical interface between the master control device and at least one of the control elements. In certain embodiments, the mechanical interface may be configured for interfacing with an existing remote control device. An existing control device may include a stock remote control device that is sold with the device to be controlled, an aftermarket universal remote control, or a custom remote control device.

[0078] Another feature of certain embodiments of the present invention is an optional locator sub-system. For example, when one touches a "locate" button on a base or a device being controlled, or on a finder device, a radio fre-

quency signal is transmitted and the device emits certain audible sounds or programmed recordings.

[0079] Another feature of certain embodiments of the present invention is an optional speech generating sub-system. Upon producing a signal with at least one control element, the speech generating sub-system speaks the function of said at least one control element. For example, when the power is turned on, a computer generated voice or pre-recorded voice speaks the phrase “device on” or other suitable phrase.

[0080] Embodiments of the present invention in the form of man-machine interfaces or remote control devices may be used independently and in conjunction with existing remote controls for various devices with standard features.

[0081] Referring now to FIGS. 2A-22C, another example of a man-machine interface is provided, man-machine interface **200**. As shown, the housing **218** is configured in the general shape of a face of an animate being. For example, as shown, control elements **202**, **204** are in the position of and general shape of ears, and may be pre-set or programmed to control audio functions such as volume. Also, as shown, control elements **206**, **208** are in the position of and general shape of eyes, and may be pre-set or programmed to control video functions such as channels, programs or files (e.g., on stored media), or other video functions. Control elements **210** and **212**, shown in the position of a nose and a mouth, respectively, are optionally provided to control power on and off, or other pre-set or preprogrammed functions. Control element **212** may also be in the general shape of a mouth or a smile, for example, indicating device “power on” as conveying a general sense of pleasure to the user. Further, control element **210** may be in the general shape of a “stop” sign, indicating “power off”. In preferred embodiments, certain control elements are formed of a pliable material for ease of use. Further, an ergonomic surface and buttons may be provided, for example, buttons of soft plastic for safety and easy handling with a “tactile click” when pushed, to provide additional reinforcement to users as to the function that they are performing.

[0082] As described, in a preferred embodiment, at least one of the control elements serves a function naturally associated with the shape of the control element. For example, the control elements in the position of and/or general shape of eyes serve to control video functions; and the control elements in the position of and/or general shape of ears serve to control audio functions.

[0083] The housing **218** is configured upon a base **220**. The shaped region in the general shape of a face of an animate being may, as shown in the example of FIG. 2B, have a tilted axis with respect to the base.

[0084] Also as shown in FIGS. 2A and 2B, the control element **210** is positioned on a location of the housing corresponding to a nose. Control element **210** controls power functions, e.g., “power off”. Further, the control element **212** is shaped in the form of a mouth, and positioned on a location of the housing corresponding to a mouth. Control element **210** controls power functions e.g., “power on”.

[0085] As shown in FIG. 2C, a master control **230** is provided that, for example, slidably insertable into and removable from the body of the man-machine interface **200**. This master control **230** may be a master control sub-system as described above and interface with the control elements as described above.

[0086] The master control **230** may be accessed as shown, or via disassembly of the man-machine interface **200**. In certain embodiments, structural insert portions may be provided with the man-machine interface for a particular brand or style of existing remote control. Thus, a user or caregiver will insert the existing remote control in the insert and then insert the assembly into the man-machine interface. Alternatively, a user or caregiver will insert the insert in the slot of the man-machine interface and then insert the existing remote control into the fitted man-machine interface.

[0087] FIGS. 3A-3C and 4A-4C show further examples of the herein system, wherein FIGS. 3A-3C show different control elements than FIGS. 2A-2C (particularly, the “power on” is controlled by a round button in the position of a mouth rather than also being in the shape of a smile as in FIGS. 2A-2C), and wherein Figures rem4}A-4C show a man-machine interface in the form of a round head.

[0088] Of course, other variations are possible. For example, a remote control device may be provided with typical functionality and additionally include one or more control elements as described herein. For example, buttons may be positioned on a remote control at a location corresponding to “ears” for audio controls.

[0089] It is contemplated that a single ear, may be used, for example, for controlling audio functions. A second ear may also be included either as a control element that may be deactivated or a decorative element. It is also contemplated that a single eye, may be used for example, for controlling video functions. A second eye may also be included either as a control element that may be deactivated or a decorative element.

[0090] The devices to be controlled by the embodiments of man-machine interfaces described herein may vary. For example, video systems may be controlled, such as televisions, DVD players and/or recorders, digital video recorder system, video cassette players and/or recorders, automotive/marine video systems, airplane video systems, or video game systems. Audio systems may be controlled, such as home audio systems, mini audio systems, portable audio systems, automotive/marine audio systems, computer audio systems, or airplane audio systems. Further devices that may be controlled include but are not limited to computer systems, appliances.

[0091] Control elements provided herein having intuitive shapes and/or positions described above as associated with the man-machine interfaces may also be provided integral with various devices. For example, personal electronic devices such as portable disc players, portable media (audio and/or video) players, and portable radios will benefit from control elements having intuitive shapes and/or positions associated with the function. Personal care devices such as electric toothbrushes and electric razors will benefit from control elements having intuitive shapes and/or positions associated with the function. Personal healthcare devices such as blood pressure and glucose monitors will benefit from control elements having intuitive shapes and/or positions associated with the function. Communications devices such as telephonic communication devices and other electronic communications devices such as web content devices will also benefit from control elements having intuitive shapes and/or positions associated with the function. Personal comfort devices such as lift beds and lift chairs may also benefit from control elements having intuitive shapes and/or positions associated with the function as described herein. The

below described examples are not intended to be limiting, but rather set forth various configurations and applications of the control elements taught herein.

[0092] For example, and referring now to FIGS. 5A-5C, a portable disc player, such as a portable CD player **500** is shown. The player **500** includes a conventional base **534** and associated cover **536**. Features of the player such as power supplies and/or recharging interfaces, electronic circuitry, speakers, microphones, output jacks such as headphone outputs and other interfaces, battery cover elements, media slots; carrying straps, and/or other features found on conventional CD players may be provided. One or more various control elements according to aspects of the present invention are provided to control operation of the device. For example, control elements **502**, **504** in the position of and configuration of ears of an animate being may be used to control the volume; control elements **506**, **508** in the position of and configuration of eyes of an animate being may control functions such as track selection and/or track scanning; control element **510** in the position of a nose of an animate being and in the configuration of an octagonal “stop” sign symbol may be used to stop a track and/or control power functions such as shutting the device off; and control element **512** in the position of and configuration of a mouth of an animate being may be used to start a track and/or control power functions such as turning the device on. Further, a mechanical or electromechanical switch element **532** in the position of and configuration of a chin of an animate being may be used to open the cover **536**.

[0093] Referring now to FIG. 6, a portable tuner device, such as a portable radio **600** is shown. The portable radio **600** includes a conventional body **634** and optionally accommodating a suitable display **640**, for example, for displaying a selected tuner frequency **642**. In certain embodiments, the radio **600** is capable of being preprogrammed to allow a user to easily scroll through selected frequencies using the control elements provided herein. Features of the radio such as power supplies and/or recharging interfaces, electronic circuitry, speakers, microphones, output jacks such as headphone outputs and other interfaces, antennae, battery cover elements, media slots; carrying straps, and/or other features found on conventional AM/FM/TV/WEATHER radios and as well as satellite radio tuners may be provided. One or more various control elements according to aspects of the present invention are provided to control operation of the device. For example, control elements **602**, **604** in the position of and configuration of ears of an animate being may be used to control the volume; control elements **606**, **608** in the position of and configuration of eyes of an animate being may control functions such as scanning through tuner stations and selecting preset tuner frequencies; control element **610** in the position of a nose of an animate being and in the configuration of an octagonal “stop” sign symbol may be used to mute the device and/or control power functions such as shutting the device off; and control element **612** in the position of and configuration of a mouth of an animate being may be used to return to listening mode (un-mute) and/or control power functions such as turning the device on. Note that the display **640** is optional, wherein frequencies or stations are preset by a user, parent, guardian or caregiver, allowing a user to scroll through with suitable control elements, e.g., control elements **606**, **608** in the position of and configuration of eyes of an animate being.

[0094] Referring now to FIG. 7, a portable disc player with a video display, e.g., liquid crystal display (LCD) or organic light emitting diode (OLED) suitable for portable devices,

such as a portable DVD player **700** is shown. The player **700** includes a conventional base **734** and associated display **740** (e.g., LCD or OLED), for example, foldable about the base **734** as is conventionally known. Features of the player such as power supplies and/or recharging interfaces, electronic circuitry, speakers, microphones, output jacks such as headphone outputs and other interfaces, battery cover elements, media slots; carrying straps, and/or other features found on conventional portable video players may be provided. One or more various control elements according to aspects of the present invention are provided to control operation of the device. For example, control elements **702**, **704** in the position of and configuration of ears of an animate being may be used to control the volume; control elements **706**, **708** in the position of and configuration of eyes of an animate being may control functions such as track selection and/or track scanning; control element **710** in the position of a nose of an animate being and in the configuration of an octagonal “stop” sign symbol may be used to stop a track and/or control power functions such as shutting the device off; and control element **712** in the position of and configuration of a mouth of an animate being may be used to start a track and/or control power functions such as turning the device on.

[0095] Referring now to FIG. 8, a portable device such as a personal audio and/or video player, personal digital assistant, portable computer, portable video and/or audio monitor, or other portable device **800** is shown. The device **800** includes a conventional body **834** and associated display **840** (e.g., LCD or OLED), for example, built into the body **834** as is conventionally known. Features of the device such as power supplies and/or recharging interfaces, electronic circuitry, internal media storage (e.g., flash memory or built in magnetic hard drive), speakers, microphones, camera devices and circuitry (e.g., for video telephony, or for camera functionality on a monitor device, for example, serving as an in-home monitor for monitoring by a parent, guardian or caretaker), output jacks such as headphone outputs and other interfaces, wireless input/output circuitry and associated antennae, battery cover elements, media slots; carrying straps, and/or other features found on conventional portable devices may be provided. One or more various control elements according to aspects of the present invention are provided to control operation of the device. For example, control elements **802**, **804** in the position of and configuration of ears of an animate being may be used to control the volume; control elements **806**, **808** in the position of and configuration of eyes of an animate being may control functions such as track selection and/or track scanning; control element **810** in the position of a nose of an animate being and in the configuration of an octagonal “stop” sign symbol may be used to stop a track and/or control power functions such as shutting the device off; and control element **812** in the position of and configuration of a mouth of an animate being may be used to start a track and/or control power functions such as turning the device on. The device **800** may interface with various networks by a wired interface (e.g., a Universal serial bus, serial port connection, parallel port connection, IEEE 1394 connection (Firewire or iLink), ethernet connection) or wireless interface (e.g., wireless local area network, wireless broadband network, Bluetooth, cellular digital packet technology, wireless metropolitan networks, or other wireless connectivity).

[0096] As generally shown in FIGS. 9A, 9B, 10A, 10B, and 11, control elements according to certain embodiments of the present invention are well suited for telephonic devices.

These telephonic devices may include audio telephonic devices and/or video telephonic devices. Further, these telephonic devices may operate on various types of telephonic networks including but not limited to plain old telephone service (POTS), digital subscriber line (DSL), asymmetric digital subscriber line (ADSL), Voice over Internet Protocol (VOIP) (including but not limited to those wherein the Internet Protocol source is T-carrier lines (e.g., North America), E-carrier lines (e.g., European), DSL, ADSL, POTS, cable networks, cellular and/or satellite networks), cellular, and/or satellite. The various telephonic systems described herein may be wired or wireless. The various telephonic systems described herein may also be used to navigate certain Interactive Voice Response (IVR) systems, which are well known to be extremely cumbersome and frustrating to the average individual, thus are an extreme burden and oftentimes impossibility for certain individuals, including young children, elderly, those with severe arthritic or other physically debilitating conditions, or those with Alzheimer's disease, dementia, or other mentally debilitating conditions.

[0097] Referring now to FIGS. 9A and 9B a telephonic device such as a mobile or wireless telephone 900 is shown. The 900 includes a body 934. Features of the telephonic device such as power supplies and recharging interfaces, electronic circuitry, internal media storage (e.g., flash memory), speakers, microphones, output jacks such as headphone outputs and other interfaces, speakerphone functionality, camera devices and circuitry (e.g., for video telephony, or for camera functionality on a telephonic device), wireless input/output circuitry and associated antennae, battery cover elements, media slots; carrying straps, and/or other features found on conventional telephones may be provided. One or more various control elements according to aspects of the present invention are provided to control operation of the device. For example, control elements 902, 904 in the position of and configuration of ears of an animate being may be used to control the volume; control elements 906, 908 in the position of and configuration of eyes of an animate being may control functions such as scrolling through stored telephone numbers or images associated with certain telephone numbers, such as images of emergency symbols, images of family, caregivers and friends, images of doctors, and the like; control element 910 in the position of a nose of an animate being and in the configuration of an octagonal "stop" sign symbol may include a video display for displaying the above mentioned images or numbers and/or to select an image or number (e.g., "stop" when a desired image is displayed) by touch screen functionality or other depressible element (e.g., the ring of the octagon shape configured to be depressed whereas a display is positioned within the octagon shape); and control element 912 in the position of and configuration of a mouth of an animate being may be used as a "call" button similar to existing phones to send a call to a selected party and/or control power functions such as turning the phone on. Further, a speaker device 946 is provided, for example, at the positions of cheeks of an animate being, and a microphone device 944 is provided, for example, at the location of a chin of an animate being.

[0098] In a further embodiment, and referring now to FIG. 9C, an example of an interface 950 is provided, for example, in the form of a keypad that is configured and dimensioned to slide within a portion of the phone 900. The interface 950 may be used to program in certain contacts and other information to allow a user to use the phone 900 without the need for

traditional keypads or the like to input the number of party to be called. Rather, a parent, guardian or caregiver may input this information. The interface 950 may be secured within a portion of the phone 900, for example, with a tamper resistant structure or other locking device such as one or more screws. Note this interface 950 may also be used in other telephonic devices 1000 and 1100 described further herein.

[0099] Referring now to FIGS. 10A and 10B a telephonic device such as a mobile or wireless telephone 1000 is shown similar to that shown in FIGS. 9A and 9B, except that a display 1040 (e.g., LCD or OLED) is provided on a foldable body portion 1036 foldably or slidably attached to includes a body 1034 rather than within the control element 1010 positioned in the location of a nose of an animate being and configured as the configuration of an octagonal "stop" sign symbol. Features of the telephonic device such as power supplies and recharging interfaces, electronic circuitry, internal media storage (e.g., flash memory), speakers, microphones, output jacks such as headphone outputs and other interfaces, speakerphone functionality, camera devices and circuitry (e.g., for video telephony, or for camera functionality on a telephonic device), wireless input/output circuitry and associated antennae, battery cover elements, media slots; carrying straps, and/or other features found on conventional telephones may be provided. One or more various control elements according to aspects of the present invention are provided to control operation of the device. For example, control elements 1002, 1004 in the position of and configuration of ears of an animate being may be used to control the volume; control elements 1006, 1008 in the position of and configuration of eyes of an animate being may control functions such as scrolling through stored telephone numbers or images associated with certain telephone numbers, such as images of emergency symbols, images of family, caregivers and friends, images of doctors, and the like, that are displayed on display 1140; control element 1010 in the position of a nose of an animate being and in the configuration of an octagonal "stop" sign symbol may be used to select an image or number (e.g., "stop" when a desired image is displayed) and/or control power functions such as shutting the phone off; and control element 1012 in the position of and configuration of a mouth of an animate being may be used as a "call" button similar to existing phones to send a call to a selected party and/or control power functions such as turning the phone on. Further, a speaker device 1046 is provided, for example, on body portion 1036, and a microphone device 1044 is provided, for example, at the location of a chin of an animate being.

[0100] Referring now to FIGS. 11A and 11B a telephonic device such as conventional style telephone 1100 is shown having a base 1134 with an associated handset 1152 (wired or wireless) having a microphone and speaker. Features of the telephonic device such as power supplies, electronic circuitry, internal media storage (e.g., flash memory or built in magnetic hard drive), speakers, microphones, output jacks such as headphone outputs and other interfaces, speakerphone functionality, camera devices and circuitry (e.g., for video telephony, or for camera functionality on a telephonic device), other input interfaces, wireless input/output circuitry and associated antennae, battery cover elements, media slots; carrying straps, and/or other features found on conventional telephones may be provided. One or more various control elements according to aspects of the present invention are provided to control operation of the device. For example,

control elements **1102**, **1104** in the position of and configuration of ears of an animate being may be used to control the volume; control elements **1106**, **1108** in the position of and configuration of eyes of an animate being may control functions such as scrolling through stored telephone numbers or images associated with certain telephone numbers, such as images of emergency symbols, images of family, caregivers and friends, images of doctors, and the like, that are displayed on display **1140** (e.g., LCD, OLED, CRT, projection-based, plasma); control element **1110** in the position of a nose of an animate being and in the configuration of an octagonal “stop” sign symbol may be used to select an image or number (e.g., “stop” when a desired image is displayed) and/or control power functions such as shutting the phone off, or hanging the phone up; and control element **1112** in the position of and configuration of a mouth of an animate being may be used as a “call” button similar to existing phones to send a call to a selected party and/or control power functions such as turning the phone on.

[0101] Referring now to FIG. 12, a control device **1200** such as a light switch conventional lighting sources is shown. The device **1200** includes a body **1234** including associated circuitry and hardware to replace existing light switch devices. One or more various control elements according to aspects of the present invention are provided to control operation of the device. For example, control elements **1206**, **1208** in the position of and configuration of eyes of an animate being may control functions such as reducing light intensity (**1206**) and increasing light intensity (**1208**), or changing light color; control element **1210** in the position of a nose of an animate being and in the configuration of an octagonal “stop” sign symbol may be used to shut off the light; and control element **1212** in the position of and configuration of a mouth of an animate being may be used to turn on the light.

[0102] Referring now to FIGS. 13A-C, a control element **1388** is provided that slides or switches from a first position indicated in FIG. 13A for full light intensity, a second to a second position indicated in FIG. 13B for medium intensity, to an “off” position indicated in FIG. 13C, or optionally any position therebetween.

[0103] Referring now to FIG. 14, a display device **1400** is shown. The display device **1400** includes a body **1434** and a display area **1440** (e.g., LCD, OLED, CRT, projection-based, plasma). Features of the device such as power supplies and recharging interfaces, input interfaces, electronic circuitry, speakers, microphones, output jacks such as headphone outputs and other interfaces, camera devices and circuitry (e.g., for video telephony, or for camera functionality on a monitor device, for example, serving as an in-home monitor for monitoring by a parent, guardian or caretaker), wireless input/output circuitry and associated antennae, battery cover elements, media slots; carrying straps, and/or other features suitable for display devices may be provided. One or more various control elements according to aspects of the present invention are provided to control operation of the device. For example, control elements **1402**, **1404** in the position of and configuration of ears of an animate being may be used to control the volume; control elements **1406**, **1408** in the position of and configuration of eyes of an animate being may control functions such as scanning up or down, for example, within a document, image or web page, scanning through a series of documents, images or web pages, enlarging/decreasing the typeface of text materials, and/or zooming in and out of images (note depressing combinations of control elements

1406, **1408** and other control elements may be used to toggle between these various functions, or only one function may be designated); optional control elements **1456**, **1458** in the position of and configuration of eyebrows of an animate being may be used to control certain functions described with respect to control elements **1406**, **1408**, control element **1410** in the position of a nose of an animate being and in the configuration of an octagonal “stop” sign symbol may be used to stop scanning through documents, images or web pages and/or control power functions such as shutting the display device off; and control element **1412** in the position of and configuration of a mouth of an animate being may be used to mute/unmute the device and/or control power functions such as turning the display device on. The display device may be used for various features, such as a television, a computer monitor, an in-home monitoring component (e.g., where the device **1400** includes a suitable camera element and interconnectivity with an associated device) video player (e.g., where the device **1400** includes suitable media sources including but not limited to internal storage (e.g., magnetic and/or flash memory) discs, cassettes, media cards or sticks, or suitable interconnectivity with media sources such as satellite network devices, cable network devices, and intranet or Internet devices). In further embodiments, suitable software is provided for use with device **1400** having features therein that are programmed to interact with one or more of the control elements **1402**, **1404**, **1406**, **1408**, **1456**, **1458**, **1410** and **1412**.

[0104] Referring now to FIG. 15, a display device **1500** is shown. The functionality of the device may be similar to device **1400** described above, except that the control elements may be displayed on a display area **1540** and operate as touch screen controls.

[0105] Referring now to FIG. 16, a picture frame device **1600** is shown. Picture frame device **1600** includes a body **1634** and a display area **1640**. Display area **1640** may be in the form of a mechanical structure for holding one or more pictures, for example, in a scrolling structure. Alternatively, or in combination, display area **1640** may include an electronic controlled display (e.g., LCD, OLED, CRT, projection-based, plasma) for displaying still images or video content, for example, loaded within an on-board memory source, provided through external media, or provided through an external media source with a suitable interface. Features of the device such as power supplies and recharging interfaces, electronic circuitry, speakers, microphones, output jacks such as headphone outputs and other interfaces, camera devices and circuitry (e.g., for video telephony, or for camera functionality on a monitor device, for example, serving as an in-home monitor for monitoring by a parent, guardian or caretaker), suitable media sources including but not limited to internal storage (e.g., magnetic and/or flash memory) discs, cassettes, media cards or sticks, wireless input/output circuitry and associated antennae, other input interfaces, battery cover elements, media slots; carrying straps, and/or other features suitable for picture frame devices may be provided. One or more various control elements according to aspects of the present invention are provided to control operation of the device. For example, control elements **1602**, **1604** (optional) in the position of and configuration of ears of an animate being may be used to activate or control the volume of voice greetings or the like, for example, associated with certain pictures; control elements **1606**, **1608** in the position of and configuration of eyes of an animate being may control functions such as scanning up or down, for example, through a

series of images or pictures, scanning forward through video content, and/or zooming in and out of images; control element **1610** in the position of a nose of an animate being and in the configuration of an octagonal “stop” sign symbol may be used to stop scanning through pictures and/or control power functions such as shutting the display device off; and control element **1612** in the position of and configuration of a mouth of an animate being may be used to mute/unmute the device and/or control power functions such as turning the display device on.). In further embodiments, suitable software is provided for use with device **1600** having features therein that are programmed to interact with one or more of the control elements **1602**, **1604**, **1606**, **1608**, **1610** and **1612**.

[**0106**] Referring now to FIG. **17**, a keyboard device **1700** is shown. Keyboard device **1700** includes a body **1734** and a conventional keyboard region **1760**. Keyboard region **1760** may be provided as shown, for example, as a standard QWERTY keyboard, or in another configuration suitable for the intended user. For example, for young children learning the alphabet, or for those with little or no experience or debilitated abilities preventing use of a conventional QWERTY arrangement, alphabetical key arrangement may be desirable. Further, fewer or additional keys for various functions may be provided. Features of the device such as circuitry, speakers, microphones, output jacks such as headphone outputs and other interfaces, camera devices and circuitry (e.g., for video telephony, or for camera functionality on a monitor device, for example, serving as an in-home monitor component for monitoring by a parent, guardian or caretaker), suitable media sources including but not limited to internal storage (e.g., magnetic and/or flash memory) discs, cassettes, media cards or sticks, wireless input/output circuitry and associated antennae, other input interfaces, battery cover elements, media slots; carrying straps, and/or other features suitable for keyboard devices may be provided. One or more various control elements according to aspects of the present invention are provided to control operation of the device. For example, control elements **1702**, **1704** (optional) in the position of and configuration of ears of an animate being may be used to activate or control the volume of a device associated with the keyboard such as a computer or television; control elements **1706**, **1708** in the position of and configuration of eyes of an animate being may control functions such as scanning up or down, for example, through a series of documents or images, scanning forward through video content, enlarging/decreasing the typeface of text materials, and/or zooming in and out of images; control element **1710** in the position of a nose of an animate being and in the configuration of an octagonal “stop” sign symbol may be used to stop scanning through pictures, provide a “no” response to a text, visual and/or audio prompt, and/or control power functions such as shutting the display device off; and control element **1712** in the position of and configuration of a mouth of an animate being may be used to turn on an associated microphone, mute/unmute the device provide a “yes” response to a text, visual and/or audio prompt, and/or control power functions such as turning the display device on.). In further embodiments, suitable software is provided for use with device **1700** having features therein that are programmed to interact with one or more of the control elements **1702**, **1704**, **1706**, **1708**, **1710** and **1712**. For example, a service such as a television display Internet and/or email system may benefit from using a keyboard **1700**.

[**0107**] Referring now to FIGS. **18A-20**, various embodiments of handheld toothbrushes, for example, incorporating one or more battery operated motors to rotation and/or vibrate a brush head are shown. These toothbrushes may be disposable, battery operated, rechargeable, and/or including replaceable heads and may be used on various sized toothbrushes for adults and children. Further, various toothbrushes described herein may incorporate various characters, for example, having facial features that form the control elements. Additionally, various toothbrushes described herein may include an automatic shut-off timer.

[**0108**] FIGS. **18A** and **18B** show one embodiment of a toothbrush **1800** including a head **1862** and a handle **1864**. A face portion **1866** includes a control element **1812** in the position of and configuration of a mouth of an animate being that may be used for turning the toothbrush on, and a control element **1810** in the position of a nose of an animate being and in the configuration of an octagonal “stop” sign symbol for turning the toothbrush off. Optionally, indicators **1806**, **1808** may indicate whether the device is on, for example, with a suitable light such as a green LED light.

[**0109**] FIG. **19** shows another embodiment of a toothbrush **1900** including a head **1962** and a handle **1964**. A face portion **1966** includes a control element **1912** in the position of and configuration of a mouth of an animate being that may be used for toggling the toothbrush between “on” and “off” states. Further, indicators **1906**, **1908** in the configuration of and/or position of eyes of an animate being indicate whether the device is on, for example, with a suitable light such as a green LED light.

[**0110**] FIG. **20** shows another embodiment of a toothbrush **2000** including a head **2062** and a handle **2064**. A face portion **2066** includes an indicator **2012** in the position of and configuration of a mouth of an animate being that may, for example, light up when the toothbrush is in the “on” state. Further, control elements **2006**, **2008** in the configuration of and/or position of eyes of an animate being may be used to switch the device between the “on” and “off” states.

[**0111**] Referring now to FIGS. **21-26**, various embodiments of devices that may be useful to control functions in a healthcare setting or for motorized beds are shown using various control elements according to embodiments of the present invention.

[**0112**] FIG. **21** shows a remote control device **2100**, for example, for controlling a television, particularly adapted for use with, for example, hospital environments. For example, as shown, control elements **2102**, **2104** are in the configuration of and position of ears, and may be pre-set or programmed to control audio functions such as volume. Also, as shown, control elements **2106**, **2108** are in the configuration of and position of eyes, and may be pre-set or programmed to control video functions such as channels, programs or files (e.g., on stored media), or other video functions. Control element **2110** is in the configuration of an octagonal stop sign and in the position of a nose, and may be used to control “off” functions or other pre-set or preprogrammed functions. Control element **2112** is in the configuration of and position of a mouth and may control power “on” functions, or other pre-set or preprogrammed functions. Further, a control element **2170** is provided, for example, in the configuration and position of a nurse’s cap, which is suitable as control for a nurse call or other assistance alert.

[**0113**] FIGS. **22A** and **22B** show a controller device **2200** for controlling operations of a hospital bed. One or more

various control elements according to aspects of the present invention are provided to control operation of the device. For example, control elements **2274**, **2276** are in the position of a head of an animate being printed or raised on the body **2234** of the device **2200** and are programmed to control lowering and raising of the head or upper body portion of a bed. Control elements **2278**, **2280** are in the position of a body of an animate being printed or raised on the body **2234** of the device **2200** and are programmed to control lowering and raising of the entire bed. Control elements **2282**, **2284** are in the position of feet or legs of an animate being printed or raised on the body **2234** of the device **2200** and are programmed to control lowering and raising of the feet or lower body portion of the bed. The buttons may be configured on the device as shown in FIG. **22B**, wherein the face of the device **2200** includes the control elements separated by gaps, and wherein the control elements are suitably connected to the motor control devices of the bed.

[0114] Referring now to FIGS. **23** and **24**, devices are shown wherein the control elements for controlling elevation of the head and feet are provided by sliding control elements **2374**, **2474**, **2382**, and **2482**. Control elements **2374**, **2474** are in the configuration of or include a depiction of a head or a face of an animate being, and slide to control elevation of one's head or upper body. Control elements **2382**, **2482** are in the configuration of or include a depiction of a foot of an animate being, and slide to control elevation of one's feet or legs.

[0115] Referring now to FIG. **25**, a device is shown wherein the control elements for controlling elevation of the head, feet, bed and controlling light intensity are provided by sliding control element **2574** in the form of a head or face, control element **2582** in the form of a foot, control element **2586** in the form of a body, and control element **2588** slidable between a first position **2590** indicating closed eyes for darkness and a second position **2592** indicating open eyes for turning the light on full intensity.

[0116] Referring now to FIG. **26**, a control device **2600** is provided having a body **2634** with a post element **2694** therein. A control element **2674** in the configuration of a head or face of an animate being is provided having one end pivotally attached to post element **2694**, wherein rotating the control element elevates or lowers the upper body portion of a motorized bed. Further, a control element **2682** in the configuration of a foot and/or leg of an animate being is provided having one end pivotally attached to post element **2694**, wherein rotating the control element elevates or lowers the lower body portion of a motorized bed.

[0117] Referring now to FIGS. **27** and **28**, various embodiments of clocks using control elements according to embodiments of the present invention are shown. Clock **2700** includes a box shaped body, for example, like conventional clock radios and includes various control elements for controlling radio and/or clock functions of the clock **2700**. Control elements **2706**, **2708** in the configuration of and position corresponding to eyes of an animate being may be used to dim or brighten the clock display **2740** illumination or other integral or separate light fixture. Control elements **2702**, **2704** in the configuration of and position corresponding to ears of an animate being may be used to increase or decrease the volume of an alarm or audio function of the clock **2700**. A control element **2710** in the configuration of an octagonal stop sign and position corresponding to a nose of an animate being may be used to shut the device off or perform "snooze" functions

in an alarm clock. A control element **2712** in the configuration of and position corresponding to a mouth of an animate being may be used to turn on the radio functions of a device, and/or speak the time wherein the clock **27** includes functionality to provide audible time alerts. FIG. **28** shows a similar clock **2800**, wherein the control elements **2802**, **2804**, **2806**, **2808**, **2810**, **2812** are incorporated in a body in the style of a conventional clock face, for example, to allow one with various debilitating conditions to remember that the digital display **2840** represents a time and/or date information.

[0118] Referring now to FIGS. **29A** and **29B**, front and back views of a camera device **2900** is provided including control elements according to certain embodiments of the present invention. FIG. **29A** depicts a side of the camera **2900** that the user looks at, for example, including a conventional viewfinder **2994**. To zoom in and out, control elements **2906**, **2908** in the position of and/or configuration of eyes of an animate being are used. Control element **2912** may be used to snap the photograph or digital picture. Control element **2904** may be used to wind film, for example, in conventional film based cameras. Referring to FIG. **29B**, the face of the camera that the subject views is depicted. The lens **2911** may be positioned in a location corresponding to the nose of an animate being. The depiction of eyes and a smile are provided, for example, to induce the subject to smile.

[0119] In certain embodiments, it may be desirable to add functionality as needs or abilities of a user grows. For example, a parent, guardian or caregiver may initially not want a user to change the video display (e.g., television channel). The control elements for the video display, e.g., in the position and/or general shape of eyes, may be removed or disabled accordingly upon initial use. At an appropriate time, the control elements for the video display, e.g., in the position and/or general shape of eyes, may be added or enabled accordingly. Thus, the device may be capable of both de-scalable de-configuration, or scalable re-configuration.

[0120] Accordingly, methods are also provided by the invention herein to remotely operate a device or interface with a machine. The method includes controlling audio functions with operation of at least one control element in the shape of an ear or positioned on a body at a location corresponding to an ear on a face. Alternatively, or in combination, a method of operating a remote control comprises controlling video functions with operation of at least one control element in the shape of an eye or positioned on a body at a location corresponding to an eye on a face.

[0121] In certain embodiments, media may be programmed specifically for use with the man-machine interfaces described herein. For example, an interactive DVD may be pre-programmed to respond to certain actuations of "ear" position or shape elements, "eye" position or shape elements, "nose" position or shape elements, or "mouth" position or shape elements. Of course, the media may be a DVD as mentioned, or embodied within one or more diskettes, flash memory devices, CD-ROMs, magnetic hard drives, accessible via Internet sites, or combinations comprising at least one of the foregoing media forms. In certain embodiments, interactive media described above may be sold with the man-machine interface. In other embodiments, interactive media described above may be sold separately, or separately created by a user, parent, guardian or caregiver.

[0122] As used herein, "animate being" refers to humans, animals, animated characters, dolls, toys (e.g., those including plastic toy figure and detachable plastic body parts for

affixing to the toy figure to form various caricatures, such as “Mr. Potato Head®” registered to Hasbro, Inc., Pawtucket, R.I.) puppet characters (including but not limited to those owned by Sesame Workshop Corporation, New York, N.Y., The Muppets Holding Company, LLC of Burbank Calif., or other similar puppet caricatures and fictional characters), any other fictional character (e.g., fictional depictions of humans, animals, extraterrestrial organisms, cyborgs, hybrids, etc.), androids, or the like.

[0123] Certain display devices in the configuration of and/or position of a mouth or smile on an animate being are useful for functions associated with turning a device on, for instance, since it can make one happy, or for muting/unmuting a device, as in holding one’s finger to the mouth to indicate desired quietness. Certain display devices in the configuration of and/or position of an ear may be useful as associated with volume controls. Certain display devices in the configuration of and/or position of an eye may be useful as associated with images, either to transform the way they look, or to scroll through them. Certain display devices in the configuration of and/or position of a nose are used control off features, as in holding one’s nose.

[0124] The herein provided devices according to various embodiments of the present invention in the form of remote controls provide an easy to use remote control with limited functions, for example, suitable for those that have trouble with, or do not need, all of the functions available on a standard remote. It is ideal for the elderly, people with Alzheimer’s Disease or Dementia, those who are cognitively or visually impaired, those who are physically disabled including arthritis sufferers. It may be set by caregivers. Further, the remote control according to certain embodiments of the present invention may be particularly well suited for children.

[0125] The intuitive control elements, for example those based on parts of a face of an animate being, allows for ease of use. For example, one sees with their eyes, so the channel up (+) and channel down (–) buttons are in the elements configured as or in the position of eyes. One hears with their ears, so the volume up (+) and volume down (–) buttons are located on the elements configured as or in the position of ears. When a device is switched in, it may make one smile, so an “ON” in certain embodiments button is located on the smiling mouth. The “OFF” button is on a control element in the configuration of a red stop sign and in the position of nose. These control elements allow one to utilize the natural ability to recognize faces to associate certain functions with elements of a face, providing a user with every possible clue via the configuration and/or position of control elements. Fur-

ther, certain embodiments of the present invention may satisfy the Principles of Universal Design and their guidelines and/or be based upon the concepts of the Montessori Educational Approach and/or the theory of Retrogenesis.

[0126] While preferred embodiments have been shown and described, various modifications and substitutions may be made thereto without departing from the spirit and scope of the invention. Accordingly, it is to be understood that the present invention has been described by way of illustrations and not limitation.

1-62. (canceled)

63. A remote control unit comprising a body;

shaped indicia control elements on the body graphically indicating the function of said shaped indicia control elements, said shaped indicia control elements in the form of human ears and/or eyes,

wherein said control elements are adaptable to be interfaced directly with an existing remote control at least partially positioned within the body, adaptable to be interfaced with a removable and programmable controller therein designed specificity for the remote control unit at least partially positioned within the body, or

adaptable for direct programming.

64-74. (canceled)

75. An interactive system comprising

a control device including at least one control element shaped in the form of, or positioned in a configuration on the control device corresponding to, a part of the face or body selected from the group consisting of ears, eyes, mouth, nose, cheek, chin, legs, feet, head, hands, or abdomen;

wherein the control element performs a function of the device associated

with the part of the face

a pre-programmed interactive media sub-system, said media sub-system having functions that interact with at least one control element on the control device.

76. The interactive system as in claim **75**, wherein said media sub-system comprises a DVD.

77. The interactive system as in claim **75**, wherein said media sub-system comprises a computer programmed sub-system stored on a form of media selected from the group consisting of diskettes, flash memory devices, CD-ROMs, DVDs, magnetic hard drives, and combinations comprising at least one of the foregoing media forms.

* * * * *