



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 074 232
A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 82304539.8

(51) Int. Cl.³: B 65 D 71/00

(22) Date of filing: 27.08.82

(30) Priority: 28.08.81 US 297092

(43) Date of publication of application:
16.03.83 Bulletin 83/11

(84) Designated Contracting States:
BE DE FR GB IT LU NL



(71) Applicant: THE MEAD CORPORATION
Courthouse Plaza Northeast
Dayton, Ohio 45463(US)

(72) Inventor: Wood, Prentice J.
3244 North Fulton Avenue APT. G-10
Hapeville Georgia 30354(US)

(74) Representative: Hepworth, John
J.M. Hepworth & Co. Furnival House 14/18 High Holborn
London, WC1V 6DE(GB)

(54) Article carrier.

(57) An article carrier comprising a bottom wall (1) a pair of side walls (2, 11) and end wall panels (5, 9 : 6, 10) upstanding from the bottom wall, a pair of riser panels (16, 17) and a pair of medial panels (20, 21) joined respectively to the medial edges of the end wall panels at the associated ends of the carrier and extending inwardly therefrom, a handle structure (28-31) joined to the riser panels and the medial panels and extending upwardly therefrom, a transverse partition panel (45, 46) joined to one of the medial panels (20, 21) and extending between the one medial panel and the adjacent side wall (11, 2) an anchoring tab (57, 58) foldably joined to the transverse partition panel (45, 46) and being adhered to the adjacent side wall, and the upper portion of the transverse partition panel being bowed outwardly toward the adjacent end of the carrier.

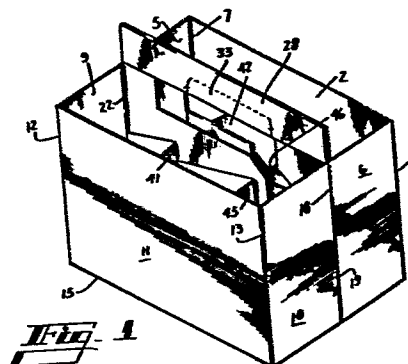

EP 0 074 232 A2

- 1 -

ARTICLE CARRIER

TECHNICAL FIELD

This invention relates to article carriers which are economical to produce and at the same time are aesthetically pleasing in appearance.

BACKGROUND ART


Article carriers are known in which at least a portion
5 of the anchoring means for certain of the transverse partition panels is struck in part from one or more of the carrier end wall panels. Of course this causes the carrier to be unattractive in appearance.

DISCLOSURE OF THE INVENTION

The invention provides an article carrier comprising a
10 bottom wall, a pair of side walls foldably joined respectively to the side edges of said bottom wall, end wall panels foldably joined respectively to the end edges of said side walls and extending inwardly therefrom, riser panels foldably joined respectively to the medial edges of said end wall panels at
15 one end of the carrier and extending inwardly therefrom, medial panels foldably joined respectively to the medial edges of said end wall panels at the other end of the carrier and extending inwardly therefrom, a handle structure joined to upper portions of said riser panels and said medial panels

0074232

and extending upwardly therefrom, a transverse partition
panel foldably joined to one of said medial panels and
extending substantially outwardly to the adjacent side wall
and being disposed in angular relationship with respect to a
5 notional perpendicular connection therebetween, an anchoring
tab joined to said transverse partition panel remote from said
medial panel and being adhered to said adjacent side wall,
characterized in that the upper portion of said transverse
partition panel is bowed outwardly toward the adjacent end
10 of the carrier.

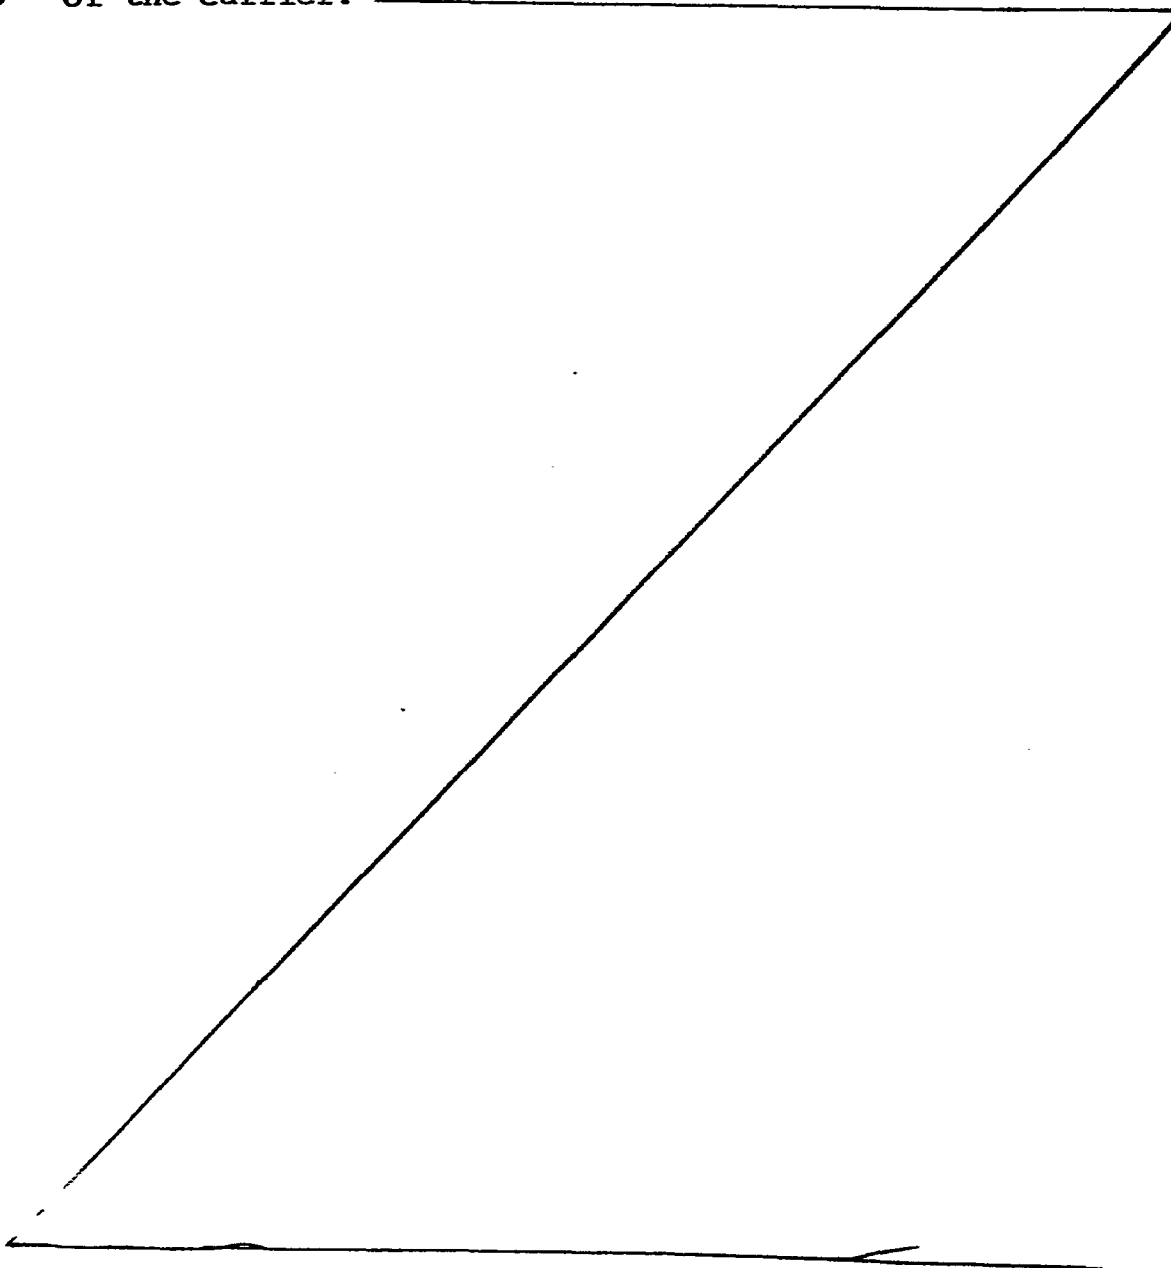

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, FIG. 1 is an isometric view of an article carrier constructed according to this invention; FIG. 2 is a plan view of the blank from which the carrier is formed; FIGS. 3, 4, 5 and 6 depict intermediate stages through which the carrier is folded and glued into a complete and collapsed carrier as shown in FIG. 7; and FIG. 8 is an isometric view of a portion of the transverse partition structure.

BEST MODE FOR CARRYING OUT THE INVENTION

In the drawings the numeral 1 designates the bottom wall of the carrier to a side edge of which side wall 2 is foldably joined along fold line 3. In addition, bottom wall 1 is provided with medial fold line 4.

End wall panels 5 and 6 are foldably joined to the end edges of side wall 2 respectively along fold lines 7 and 8. In like manner end wall panels 9 and 10 are foldably joined respectively to the end edges of side wall 11 along fold lines 12 and 13. Anchoring flap 14 is joined to the lower edge of side wall 11 along fold line 15. Also riser panels 16 and 17 are joined respectively to end wall panels 10 and 6 along fold lines 18 and 19.

Medial structure for the carrier is provided in a form of medial panels 20 and 21 which are foldably joined respectively to end wall panels 9 and 5 along fold lines 22 and 23. In addition, medial partition panels 24 and 25 are joined to the upper and lower edges respectively of medial panel 21 along fold lines 26 and 27.

Handle structure for the carrier is provided in the form of handle panels 28, 29, 30 and 31. Handle panels 28 and 29 are joined respectively to riser panels 16 and 17 along fold lines 18 and 19 and handle panel 30 is joined to handle panel 28 along fold line 32.

Hand cushioning means is provided in the form of flaps 33 and 34 which are joined respectively to handle panels 28 and 29 along fold lines 35 and 36. Additionally, handle panel 28 is joined to handle panel 29 along fold line 37 and, in similar fashion, handle panel 30 is joined to handle panel 31 along fold line 38. Also locking tab 39 is joined to handle panel 29 along fold line 40.

Transverse partitioning structure for the carrier is provided in the form of transverse partition panels 41 and 42 which are joined respectively to medial panels 20 and 21 along fold lines 43 and 44.

Additional transverse partition structure is provided in the form of transverse partition panels 45 and 46. More specifically, transverse partition panel 45 is joined to medial panel 20 by means of fold line 47 and web panel 48. In similar fashion, transverse partition panel 46 is joined to medial panel 21 by means of fold line 49 and web panel 50.

Transverse partition panel 41 is provided with anchoring tab 51 which is joined thereto by means of fold lines 52 and 53. In like manner anchoring tab 54 is joined to transverse partition panel 42 along fold lines 55 and 56.

As best viewed in FIG. 2, anchoring tabs 57 and 58 are struck substantially respectively from transverse partition panels 45 and 46. Further anchoring tab 57 is joined to transverse partition tab 45 along angular fold lines 59 and 60 and, in like manner, anchoring tab 58 is joined to transverse partition panel 46 along angular fold lines 61 and 62. Anchoring tabs 57 and 58 are provided with bend lines 63 and 64.

According to another feature of this invention, keel panel 65 is joined to the lower edge of medial panel 20 along fold line 66 and locking aperture 67 is formed astride the fold line 66. Also locking tab 68 is formed along the periphery of locking aperture 67. To complete the locking structure, locking tab 69 is

D-2237

-4-

formed along the lower edge of medial panel 21.

In order to form the carrier from the blank shown in FIG. 2, initially it is necessary to apply glue to handle panels 30 and 31 as shown by stippling in FIG. 2. Then it is simply necessary to elevate and fold handle panels 30 and 31 upwardly and to the right along fold line 32 into the positions shown in FIG. 3. Then medial partition panel 24 is folded rearwardly and downwardly, as viewed in FIG. 2, along fold line 26. Also riser panels 16 and 17 are elevated and folded to the left respectively along fold lines 18 and 19. The carrier then appears as shown in FIG. 3.

Thereafter glue is applied to anchoring tabs 51, 54, 57 and 58 as shown by stippling in FIG. 3. Following this the medial structure for the carrier is elevated and folded over along fold lines 7 and 12 into the positions shown in FIG. 4.

Then locking tab 39 is folded upwardly and to the right along fold line 40 into an interlocking relationship with medial panel 21 as best shown in FIGS. 5 and 6. Also keel panel 65 is folded downwardly along fold line 66. The carrier then appears as shown in FIG. 5.

Following this operation, medial partition panel 25 is elevated and folded over along fold line 27. Also bottom wall 1 is folded along medial fold line 4 to occupy the position shown in FIG. 6. Then an application of glue is made to anchoring flap 14 as well as to medial panels 20/21, keel panel 65, riser panels 16 and 17, handle panels 30 and 31, and medial partition panels 24 and 25, as shown by stippling in FIG. 6. Then the portions of the carrier disposed above fold line 38 are simply elevated and folded downwardly to occupy the positions shown in FIG. 7 which represents the carrier in complete and collapsed condition.

In order to set up the carrier, it is simply necessary to expand side walls 2 and 11 into positions whereby bottom wall 1 folds into ^a/flat plane. Then the

D-2237

-5-

associated end of bottom wall 1 is manipulated into locking engagement with locking tabs 68 and 69.

Since anchoring tabs 57 and 58 are struck substantially from the respective transverse partition panels 45 and 46 and not from end panels 9 and 5, when the carrier is fully assembled and glued, the structural relationships between transverse partition panels 45 and 46 and the other elements of the carrier cause these panels to assume an angular relationship with respect to the medial structure and the side walls which varies slightly from perpendicular. This causes the associated end cell to be somewhat larger in size than desired.

In order to compensate for the oversized end cells, the upper portions of transverse partition panels 45 and 46 are caused to bow slightly outwardly whereby proper spacing is achieved between the transverse partition panel and the associated end wall panel. This is accomplished by means of web panels 48 and 50 which, when the carrier is set up, cause the upper portions of transverse partition panels 45 and 46 to bow or bend toward the respective end wall panels 9 and 5.

To further cause transverse partition panels 45 and 46 to bend in an outward fashion along the upper portions thereof, angular fold lines 59-62 are provided. Since fold lines 59-62 diverge outwardly with respect to the ends of transverse partition panels 45 and 46, as the carrier is set up, additional stress is introduced along the upper portions thereof thereby causing them to bow outwardly.

INDUSTRIAL APPLICABILITY

By this invention a carrier is provided which is economical to produce, aesthetically pleasing and at the same time compensates for inherent undesirable angular dispositions of certain of the transverse partition panels.

- 6 -

CLAIMS

1. An article carrier comprising a bottom wall (1), a pair of side walls (2,11) foldably joined respectively to the side edges of said bottom wall, end wall panels (5,9: 6,10) foldably joined respectively to the end edges of said side walls and extending inwardly therefrom, riser panels (16,17) foldably joined respectively to the medial edges of said end wall panels (10,6) at one end of the carrier and extending inwardly therefrom, a medial panels (20,21) foldably joined respectively to the medial edges of said end wall panels (9,5) at the other end of the carrier and extending inwardly therefrom, a handle structure (28-31) joined to upper portions of said riser panels and said medial panels and extending upwardly therefrom, a transverse partition (45,46) panel foldably joined to one of said medial panels (20,21) and extending substantially outwardly to the adjacent side wall (11,2) and being disposed in angular relationship with respect to a notional perpendicular connection therebetween, an anchoring tab (57,58) joined to said transverse partition panel (45,46) remote from said medial panel and being adhered to said adjacent side wall, characterised in that the upper portion of said transverse partition panel is bowed outwardly toward the adjacent end of the carrier.

2. An article carrier according to claim 1 further characterized in that said transverse partition panel (45,46) is foldably joined in part to said one medial panel by means of a web panel (48,50).

5 3. An article carrier according to claim 2 further characterized in that the upper portion of said transverse partition panel is foldably joined to said one medial panel by means of said web panel.



10 4. An article carrier according to any of the preceding claims, further characterized in that said anchoring tab (57, 58) is joined to said transverse partition panel (45,46) by means of an angular fold line.

15 5. An article carrier according to claim 3 further characterized in that said anchoring tab is joined to said transverse partition panel by means of a pair of angular fold lines (59,60: 61,62).

20 6. An article carrier comprising a bottom wall, (1) a pair of side walls (2,11) foldably joined respectively to the side edges of said bottom wall, end wall panels (5,9: 6,10) foldably joined respectively to the end edges of said side walls and extending inwardly therefrom, riser panels (16,17) foldably joined respectively to the medial edges of said end wall panels (10,6) at one end of the carrier and extending inwardly therefrom, medial panels (20,21) foldably joined respectively to the medial edges of said end wall panels (9,5) at the other
25 end of the carrier and extending inwardly therefrom, a handle

structure (28-31) joined to the upper portions of said riser panels and said medial panels and extending upwardly therefrom, characterized in that a keel panel (65) is foldably joined to the lower edge of one of said medial panels (20),
5 the keel panel having a locking aperture (67) disposed astride the fold line between said keel panel and said one medial panel, said locking aperture including a locking tab (68) located on the periphery of said locking aperture and arranged to cooperate with one end edge of said bottom wall to maintain
10 the carrier in a set up condition.

7. An article carrier according to claim 6 further characterized in that a second locking tab (69) is formed along the lower edge of the other of said medial panels (21) and arranged to cooperate with said one end edge of said
15 bottom wall.

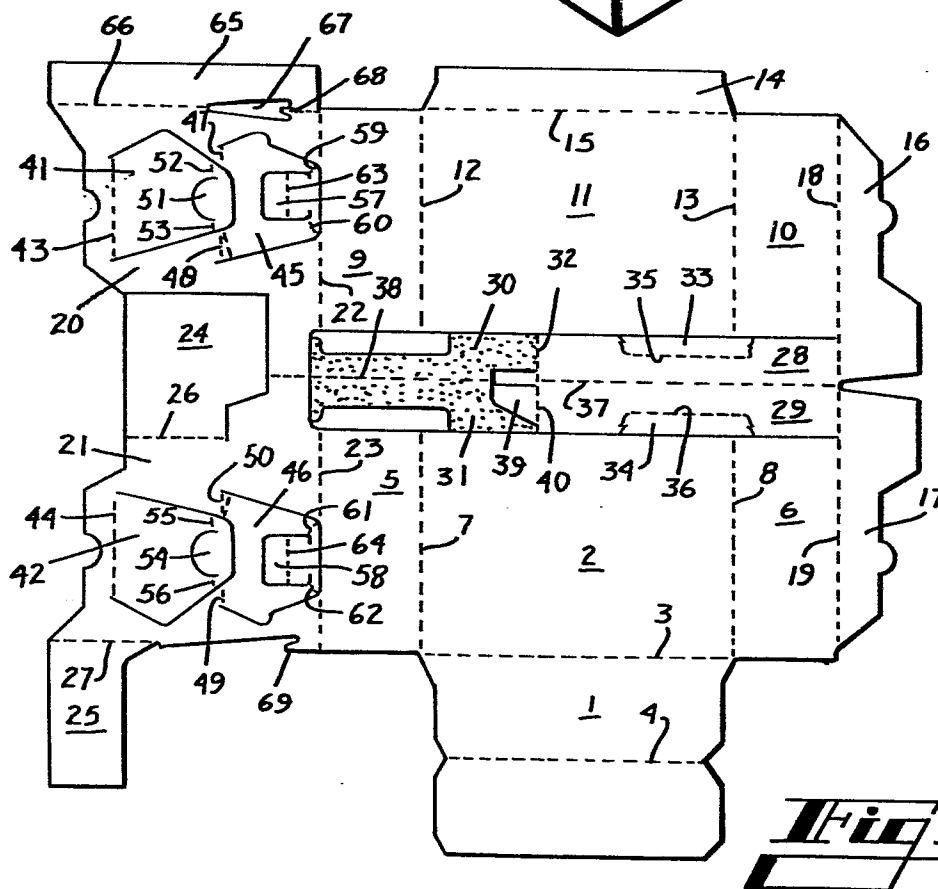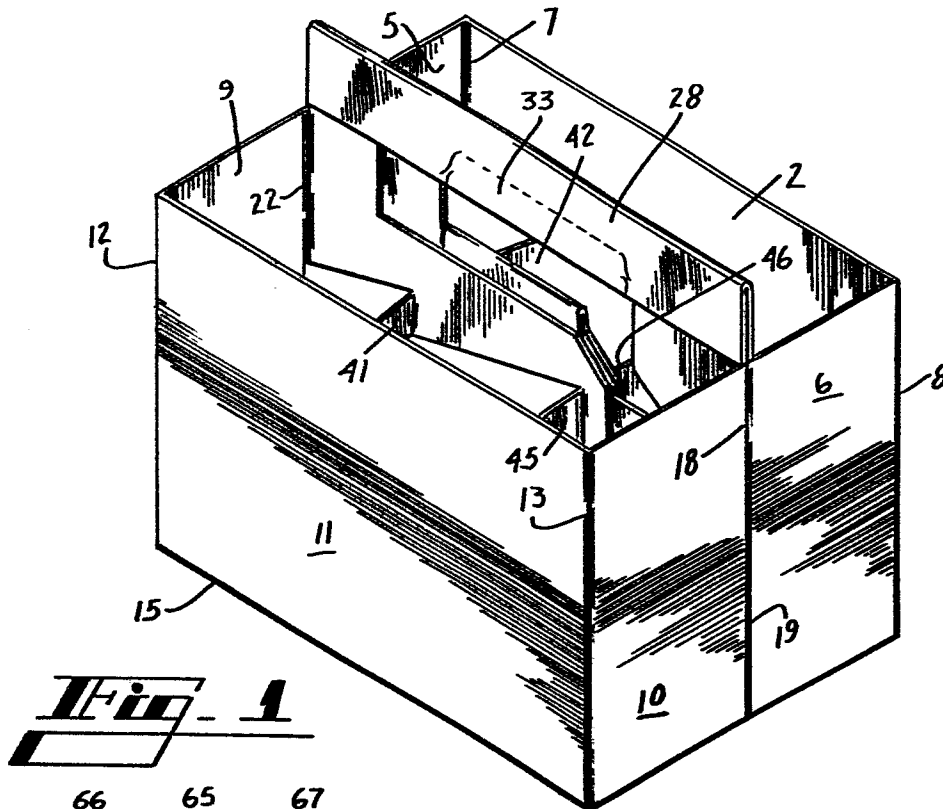

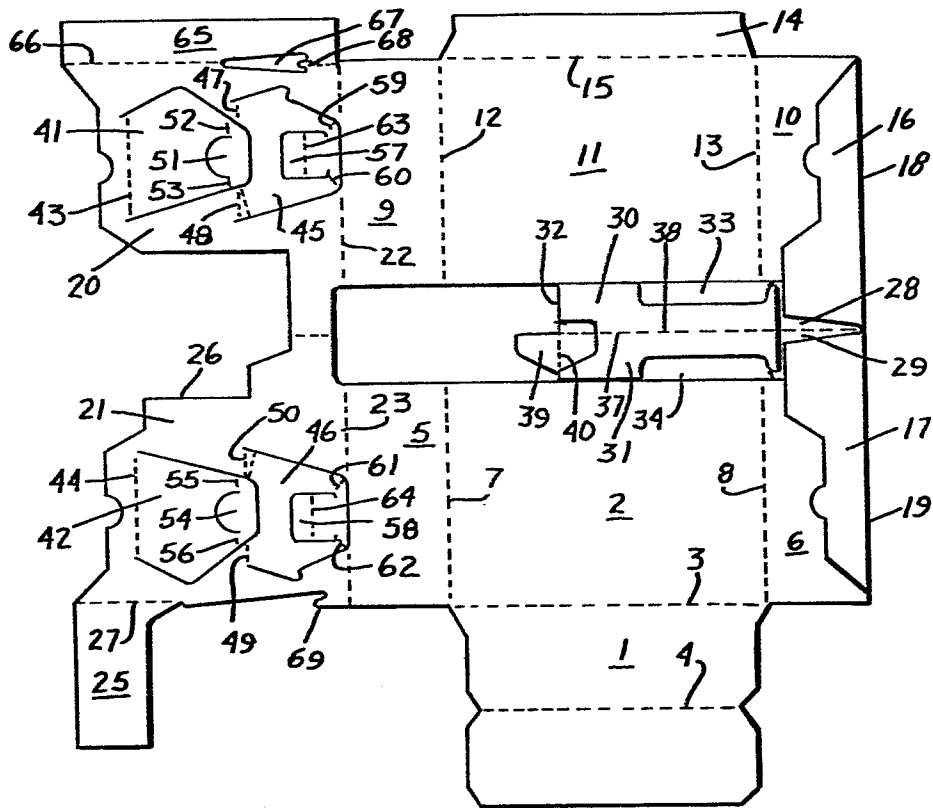


Fig. 3

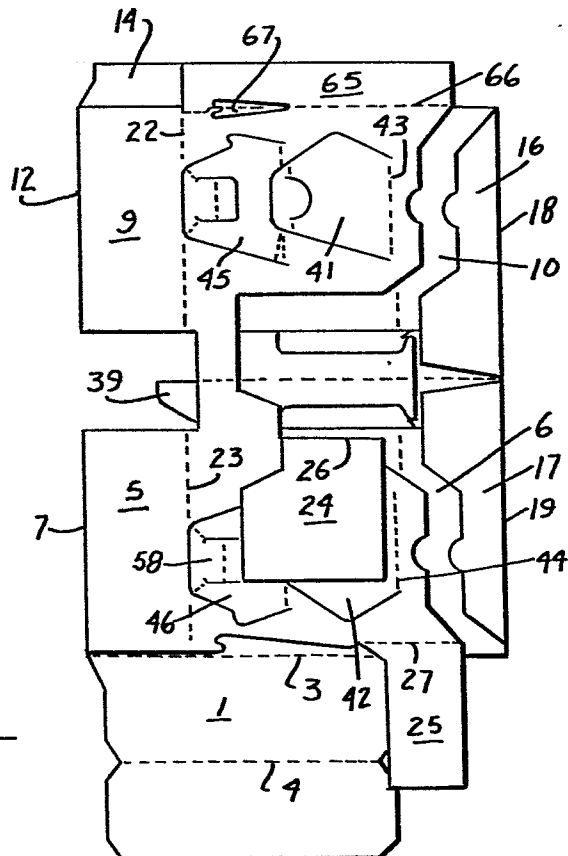


Fig. 4

