



US00D800119S

(12) **United States Design Patent** (10) **Patent No.:** **US D800,119 S**  
(45) **Date of Patent:** **\*\* Oct. 17, 2017**

(54) **COORDINATE INPUT INSTRUMENT**(71) Applicant: **Wacom Co., Ltd.**, Kazo-shi, Saitama (JP)(72) Inventor: **Naoya Nishizawa**, Tokyo (JP)(73) Assignee: **Wacom Co., Ltd.**, Kazo-Shi (JP)(\*\*\*) Term: **15 Years**(21) Appl. No.: **29/574,827**(22) Filed: **Aug. 18, 2016**(30) **Foreign Application Priority Data**

Mar. 10, 2016 (JP) ..... 2016-005282

(51) **LOC (10) Cl.** ..... **07-05**(52) **U.S. Cl.**USPC ..... **D14/411**(58) **Field of Classification Search**USPC ..... D14/372, 496, 432, 371, 125, 126, 129,  
D14/299, 411; D16/300–342; 351/158,  
351/153, 144; 345/7–9, 905; 455/344;  
348/115, 53, 121, 739CPC ..... G02B 27/017; G06F 3/016; G06F 3/033;  
G06F 3/0317; G06F 3/03545; G06F  
3/041; G06K 9/222

See application file for complete search history.

(56) **References Cited**

## U.S. PATENT DOCUMENTS

D530,372 S	10/2006	Sugino et al.
D596,668 S	7/2009	Ehara et al.
D630,220 S	1/2011	Zenri et al.
D688,666 S *	8/2013	Kowari .....
D691,137 S *	10/2013	Yeon .....
D697,915 S *	1/2014	Lien .....
D709,070 S *	7/2014	Leung .....
D709,500 S	7/2014	Ashida et al.
D719,162 S *	12/2014	Albers .....
D720,348 S *	12/2014	Robinson .....

(Continued)

*Primary Examiner* — Austin Murphy(74) *Attorney, Agent, or Firm* — Christensen O'Connor Johnson Kindness PLLC; Brandon Stallman; Jake Ferderer

(57)

**CLAIM**

The ornamental design for a coordinate input instrument, as shown and described.

**DESCRIPTION**

FIG. 1 is a front top left isometric view of a coordinate input instrument according to an embodiment of my new design; FIG. 2 is a front bottom right isometric view of the coordinate input instrument of FIG. 1;

FIG. 3 is a left side view of the coordinate input instrument of FIG. 1;

FIG. 4 is a front view of the coordinate input instrument of FIG. 1;

FIG. 5 is a rear view of the coordinate input instrument of FIG. 1;

FIG. 6 is a top view of the coordinate input instrument of FIG. 1; and,

FIG. 7 is a bottom view of the coordinate input instrument of FIG. 1.

The dotted broken lines show portions of the coordinate input device which form no part of the claimed design. The dot-dash broken lines define the bounds of the claimed design and form no part thereof.

While the accompanying drawings include broken lines that form no part of the claimed design, the broken lines provide written description of prospective embodiments that are claimed when one or more of the broken lines are amended to solid lines. Similarly, while the solid lines in the drawings form part of the claimed design, the solid lines provide written description of prospective embodiments that are not claimed when one or more of the solid lines are amended to broken lines.

**1 Claim, 4 Drawing Sheets**


(56)

**References Cited**


U.S. PATENT DOCUMENTS

D724,087 S \* 3/2015 Sakatsume ..... D14/411  
D750,630 S \* 3/2016 Nishizawa ..... D14/411  
D771,048 S \* 11/2016 Martindale ..... D14/411  
D786,871 S \* 5/2017 Park ..... D14/411


\* cited by examiner

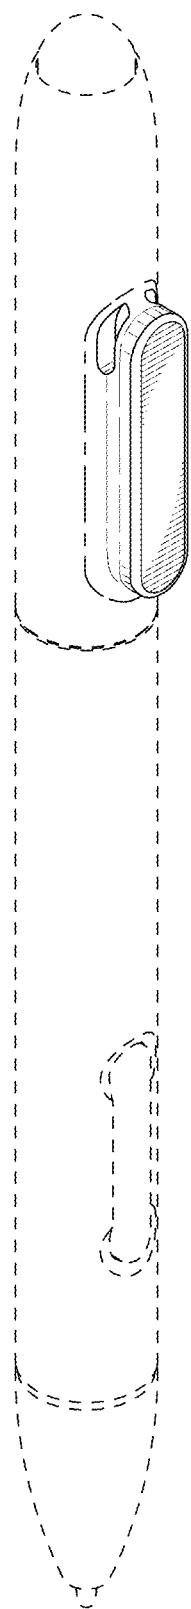


*Fig. 1.*

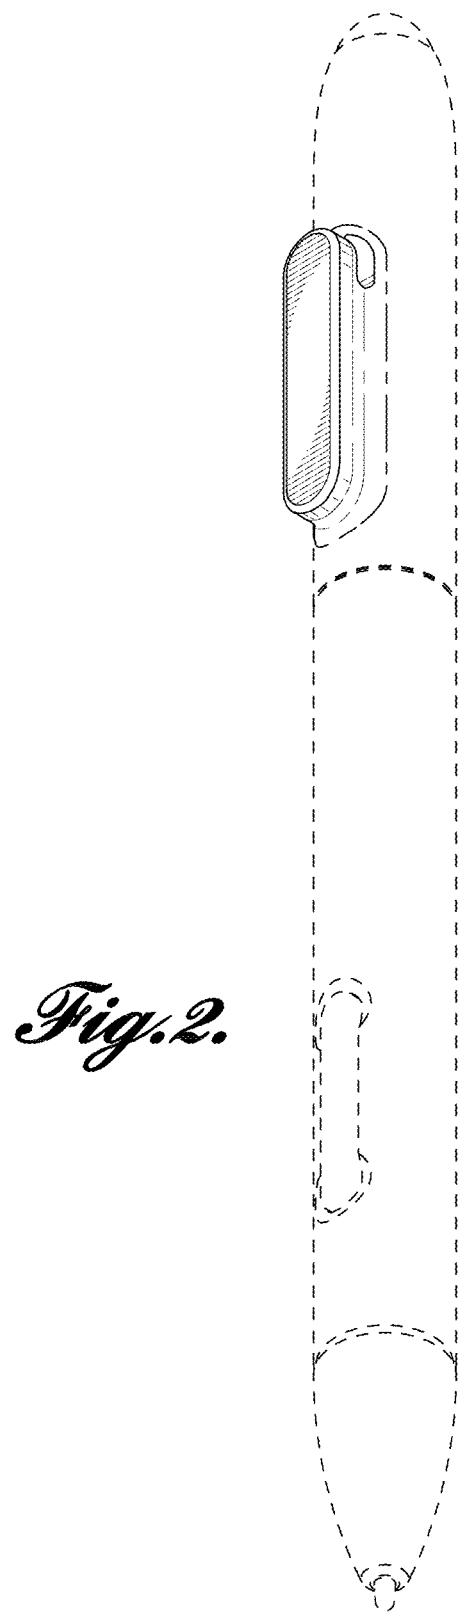


*Fig. 2.*

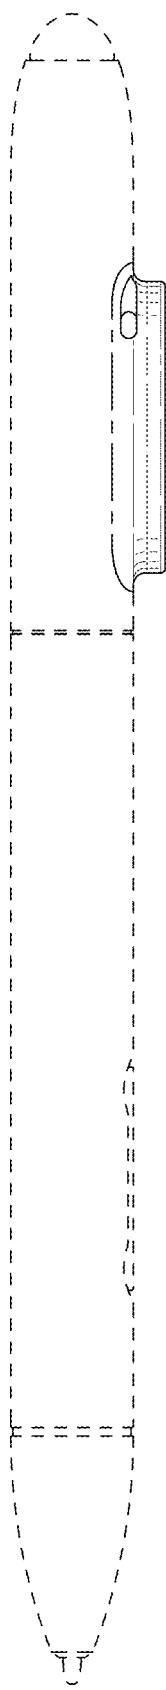


*Fig. 3.*

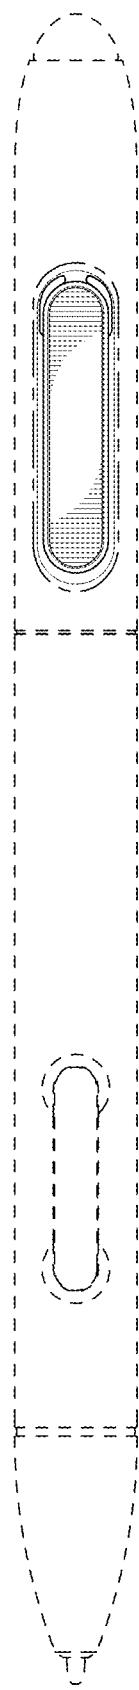


*Fig. 4.*

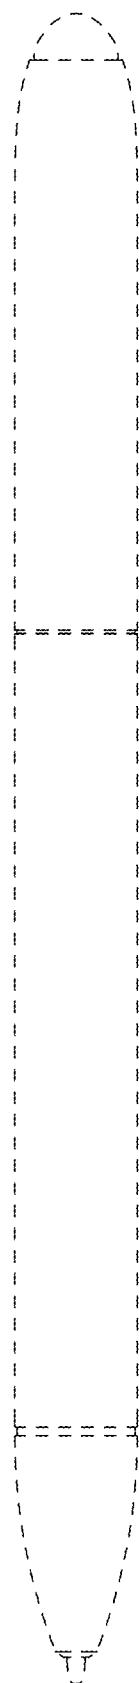

*Fig. 5.*

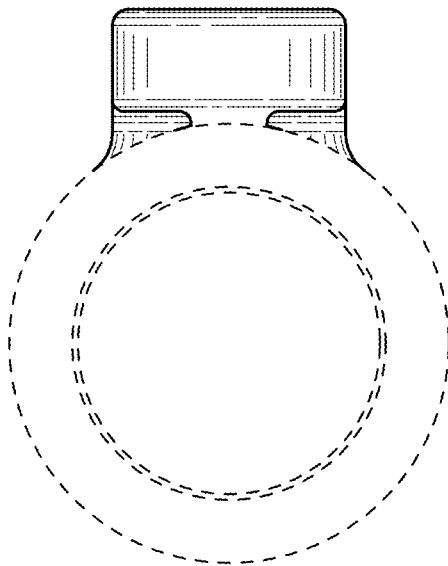

*Fig. 6.*

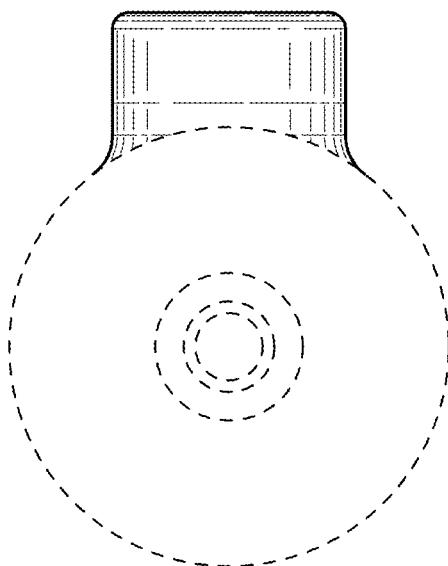

*Fig. 7.*