

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 100 417 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

07.04.2004 Bulletin 2004/15

(51) Int Cl.7: **A61F 2/44**

(86) International application number:
PCT/EP1999/005541

(21) Application number: **99940102.9**

(22) Date of filing: **30.07.1999**

(87) International publication number:
WO 2000/007527 (17.02.2000 Gazette 2000/07)

(54) INTERVERTEBRAL ALLOGRAFT SPACER

ZWISCHENWIRBEL-ALLOTTRANSPLANTAT-DISTANZSTÜCK

ESPACEUR D'ALLOGREFFE INTERVERTEBRAL

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(30) Priority: **03.08.1998 US 95209 P**

15.07.1999 WOPCT/EP99/05008

(43) Date of publication of application:

23.05.2001 Bulletin 2001/21

(73) Proprietor: **SYNTHES AG Chur**

7002 Chur (CH)

(72) Inventors:

- **PAUL, David**
Phoenixville, PA 19460 (US)

• **EMCH, Hansjuerg**
Philadelphia, PA 19147 (US)

• **SCHENK, Beat**
4412 Nuglar/Bl. (CH)

(74) Representative: **Lusuardi, Werther Giovanni, Dr.**
Dr. Lusuardi AG,
Kreuzbühlstrasse 8
8008 Zürich (CH)

(56) References cited:

EP-A- 0 646 366

WO-A-95/08964

WO-A-95/15133

WO-A-97/15248

WO-A-99/13806

FR-A- 2 717 068

US-A- 5 514 180

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention is directed to an allogenic implant according to the definition of claim 1. More particularly, it refers to an allogenic intervertebral implant conforming in size and shape with end plates of vertebrae.

[0002] A number of medical conditions such as compression of spinal cord nerve roots, degenerative disc disease, and spondylolisthesis can cause severe low back pain. Intervertebral fusion is a surgical method of alleviating low back pain. In posterior lumbar interbody fusion ("PLIF"), two adjacent vertebral bodies are fused together by removing the affected disc and inserting an implant that would allow for bone to grow between the two vertebral bodies to bridge the gap left by the disc removal.

[0003] A number of different implants and implant materials have been used in PLIF with varying success. Current implants used for PLIF include threaded titanium cages and allografts. Threaded titanium cages suffer from the disadvantage of requiring drilling and tapping of the vertebral endplates for insertion. In addition, the incidence of subsidence in long term use is not known. Due to MRI incompatibility of titanium, determining fusion is problematic. Finally, restoration of lordosis, i.e., the natural curvature of the lumbar spine is very difficult when a cylindrical titanium cage is used.

[0004] Allografts are sections of bone taken from a long bone of a donor. A cross section of the bone is taken and processed using known techniques to preserve the allograft until implantation and reduce the risk of an adverse immunological response when implanted. For example, U.S. Patent No. 4,678,470 discloses a method for processing a bone grafting material which uses glutaraldehyde tanning to produce a non-antigenic, biocompatible material. Allografts have mechanical properties which are similar to the shielding that occurs with metallic implants. They are also MRI compatible so that fusion can be more accurately ascertained and promote the formation of bone, i.e., osteoconductive. Although the osteoconductive nature of the allograft provides a biological interlocking between the allograft and the vertebrae for long term mechanical strength, initial and short term mechanical strength of the interface between the allograft and the vertebrae are lacking as evidenced by the possibility of the allograft being expelled after implantation.

Currently commercially available allografts are simply sections of bone not specifically designed for use in PLIF. As a result, the fusion of the vertebral bodies does not occur in optimal anatomical position. A surgeon may do some minimal intraoperative shaping and sizing to customize the allograft for the patient's spinal anatomy. However, significant shaping and sizing of the allograft is not possible due to the nature of the allograft. Even if extensive shaping and sizing were possible, a surgeon's ability to manually shape and size the allograft to the

desired dimensions is severely limited. Most PLIF implants, whether threaded cages or allograft, are available in different sizes and have widths that vary with the implant height. For example, the width of a cylindrical cage will be substantially equivalent with the implant height. Although larger heights may be clinically indicated, wider implants are generally not desirable since increased width requires removal of more of the facet, which can lead to decreased stability, and more retraction of nerve roots, which can lead to temporary or permanent nerve damage.

From the US-A-5 514 180 HEGGENESS ET AL. a prosthetic intervertebral device is known in the form of a simple cylindrical body having curved sidewalls and smooth top and bottom surfaces in order to fit between surfaces of adjacent vertebrae. This known implant may comprise allograft sections without disclosing the particulars of such an embodiment.

[0005] As the discussion above illustrates, there is a need for an improved implant for fusing vertebrae.

The invention solves the posed problem with an implant that shows the features of claim 1. Additional advantageous embodiments of the invention are characterized in the subclaims.

The present invention relates to an allogenic intervertebral implant for use when surgical fusion of vertebral bodies is indicated. In one embodiment, the implant comprises a piece of allogenic bone conforming in size and shape with a portion of the end plates of the vertebrae and has a wedge-shaped profile with a plurality of teeth located on top and bottom surfaces. The top and bottom surfaces can be flat planar surfaces or curved surfaces to mimic the topography of the end plates. The implant has a channel on at least one side for receiving a surgical tool. This channel runs in the anterior direction to accommodate a variety of surgical approaches. A threaded hole on the anterior, posterior, posterior-lateral, or lateral side can be provided for receiving a threaded arm of an insertion tool.

[0006] In another embodiment, the implant has an interior space for receiving an osteoconductive material to promote the formation of new bone.

[0007] In another embodiment, the implant is made in two halves: a top portion having a top connecting surface and a bottom portion having a bottom connecting surface. The top connecting surface mates with the bottom connecting surface when the top and bottom portions are joined. The top and bottom portions have holes that align for receiving a pin to secure the top and bottom portions together. The pin can be made of allogenic bone.

[0008] In yet another embodiment, the medial side of the implant has a scalloped edge such that when a first implant is implanted with a second implant with the medial sides facing each other, the scalloped edges define a cylindrical space.

[0009] The present invention also relates to a discrete spacer used in conjunction with any of the other embod-

iments of the implant. In one embodiment, the spacer comprises a piece of allogenic bone conforming in size and shape with a portion of an end plates of the vertebrae and has a wedge-shaped profile with substantially smooth top and bottom surfaces. The intersecting regions between the top and bottom surfaces and at least of the lateral sides and the intersecting region between the anterior and posterior sides and the same lateral side are curved surfaces to facilitate implantation of the spacer. Thus, the spacer can be implanted through an opening on one side of the spinal canal and moved with a surgical instrument to the contralateral side.

[0010] The invention and additional embodiments of the invention are explained in even more detail with reference to the partially schematic illustration of the embodiments.

In the drawings:

[0011]

FIG. 1 is a top view of a first embodiment of the implant according to the present invention;

FIG. 2 is a side view of the implant of FIG. 1;

FIG. 3 is a back view of the implant of FIG. 1;

FIG. 4 is a top view of a second embodiment of the implant;

FIG. 5 is a side view of the implant of FIG. 4;

FIG. 6 is a top view of a third embodiment of the implant;

FIG. 7 is a side view of the implant of FIG. 6;

FIG. 8A is a top view of a top connecting surface of a top portion of the implant of FIG. 6;

FIG. 8B is a top view of a bottom connecting surface of a bottom portion of the implant of FIG. 6;

FIG. 9 is a perspective view of a fourth embodiment of the implant;

FIG. 10A is a side view of one embodiment of the teeth on the implant;

FIG. 10B is a side view of a second embodiment of the teeth of the implant;

Fig. 11 is a side view of an embodiment of the implant similar to the embodiment of Fig. 6 - 8;

Fig. 12 is a top view of a vertebral bone characteristic of those of the cervical, thoracic, or lumbar

spine;

Fig. 13 is a side view of sequentially aligned vertebral bones, such as are found in the cervical, thoracic, or lumbar spine;

Fig. 14 is a posterior view of a sequence of vertebrae; and

Fig. 15 is an end view of another embodiment of the implant.

[0012] FIG. 1 shows a top view of a first embodiment of intervertebral allograft spacer or implant 10 according to the present invention. Implant 10 conforms in size and shape with a portion of end plates of the vertebrae between which implant 10 is to be implanted. Because implant 10 is an allograft, implant 10 promotes the formation of new bone to fuse the two vertebral bodies together. Although implant 10 will probably be predominantly used in the lumbar region of the spine, implant 10 can be configured for implantation in any region of the spine. Implant 10 has a plurality of teeth 12 on superior and inferior surfaces 14, 16 which provide a mechanical interlock between implant 10 and the end plates. Teeth 12 provide the mechanical interlock by penetrating the end plates. The initial mechanical stability afforded by teeth 12 minimizes the risk of post-operative expulsion of implant 10. Teeth 12 can be pyramid-shaped (FIG. 10A). Preferably, the angle formed from the tip to the base is approximately 60°. Alternatively, teeth 12 have a saw tooth shape with the saw tooth running in the anterior-posterior direction (FIG. 10B).

[0013] As shown in FIG. 2 and FIG. 3, a first lateral side 18 has a channel 20 and a second lateral side 22 also has a channel 20. Channels 20 are sized to receive a surgical instrument such as an inserter for implantation of implant 10. If the inserter has a threaded arm, implant 10 can be provided with a threaded hole 24. In FIG. 2, channel 20 is shown extended only partially along first lateral side 18. Channel 20 can extend along the entire length of first lateral side 18 as shown in the embodiment of FIG. 5. In FIG. 3, channels 20 are shown on both first and second lateral sides 18, 22. It should be noted that implant 10 can also have no channels or channels on one lateral side only as shown in the embodiment of FIG. 9.

[0014] The dimensions of implant 10 can be varied to accommodate a patient's anatomy. Typically, implant 10 would have a width between 6-15 mm (in the medial-lateral direction), a length between 15-30 mm (in the anterior-posterior direction), and a height between 4-30 mm (maximum height in the superior-inferior direction). The size of implant 10 allows implant 10 to be implanted using conventional open surgical procedures or minimally invasive procedures, such as laparoscopic surgery. Additionally, because the width is kept to a restricted size range and does not necessarily increase with

implant height, taller implants can be used without requiring wider implants. Thus, facet removal and retraction of nerve roots can remain minimal.

[0015] In order to restore the natural curvature of the spine after the affected disc has been removed, implant 10 has a wedge-shaped profile. As shown in FIG. 2, this wedge shape results from a gradual decrease in height from an anterior side 26 to a posterior side 28. In anatomical terms, the natural curvature of the lumbar spine is referred to as lordosis. When implant 10 is to be used in the lumbar region, the angle formed by the wedge should be approximately between 4,2° and 15° so that the wedge shape is a lordotic shape which mimics the anatomy of the lumbar spine.

[0016] In order to facilitate insertion of implant 10, anterior side 26 transitions to superior and inferior surfaces 14, 16 with rounded edges 30. Rounded edges 30 enable implant 10 to slide between the endplates while minimizing the necessary distraction of the endplates.

[0017] Although implant 10 is typically a solid piece of allogenic bone, implant 10 can be provided with a hollow interior to form an interior space. This interior space can be filled with bone chips or any other osteoconductive material to further promote the formation of new bone.

[0018] FIG. 4 shows a top view of a second embodiment of an implant 40 according to the present invention. In general, most of the structure of implant 40 is like or comparable to the structure of implant 10. Accordingly, discussion of the like components is not believed necessary. The superior and inferior surfaces 14, 16 of implant 10 are flat planar surfaces. As seen best in FIG. 5, superior and inferior surfaces 14, 16 of implant 40 are curved surfaces which still retain the wedge-shaped profile. The curved surfaces of superior and inferior surfaces 14, 16 of implant 40 are a mirror-image of the topography of the vertebral end plates. Thus, the curved surfaces conform to the contours of the end plates.

[0019] FIG. 6 shows a top view of a third embodiment of an implant 50 according to the present invention. In general, most of the structure of implant 50 is like or comparable to the structure of implants 10, 40. Accordingly, discussion of the like components is not believed necessary. As best seen in FIG. 7, implant 50 comprises a top portion 52 joined to a bottom portion 54. As it may be difficult to obtain a single section of allogenic bone from which implant 50 is to be made, fabricating implant 50 in two pieces, i.e. top and bottom portions 52, 54, allows smaller sections of allogenic bone to be used. A top connecting surface 56 and a bottom connecting surface 58 define the interface between top and bottom portions 52, 54. As shown in FIGS. 8A and 8B, top and bottom surfaces 56, 58 have ridges 60 that mate with grooves 62 to interlock top and bottom portions 52, 54. Preferably, ridges 60 and grooves 62 are formed by milling top and bottom surfaces 56, 58 in a first direction and then milling a second time with top and bottom surfaces 56, 58 oriented 90° with respect to the first direc-

tion.

[0020] A pin 64 passing through aligned holes 66 in top and bottom portions 52, 54 serves to retain top and bottom portions 52, 54 together. Although pin 64 can be made of any biocompatible material, pin 64 is preferably made of allogenic bone. The number and orientation of pins 64 can be varied.

[0021] Fig. 11 shows an embodiment of an implant 80 which, like implant 50, is made in multiple pieces. In general, most of the structure of implant 80 is like or comparable to the structure of implants 10, 40, 50. Accordingly, discussion of the like components is not believed necessary. Implant 80 has a top portion 82, a middle portion 84, and a bottom portion 86. As was the case for implant 80, the surfaces between the portions are mating surfaces with interlocking surface features, such as ridges and grooves. One or more pins preferably hold top, middle, and bottom portions 82, 84, 86 together.

[0022] FIG. 9 shows a perspective view of a fourth embodiment of a first implant 70 according to the present invention. A second implant 70', which is substantially similar to first implant 70, is also shown. In general, most of the structure of first and second implants 70, 70' is like or comparable to the structure of implants 10, 40, 50. Accordingly, discussion of the like components is not believed necessary. First lateral sides 18 of first and second implants 70, 70' are scalloped to have a C-shape. When first and second implants 70, 70' are placed side by side with the first lateral sides 18 facing each other, a cylindrical space 72 is formed. When first and second implants 70, 70' are implanted together, cylindrical space 72 can be filled with osteoconductive material to help promote the formation of new bone. First and second implants 70, 70' can be provided with locking pins 74 which engage apertures 76 to maintain the spatial relationship between first and second implants 70, 70'.

[0023] The use of the implant according to the present invention will now be described with reference to Fig. 12 - 14 and using posterior lumbar interbody fusion as an example. As the implant according to the present invention conforms in size and shape to a portion of end plates 100, preoperative planning is recommended for proper sizing. Determine the appropriate implant height by measuring adjacent intervertebral discs 102 on a lateral radiograph. The implant must be seated firmly with a tight fit between end plates 100 when the segment is fully distracted. The tallest possible implant should be used to maximize segmental stability. Due to variability in degrees of magnification from radiographs, the measurements are only an estimate.

[0024] With the patient in a prone position on a lumbar frame, radiographic equipment can assist in confirming the precise intraoperative position of the implant. The surgeon incises and dissects the skin from a midline laterally and locates spinous process 104, lamina 106, dura 108, and nerve roots of the appropriate level(s). As much as possible facets 110 should be preserved to pro-

vide stability to the intervertebral segment. The surgeon performs a laminotomy to the medial aspect of facet 110 and reflects dura 108 to expose an approximately 13 mm window to the disc space. Disc 102 is removed through the window until only anterior 112 and lateral 114 annulus remain. The superficial layers of the entire cartilaginous end plates 100 are also removed to expose bleeding bone. Excessive removal of the subchondral bone may weaken the anterior column. Furthermore, if the entire end plate is removed, this may result in subsidence and a loss of segmental stability.

[0025] Distraction can be done with either a surgical distractor or a trial spacer implant. In the first method, the distractor blades should be completely inserted into the disc space so that the ridges at the end of the blades rest on vertebral body 116. Fluoroscopy can assist in confirming that the distractor blades are parallel to end plates 100. Correct placement will angle the handles of the distractor cranially, particularly at L5-S1. The handle of the distractor is squeezed to distract the innerspace. The distraction is secured by tightening the speed nut on the handle.

[0026] Using the preoperatively determined size, a trial spacer is inserted in the contralateral disc space with gentle impaction. Fluoroscopy and tactile judgement can assist in confirming the fit of the trial spacer until a secure fit is achieved. Using either the slots or threader hole on the implant, the selected implant is inserted in the contralateral disc space. Alternatively, the channels on the implant allow distraction and insertion to occur on the same side. Regardless of the side the implant is inserted in, autogenous cancellous bone or a bone substitute should be placed in the anterior and medial aspect of the vertebral disc space prior to placement of the second implant. The distractor is removed and a second implant of the same height as the first implant is inserted into the space, using gentle impaction as before. Preferably, the implants are recessed 2 - 4 mm beyond the posterior rim of the vertebral body.

[0027] As previously noted, the implant according to the present invention can be inserted using minimally invasive procedures. In some of these procedures, only one side of the spinal cord needs to be approached. This minimizes muscle stripping, scar tissue in the canal, and nerve root retraction and handling. In clinical situations in which bilateral implant placement is required, proper implantation on the side opposite the incision can be difficult. Fig. 15 shows a beveled spacer 120 that facilitates placement on the side contralateral to the incision. In general and unless otherwise described, most of the structure of beveled spacer 120 is like or comparable to the structure of implants 10, 40, 50 and 80. Accordingly, discussions of the like components is not believed necessary. First lateral side 18 transitions to superior and inferior surfaces 14, 16 with rounded edges 30. First lateral side 18 also transitions to anterior and posterior sides 26, 28 with rounded edges 30. Additionally, spacer 120 has no teeth. The lack of teeth and rounded edge

30 enable spacer 20 to slide between the end plate and across the evacuated space (from one lateral annulus to the other) to the contralateral side. First lateral side 18 is the side that must promote movement of spacer 120. Once spacer 120 has been placed on the side contralateral to the single incision using a surgical instrument to push spacer 120, bone graft or other osteoconductive material is packed in the disc space. Finally, an implant (any of implant 10, 40, 50, 70 or 70' can be used) is implanted in the side proximal to the incision.

[0028] While it is apparent that the illustrative embodiments of the invention herein disclosed fulfill the objectives stated above, it will be appreciated that numerous modifications and other embodiments may be devised by those skilled in the art. Therefore, it will be understood that the scope of the present invention is only limited by the appended claims.

Claims

1. An implant (10;40;50;70;80) comprising a piece of allogenic bone and having a plurality of planar or curved sidewalls (18;22;26;28), a top surface (14) and a bottom surface (16) in order to fit as a graft between surfaces of adjacent bones or bone fragments,

characterized in that

A) said top and bottom surfaces (14;16) are provided with a three-dimensional structure for interlocking with said surfaces of adjacent bones or bone fragments; and that

B) said implant (10;40;50;70;80) is in combination with a discrete spacer (120) comprising a piece of allogenic bone conforming in size and shape with a portion of an end plate of a vertebra and having a wedge-shaped profile, wherein the top and bottom surfaces (14;16) of said spacer (120) are substantially smooth and the transition regions between top and bottom surfaces (14;16) and anterior (26) and lateral sides (18, 22) of the spacer (120) have curved edges (30) to facilitate implantation of the spacer (120).

2. The implant according to claim 1, **characterized in that** the implant (10;40;50;70;80) has a wedge-shaped profile.
3. The implant according to claim 1 or 2, **characterized in that** at least one sidewall (18;22;26;28) has a channel (20) for receiving a surgical instrument.
4. The implant according to claim 3, **characterized in that** the channel (20) runs in an anterior-posterior direction.

5. The implant according to one of the claims 1 to 4, **characterized in that** the three-dimensional structure includes a plurality of teeth (12).
6. The implant according to claim 5, **characterized in that** the teeth (12) have a pyramid shape.
7. The implant according to claim 6, **characterized in that** the teeth (12) have a saw tooth shape.
8. The implant according to one of the claims 1 to 7, **characterized in that** at least one sidewall (18;22;26;28) of the implant (10;40;50;70;80) has at least one hole (24) for attachment of an inserter.
9. The implant according to claim 8, **characterized in that** the at least one hole (24) is threaded.
10. The implant according to claim 8 or 9, **characterized in that** the at least one hole (24) is provided in an anterior, posterior, posterior-lateral, or lateral side.
11. The implant according to one of the claims 1 to 10, **characterized in that** the top and bottom surfaces (14;16) are defined by flat planar surfaces.
12. The implant according to one of the claims 1 to 11, **characterized in that** a region between the top and bottom surfaces (14;16) and an anterior side of the implant is a curved edge (30) to facilitate implantation of the implant.
13. The implant according to one of the claims 1 to 12, **characterized in that** it is an intervertebral implant (10;40;50;70;80).
14. The implant according to claim 13, **characterized in that** the top and bottom surfaces (14;16) are defined by curved surfaces.
15. The implant according to one of the claims 1 to 14, **characterized in that** the implant (10;40;50;70;80) has an interior space (72) for receiving an osteoconductive material.
16. The implant according to one of the claims 1 to 15, **characterized in that** the implant (10;40;50;70;80) is divided into two portions, a top portion (52) having a top connecting surface (56) and a bottom portion (54) having a bottom connecting surface (58), the top connecting surface (56) mating with the bottom connecting (58) surface when the top and bottom portions (52;54) are joined.
17. The implant according to claim 16, **characterized in that** top and bottom connecting surfaces (56;58) are provided with ridges (60) and grooves (62) that mate with each other in order to interlock the top and bottom portions (52;54).
18. The implant according to claim 16 or 17, **characterized in that** a pin (64) is inserted through a hole (66) in the top portion (52) and a hole (66) in the bottom portion (54) to secure the top and bottom portions (52;54) together.
19. The implant according to claim 18, **characterized in that** the pin (64) is made of allogenic bone.
20. The implant according to one of the claims 1 to 19, **characterized in that** it is divided into a first and a second part (70;70') each having a medial side (18) with a scalloped edge such that when the two parts (70;70') are implanted with their medial sides (18) facing each other, the scalloped edges of said medial sides (18) of said two parts (70;70') define a cylindrical space (72).
21. The implant according to claim 20, **characterized in that** the first part (70') is provided with a locking pin (74) on the medial side (18) and the second part (70) is provided with an aperture (76) at the medial side (18) configured and dimensioned to receive the locking pin (74) to maintain the spatial relationship between the said two parts (70;70').
22. The implant according to claim 21, **characterized in that** the locking pin (74) is made of allogenic bone.
23. The implant according to one of the claims 1 to 22, **characterized in that** the implant (10;40;50;70;80) has a width between 6 - 15 mm.
24. The implant according to one of the claims 1 to 23, **characterized in that** the implant (10;40;50;70;80) has a length between 15 - 30 mm.
25. The implant according to one of the claims 1 to 24, **characterized in that** the implant (10;40;50;70;80) has a height between 4 - 30 mm.
26. The implant according to one of the claims 1 to 25, **characterized in that** the implant (80) is made of a plurality of interconnecting sections (82;84;86), each of said sections (82;84;86) having a surface mating with a surface of the adjacent interconnecting section.

Patentansprüche

1. Ein Implantat (10, 40, 50, 70, 80), bestehend aus einem allogenen Knochenstück mit mehreren planaren oder gekrümmten Seitenwänden (18, 22, 26,

- 28), einer oberen und einer unteren Oberfläche (14 + 16), um als Implantat zwischen die Oberflächen benachbarter Knochen oder Knochenfragmente zu passen,
dadurch gekennzeichnet, dass
- a) die aufgeführten obere und untere Oberfläche (14 + 16) eine dreidimensionale Struktur aufweisen, mit denen sie sich mit benachbarten Knochen oder Knochenfragmenten verzahnen können, und dass
- b) das aufgeführte Implantat (10, 40, 50, 70, 80) mit einem diskreten Distanzstück (120) kombiniert wird, das aus einem allogenen Knochenstück besteht, das in Größe und Form zu einem Teil einer Wirbel-Endplatte passt und ein keilförmiges Profil aufweist, wobei obere und untere Oberfläche (14 + 16) des Distanzstücks (120) im wesentlichen glatt sind, und der Übergang zwischen den Übergangsbereichen zwischen oberer und unterer Oberfläche (14 + 16) und anterioren (26) und lateralen Seiten (18, 22), des Distanzstücks (120) gekrümmte Kanten (30) aufweisen, um die Implantation des Distanzstücks (120) zu erleichtern.
2. Ein Implantat nach Anspruch 1, **dadurch gekennzeichnet, dass** das Implantat (10, 40, 50, 70, 80) ein keilförmiges Profil aufweist.
 3. Ein Implantat nach den Ansprüchen 1 und 2, **dadurch gekennzeichnet, dass** wenigstens eine Seitenwand (18, 22, 26, 28) einen Kanal (20) zur Aufnahme eines chirurgischen Instruments aufweist.
 4. Ein Implantat nach Anspruch 3, **dadurch gekennzeichnet, dass** der Kanal (20) in anterior-posteriorer Richtung verläuft.
 5. Ein Implantat nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** die dreidimensionale Struktur mehrere Zähne (12) aufweist
 6. Ein Implantat nach Anspruch 5, **dadurch gekennzeichnet, dass** die Zähne (12) eine pyramidenartige Form haben.
 7. Ein Implantat nach Anspruch 6, **dadurch gekennzeichnet, dass** die Zähne (12) sägezahnförmig sind.
 8. Ein Implantat nach einem der Ansprüche 1 bis 7, **dadurch gekennzeichnet, dass** wenigstens eine Seitenwand (18, 22, 26, 28) des Implantats (10, 40, 50, 70, 80) wenigstens ein Loch (24) zur Befestigung einer Einführungshilfe aufweist.
 9. Ein Implantat nach Anspruch 8, **dadurch gekennzeichnet, dass** wenigstens ein Loch (24) mit einem Gewinde versehen ist.
 10. Ein Implantat nach Anspruch 9 oder 10, **dadurch gekennzeichnet, dass** jede anteriore, posteriore, posterior-laterale und laterale Seite wenigstens ein Loch (24) aufweist.
 11. Ein Implantat nach einem der Ansprüche 1 bis 10, **dadurch gekennzeichnet, dass** obere und untere Oberfläche (14 + 16) flach geformt sind.
 12. Ein Implantat nach einem der Ansprüche 1 bis 11, **dadurch gekennzeichnet, dass** ein Bereich zwischen oberer und unterer Oberfläche (14 + 16) und eine anteriore Seite des Implantats eine gekrümmte Kante (30) aufweisen, um die Implantation des Implantats zu erleichtern.
 13. Ein Implantat nach einem der Ansprüche 1 bis 12, **dadurch gekennzeichnet, dass** es sich um ein intervertebrales Implantat handelt.
 14. Ein Implantat nach Anspruch 13, **dadurch gekennzeichnet, dass** obere und untere Oberfläche (14 + 16) gekrümmt sind.
 15. Ein Implantat nach einem der Ansprüche 1 bis 14, **dadurch gekennzeichnet, dass** das Implantat (10, 40, 50, 70, 80) einen Hohlraum (72) aufweist, der osteokunduktives Material aufnehmen kann.
 16. Ein Implantat nach einem der Ansprüche 1 bis 15, **dadurch gekennzeichnet, dass** das Implantat (10, 40, 50, 70, 80) aus zwei Teilen besteht, einem Oberteil (52) mit Verbindungsoberfläche (56) und einem Unterteil (54) mit Verbindungsoberfläche (58), wobei beide Oberflächen sich miteinander verbinden, wenn Oberteil (52) und Unterteil (54) miteinander verbunden werden.
 17. Ein Implantat nach Anspruch 16, **dadurch gekennzeichnet, dass** obere und untere Verbindungsoberfläche (56 + 58) Einkerbungen (62) haben, die sich miteinander verbinden, um Oberteil und Unterteil (52 + 54) miteinander zu verzahnen.
 18. Ein Implantat nach Anspruch 16 oder 17, **dadurch gekennzeichnet, dass** ein Stift (64) durch ein Loch (66) in das Oberteil (52) eingeführt wird, sowie ein Loch (66) im Unterteil (54), um Oberteil (52) und Unterteil (54) fest miteinander zu verbinden.
 19. Ein Implantat nach Anspruch 19, **dadurch gekennzeichnet, dass** der Stift (64) aus allogenem Knochenmaterial besteht.

20. Ein Implantat nach einem der Ansprüche 1 bis 19, **dadurch gekennzeichnet, dass** es aus zwei Teilen (70 + 70') besteht, die beide eine mediane Seite mit einer bogenförmigen Kante aufweisen, die so beschaffen sind, dass bei einer Implantation beider Teile (70 + 70'), bei der die medianen Seiten (18) einander gegenüber liegen, die bogenförmigen Kanten der medianen Seiten (18) beider Teile (70 + 70') einen zylindrischen Hohlraum (72) bilden.
21. Ein Implantat nach Anspruch 20, **dadurch gekennzeichnet, dass** das erste Teil (70') auf der medianen Seite (18) einen Verschlussstift (74) aufweist, während das zweite Teil (79) auf der medianen Seite (18) so konfiguriert und dimensioniert ist, dass es den Verschlussstift (74) aufnehmen kann, um die räumliche Verbindung zwischen beiden Teilen (70 + 70') aufrecht zu erhalten.
22. Ein Implantat nach Anspruch 21, **dadurch gekennzeichnet, dass** der Verschlussstift aus allogenen Knochenmaterial besteht.
23. Ein Implantat nach einem der Ansprüche 1 bis 22, **dadurch gekennzeichnet, dass** das Implantat (10, 40, 50, 70, 80) 6-15 mm breit ist.
24. Ein Implantat nach einem der Ansprüche 1 bis 23, **dadurch gekennzeichnet, dass** das Implantat (10, 40, 50, 70, 80) 15-30 mm lang ist.
25. Ein Implantat nach einem der Ansprüche 1 bis 24, **dadurch gekennzeichnet, dass** das Implantat (10, 40, 50, 70, 80) 4-30 mm hoch ist.
26. Ein Implantat nach einem der Ansprüche 1 bis 25, **dadurch gekennzeichnet, dass** Implantat (80) aus mehreren miteinander zu verbindenden Teilen (82, 84, 86) besteht, wobei jeder dieser Teile (82, 84, 86) eine Oberfläche hat, die mit der Oberfläche des benachbarten Teils verbunden werden kann.
- Revendications**
1. Implant (10, 40, 50, 70, 80) comprenant un morceau d'os allogène et ayant une pluralité de parois latérales planes ou courbes (18, 22, 26, 28), une surface supérieure (14) et une surface inférieure (16) en vue de s'ajuster comme une greffe entre des surfaces d'os ou des fragments d'os adjacents, **caractérisé en ce que**
- A) lesdites surfaces supérieure et inférieure (14, 16) sont pourvues d'une structure en trois dimensions pour s'interconnecter avec lesdites surfaces d'os ou de fragments d'os adjacents, **et en ce que**
- B) ledit implant (10, 40, 50, 70, 80) est combiné avec un espaceur discret (120) comprenant un morceau de tissu osseux allogène se conformant en taille et en forme à une partie d'un plateau vertébral et ayant un profil en forme de clavette, dans lequel les surfaces supérieure et inférieure (14, 16) dudit espaceur (120) sont sensiblement lisses et le passage entre les surfaces supérieure et inférieure et les cotés antérieur (26) et latéraux (18, 22) de l'espaceur a lieu par des bords courbes (30) pour faciliter l'implantation de l'espaceur (120).
2. Implant selon la revendication 1, **caractérisé en ce que** l'implant (10, 40, 50, 70, 80) a un profil en forme de clavette.
3. Implant selon la revendication 1 ou 2, **caractérisé en ce qu'**au moins une paroi latérale (18, 22, 26, 28) a un canal (20) pour recevoir un instrument chirurgical.
4. Implant selon la revendication 1, **caractérisé en ce que** le canal (20) court dans une direction antéro-postérieure.
5. Implant selon une des revendications 1 à 4, **caractérisé en ce que** la structure en trois dimensions comprend une pluralité de dents (12).
6. Implant selon la revendication 5, **caractérisé en ce que** les dents (12) ont une forme pyramidale.
7. Implant selon la revendication 6, **caractérisé en ce que** les dents (12) ont une forme de dent de scie.
8. Implant selon une des revendications 1 à 7, **caractérisé en ce qu'**au moins une des parois latérales (18, 22, 26, 28) de l'implant (10, 40, 50, 70, 80) a au moins un trou (24) pour la fixation d'un applicateur.
9. Implant selon la revendication 8, **caractérisé en ce que** ledit au moins un trou (24) est fileté.
10. Implant selon la revendication 8 ou 9, **caractérisé en ce que** ledit au moins un trou (24) est pourvu d'un côté antérieur, postérieur, postéro-latéral ou latéral.
11. Implant selon une des revendications 1 à 10, **caractérisé en ce que** les surfaces supérieure et inférieure (14, 16) sont définies par des surfaces planes plates.
12. Implant selon une des revendications 1 à 11, **caractérisé en ce qu'**une région entre les surfaces supérieure et inférieure (14, 16) et un côté antérieur

de l'implant est un bord courbe (30) pour faciliter l'implantation de l'implant.

(74) pour maintenir le rapport spatial entre lesdites deux parties (70, 70').

13. Implant selon une des revendications 1 à 12, **caractérisé en ce qu'il** est un implant intervertébral (10, 40, 50, 70, 80). 5
14. Implant selon la revendication 13, **caractérisé en ce que** les surfaces supérieure et inférieure (14, 16) sont définies par des surfaces courbes. 10
15. Implant selon une des revendications 1 à 14, **caractérisé en ce que** l'implant (10, 40, 50, 70, 80) a un espace intérieur (72) pour recevoir du matériau ostéoconducteur. 15
16. Implant selon une des revendications 1 à 15, **caractérisé en ce que** l'implant (10, 40, 50, 70, 80) est divisé en deux parties, une partie supérieure (52) ayant une surface de connexion supérieure (56) et une partie inférieure (54) ayant une surface de connexion inférieure (58), la surface de connexion supérieure (56) s'accouplant avec la partie de connexion inférieure (58) quand les parties supérieure et inférieure (52, 54) sont unies. 20 25
17. Implant selon la revendication 16, **caractérisé en ce que** les surfaces de connexion supérieure et inférieure (56, 58) sont pourvues d'arêtes (60) et de rainures (62) qui s'accouplent les unes avec les autres en vue d'interconnecter les parties supérieure et inférieure (52, 54). 30
18. Implant selon la revendication 16 ou 17, **caractérisé en ce qu'une** broche (64) est insérée par un trou (66) dans la partie supérieure (52) et par un trou (66) dans la partie inférieure (54) pour fixer ensemble les parties supérieure et inférieure (52, 54). 35
19. Implant selon la revendication 18, **caractérisé en ce que** la broche (64) est en os allogène. 40
20. Implant selon une des revendications 1 à 19, **caractérisé en ce qu'il** est divisé en une première et une deuxième partie (70, 70') ayant chacune un côté médial (18) avec un bord échancré de telle sorte que quand les deux parties (70, 70') sont implantées avec leurs côtés médiaux (18) se faisant face, les bords échancrés desdits côtés médiaux (18) desdites deux parties (70, 70') définissent un espace cylindrique (72). 45 50
21. Implant selon la revendication 20, **caractérisé en ce que** la première partie (70') est pourvue d'une broche de verrouillage (74) sur le côté médial (18) et la deuxième partie (70) est pourvue d'une ouverture (76) sur le côté médial (18) configurée et dimensionnée pour recevoir la broche de verrouillage 55
22. Implant selon la revendication 21, **caractérisé en ce que** la broche de verrouillage (74) est en os allogène.
23. Implant selon une des revendications 1 à 22, **caractérisé en ce que** l'implant (10, 40, 50, 70, 80) a une largeur entre 6 - 15 mm.
24. Implant selon une des revendications 1 à 23, **caractérisé en ce que** l'implant (10, 40, 50, 70, 80) a une largeur entre 15 - 30 mm.
25. Implant selon une des revendications 1 à 24, **caractérisé en ce que** l'implant (10, 40, 50, 70, 80) a une largeur entre 4 - 30 mm.
26. Implant selon une des revendications 1 à 25, **caractérisé en ce que** l'implant (80) est fait d'une pluralité de sections (82, 84, 86) d'interconnexion, chacune desdites sections (82, 84, 86) ayant une surface s'accouplant avec une surface de la section d'interconnexion adjacente.

FIG 1

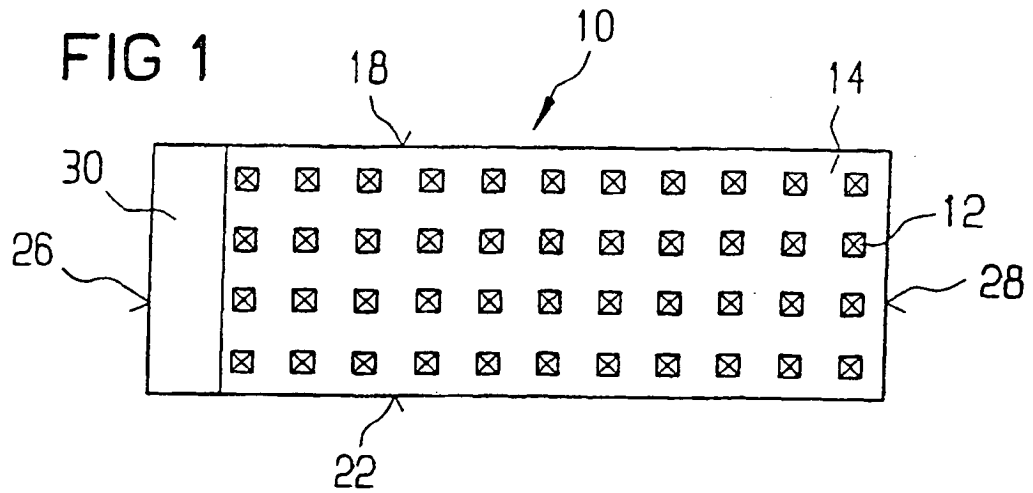


FIG 2

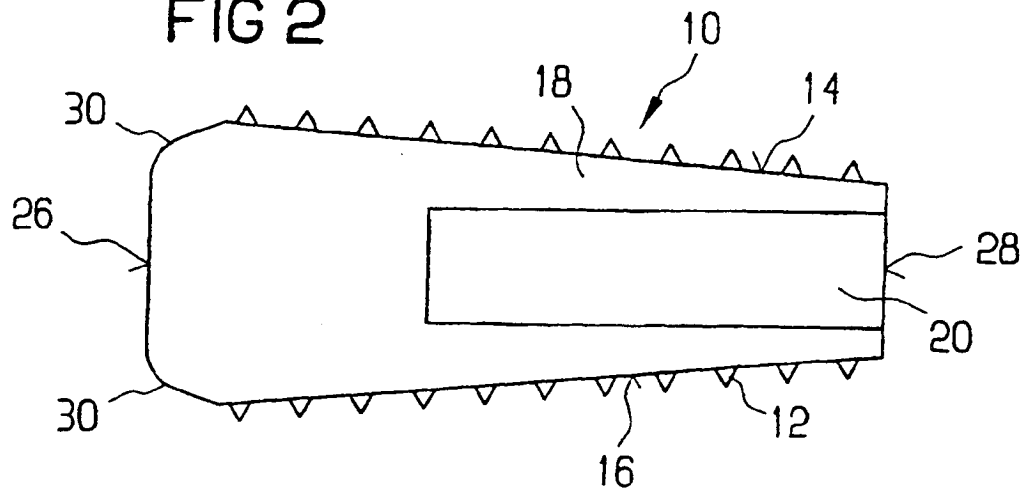


FIG 3

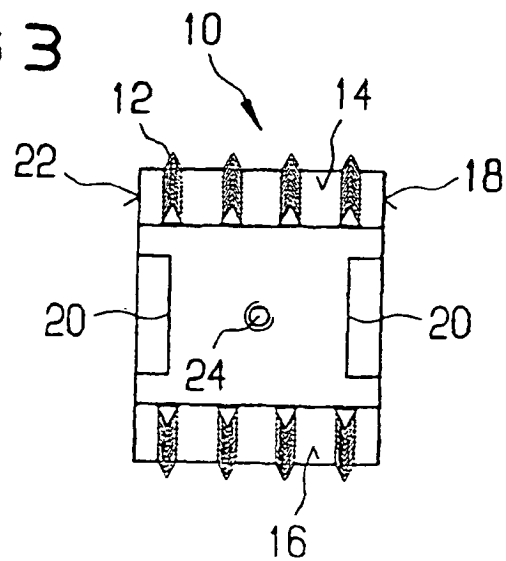


FIG 4

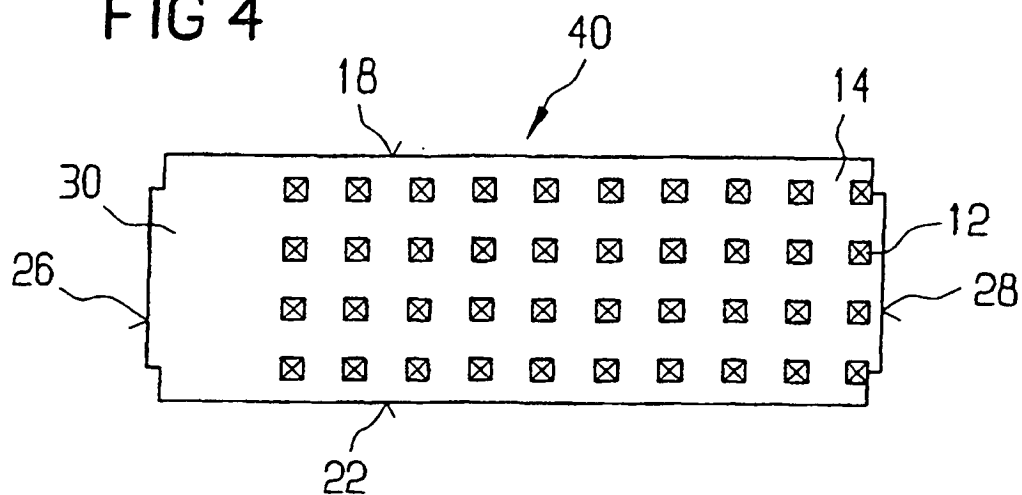


FIG 5

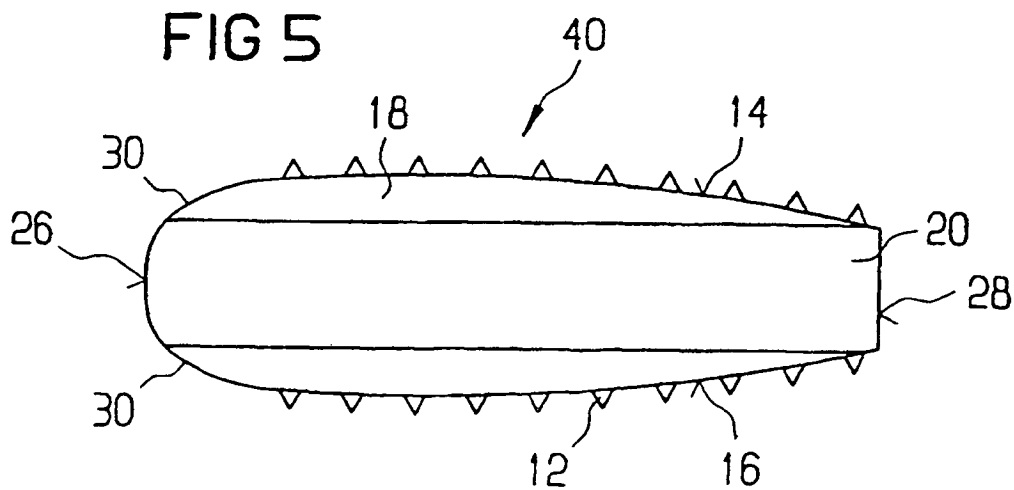


FIG 6

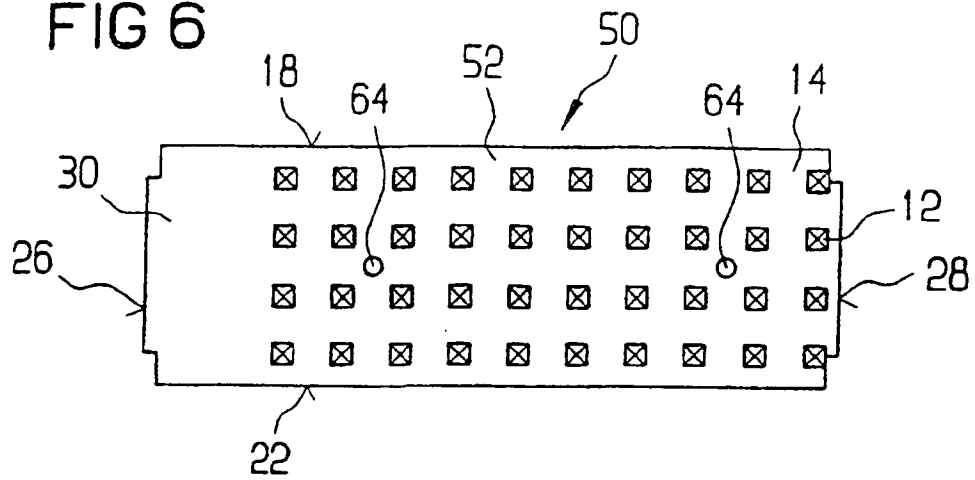


FIG 7

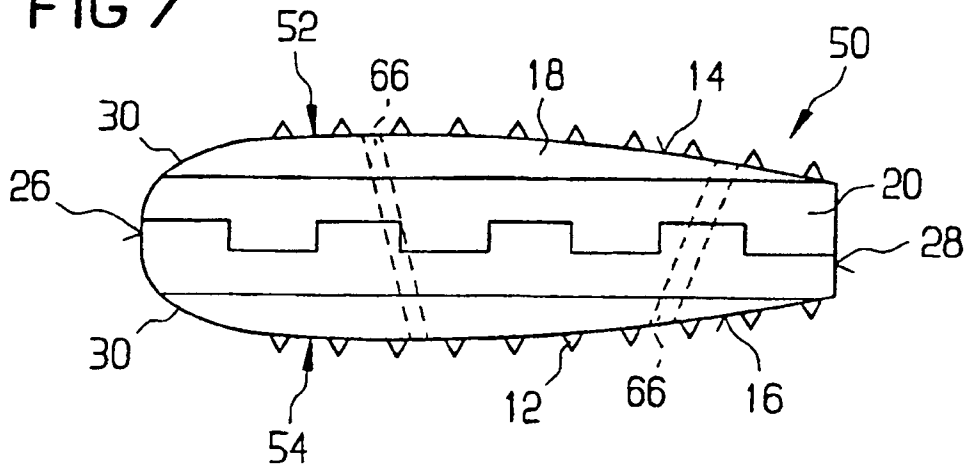


FIG 8A

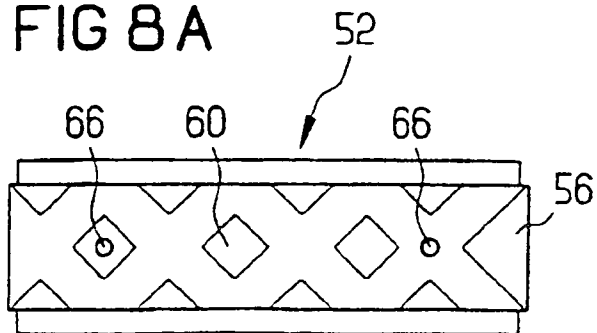


FIG 8B

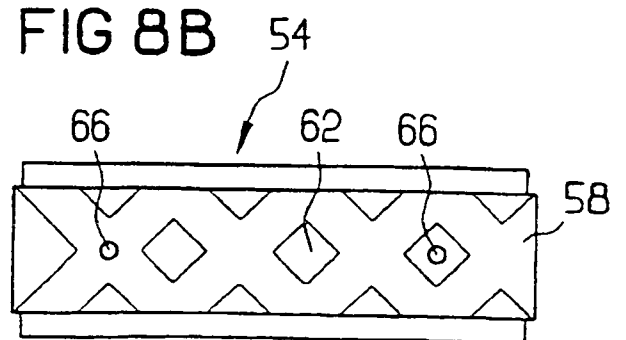


FIG 9

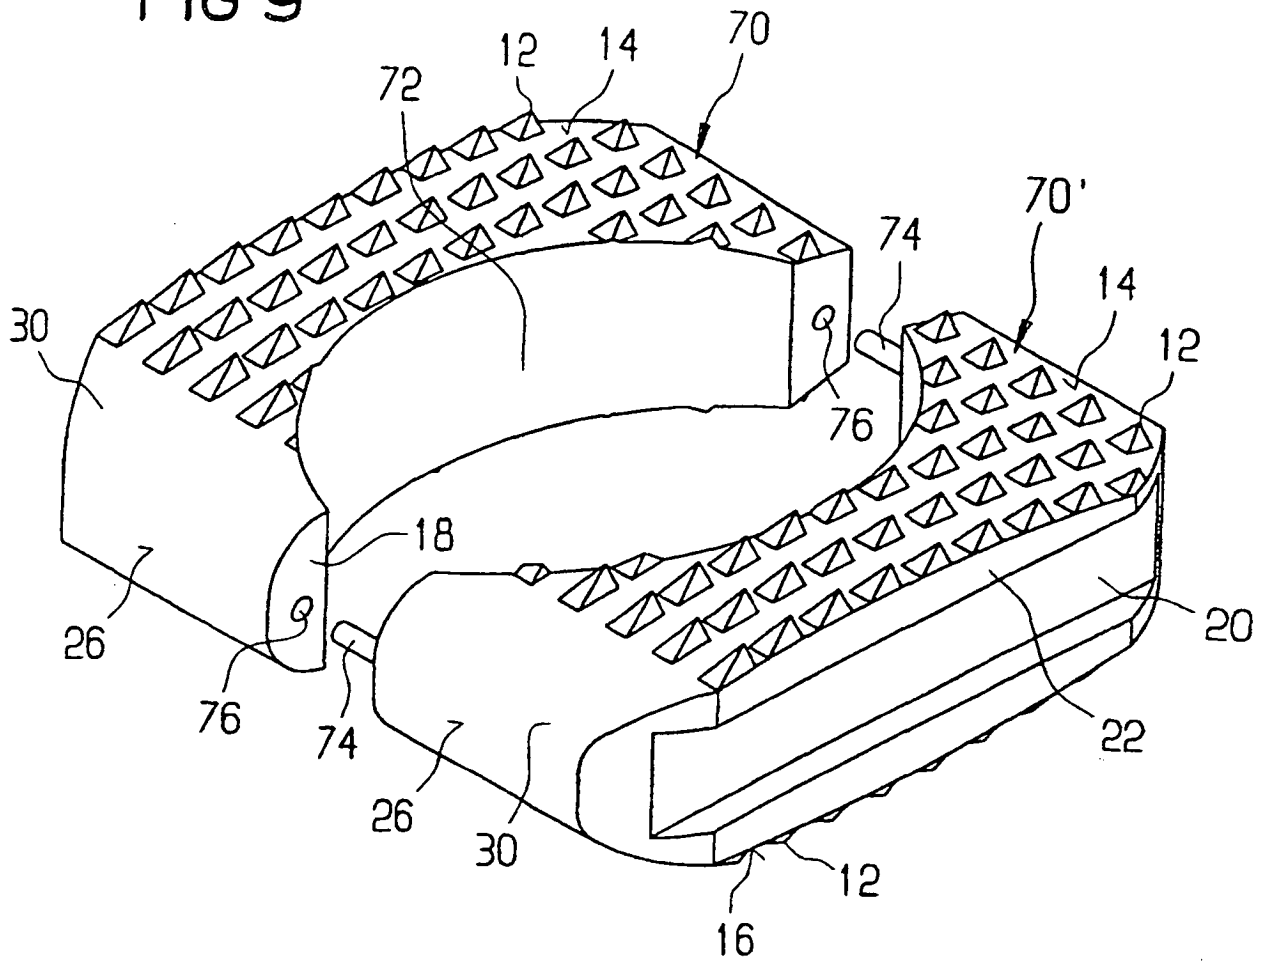


FIG 10A




FIG 10B




FIG 11

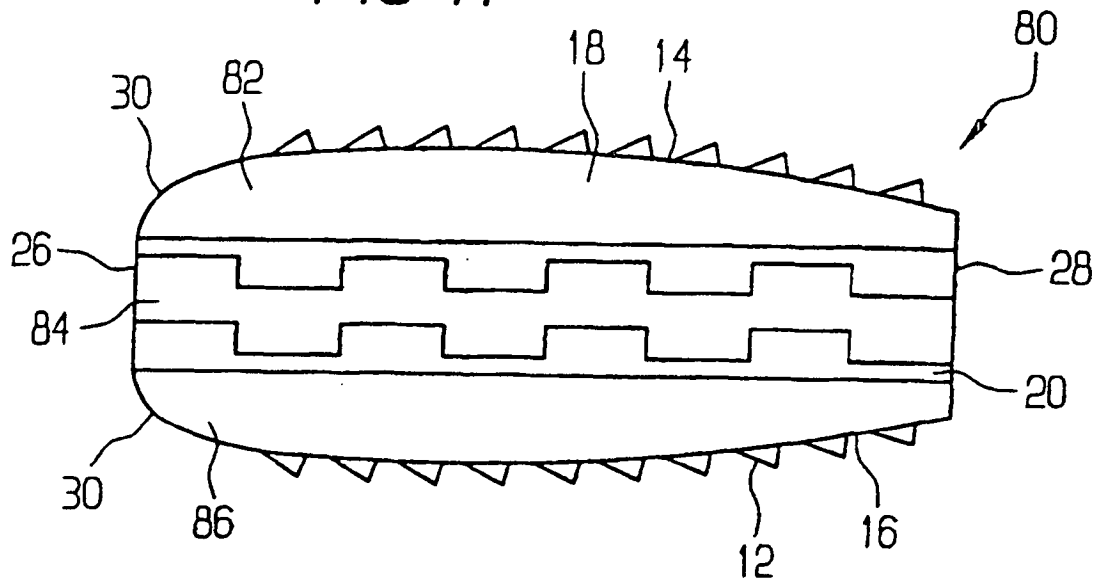


FIG 15

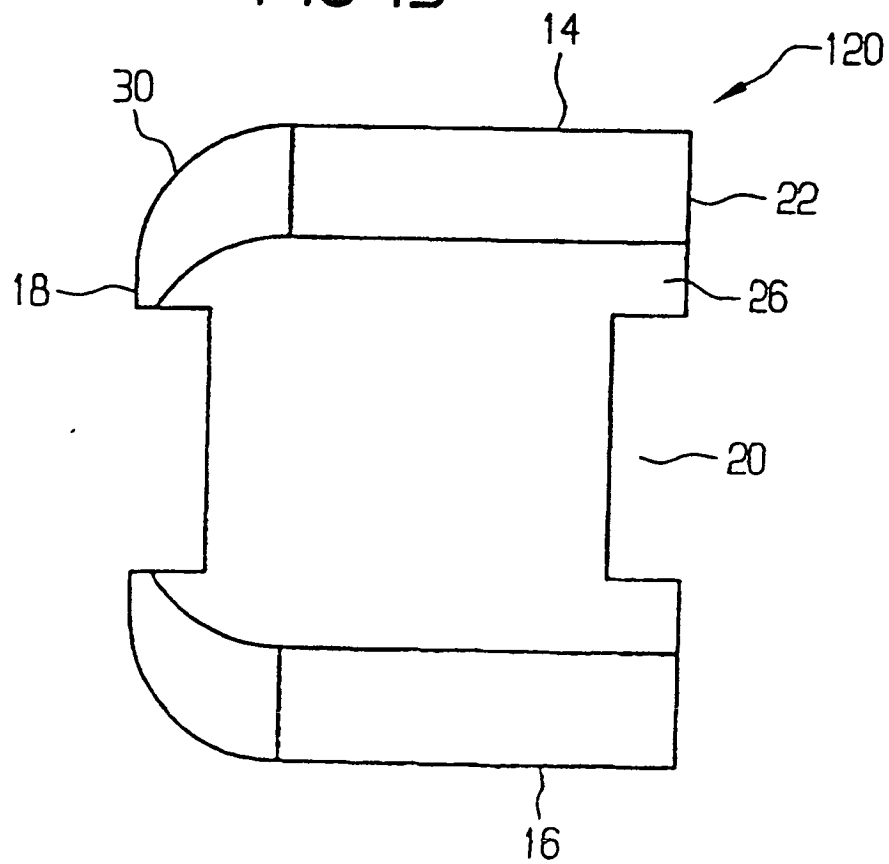


FIG 13

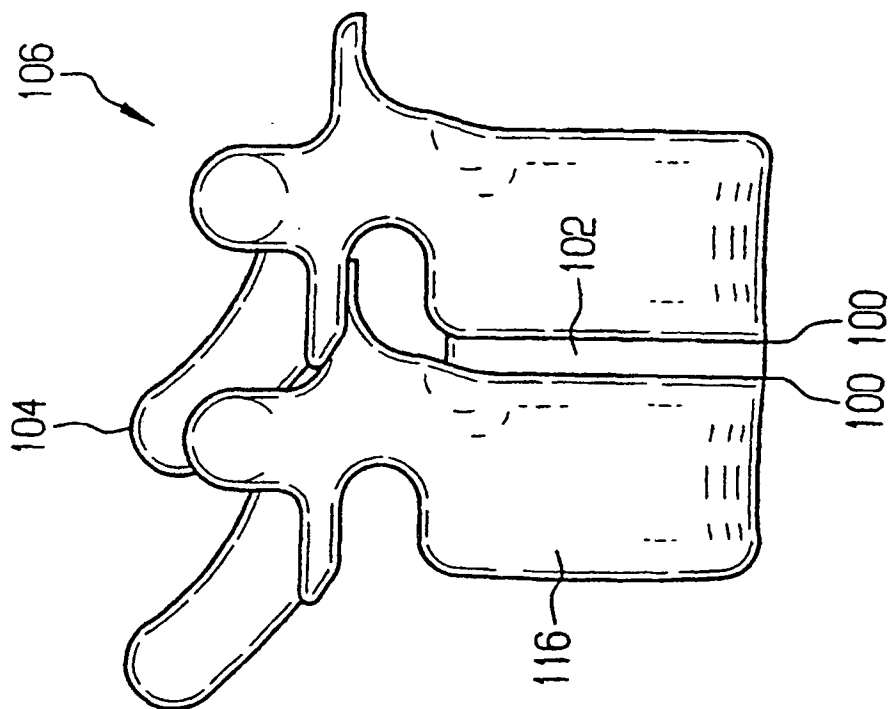


FIG 12

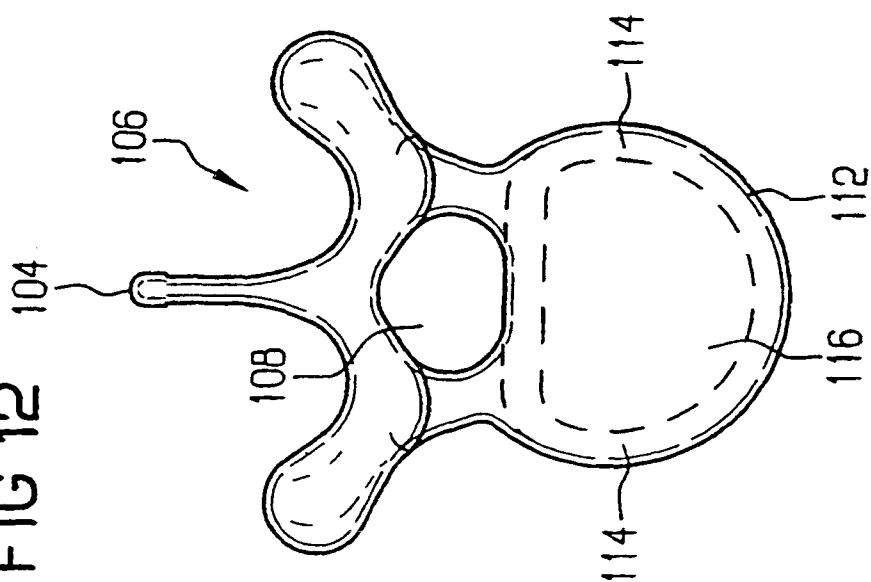


FIG 14

