

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(10) International Publication Number

WO 2015/154835 A1

(43) International Publication Date  
15 October 2015 (15.10.2015)

(51) International Patent Classification:  
*H01L 21/67* (2006.01)    *H05B 1/02* (2006.01)

(21) International Application Number:  
PCT/EP2015/000144

(22) International Filing Date:  
27 January 2015 (27.01.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
14/247,427    8 April 2014 (08.04.2014)    US

(71) Applicants: PLANSEE SE [AT/AT]; A-6600 Reutte (AT). PLANSEE USA LLC [US/US]; 115 Constitution Boulevard, Franklin, MA 02038 (US).

(72) Inventors: BOGUSLAVSKIY Vadim; 232 Mount Lucas Road, Princeton, NJ 08540 (US). PLANKENSTEINER, Arno; Fanggasse 2 E, A-6067 Absam (AT).

(74) Agent: CIESLA, Bettina; c/o Plansee Group Service GmbH, IP Department, Metallwerk-Plansee-Str. 71, A-6600 Reutte (AT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

---

(54) Title: SUPPORTING SYSTEM FOR A HEATING ELEMENT

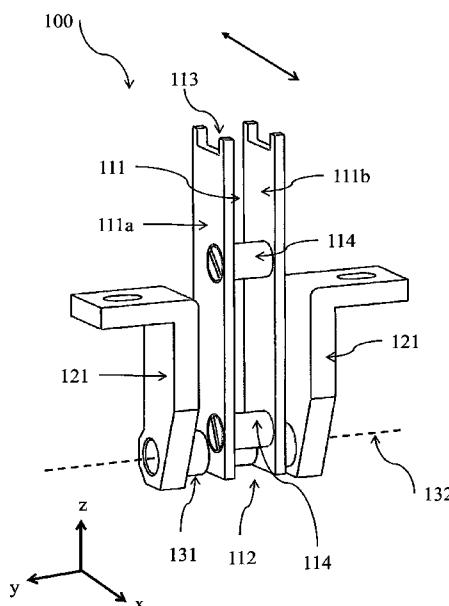

(57) Abstract: The invention relates to a supporting system for support of a heating element which comprises a supporting member and a base member. The supporting member has a main extension direction extending substantially in a height direction and a proximal and distal end whereas the proximal end is adapted to support the heating element. The base member is connected via at least one hinge to a distal portion of the supporting member which distal portion is arranged distal from the proximal end. The supporting member is pivotable relative to the base member about a rotation axis which is oriented parallel to a substantially rigid direction.

Fig. 1

## SUPPORTING SYSTEM FOR A HEATING ELEMENT

The present invention is related to a supporting system for the support of a heating element as well as to a heating system comprising at least one heating element.

Furnaces or electric heaters comprising resistive heating elements are commonly known and used in different industries for various applications. Thereby heat is generated when an electric current is applied through the electric conductive heating elements, also known as heating filaments, and due to electric resistance electric energy is dissipated into heat. Typically the heating elements are placed in close proximity to the item or material to be heated. Heater systems for various applications such as reactors for MOCVD (metal organic chemical vapor deposition) techniques used e.g. in the processing of semiconductor materials, e.g. for the epitaxial growth of compound semiconductors, are required to be operated at considerable elevated temperatures, e.g. above 800°C which poses challenges in the design and on the material of the heating element assembly. For applications which require especially high temperatures the heating elements are frequently made from ceramic materials (which is expensive and difficult to manufacture into the desired geometric shape) or comprise refractory metals such as tungsten, molybdenum, rhenium, tantalum, niobium, etc. or alloys thereof.

When designing a high-temperature heating system one of the main issues one has to cope with is the thermally induced cyclic expansion and contraction of the heating elements. For certain applications in particular for MOCVD reactors a precise positioning of the heating elements is important, which should also be maintained in a controlled way during operation cycles of the heating system. Usually different kinds of mechanical support structures such as terminals are used to make sure that the heating elements are positioned correctly and kept in a predefined position. When e.g. during a MOCVD process inside of the reactor the heating elements are heated up to 1000 to 2200°C the heating elements expand considerably and when kept in a fixed place by the terminal, significant mechanical stress is generated inside the material of the heating

element. Such mechanical stress might lead to uncontrolled plastic deformations or cause the heating element to deteriorate or even break, leading to a decreased lifetime of the heating element. Uncontrolled deformations are undesired since there is a severe risk of a contact between the heating element 5 with other parts of the heating systems or with other heating elements or within the heating element itself and as a consequence a short circuit might occur. Furthermore, since deformations of the heating elements influence the local electric resistivity plastic deformations are especially unfavorable in demanding high temperature applications like epitaxial growth processes of compound 10 semiconductors where a homogeneous or otherwise precisely controlled temperature profile is important. The situation with heating elements comprising refractory metals is most problematic because the strength creep resistance of these metals decreases with temperature and drops substantially above 1200 to 1400°C. Above these temperatures even small stresses might cause undesired 15 plastic deformations which are retained when the heating element cools down.

To overcome problems with fixed terminals various systems with flexible elements have been devised which are designed to allow expansion of the heating element in some preferable directions. Some such known terminals 20 comprise different kinds of springs, e.g. with an U-form shape which allow a movement of the connection position between the heating element and the terminal. While such springs with an U-form shape achieve to reduce thermally induced stress inside the heating elements to a certain extent, their properties do not fully convince in practice since the heating element can extend itself in 25 two or more directions and there remains a risk of a short circuit due to electric contact of the heating elements with itself or other parts of the heating system.

In US7645342 it is proposed that the heating elements include a plurality of extended pin openings through which pins are inserted to fix the heating 30 elements in a plane. The size and geometric shape of the pin openings are designed such that within a certain temperature range they should allow the expansion of the heating element in the horizontal direction. However, in practical implementations several problems occur, especially at high temperatures above 1500°C. It is found that at such high temperatures the pins

which are in contact with the heating element and usually are made of refractory metals have a tendency to bond via diffusion to the heating elements, thus hindering them from a free movement in a horizontal direction. As a consequence, mechanical stress is built up upon heating, leading to plastic 5 deformations of the shape of the heating element.

According to the aforesaid, there is a need in the industry for supporting systems for heating elements, in particular for heating elements which can be used in high temperature heaters operating at temperatures above 1600°C. 10 Thus, it is an object of the present invention to provide a supporting system for a heating element in a heater as well as a heating system comprising such supporting systems wherein thermally induced stress inside the heating element is reduced during operation and the heating element and the heating system are especially suitable for high-temperature applications.

15 According to the invention, the supporting system for support of a heating element comprises a supporting member which is adapted to support the heating element. The supporting member is preferable rigid and of elongated shape, it has a main extension direction and extends substantially in a height 20 direction. Preferably, the main extension direction is exactly parallel or angled  $\leq$  10° with regard to the height direction, however, the supporting member does not need to have a strictly straight configuration. The height direction can be defined to be perpendicular to the extension plane of the heating element in the local region where it is mounted at the supporting 25 member in the oriented position. Preferably the heating element has a curved main extension direction and is arranged in a planar configuration which defines the extension plane. In case that the arriving part of the heating element at the supporting member is of substantially straight configuration the height direction can be defined by the overall geometric structure of the heating element. 30 According to the present invention, the supporting member has two ends, a proximal end and a distal end. The proximal end is facing towards the heating element and has a supporting portion for the support of the heating element. The distal end is arranged distal from the proximal end and has a distal portion to which a base member is connected via at least one hinge. Preferably, the

supporting member and the base member are pivotally connected via exactly one hinge. The base member can be secured to a base e.g. to a base plate in the heating system or the heater housing comprising the heating element.

According to the invention the supporting member and the base member form

- 5 two arms which are hinged together such that the supporting member is pivotable relative to the base member about an axis which is oriented parallel to a substantially rigid direction. Thus, the supporting member is movable in a moveable direction wherein the moveable direction is defined by a direction which is substantially perpendicular to the height direction (the angle is
- 10 preferably in the range of 75-105°). Movements of the supporting member are restricted in the substantially rigid direction which is perpendicular to the moveable direction and perpendicular to the height direction. Therefore, the hinge provides the heating element the possibility to move along the moveable direction during thermal extension while it substantially hinders the heating
- 15 element to displace in the substantially rigid direction.

During the heating up process of the heating element the heating element tries to expand its dimensions and thermal induced stress causing irregular deformations would build up if a relative movement between the heating

- 20 element and basis member where the supporting system is fastened to a base of the heating system is prohibited. With this inventive arrangement it can be achieved that the thermally induced displacement of the heating element is guided in a controlled way and is substantially reduced to only one single direction, in particular the moveable direction or the height direction,
- 25 respectively. This leads to the possibility that thermally induced mechanical stress inside the material of the heating element and thus the risk of plastic deformations is decreased.

It is advantageous if the rotation axis of the supporting member does not

- 30 coincide with the center of mass of the supporting member and the rotation axis is arranged such that due to gravity a rotational moment onto the supporting member results, causing a force on the heating element in the desired expansion direction. Preferably, the rotation axis is arranged spacedly from the center of mass of the supporting member along the height direction and/or the

moveable direction. Furthermore, it is advantageous if the force exerted by the supporting system into the movable direction does not exceed the limiting creep stress of the heating element material at operational temperature.

5 According to an advantageous embodiment of the invention, the base member extends at least partially from the distal portion in the height direction towards the proximal end. In another advantageous embodiment the base member can be arranged horizontally. Preferably, the base member and the supporting member are aligned at room temperature when the heating element is in its  
10 unheated state. Furthermore, in a preferred embodiment the main extension direction of the supporting member and/or the base member is substantially parallel to the height direction. Thus, it is substantially perpendicular to the plane spaced by the heating element configuration. This way a heating system can be realized which on the one hand has a very compact construction with a  
15 comparably small height and on the other hand still can be operated at high temperatures, in particular at temperatures above 1600°C. Due to the extended elongated shape of the supporting member a resulting significant temperature difference between the proximal and distal end of the supporting member can be achieved, especially when the supporting member is arranged in proximity to  
20 the bottom surface of the heating system, which typically is cooled by a liquid such as water.

Furthermore, in a preferred embodiment the base member and the hinge is protected from heat via a heat shield system which can be arranged between the heating elements and the base member. Thus, the base member and the  
25 hinge are at a considerably lower temperature at which the material is less stressed.

The supporting member does not need to be made of full material, in a preferred embodiment the supporting member comprises two or more bars or  
30 sheets which are arranged in a substantially parallel orientation and are pivotally connected to the base member at its distal portion. The bars or sheets are mechanically connected to each other, e.g. via separator elements (sleeves) which are disposed between the bars or sheets and fastened with screws or the like. This way a construction for the supporting member can be

realized which on the one hand requires less material and on the other hand is sufficiently stiffened against undesirable twisting or bending.

5 The inventive supporting system can provide mechanical support of the heating element only or can be configured both for mechanical support and electric supply of the heating element with electrical power.

Furthermore, regarding material composition parts of the inventive supporting system, in particular the supporting member and/or the base member and/or the 10 components of the hinge, can comprise at least 90% by weight of a refractory metal. In particular, the refractory metal is selected from tungsten, molybdenum, niobium, tantalum, rhenium, and alloys thereof. One example for the material is tungsten or an alloy of tungsten (at least 90% by weight of tungsten), for example vacuum metalized tungsten alloy which besides tungsten comprises a 15 small amount of potassium silicate. A further example for the material is molybdenum or an alloy of molybdenum (at least 95% by weight molybdenum).

A supporting system which provides mechanical support only needs to be electrically isolated against the base where it is fixed respectively against the 20 housing of the heating system. In particular, electrical isolation can be provided by Alumina ( $Al_2O_3$ ) or Boron Nitride (BN) or ceramic materials like Aluminium Nitride (AlN) or Silicon Alumina Nitride (SiAlON), etc. In order to prevent decomposition or evaporation of ceramics the supporting system has to be configured such that the temperature at the interface towards the electrical 25 insulating parts does not exceed temperatures around 1500-1600°C.

Those skilled in the art will appreciate that there are numerous methods how to connect the heating element to the supporting member. These methods include twisted wire, clamping, welding, screwing, bolting and the like. For a supporting 30 system which in addition provides electrical contact, the method selected should ensure sufficient surface contact between the supporting member and the heating element in order to achieve proper electrical connection between the supporting member and the heating element.

The invention further includes a heating system comprising at least one heating element and at least one supporting system according to the present invention.

The heating system in particular can be configured such that it can be used as a heater in a MOCVD reactor.

- 5 The inventive heating system can be characterized such that each heating element comprises two supporting systems which are configured for power supply to the heating element and which are located at both ends of the heating element. The power supply supporting systems are in particular also configured for mechanical support of the heating element. In addition, further supporting systems according to the present invention are possible, in particular only for mechanical support of the heating element which are located with respect to the two ends of the heating element between the two supporting systems for power supply.
- 10
- 15 According to the invention the respective moveable directions of the different supporting systems of a single heating element originate from a common central point whereas the central point in particular can be chosen to lie in the extension plane of the heating element. In other words, in order to adjust the different supporting systems of a single heating element a common central point preferable in the extension plane of the heating element is defined. From this central point each of the supporting systems is aligned such that its respective moveable direction is oriented from the central point radially outwards.
- 20

It is advantageous that as in most known common heating systems the heating element or an arrangement of a plurality of heating elements are arranged in a planar configuration. In particular for MOCVD reactors various examples thereof are described in US7645342 which document is incorporated by reference. In an advantageous embodiment the heating element has a substantially circular configuration which is interrupted at some point leading to a first and a second end of the heating element defining a small interruption between. At the first and second end the heating element is electrically connected to a power source. In a preferable embodiment the supporting systems providing electrical contact are realized as rigid, fixed connections. Preferably, the distance between the two ends of the heating element is as small as possible, of course they have to

- 25
- 30

be spaced sufficiently apart so that during operation no electrical short circuit may occur. For this embodiment it is advantageous if the central point is in coincidence with or close to the geometric middle point between the two ends of the (interrupted) circular configuration of the heating element. Thus, the

5 moveable directions of the supporting systems are oriented radially outwards from a point close to the two ends of the (substantially) circular heating element.

Furthermore, the inventive heating system can be characterized in that the rotation axis of the supporting member is not aligned with the center of mass of

10 the supporting member and a resulting rotational moment onto the supporting member causes a force on the heating element in direction of the desired expansion of the heating element, i.e. along an arc in the moveable direction of the supporting member. If the present invention is used for a heating system with a substantially circular extension, it is advantageous that the supporting  
15 system provides a small force in the outward, namely in a – from the central point – radial direction. In order to avoid plastic deformation of the heating element it is preferable that the force exerted by the supporting system does not exceed the limiting creep stress of the heating element material, also at operational temperature when the material properties of the heating element  
20 deteriorate.

In an advantageous embodiment the heating system includes a heat shield system comprising one or a plurality of heat shields which are arranged below the heating elements. In a preferable embodiment the supporting member

25 extends through openings in the heat shield system. The base member and the hinge in contrary are arranged below the heat shield arrangement and therefore will be protected from radiative heat.

The embodiments of the invention presented above can be combined freely

30 with each other. Many of the embodiments can be combined in order to form a new embodiment.

The present invention is further discussed with respect to the accompanying drawings. The figures show schematically:

Figure 1 a perspective view of a supporting system according to the present invention

Figure 2 a perspective view of a first embodiment of a heating system according to the present invention

5 Figure 3 a perspective view of a second embodiment of an inventive heating system

Figure 4 a top view of the heating system of figure 3

10 10 The supporting system (100) according to the embodiment in figure 1 comprises an elongated rigid supporting member (111) with a distal (112) and a proximal end (113). On top of the rigid supporting member (111) a heating element is mounted (not shown) which extension defines an extension plane. The main extension of the supporting member (111) extends in a height direction z which

15 15 is perpendicular to the extension plane of the heating element. The supporting system further comprises a base member (121) which is e.g. fixed on a support plate (not shown) with screws or any other kind of mechanical fixation. The supporting member (111) and the base member (121) are pivotally connected via a hinge (131) which in this specific embodiment is realized with a bolt, protruding pin or the like whose rotation axis (132) is oriented in a substantially rigid direction y orthogonal to the height direction z and the movable direction x. In order to provide for low friction the hinge can be made of a hard ceramic material like Alumina ( $Al_2O_3$ ) or sapphire which at the same time provides electric insulation.

20 20 The rotation axis (132) is arranged spacedly with the center of mass of the supporting member (in this specific embodiment the rotation axis is arranged in a distal portion close to the distal end of the supporting member) and is positioned asymmetric with respect to the main extension direction of the supporting member (111) such that due to the weight of the supporting member

25 25 a rotational moment onto the supporting member will arise. This causes a force on the heating element in direction of the desired outward expansion of the heating element.

30 30 In this embodiment the supporting member is realized with two bars (111a, 111b) which are arranged in a substantially parallel orientation and are hinged

to the base member at its distal portion. The bars are mechanically attached to each other via sleeves (114) disposed between the bars and fixed with screws or the like. Preferably the sleeves are arranged asymmetric with respect to the main extension direction of the supporting member (111) in an opposite

- 5 direction to the rotation axis (132) such that the additional weight of the sleeves leads to a rotational moment in the desired expansion direction. This construction substantially hinders the heating element to displace in the rigid direction y. During the heating process the dimension of the heating element increases and when arranged in a circular configuration – a top view of this
- 10 situation is shown in figure 4 - the heating element tends to move radially outward. In order to reduce thermally induced stress inside the heating element, the supporting system (100) according to the present invention provides the heating element the possibility to move relative to the base member (121) during thermal extension. The proximal end of supporting member (111) is
- 15 dislocated as to the base member (121) by a movement along an arc in the moveable direction x.

While the supporting member (111) in this specific embodiment is realized as an extended linear object, in general the supporting member (111) does not

- 20 have to be of straight configuration nor has to be arranged parallel to the height direction z. However, it has to be ensured that the heating element can move freely in a moveable direction x.

The arrangement of the base member, which in this specific embodiment

- 25 extends at least partially in the height direction towards the proximal end of the supporting member, enables an extremely compact construction of the supporting system so that compared to known conventional designs considerable less height is required between the heating element and the bottom surface of the heating system.

30

Figure 2 illustrates an exemplary heating system according to the present invention comprising two heating elements (150, 151) which are individually controllable such that a better control of the temperature profile of the heating system is gained. The heating elements (150, 151) each are mounted on two

fixed, rigid supporting systems (200, 201) at their ends respectively. These fixed supporting systems (200, 201) at the heating elements ends are configured for the supply of the heating elements with electric power. The outer heating element (150) with an interrupted circular configuration is in addition

5 mechanically supported by a flexible supporting system (100) according to figure 1 comprising a supporting member (111) and a base member (121) connected via a hinge (131). The supporting system (100) is configured for mechanical support only and needs to be electrically isolated against the base at which it is mounted, e.g. if the hinge is made of an electric isolating material.

10 It is advantageous if a heat shield system (160) comprising one or stacked layers of heat shields is installed. The heat shields are placed in close proximity to one another with a 1-5 mm separation being typical. They are maintained by spacer elements in the desired position. The supporting member of the mechanical supporting system (100) as well as the fixed, rigid supporting

15 systems (200, 201) for power supply extend through openings in the heat shields.

Figure 3 depicts another embodiment of an exemplary heating system comprising a heating element (150) with an interrupted circular configuration mounted on two fixed, rigid supporting systems (200) at its end respectively. These fixed supporting systems (200) at the heating element ends provide the heating element with electric power. The distance between the ends of the filament is kept as small as possible without causing electric short during operation of the heating system. Several flexible supporting systems (100)

20 comprising a hinge are provided for mechanical support of the heating element which are electrically isolated against the base at which they are mounted. For reasons of clarity a heat shield system is not shown in figure 3.

Figure 4 shows a top view of the heating system in figure 3 and illustrates the orientation of the moveable direction x of the supporting systems (100). In this embodiment the respective moveable directions of the different supporting systems (100) originate from the geometric middle point between the two ends of the (interrupted) circular configuration of the heating element and are oriented in the extension plane of the heating element radially outwards.

It should be readily understood that the invention is not limited to these specific embodiments, for heating systems certainly different embodiments of the supporting system can be employed and other combinations of support systems 5 are possible. In particular the electricity supplying supporting systems (200) can be realized by a flexible supporting system comprising a hinge.

## CLAIMS

1. Supporting system (100) for support of a heating element (150, 151)

5 comprising

a supporting member (111), the supporting member having a main extension direction extending substantially in a height direction and a proximal (113) and distal end (112) whereas the proximal end (113) is adapted to support the heating element (150, 151),

10 and

a base member (121), the base member being connected via at least one hinge (131) to a distal portion of the supporting member (111) which distal portion is arranged distal from the proximal end (113), whereas the supporting member (111) is pivotable relative to the base 15 member (121) about a rotation axis (132) which is oriented parallel to a substantially rigid direction.

2. Supporting system according to claim 1, characterized in that the rotation axis (132) is arranged spacedly from the center of mass of the supporting 20 member.

3. Supporting system according to claim 1 or 2, characterized in that the rotation axis (132) is arranged spacedly from the center of mass of the supporting member along the height direction and/or the moveable 25 direction.

4. Supporting system according to claim 1 to 3, characterized in that the base member extends at least partially from the distal portion in the height direction towards the proximal end (113).

30

5. Supporting system according to claim 1 to 4, characterized in that the supporting member (111) comprises two or more bars (111a, 111b) which are arranged in a substantially parallel orientation.

6. Supporting system according to claim 1 to 5, characterized in that the material of the supporting member and/or the base member comprises at least 90 % by weight of a refractory metal.
- 5 7. Supporting system according to claim 6, characterized in that the refractory metal is selected from tungsten, molybdenum, tantalum, rhenium, niobium and alloys thereof.
8. Heating system comprising at least one heating element (150, 151) and at 10 least one supporting system (100) according to claim 1 to 7.
9. Heating system according to claim 8, characterized in that the supporting systems (100) are oriented such that the respective movable directions of the different supporting systems (100) originate from a common central 15 point.
10. Heating system according to claim 8 to 9, characterized in that the heating system further comprises a heat shield system (160) arranged below the heating element (150, 151) and above the hinge (131) and the base 20 member (121) and which have openings through which the supporting member of the supporting systems (100) can extend.

1/4

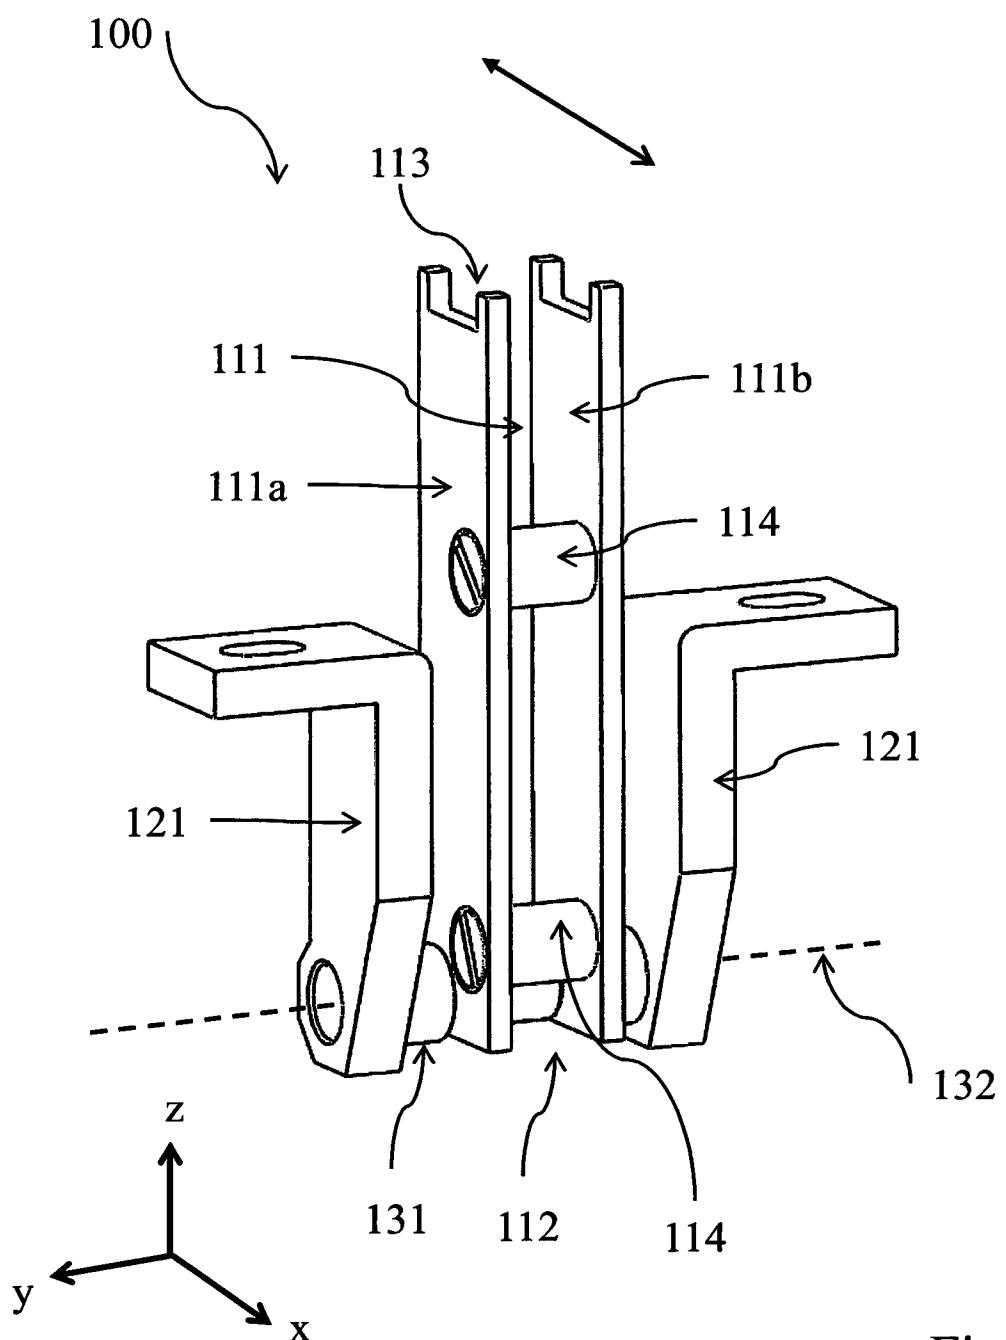


Fig. 1

2/4

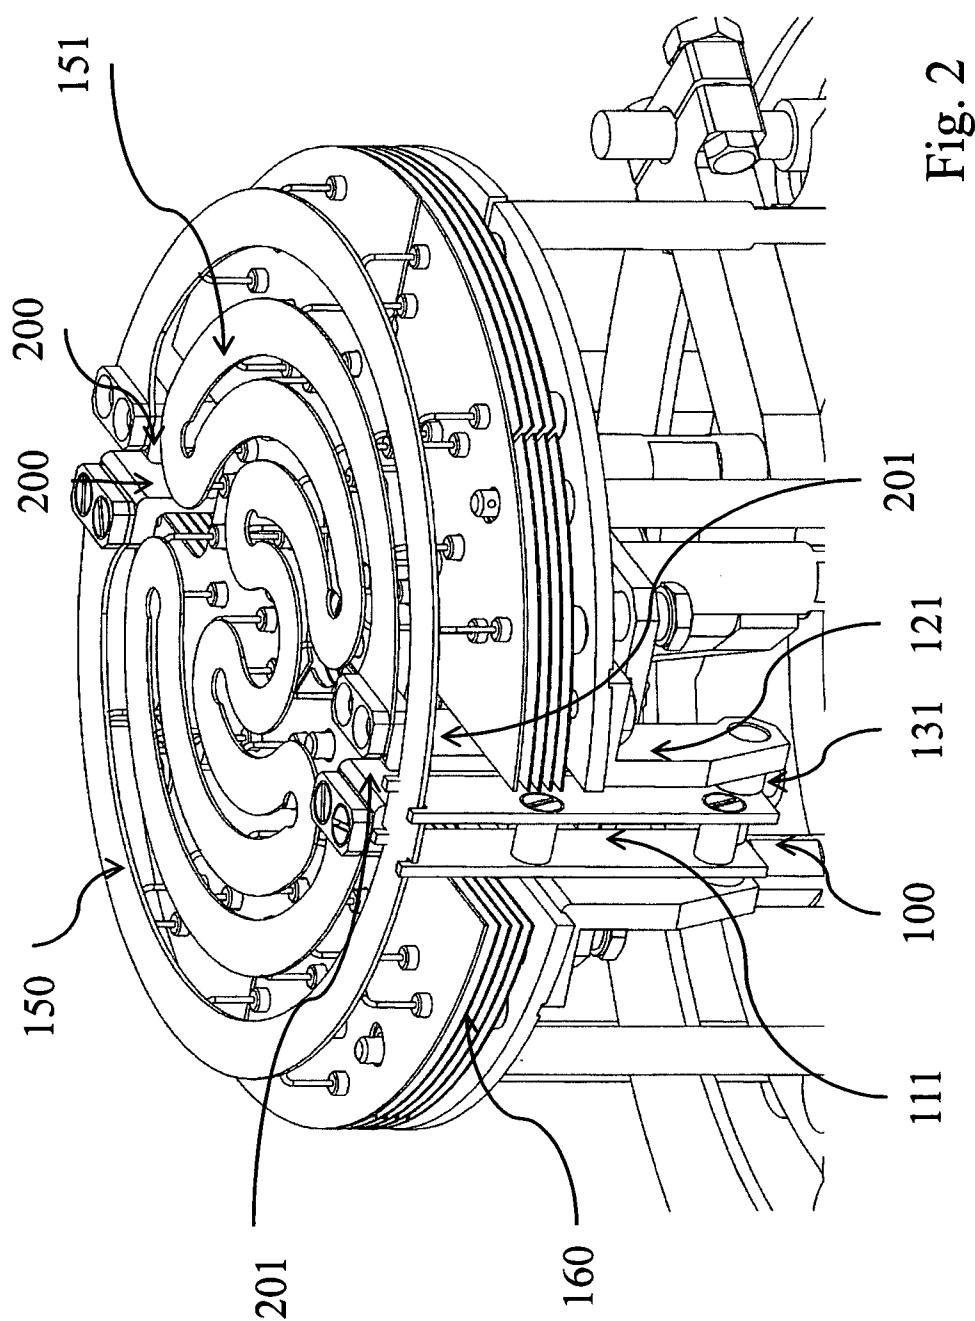


Fig. 2

3/4

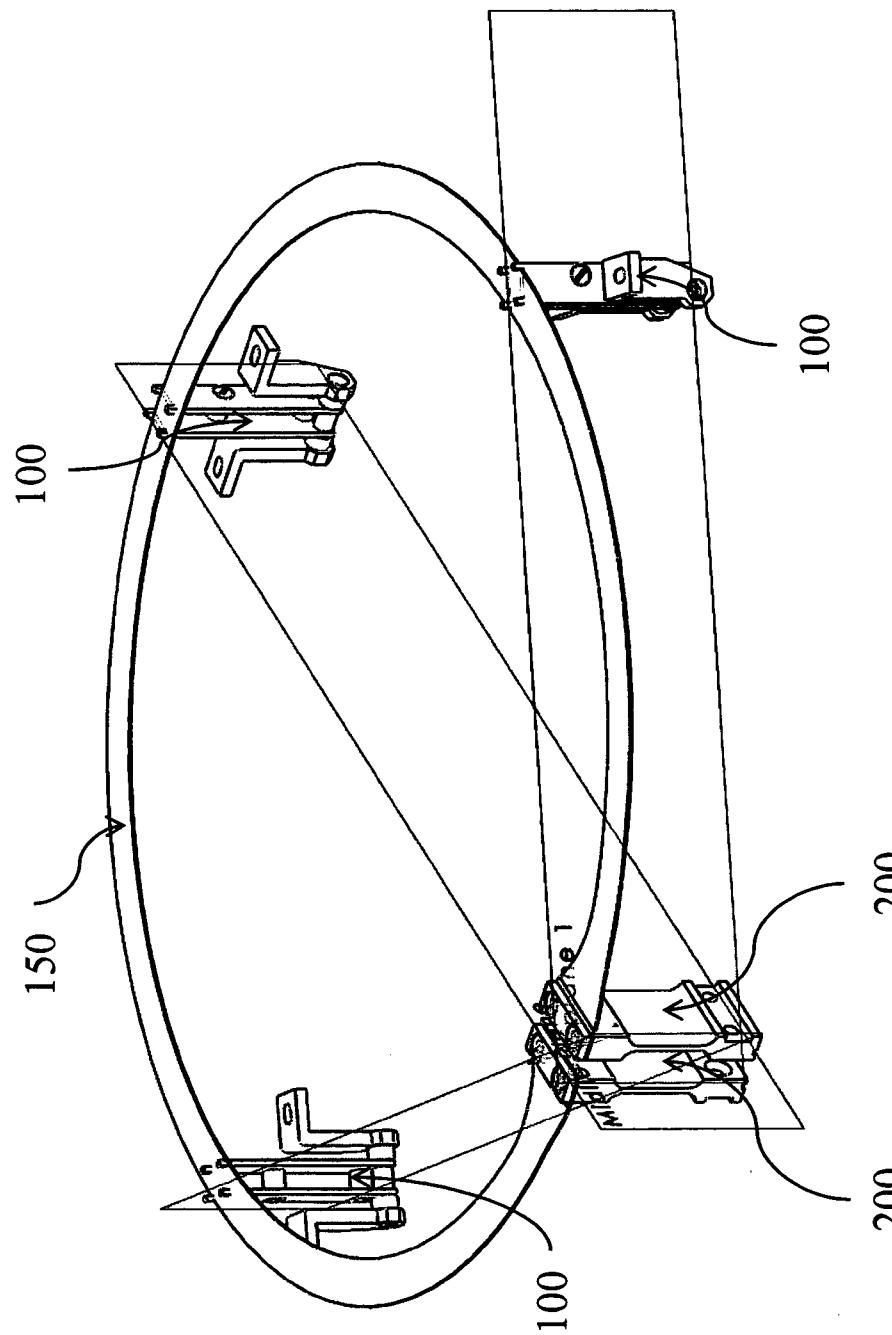


Fig. 3

4/4

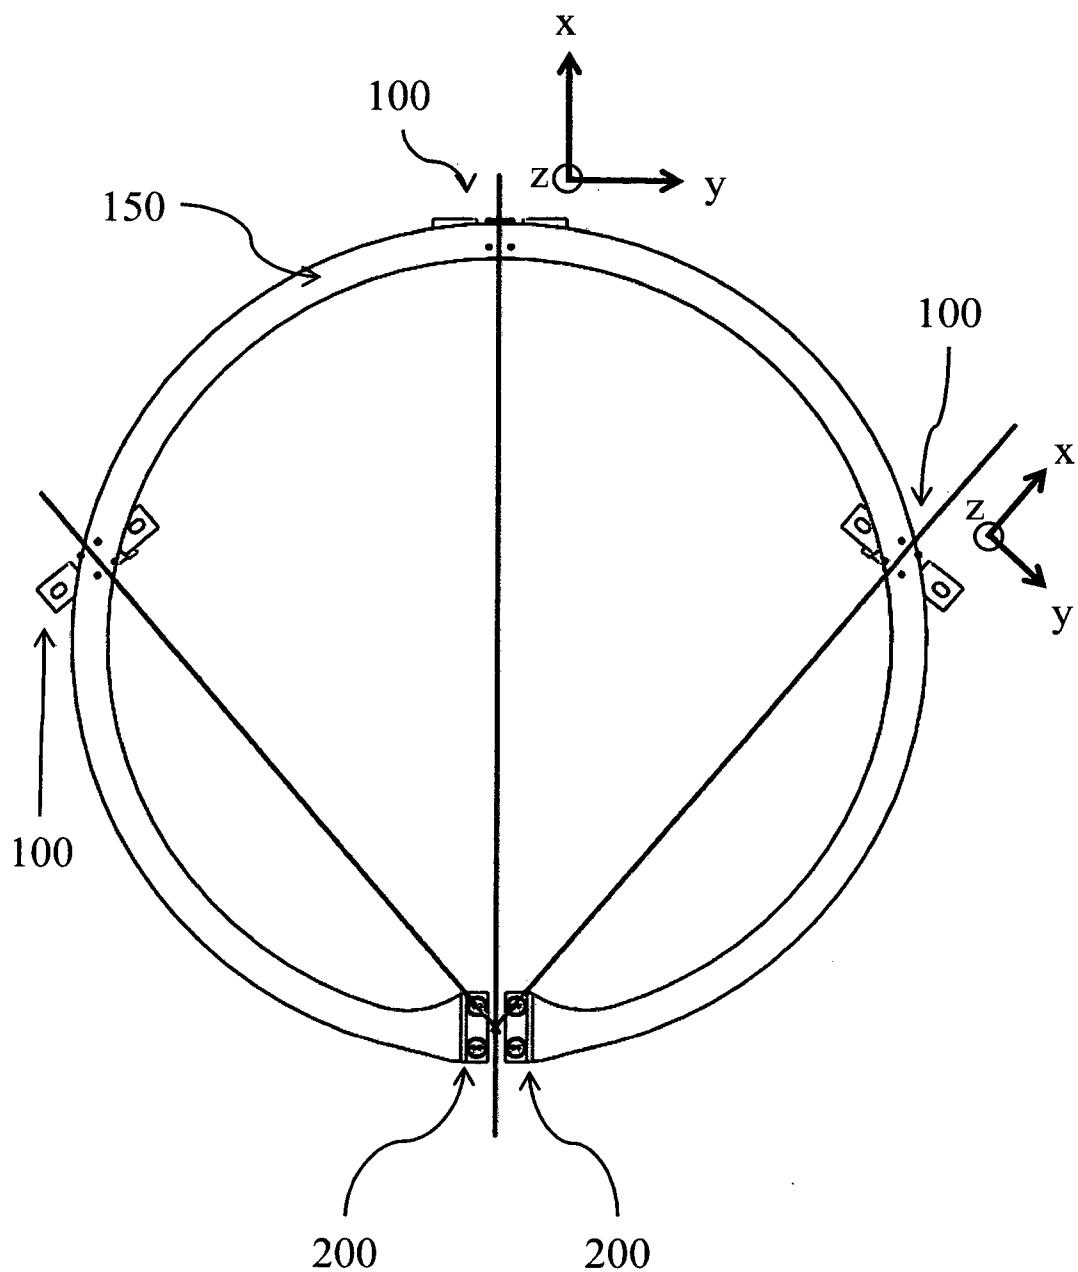


Fig. 4

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2015/000144

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. H01L21/67 H05B1/02  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
H01L H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 964 433 A2 (SHINETSU CHEMICAL CO [JP]) 15 December 1999 (1999-12-15) paragraph [0021] - paragraph [0028]; figures 1-3 -----	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
7 May 2015	19/05/2015
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Angermeier, Detlef

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No

PCT/EP2015/000144

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0964433	A2 15-12-1999	DE 69934049 T2 EP 0964433 A2 JP H11354260 A US 6242719 B1	15-03-2007 15-12-1999 24-12-1999 05-06-2001