



(22) Date de dépôt/Filing Date: 2006/09/28

(41) Mise à la disp. pub./Open to Public Insp.: 2008/03/28

(51) Cl.Int./Int.Cl. *E02F 5/20* (2006.01),
E02F 3/06 (2006.01), *E21B 11/00* (2006.01),
E21B 15/00 (2006.01), *E21B 7/00* (2006.01)


(71) Demandeur/Applicant:
PASKAR, STANLEY M., CA

(72) Inventeur/Inventor:
PASKAR, STANLEY M., CA

(74) Agent: THOMPSON, DOUGLAS B.

(54) Titre : STABILISATEUR DE TARIERE

(54) Title: AUGER STABILIZER

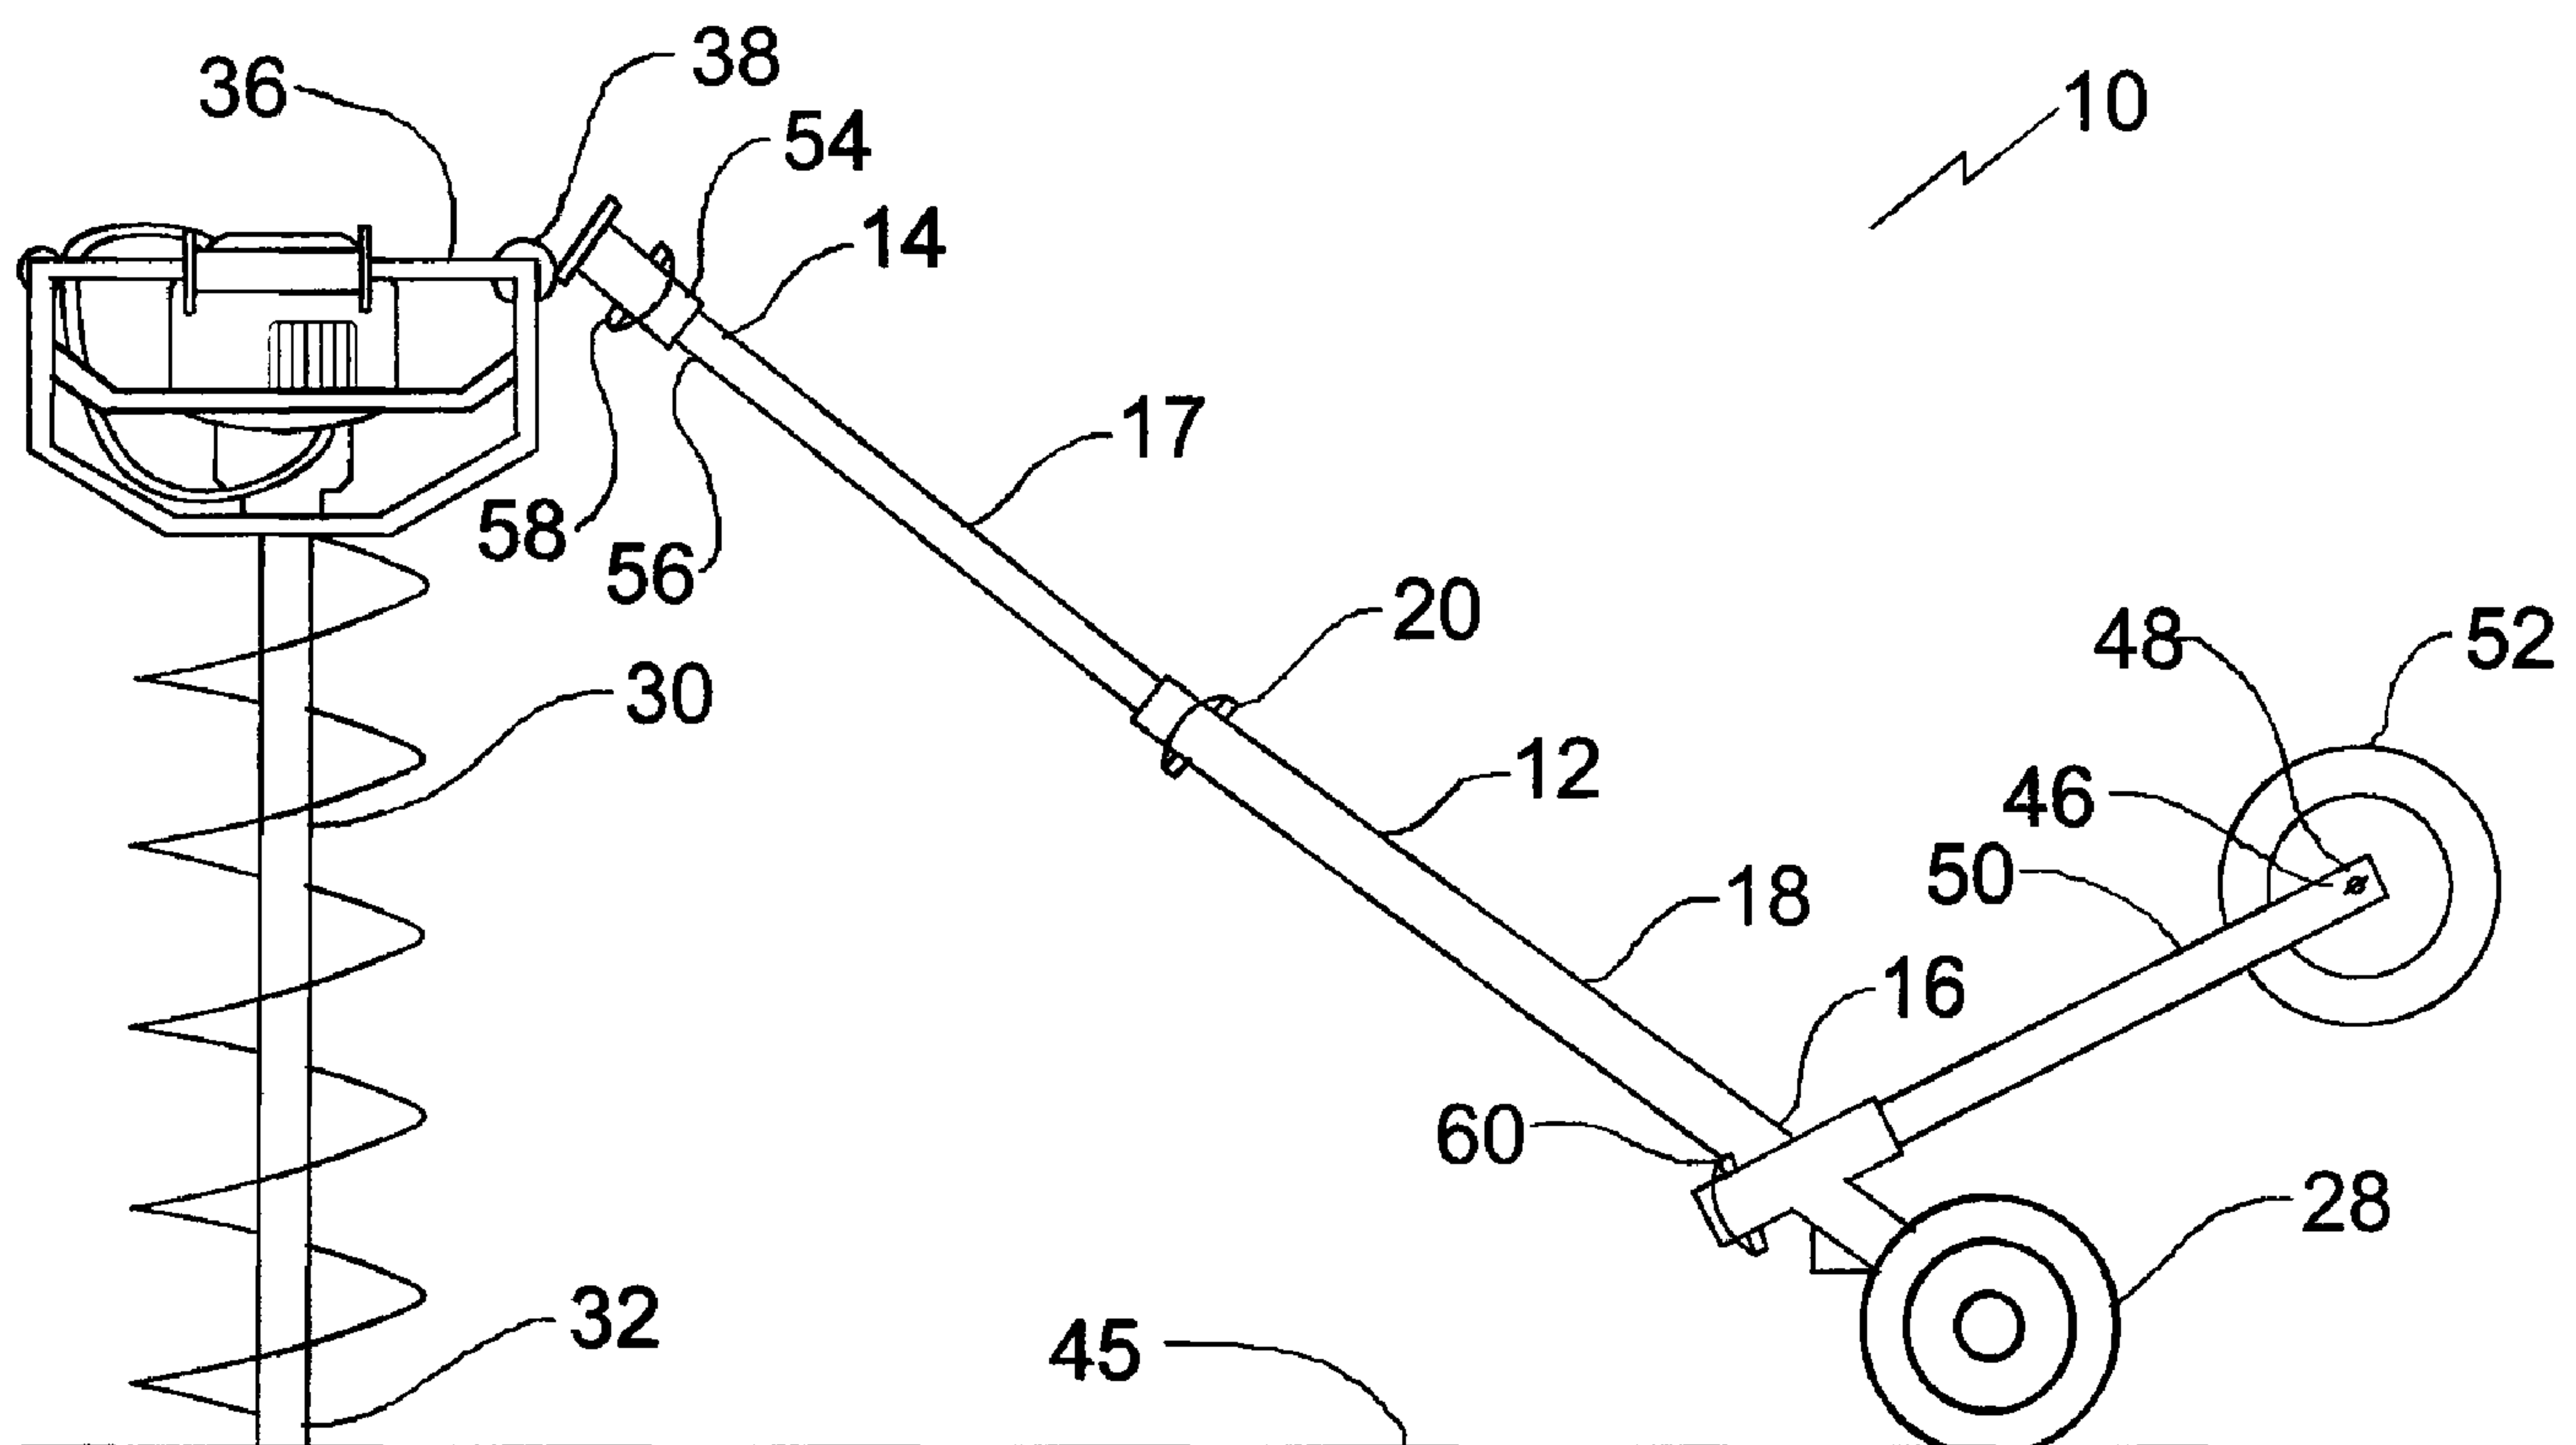

(57) Abrégé/Abstract:

An auger stabilizer includes a rigid elongated body having a first end and a second end. The length of the body is adjustable between a retracted transport position and an extended drilling position. A pair of spaced apart wheels are attached at the second end of the body. A split body with two halves connected by fasteners is used to pivotally attach the first end of the body to a handle of an auger. When the body is in the extended drilling position, the pair of spaced apart wheels roll along a ground surface away



(57) **Abrégé(suite)/Abstract(continued):**

from the auger as the handle of the auger descends and the pair of spaced apart wheels act to stabilize the handle of the auger against reactive torque.

ABSTRACT OF THE DISCLOSURE

An auger stabilizer includes a rigid elongated body having a first end and a second end. The length of the body is adjustable between a retracted transport position and an extended drilling position. A pair of spaced apart wheels are attached at the second end of the body. A split body with two halves connected by fasteners is used to pivotally attach the first end of the body to a handle of an auger. When the body is in the extended drilling position, the pair of spaced apart wheels roll along a ground surface away from the auger as the handle of the auger descends and the pair of spaced apart wheels act to stabilize the handle of the auger against reactive torque.

TITLE

Auger Stabilizer

FIELD

5 The present application relates to a stabilizer for an auger, specifically, an auger used for drilling post holes and the like.

BACKGROUND

10 Augers are commonly used to dig holes, such as for posts. These augers have a gas powered engine that drives a depending auger screw. Handles are provided to allow either one or two people to operate it. A problem often encountered is reactive torque. US patent 5,007,492 teaches a safety stabilizer to help counteract the twisting motion on the handles caused by reactive torque.

15 SUMMARY

 There is provided an auger stabilizer which includes a rigid elongated body having a first end and a second end. The length of the body is adjustable between a retracted transport position and an extended drilling position. A pair of spaced apart wheels are attached at the second end of the body. Means are provided for pivotally attaching the first end of the body
20 to a handle of an auger. When the body is in the extended drilling position, the pair of spaced apart wheels roll along a ground surface away from the auger as the handle of the auger descends and the pair of spaced apart wheels act to stabilize the handle of the auger against reactive torque.

25 BRIEF DESCRIPTION OF THE DRAWINGS

 These and other features will become more apparent from the following description in which reference is made to the appended drawings, the drawings are for the purpose of illustration only and are not intended to be in any way limiting, wherein:

FIG. 1 is a side plan view of the auger stabilizer in the extended drilling position.

30 **FIG. 2** is a side plan view of the auger stabilizer in the extended drilling position with the auger drilling a hole.

FIG. 3 is a side plan view of the auger stabilizer in the retracted transport position and

in an upright orientation.

FIG. 4 is a side plan view of the auger stabilizer of **FIG. 1** in the retracted transport position and in a reclined position.

FIG. 5 is a detailed perspective view of the pivotal attachment of the auger stabilizer
5 to the handle of the auger

FIG. 6 is an exploded perspective view of the body of the auger stabilizer.

FIG. 7 is an exploded perspective view of the support stand.

FIG. 8 is an exploded perspective view of the counterweight and counterweight mounting.

10 **FIG. 9** is an exploded side elevation view of the support stand being used to remove the auger from the ground.

DETAILED DESCRIPTION

15 An auger stabilizer generally identified by reference numeral 10, will now be described with reference to **FIG. 1** through **9**.

Structure and Relationship of Parts:

Referring to **FIG. 1**, auger stabilizer 10 includes a rigid elongated body 12 having a first end 14 and a second end 16. The length of body 12 is adjustable between a retracted
20 transport position shown in **FIG. 3** and an extended drilling position shown in **FIG. 1**. Referring to **FIG. 6**, this may be done by providing a first tubular member 17 and a second tubular member 18 that are telescopically mated. A removable pin connection 20 is provided for fixing first tubular member 17 and second tubular member 18 in a selected telescopic position. It will be understood that other means known to those skilled in the art may be used
25 to make the length of body 12 adjustable and to fix their position. A cross bar 22 is transversely positioned at second end 16 of body 12 having opposed ends 24 and 26. Wheel mounts 29 are provided at each of opposed ends 24 and 26 of cross bar 22. Referring to **FIG. 1**, a pair of are spaced apart wheels 28 may then be mounted to body 12. Referring to **FIG. 4** and **6**, when reclined for use as a dolly, cross bar 22 engages a ground piercing end 32 of
30 auger 30 to serve as a pivotal stop. Referring to **FIG. 3**, to allow auger 30 to remain upright when not being transported and when not drilling, a support stand 34 is mounted on cross bar 22 at second end 16 of body 12. Support stand 34 is designed to support body 12 and auger

30 in a substantially vertical orientation when body 12 is in the retracted transport position.

Referring to **FIG. 5**, first end 14 of body 12 is pivotally attached to the handle 36 of auger 30. As depicted, this is done by providing a split body 38 having two halves 40 and 42 that are positioned around handle 36 and then secured together with fasteners 44. Thus, body 12 is able to rotate with respect to auger 30 between the extended drilling position shown in **FIG. 1** and the retracted transport position shown in **FIG. 3**. In the retracted transport position, body 12 may be reclined to be used as a dolly as shown in **FIG. 4** such that cross bar 22 engages ground piercing end 32 as described above. When in this position, wheels 28 allow body 12 to act as a dolly to transport auger 30. Referring to **FIG. 1** and **2**, in the extended drilling position, wheels 28 roll along a ground surface 45 away from auger 30 as handle 36 of auger 30 descends. As this occurs, wheels 28 act to stabilize handle 36 of auger 30 against reactive torque. A counterweight mounting 46 is positioned at second end 16 of body 12. As depicted, counterweight mounting 46 is positioned at a remote end 48 of a cantilever arm 50. One or more counterweights 52 is then mounted on counterweight mounting 46 to provide additional mass acting upon wheels 28. This helps further stabilize handle 36 against reactive torque, and also allows the user to lift auger 30 using less force.

In order to allow for more flexible use, some attachments are releasable. For example, referring to **FIG. 5**, split body 38 has a depending female coupling 54 adapted to mate with first end 14 of body 12, which serves as a male coupling 56. A pin connection 58 is provided to prevent male coupling 56 from being accidentally withdrawn from female coupling 54. Body 12 is thus selectively detachable from female coupling 54 and thus auger 30 by removing pin connection 58. In addition, referring to **FIG. 7** and **8**, cantilever arm 50 and support stand 34 use similar pin connections 60 and 62, respectively. Referring to **FIG. 6**, cross bar 22 also has mounting 64 and 66 to support cantilever arm 50 and support stand 34, respectively, such that either may be removed so as not to impede the use of body 12 and auger 30. Body 12 is designed such that cantilever arm 50 and support stand 34 extend in opposite directions from cross bar 22. In addition, referring to **FIG. 9**, it may be necessary to remove the top portion of auger 30 from the auger screw if auger 30 becomes stuck. A bar is then be used as a wrench to turn auger 30 to remove it from the ground. Support stand 34 may be designed such that it can be used as a bar for that purpose.

Operation:

The use of auger stabilizer 10 described above in relation to **FIG. 1** through 8 will now be discussed. Referring to **FIG. 5**, split body 38 is attached to handle 36 of auger 30 by placing first half 40 and second half 42 about handle 36, and securing it using fasteners 44 to
5 as a pivotal connection. Body 12 is then attached to split body 38 and thus handle 36 of auger 30 by engaging male coupling 56 and female coupling 54, and securing them with pin connection 58. As pin connection 58 is removable, it is unnecessary to remove split body 38 once attached, if it is preferable to use auger 30 without body 12. Referring to **FIG. 3**, body
10 12 is shown in the retracted transport position. Support stand 34 allows auger 30 and body 12 to remain in a substantially vertical position. Referring to **FIG. 4**, body 12 may be reclined such that support stand 34 no longer engages ground surface 45, and ground piercing end 32 of auger 30 is supported by cross bar 22. Body 12 thus acts as a dolly such that auger 30 may be moved to the desired location on wheels 28. When auger 30 is correctly positioned,
15 support stand 34 is removed, and counterweight mounting 46 is attached to body 12 as shown in **FIG. 1**. Body 12 is then extended by telescopically extending first tubular member 17 and second tubular member 18, and using pin connection 20 to fix them in the selected telescopic position. Auger 30 may then be operated to dig a hole in ground surface 45. Referring to **FIG. 2**, as auger 30 and handle 36 descend, wheels 28 allow second end 16 of body 12 to
20 move further away from auger 30, with counterweight 52 providing additional weight on wheels 28. This helps to stabilize auger 30 from any reactive torque that may be applied during drilling. Counterweight 52 also acts to reduce the amount of force necessary to lift auger from the hole. Referring to **FIG. 1**, auger 30 may then be raised, and repositioned to drill another hole. When the drilling is completed, body 12 is returned to the retracted
25 position shown in **FIG. 3**, counterweight 52 is replaced with support stand 34, and body 12 may again be used as a dolly as shown in **FIG. 4**.

In this patent document, the word "comprising" is used in its non-limiting sense to mean that items following the word are included, but items not specifically mentioned are not
30 excluded. A reference to an element by the indefinite article "a" does not exclude the possibility that more than one of the element is present, unless the context clearly requires that there be one and only one of the elements.

It will be apparent to one skilled in the art that modifications may be made to the illustrated embodiment without departing from the spirit and scope defined in the Claims.

What is Claimed is:

1. An auger stabilizer, comprising:

5 a rigid elongated body having a first end and a second end, the length of the body
being adjustable between a retracted transport position and an extended drilling position;
 a pair of spaced apart wheels attached at the second end of the body; and
 means for pivotally attaching the first end of the body to a handle of an auger, such
that when the body is in the extended drilling position, the pair of spaced apart wheels roll
10 along a ground surface away from the auger as the handle of the auger descends, the pair of
spaced apart wheels acting to stabilize the handle of the auger against reactive torque.

2. The auger stabilizer of claim 1, wherein a counterweight mounting is provided at the
second end of the body, such that a counterweight is mounted on the counterweight mounting
15 to provide additional mass acting upon the body.

3. The auger stabilizer of claim 1, wherein a support stand is mounted at the second end of
the body, the support stand supporting the body and the auger pivotally attached to the auger
in a substantially vertical orientation when the body is in the retracted transport position.

20

4. The auger stabilizer of claim 3, wherein the support stand is one of retractable or
removable.

5. The auger stabilizer of claim 2, wherein the counterweight mounting is positioned at a
25 remote end of a cantilever arm.

6. The auger stabilizer of claim 1, wherein a cross bar is transversely positioned at the second
end of the body, the pair of spaced apart wheels being mounted at opposed ends of the cross
bar.

30

7. The auger stabilizer of claim 6, wherein the cross bar engages a ground piercing end of the
auger to serve as a pivotal stop when the body is in the retracted transport position and

reclined for use as a dolly in transporting the auger.

8. The auger stabilizer of claim 1, wherein the body includes a first tubular member and a second tubular member, the first tubular member and the second tubular member being
5 telescopically mated, means being provided for fixing the first tubular member and the second tubular member in a selected telescopic position.

9. The auger stabilizer of claim 1, wherein the means for pivotally attaching the first end of the body to a handle of an auger is a split body having two halves that are positioned around
10 the handle of the auger and then secured together with fasteners.

10. The auger stabilizer of claim 9, wherein the split body has a one of a depending female coupling or a depending male coupling adapted to mate with the first end of the body which serves as another of the female coupling or the male coupling, a pin connection being
15 provided to prevent the male coupling from being accidentally withdrawn from the female coupling, the body being selectively detachable from the split body by removing the pin connection.

11. The auger stabilizer of claim 4, wherein the support stand is removable, the support stand
20 acting as a bar to remove the auger from a hole.

12. An auger stabilizer, comprising:

a rigid elongated body having a first end and a second end, the body including a first tubular member and a second tubular member, the first tubular member and the second
25 tubular member being telescopically mated enabling a length of the body to be adjusted between a retracted transport position and an extended drilling position, means being provided for fixing the first tubular member and the second tubular member in a selected telescopic position;

a cross bar transversely positioned at the second end of the body, the cross bar having
30 opposed ends;

a pair of spaced apart wheels being provided with one of the spaced apart wheels being mounted each of the opposed ends of the cross bar;

a split body adapted for pivotally attaching the first end of the body to a handle of an auger, the split body having two halves that are positioned around the handle of the auger and then secured together with fasteners, such that when the body is in the extended drilling position, the pair of spaced apart wheels roll along a ground surface away from the auger as
5 the handle of the auger descends, the pair of spaced apart wheels acting to stabilize the handle of the auger against reactive torque;

a counterweight mounting being positioned at the second end of the body, such that a counterweight is mounted on the counterweight mounting to provide additional mass acting upon the body.

10

13. The auger stabilizer of claim 12, wherein a support stand is mounted at the second end of the body, the support stand supporting the body and the auger pivotally attached to the body in a substantially vertical orientation when the body is in the retracted transport position.

15 14. The auger stabilizer of claim 12, wherein the counterweight mounting is positioned at a remote end of a cantilever arm.

15. The auger stabilizer of claim 12, wherein the cross bar engages a ground piercing end of the auger to serve as a pivotal stop, when the body is in the retracted transport position and
20 reclined for use as a dolly in transporting the auger.

16. The auger stabilizer of claim 12, wherein the split body has a depending female coupling adapted to mate with the first end of the body which serves as a male coupling, a pin connection being provided to prevent the male coupling from being accidentally withdrawn
25 from the female coupling, the body being selectively detachable from the female coupling by removing the pin connection.

17. In combination,

an auger comprising a handle and a ground piercing end;

30 an auger stabilizer comprising:

a rigid elongated body having a first end and a second end, the length of the body being adjustable between a retracted transport position and an extended drilling

position;

a pair of spaced apart wheels attached at the second end of the body; and
means for pivotally attaching the first end of the body to a handle of an auger,
such that when the body is in the extended drilling position, the pair of spaced apart wheels
5 roll along a ground surface away from the auger as the handle of the auger descends, the pair
of spaced apart wheels acting to stabilize the handle of the auger against reactive torque.

18. The combination of claim 17, wherein a counterweight mounting is provided at the
second end of the body, such that a counterweight is mounted on the counterweight mounting
10 to provide additional mass acting upon the body.

19. The combination of claim 17, wherein a support stand is mounted at the second end of the
body, the support stand supporting the body and the auger pivotally attached to the auger in a
substantially vertical orientation when the body is in the retracted transport position.

15

20. The combination of claim 19, wherein the support stand is one of retractable or
removable.

21. The combination of claim 18, wherein the counterweight mounting is positioned at a
20 remote end of a cantilever arm.

22. The combination of claim 17, wherein a cross bar is transversely positioned at the second
end of the body, the pair of spaced apart wheels being mounted at opposed ends of the cross
bar.

25

23. The combination of claim 22, wherein the cross bar engages a ground piercing end of the
auger to serve as a pivotal stop, when the body is in the retracted transport position and
reclined for use as a dolly in transporting the auger.

30 24. The combination of claim 17, wherein the body includes a first tubular member and a
second tubular member, the first tubular member and the second tubular member being
telescopically mated, means being provided for fixing the first tubular member and the second

tubular member in a selected telescopic position.

25. The combination of claim 17, wherein the means for pivotally attaching the first end of the body to a handle of an auger is a split body having two halves that are positioned around
5 the handle of the auger and then secured together with fasteners.

26. The combination of claim 25, wherein the split body has a one of a depending female coupling or a depending male coupling adapted to mate with the first end of the body which serves as another of the female coupling or the male coupling, a pin connection being
10 provided to prevent the male coupling from being accidentally withdrawn from the female coupling, the body being selectively detachable from the split body by removing the pin connection.

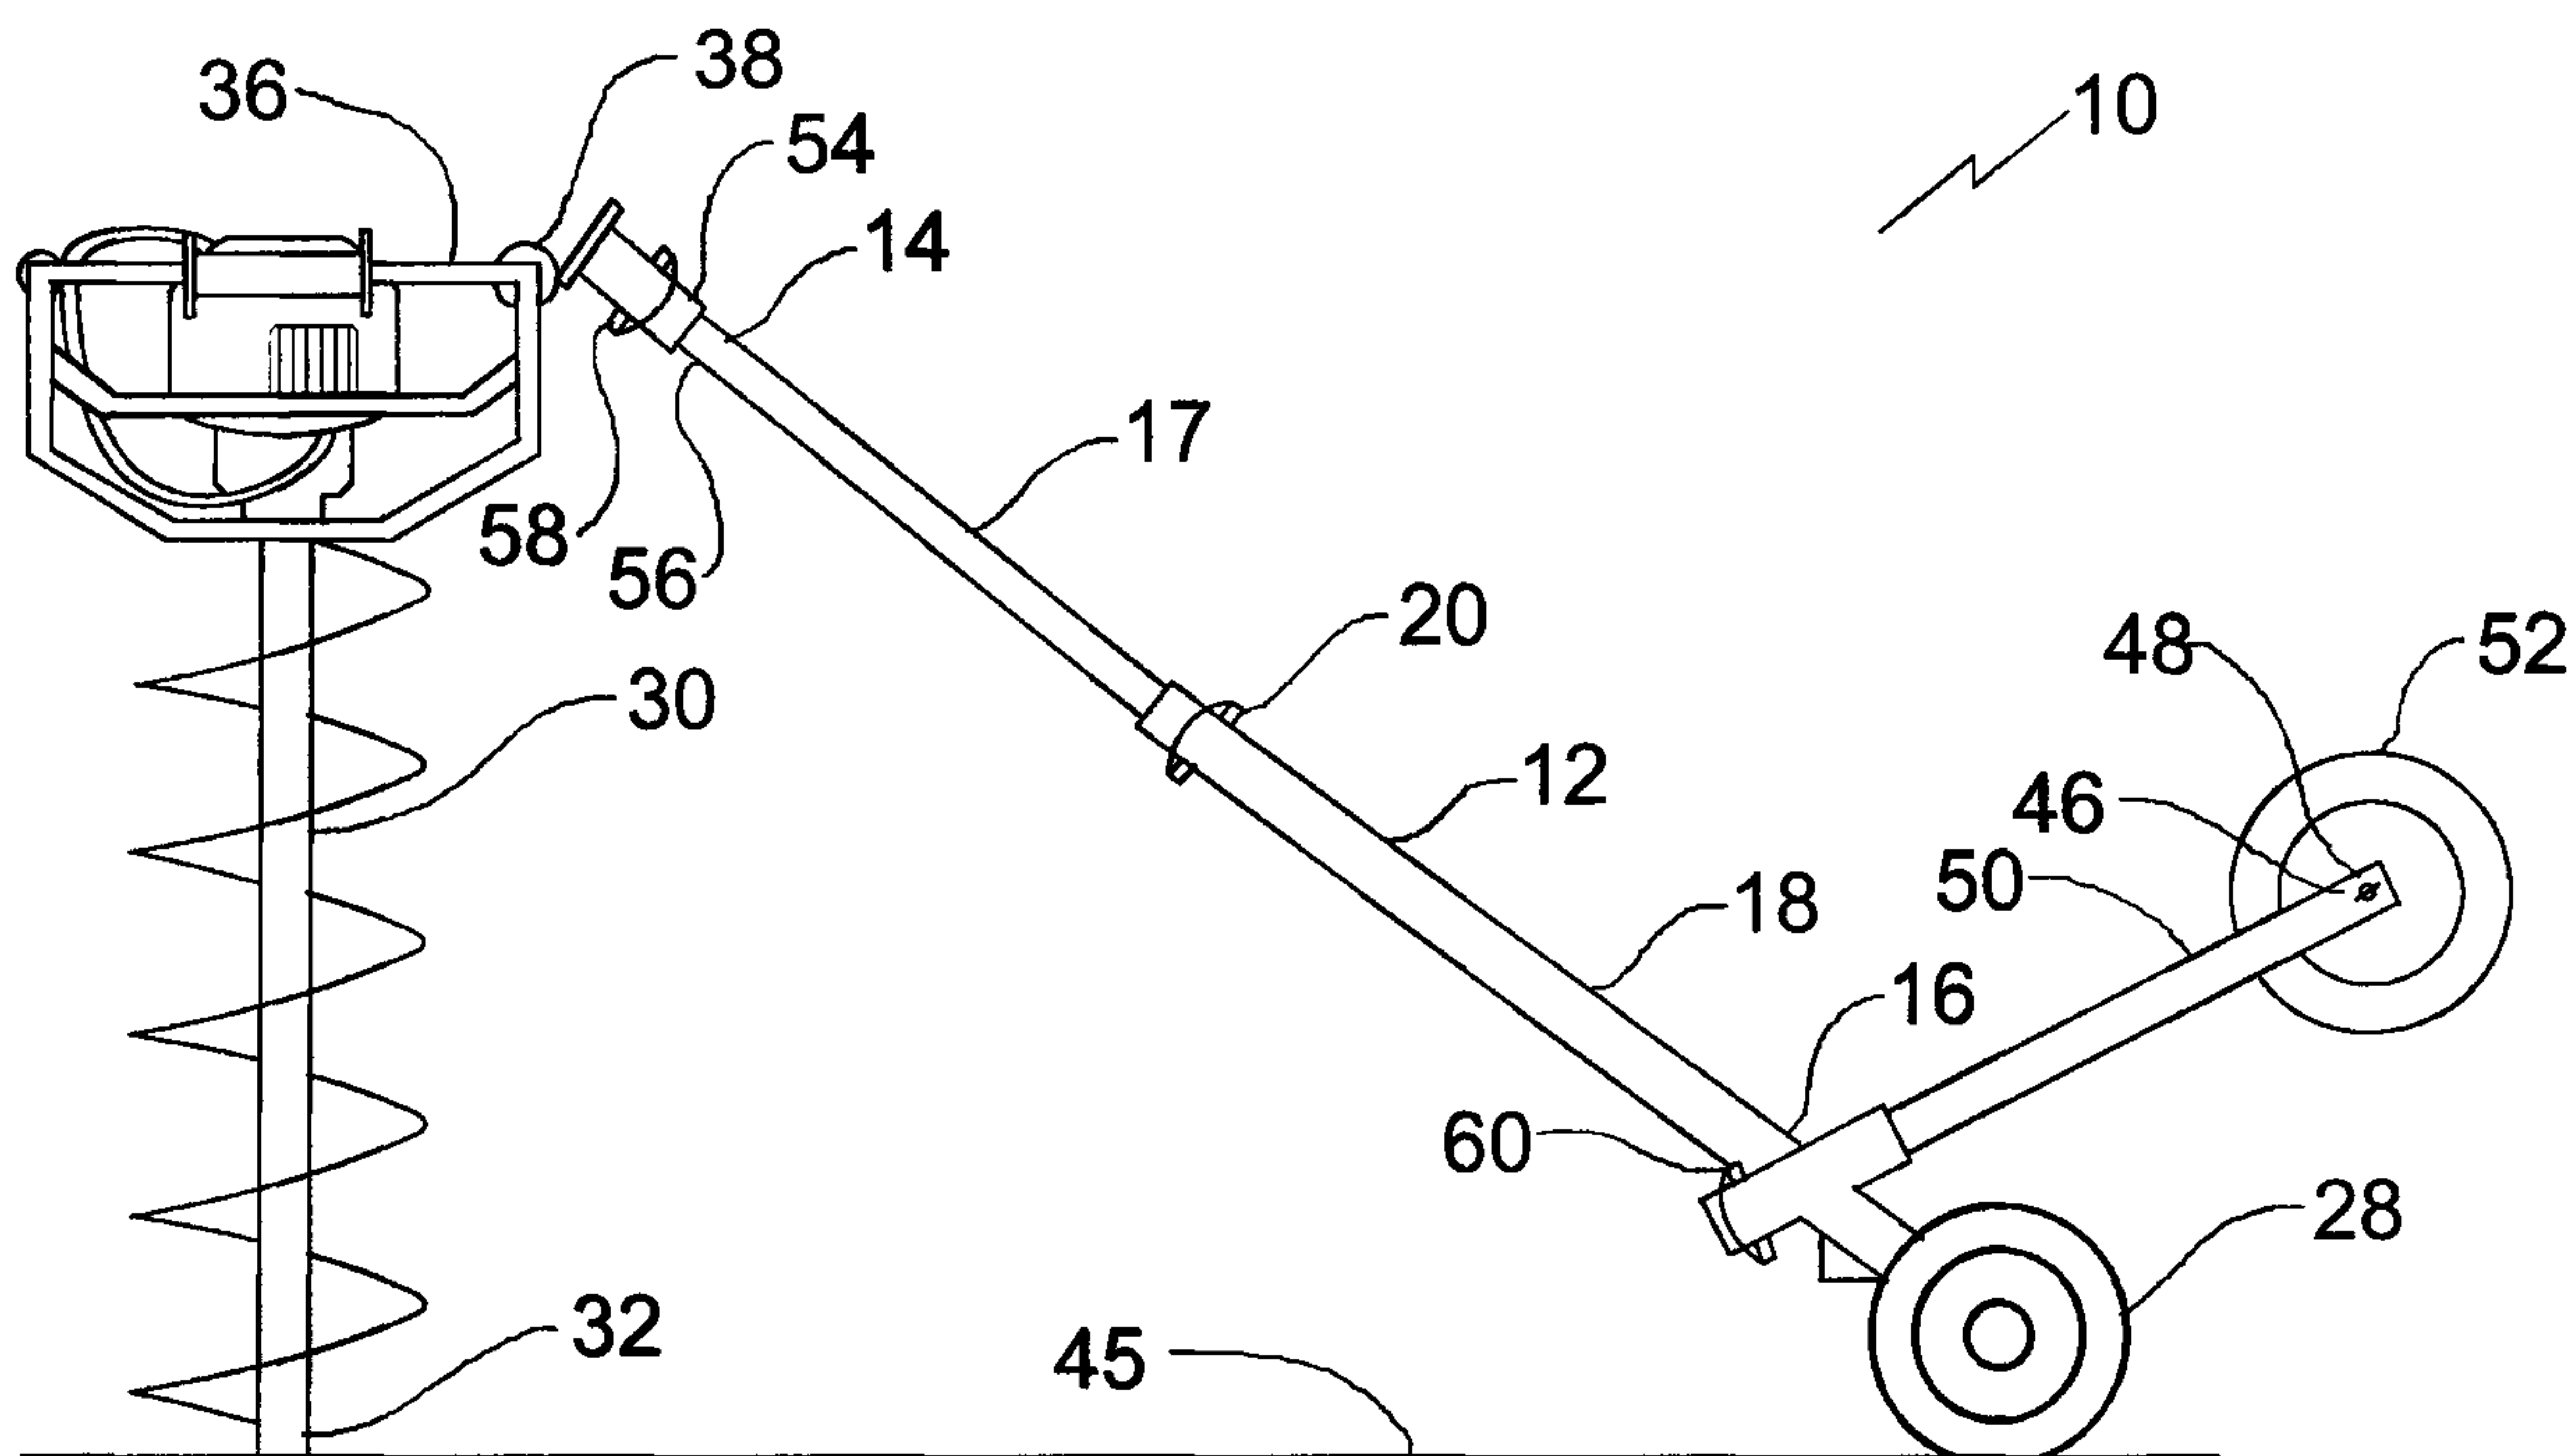


FIG. 1

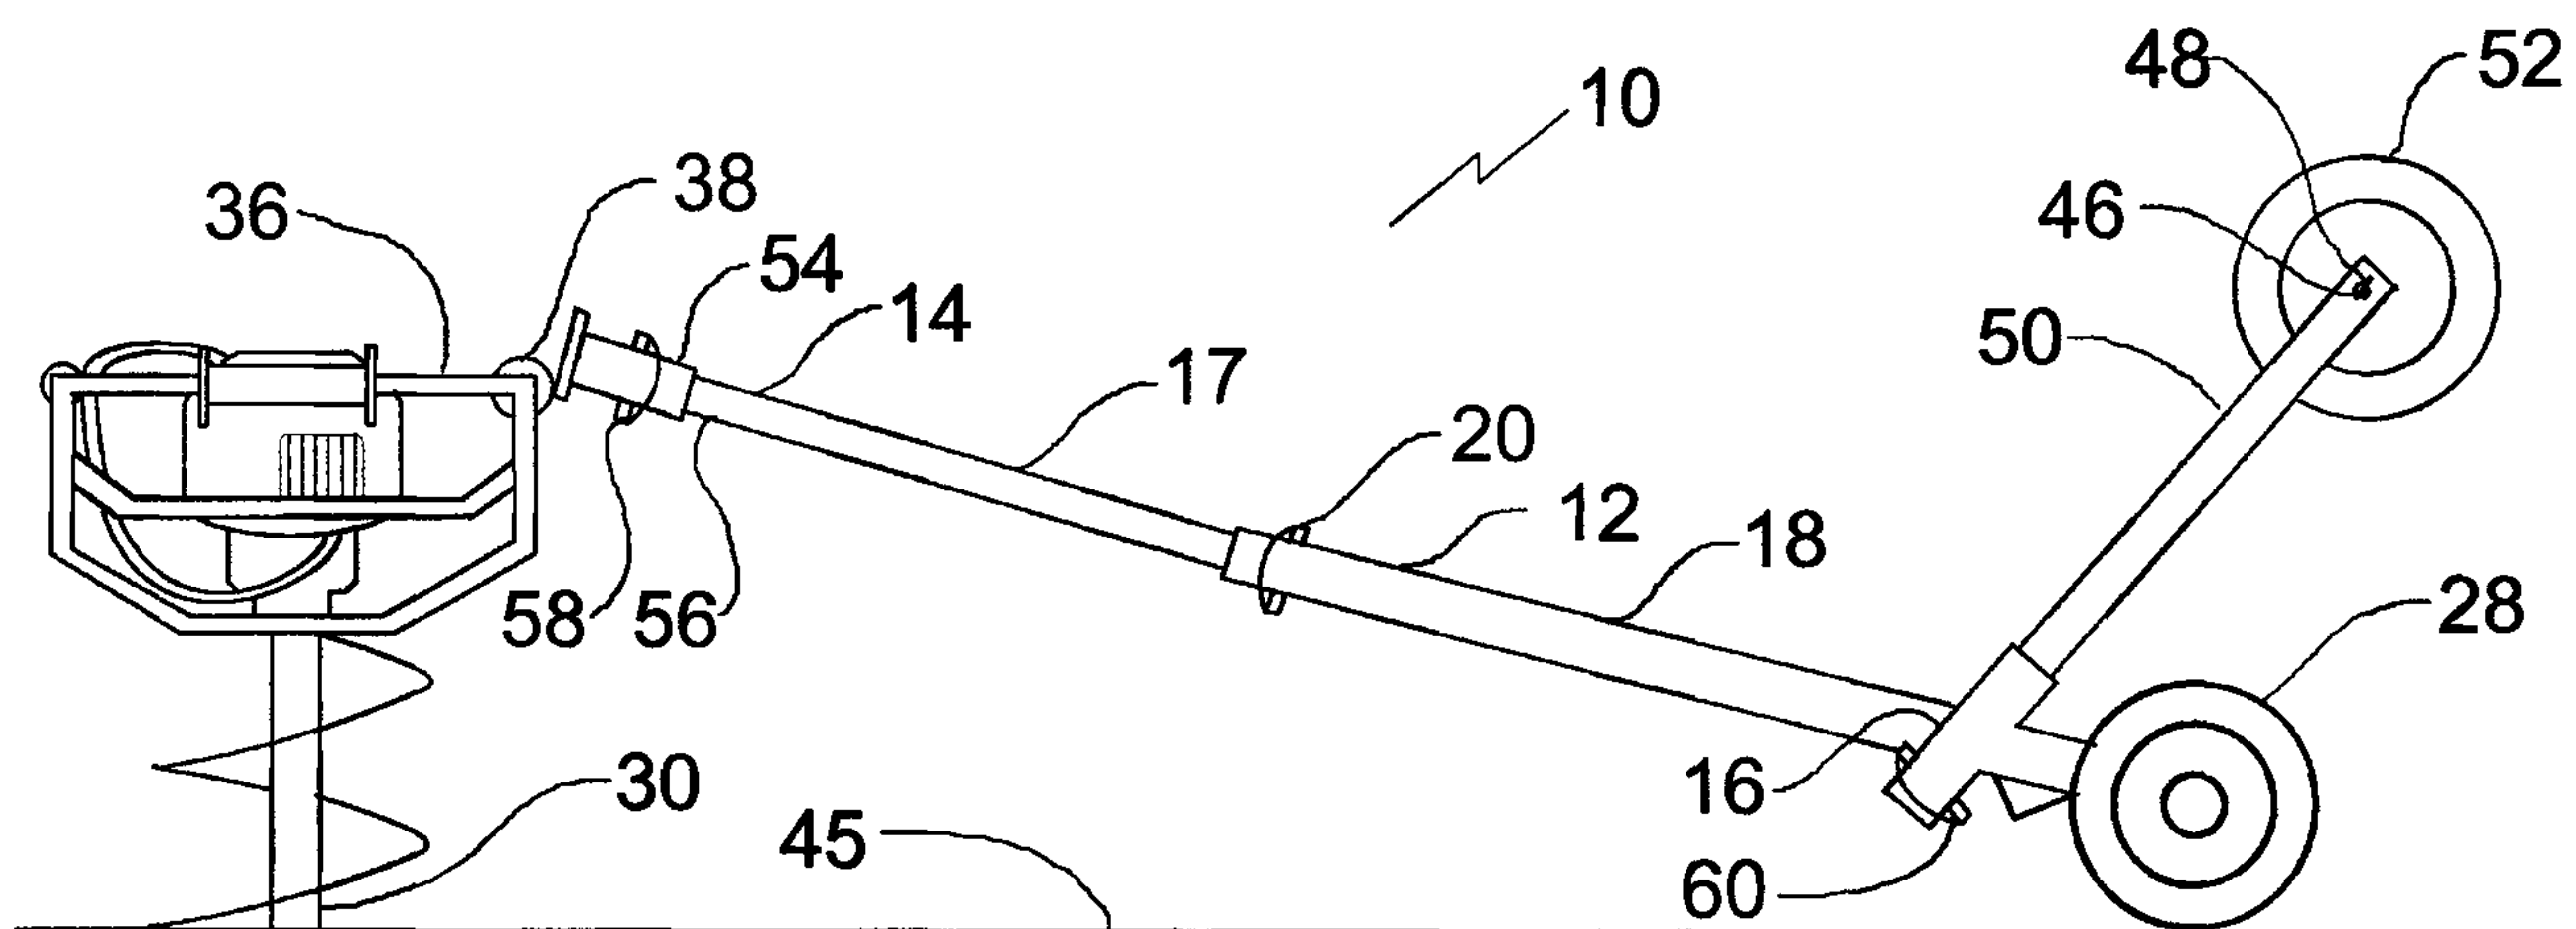


FIG. 2

10

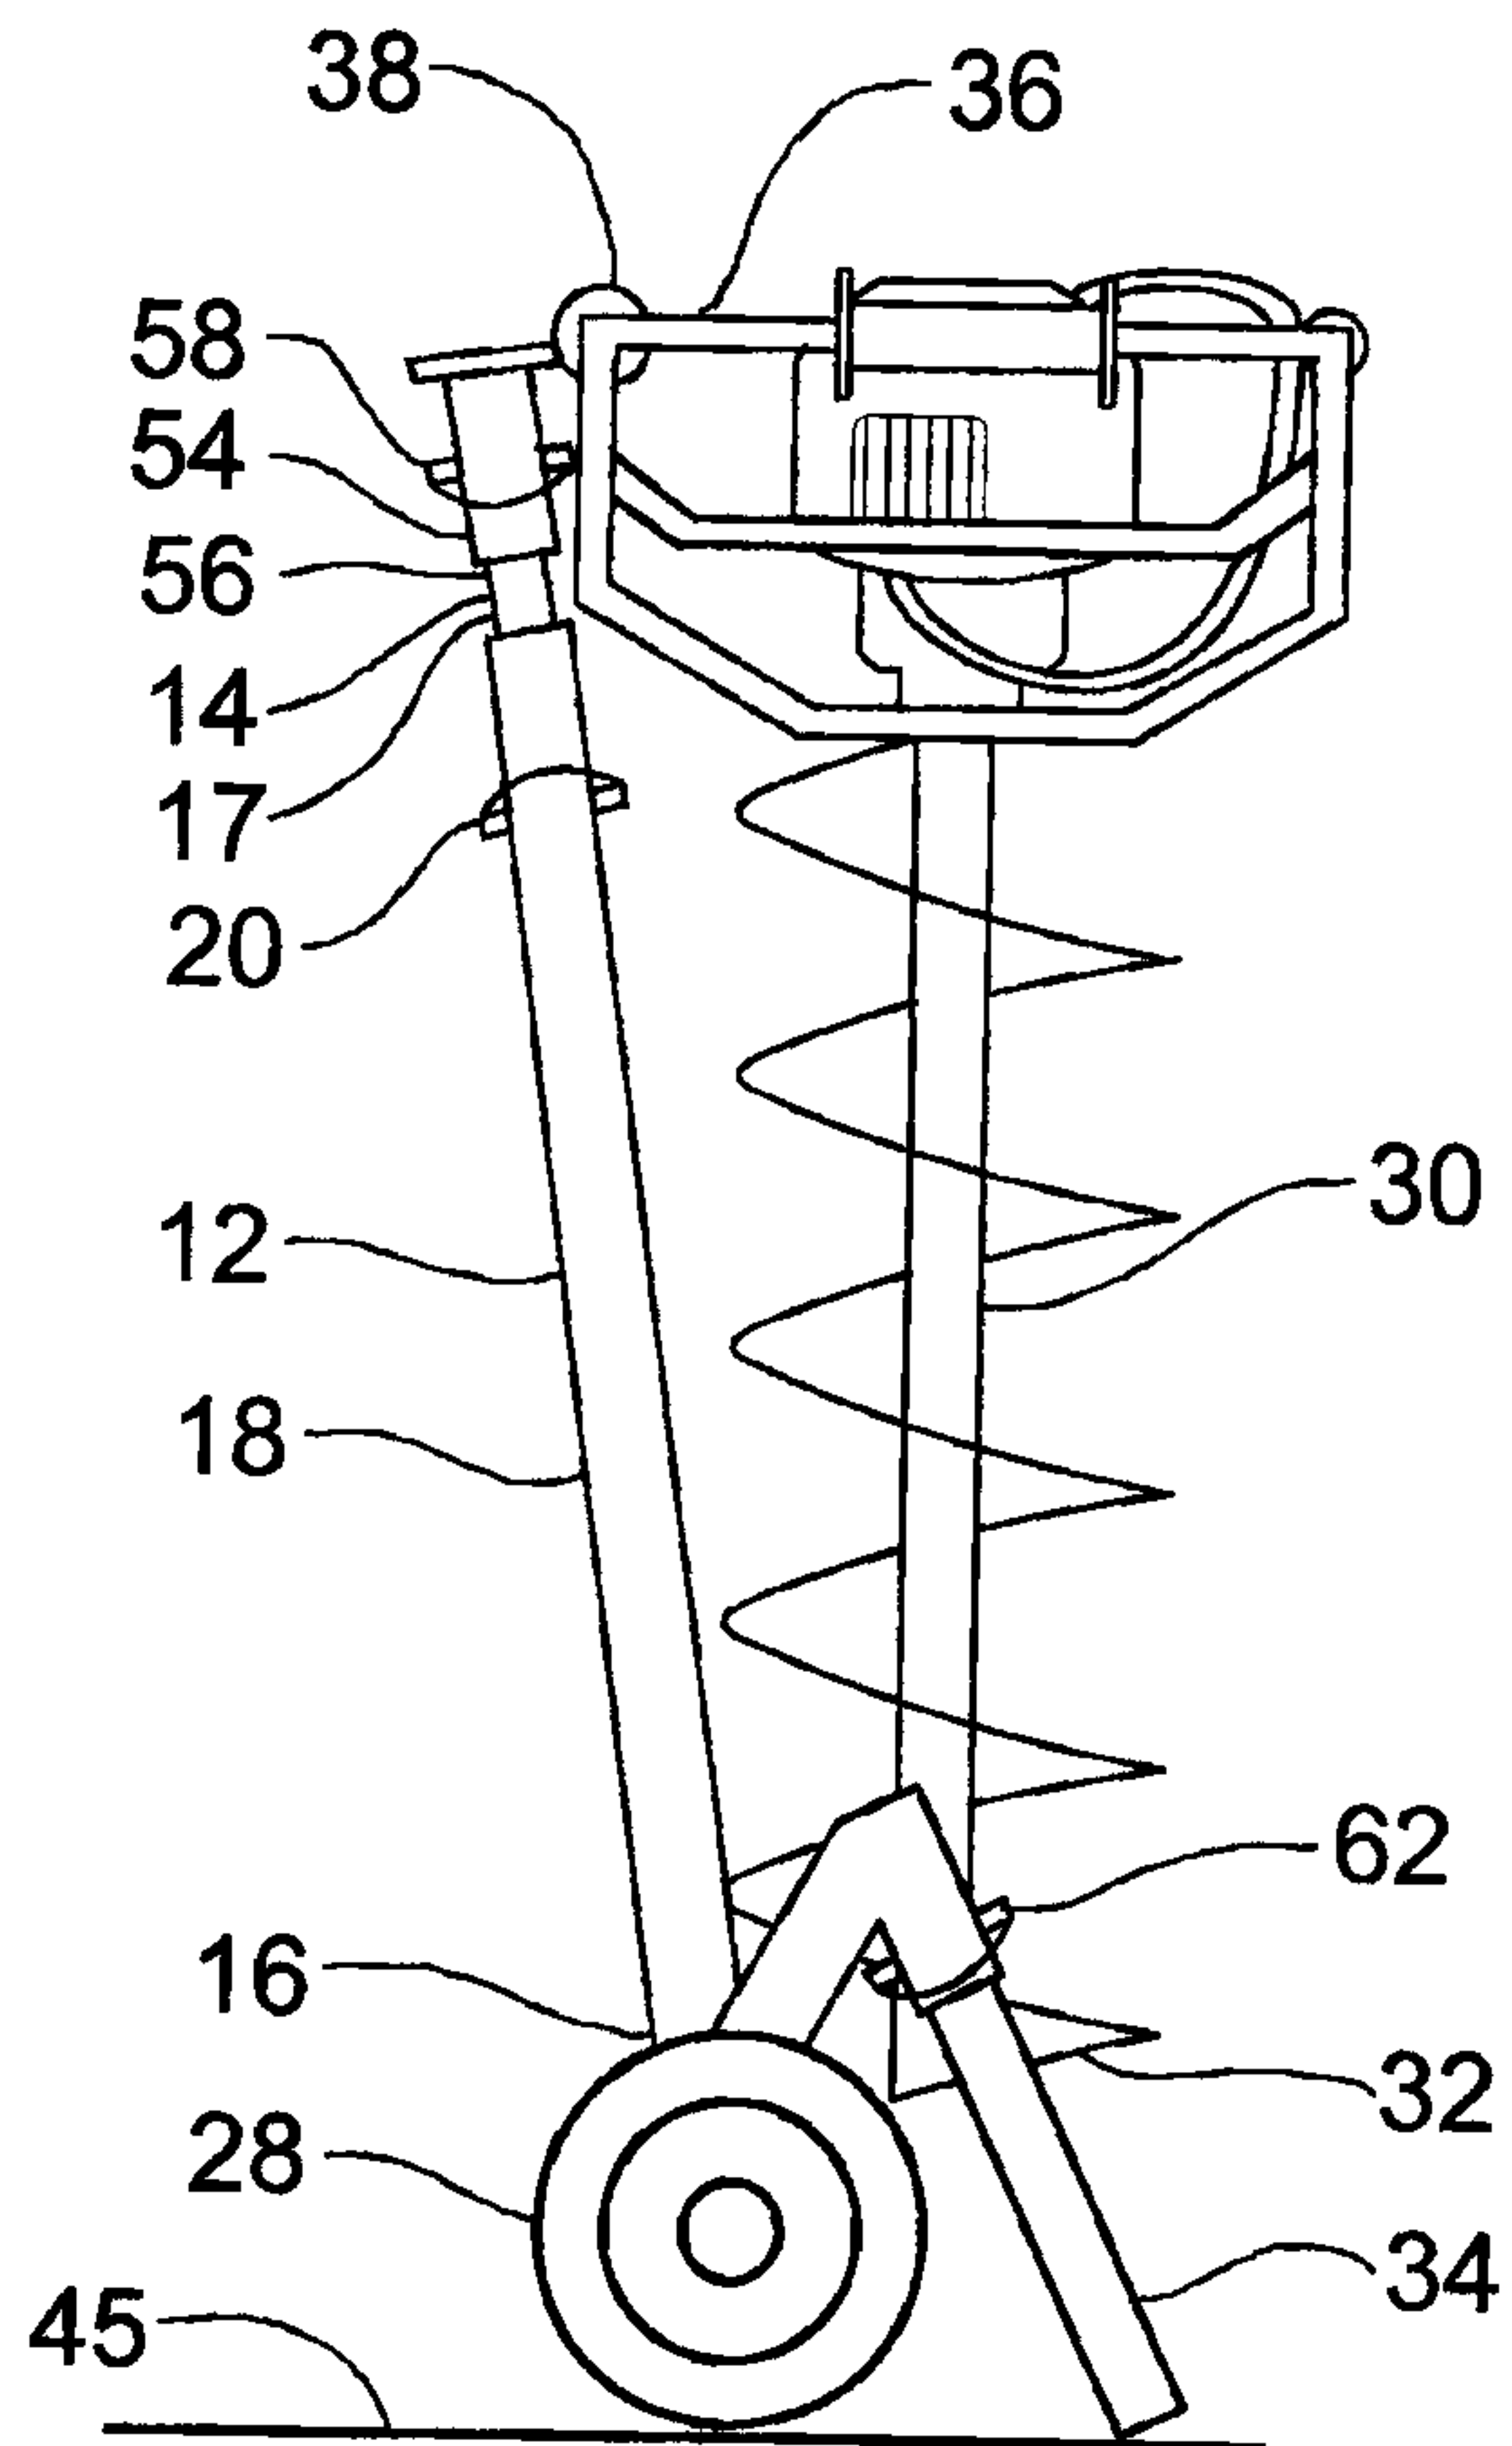


FIG. 3

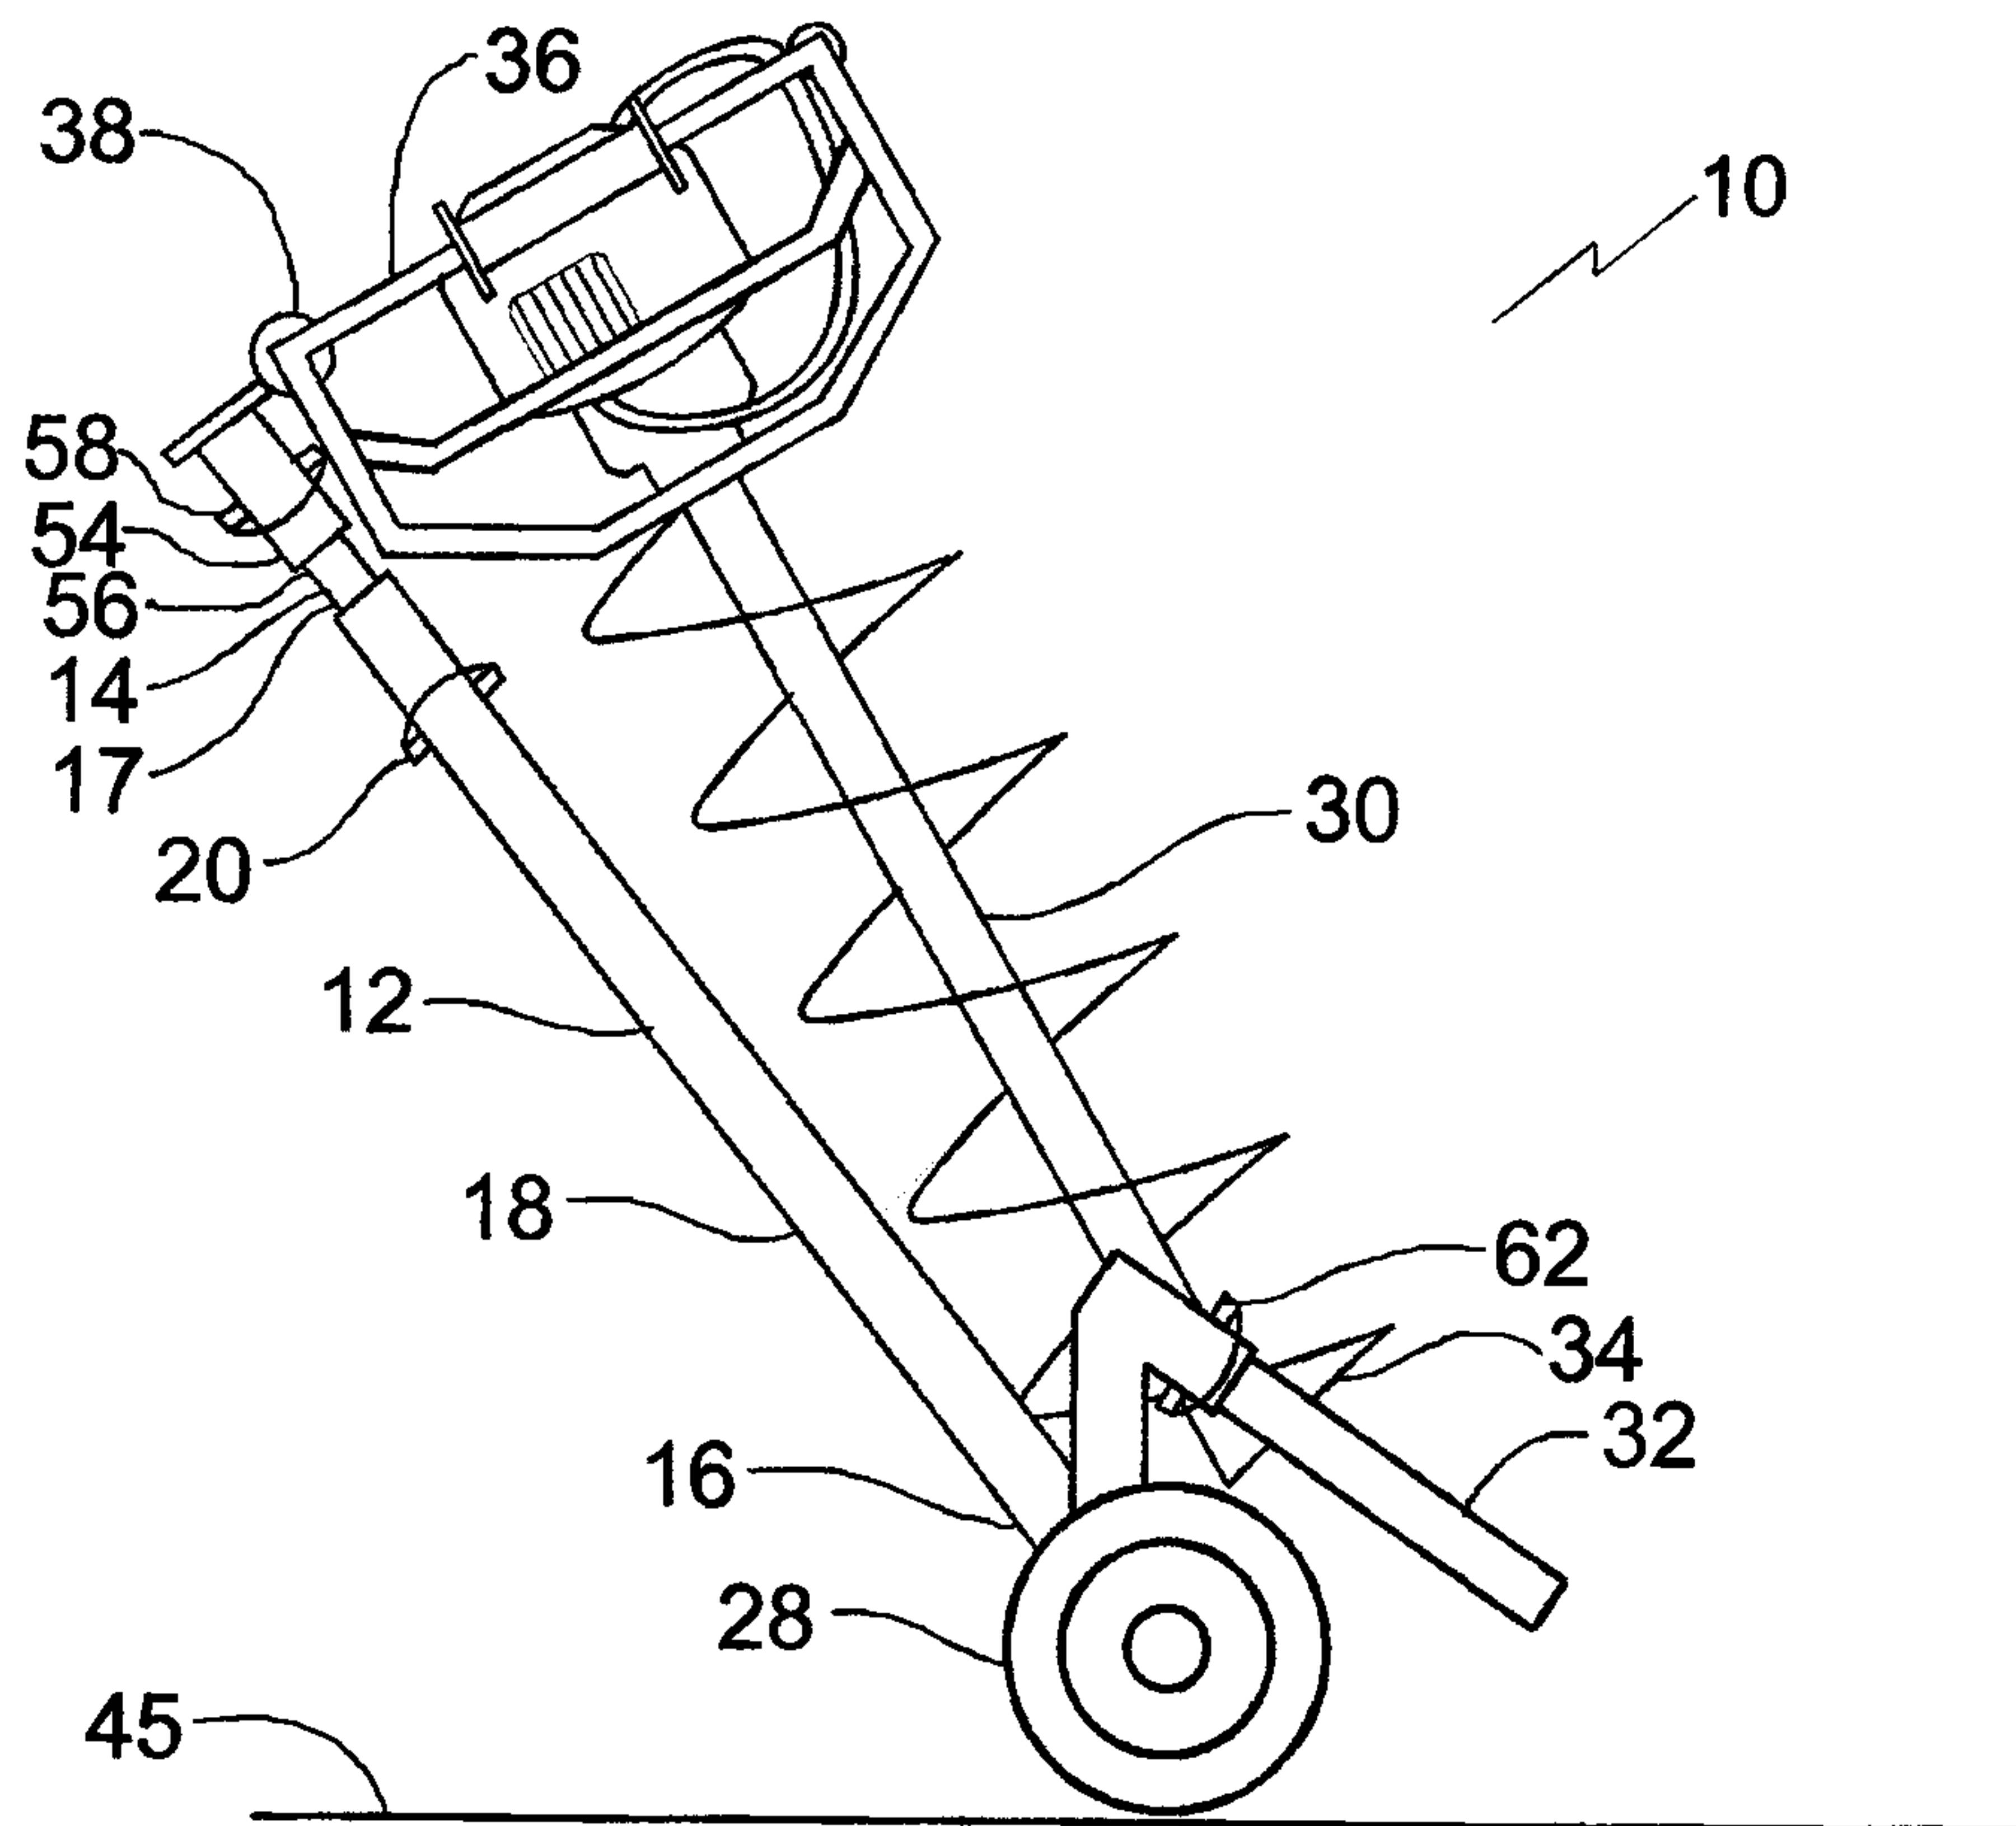


FIG. 4

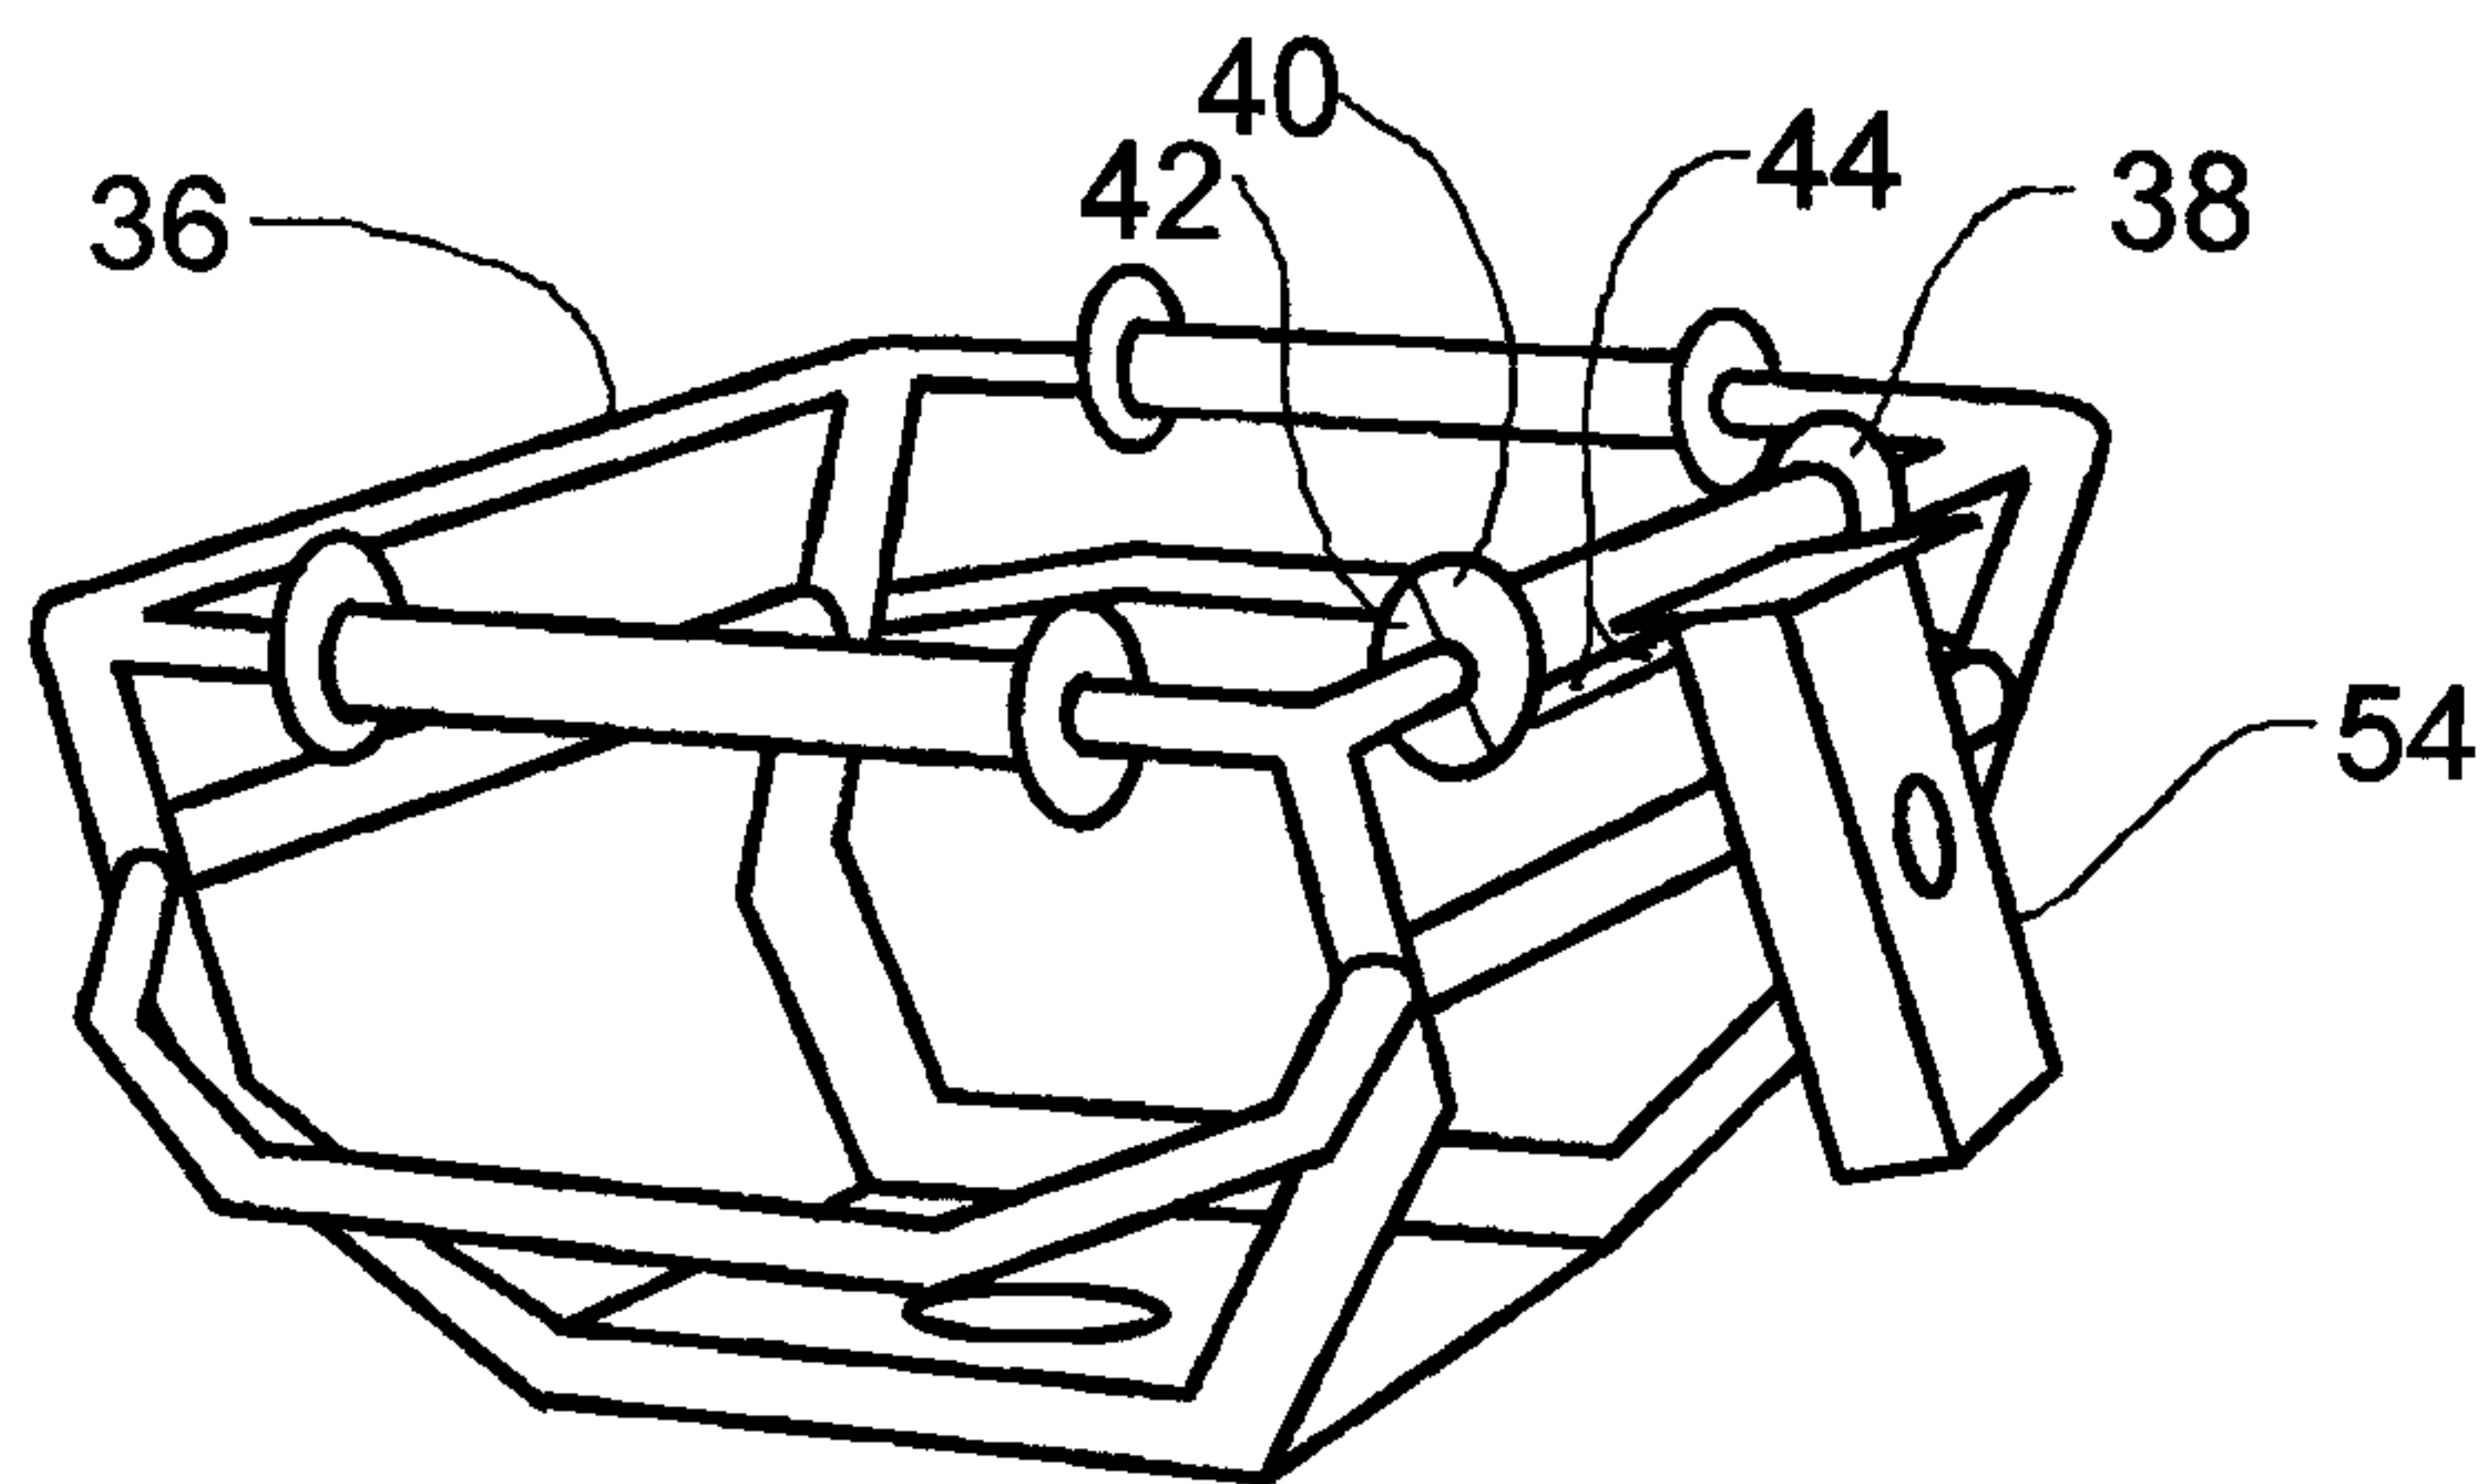
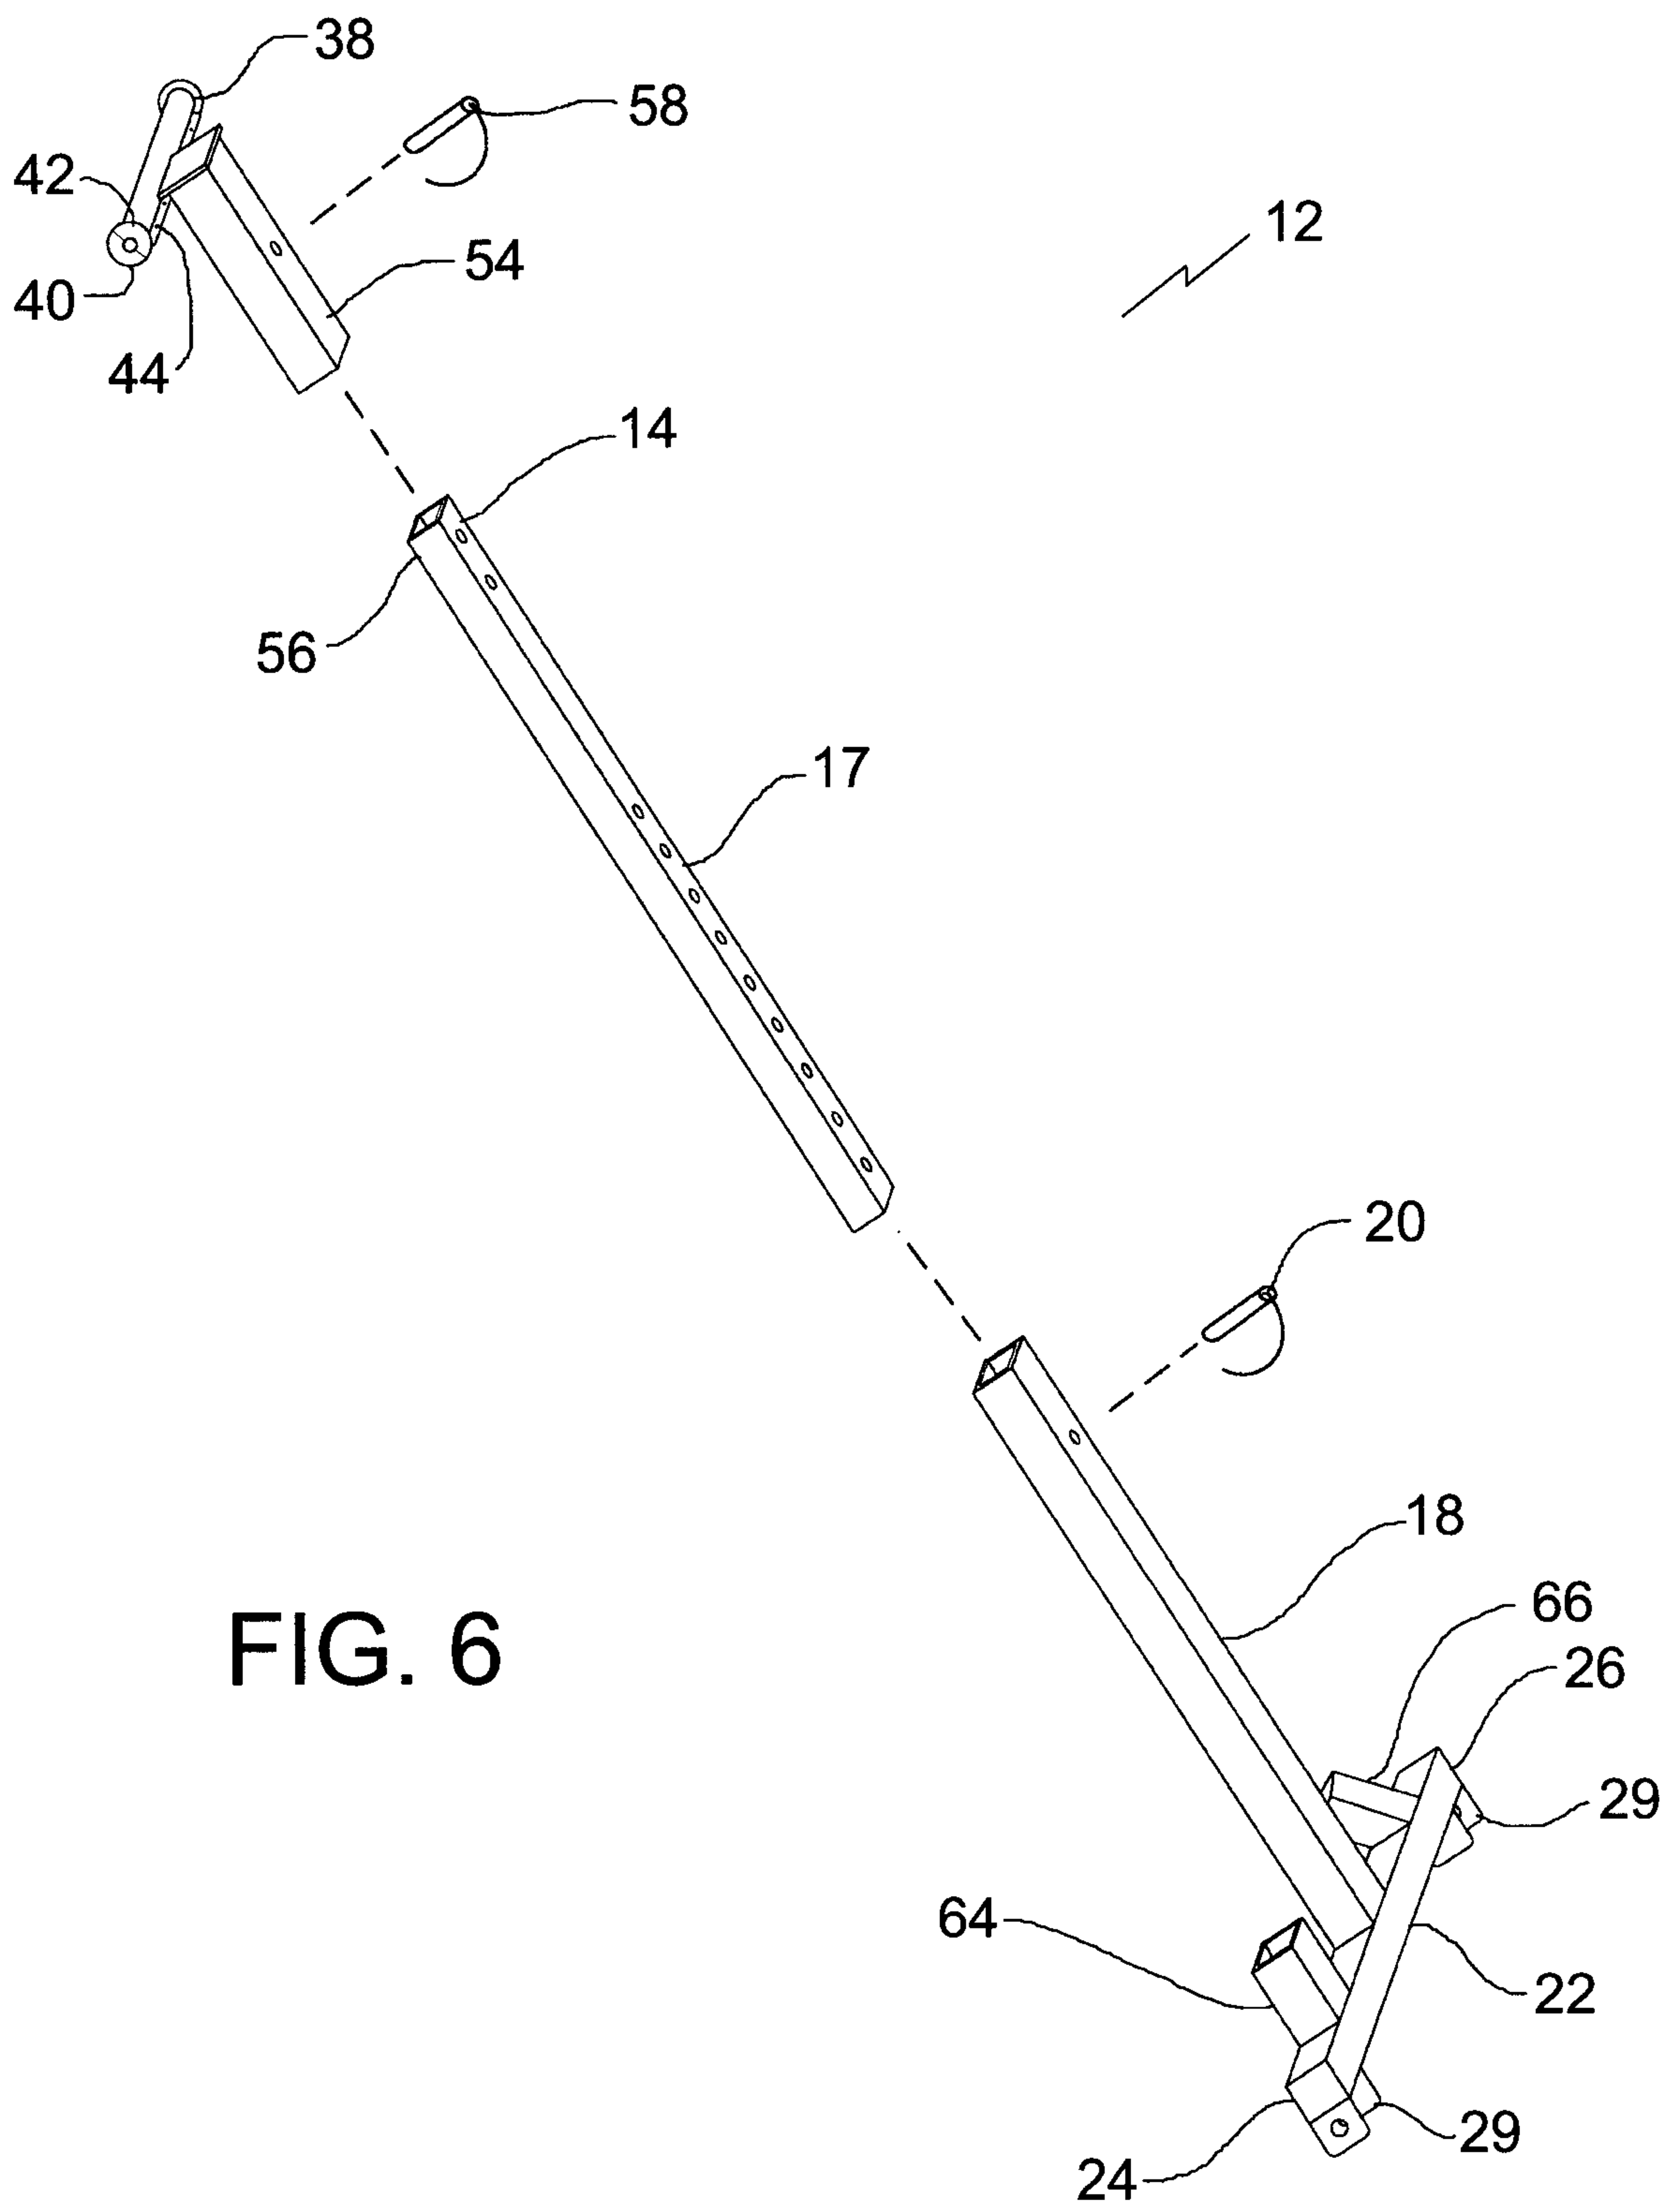


FIG. 5



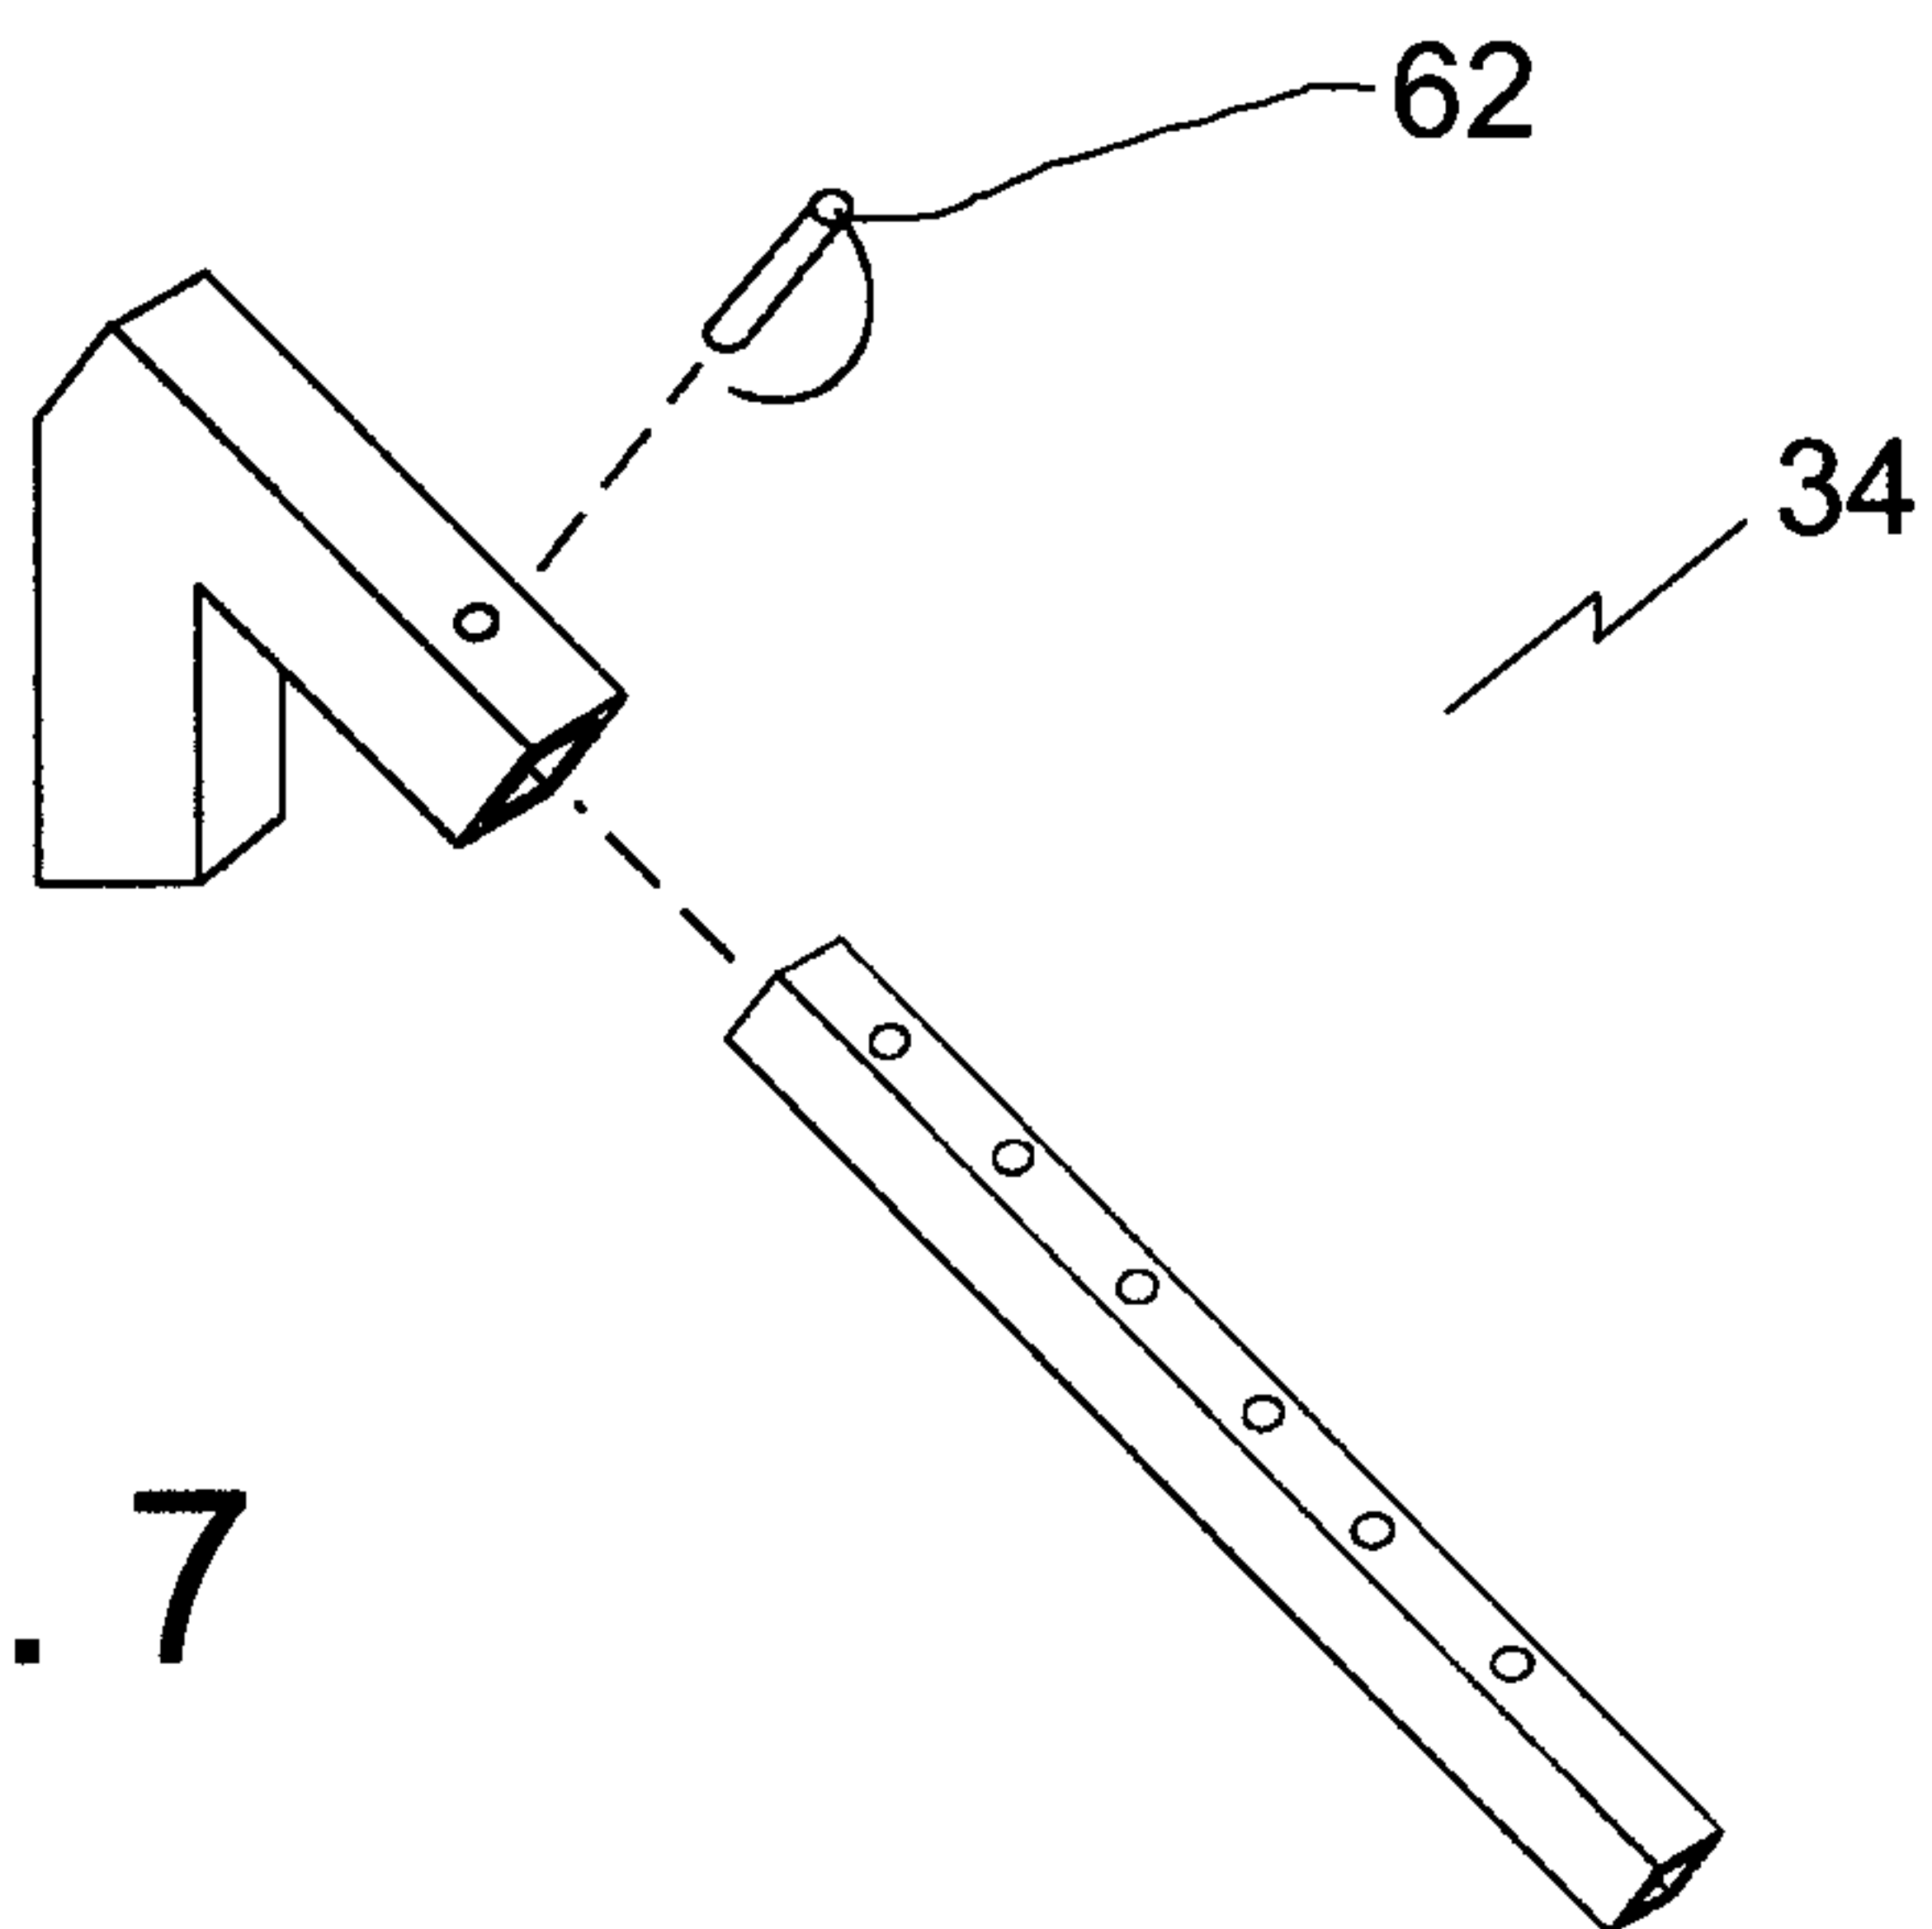


FIG. 7

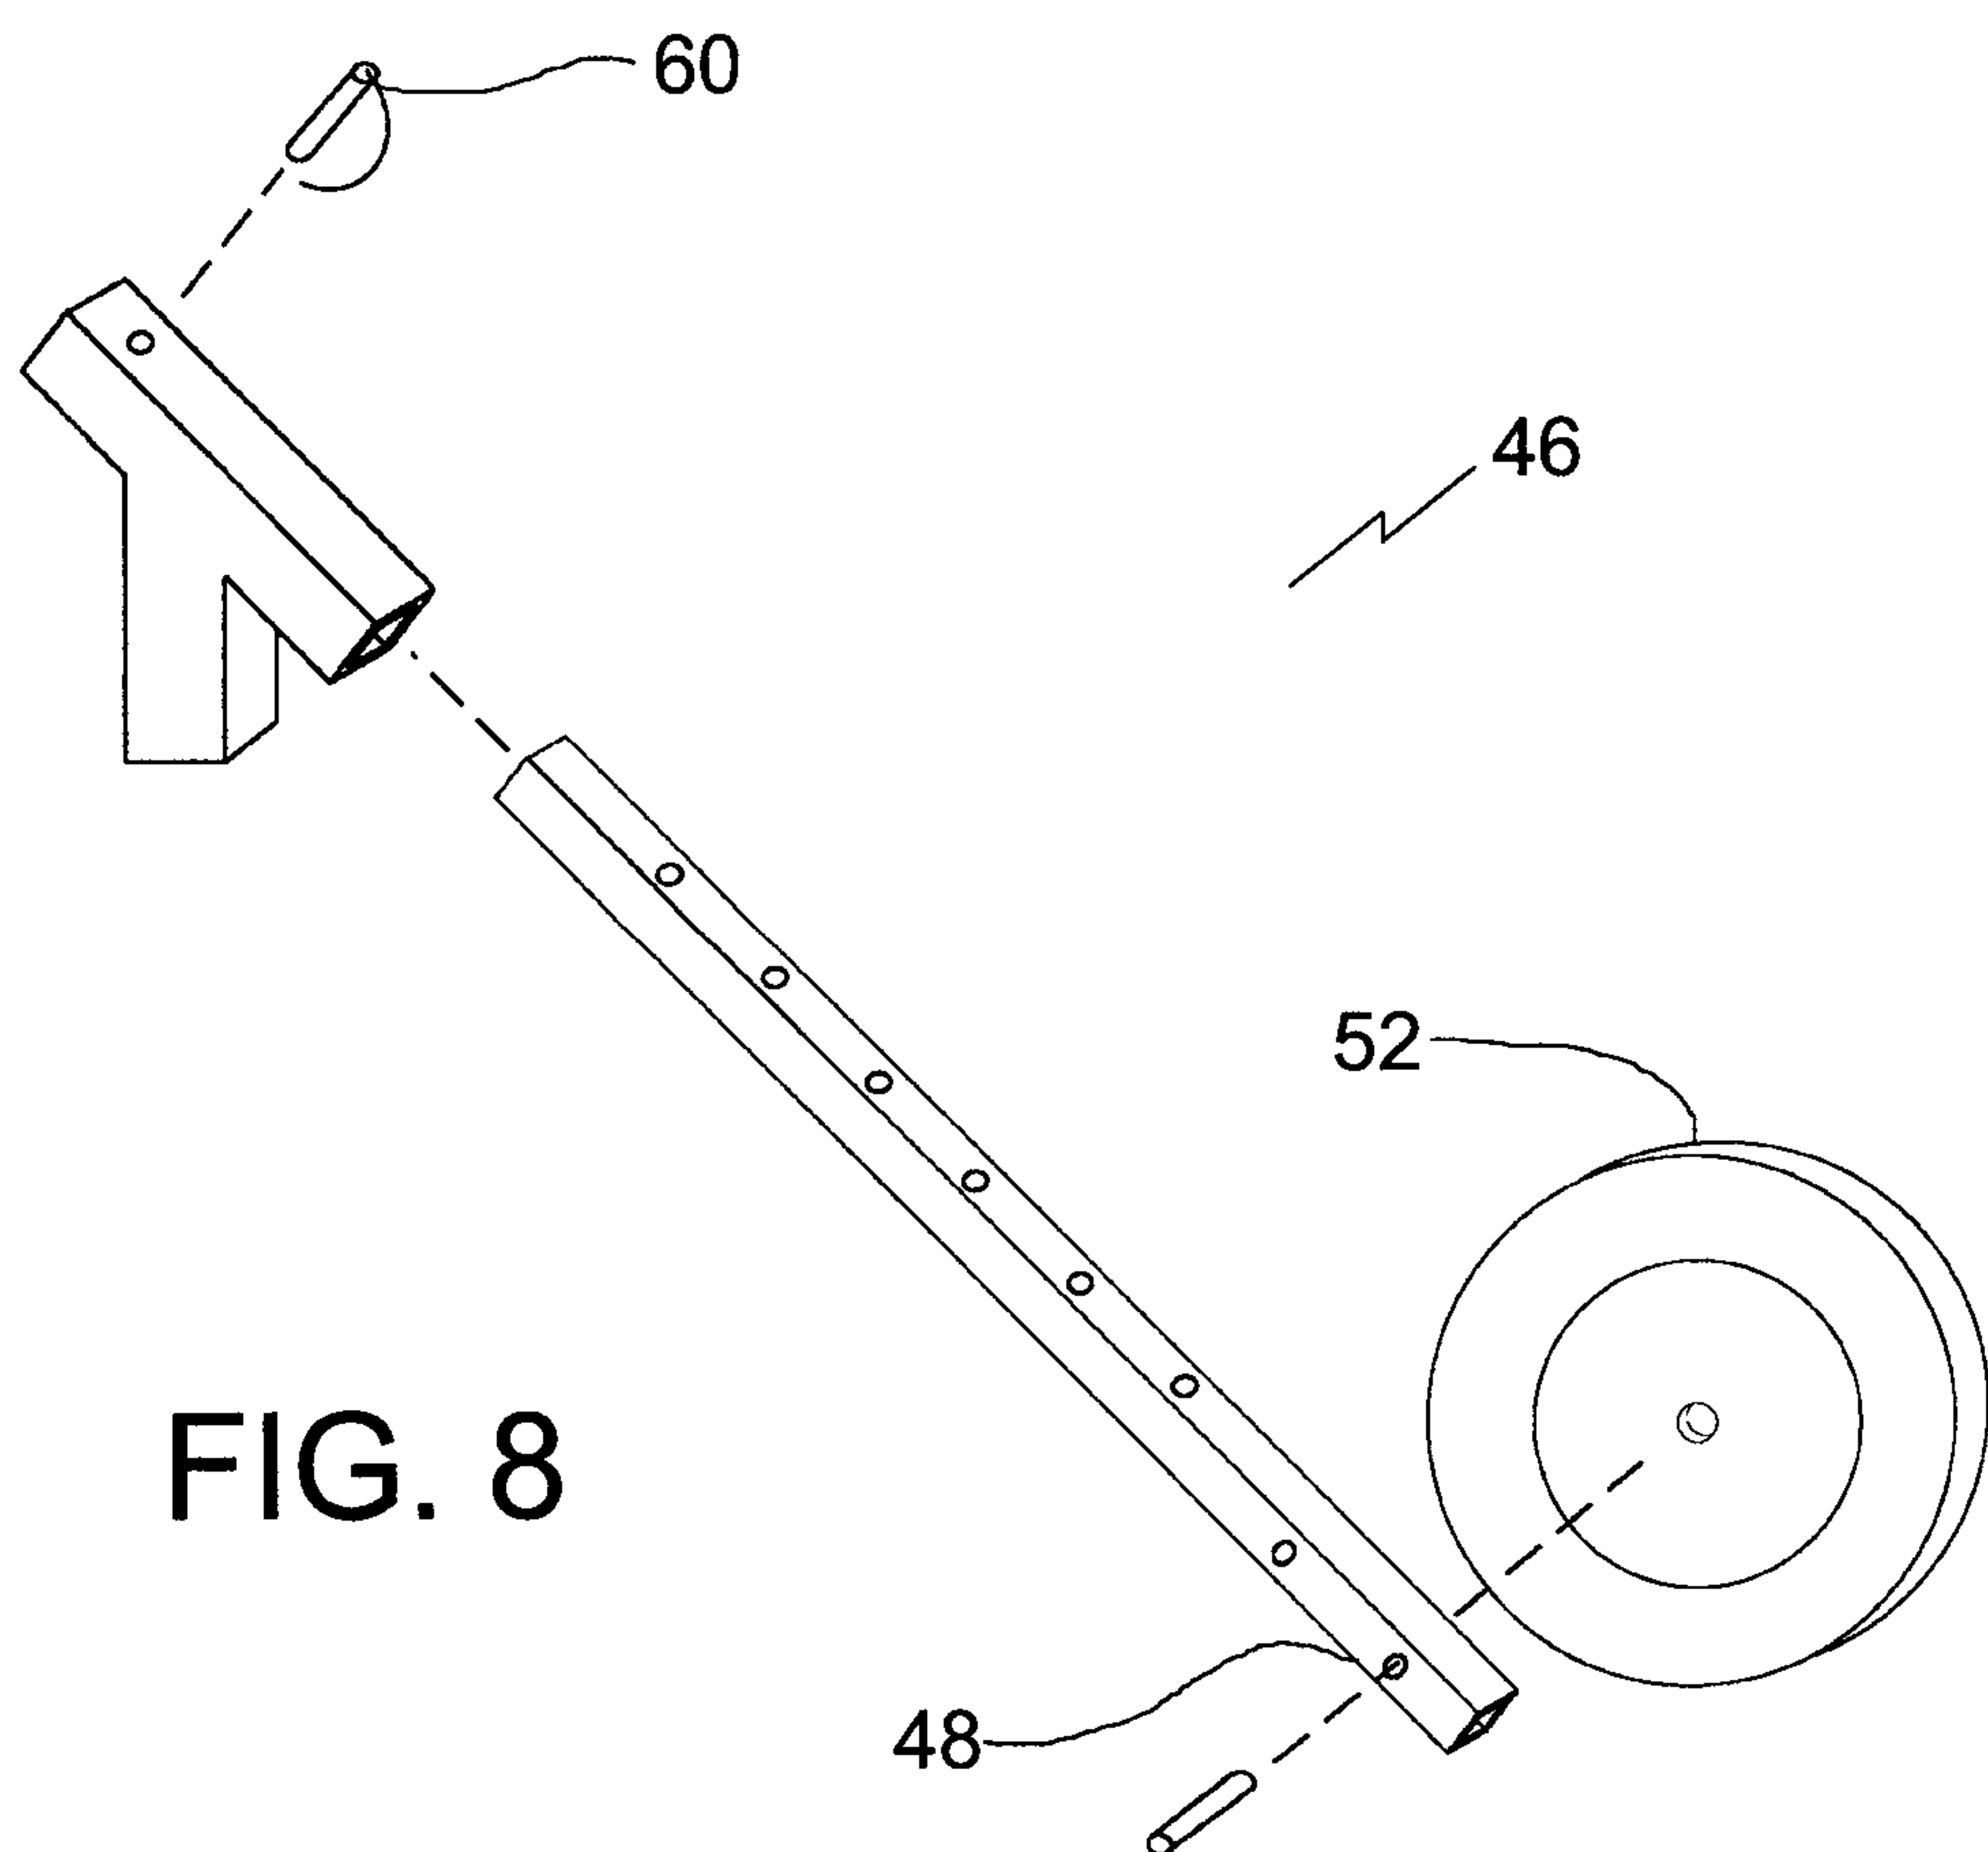


FIG. 8

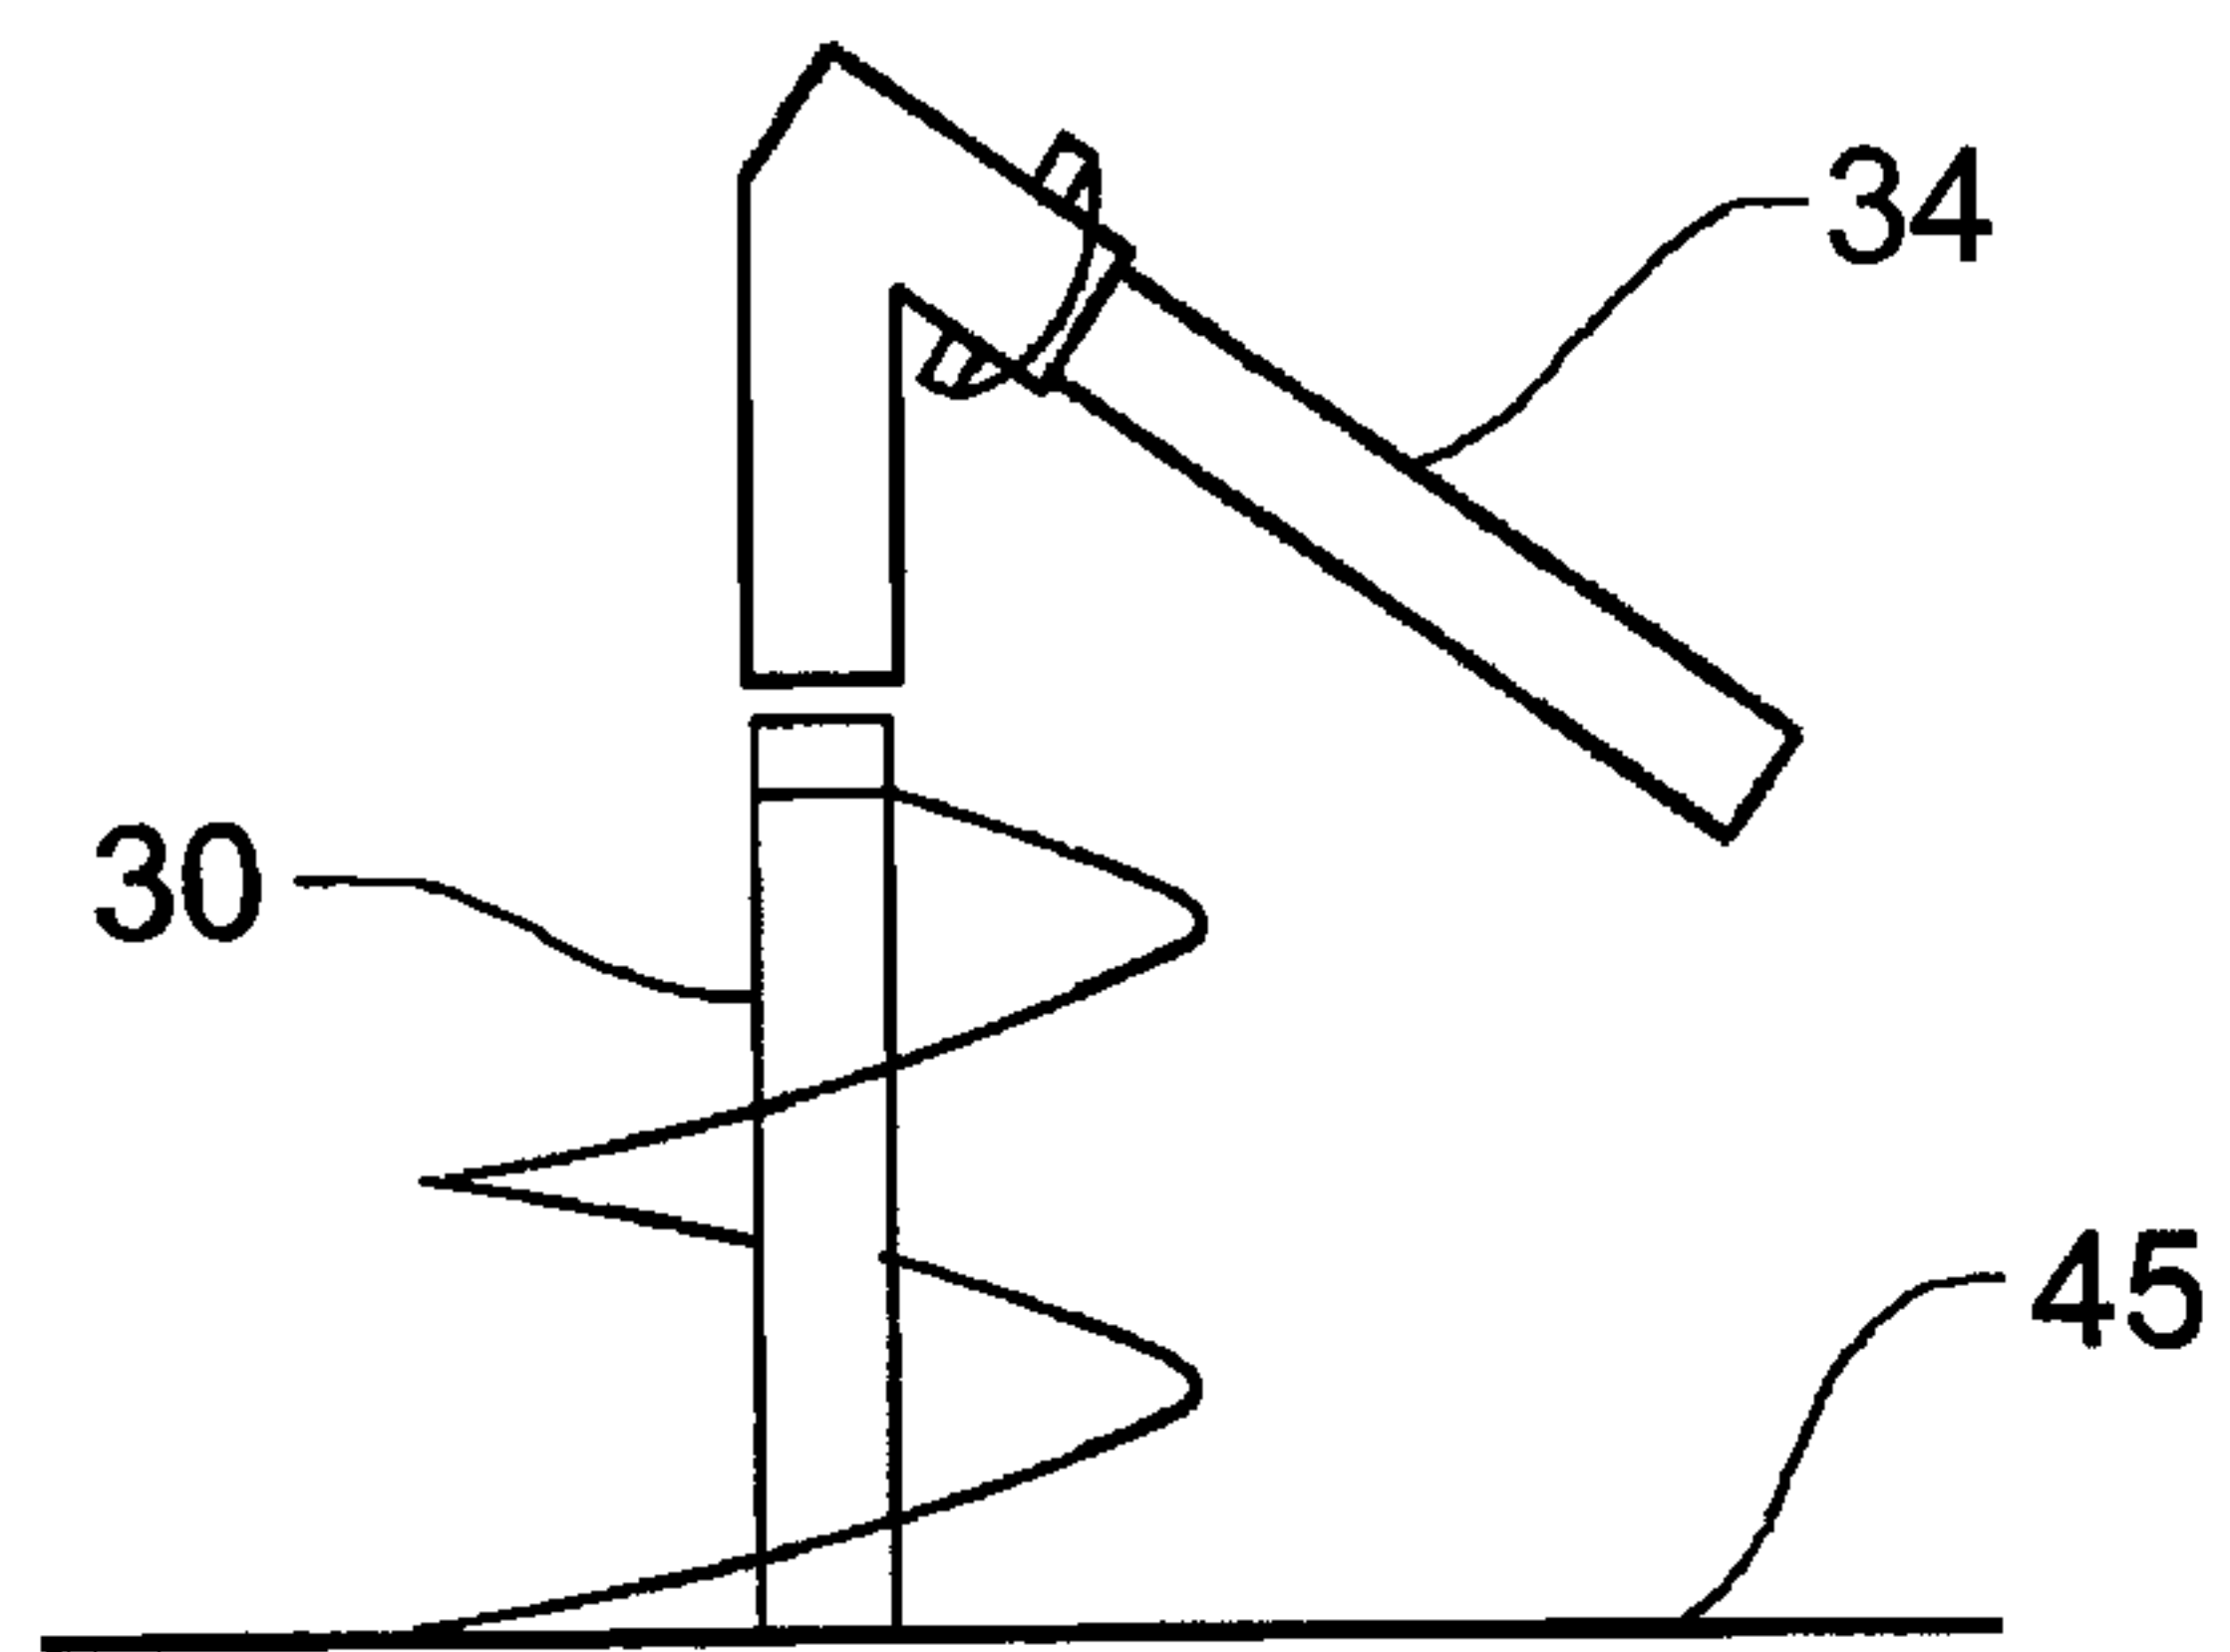


FIG. 9

