



US00D712945S

(12) **United States Design Patent**  
**Brucksch**

(10) **Patent No.:** **US D712,945 S**

(45) **Date of Patent:** **\*\* Sep. 9, 2014**

- (54) **TELESCOPE-HANDLING ARM**
- (71) Applicant: **Joachim Brucksch**, Kusterdingen (DE)
- (72) Inventor: **Joachim Brucksch**, Kusterdingen (DE)
- (73) Assignee: **Vallon GmbH**, Eningen (DE)
- (\*\*) Term: **14 Years**
- (21) Appl. No.: **29/462,362**

- D519,820 S \* 5/2006 Newman et al. .... D8/107
- D519,990 S \* 5/2006 Lazor ..... D14/229
- D522,550 S \* 6/2006 Kung ..... D16/132
- D649,992 S \* 12/2011 Nusser ..... D16/131

(Continued)

*Primary Examiner* — Paula Greene

(74) *Attorney, Agent, or Firm* — Cascio & Zervas

- (22) Filed: **Aug. 1, 2013**
- (51) **LOC (10) Cl.** ..... **16-01**
- (52) **U.S. Cl.**  
USPC ..... **D16/132**
- (58) **Field of Classification Search**  
CPC ..... G02B 23/00  
USPC ..... D16/132, 136; 359/430, 399, 406, 229;  
248/125.8, 278.1, 904, 121; 403/54,  
403/109.5; D8/107, 355; D14/229  
See application file for complete search history.

(57) **CLAIM**  
The ornamental design for a telescope-handling arm, as shown and described.

**DESCRIPTION**

FIG. 1 is a right side elevational view of the telescope handling arm showing my design in the unfolded condition in which the handling arm is in the fully extended position and securing a pivotally mounted detector at the distal end and the support rod is in a fully extended position, the left side being a mirror image thereof;

FIG. 2 is a right side elevational view thereof in the unfolded condition with the handling arm in a partially extended position and securing a pivotally mounted detector at the distal end and the support rod is in the fully extended position, the left side being a mirror image thereof;

FIG. 3 is a right side elevational view thereof in the unfolded condition with a latch mechanism disengaged to permit retraction of the handling arm to a second partially extended position and securing a pivotally mounted detector at the distal end and the support rod in a partially extended position, the left side being a mirror image thereof;

FIG. 4 is an enlarged fragmentary view of the distal end of the handling arm that is connected to the pivotally mounted detector as shown in FIG. 3; and,



FIG. 5 is a right side elevational view thereof in the folded condition in which the handling arm is in the collapsed position and securing a pivotally mounted detector at the distal end that is in the folded position and the support rod is in the collapsed position, the left side being a mirror image thereof.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

1,255,185	A	*	2/1918	Lehmkuhl	.....	248/282.1
1,942,925	A	*	1/1934	Jenkins	.....	248/123.2
2,806,416	A	*	9/1957	Jones, Jr.	.....	294/139
3,284,103	A	*	11/1966	Polzin et al.	.....	403/72
3,289,563	A	*	12/1966	Kent	.....	396/422
3,324,254	A	*	6/1967	Shaw et al.	.....	381/363
3,747,886	A	*	7/1973	Carlson et al.	.....	248/325
3,887,155	A	*	6/1975	Bertalot	.....	248/333
3,951,511	A	*	4/1976	Parsons	.....	359/430
4,435,105	A	*	3/1984	Rampley	.....	409/109
D289,835	S	*	5/1987	Schoenig et al.	.....	D6/462
4,761,092	A	*	8/1988	Nakatani	.....	403/104
5,039,215	A	*	8/1991	Hirabayashi	.....	359/430
5,154,381	A	*	10/1992	Malinao	.....	248/178.1
5,275,364	A	*	1/1994	Burger et al.	.....	248/125.1
5,332,136	A	*	7/1994	Rudolph	.....	224/185
5,820,623	A	*	10/1998	Ng	.....	606/1
6,349,905	B1	*	2/2002	Mills	.....	248/126

**1 Claim, 2 Drawing Sheets**

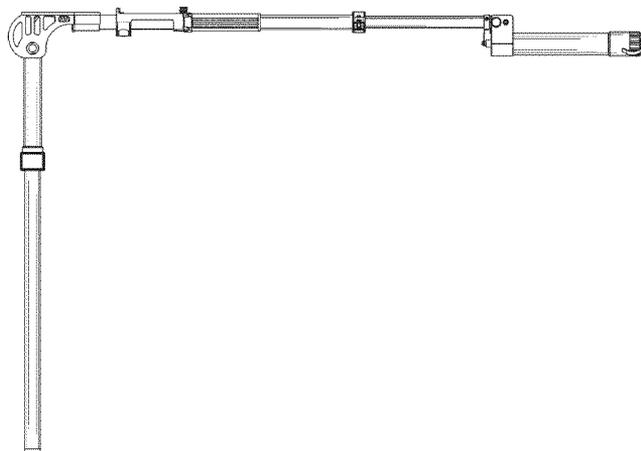

# US D712,945 S

Page 2

---


(56)

## References Cited


### U.S. PATENT DOCUMENTS

8,469,323 B1 *	6/2013	Deros et al. ....	248/278.1
2006/0273231 A1 *	12/2006	Huang .....	248/371
2013/0161465 A1 *	6/2013	Huang .....	248/278.1
8,091,606 B2 *	1/2012	Nien et al. ....	160/176.1 R
D670,150 S *	11/2012	Angel et al. ....	D8/107

\* cited by examiner

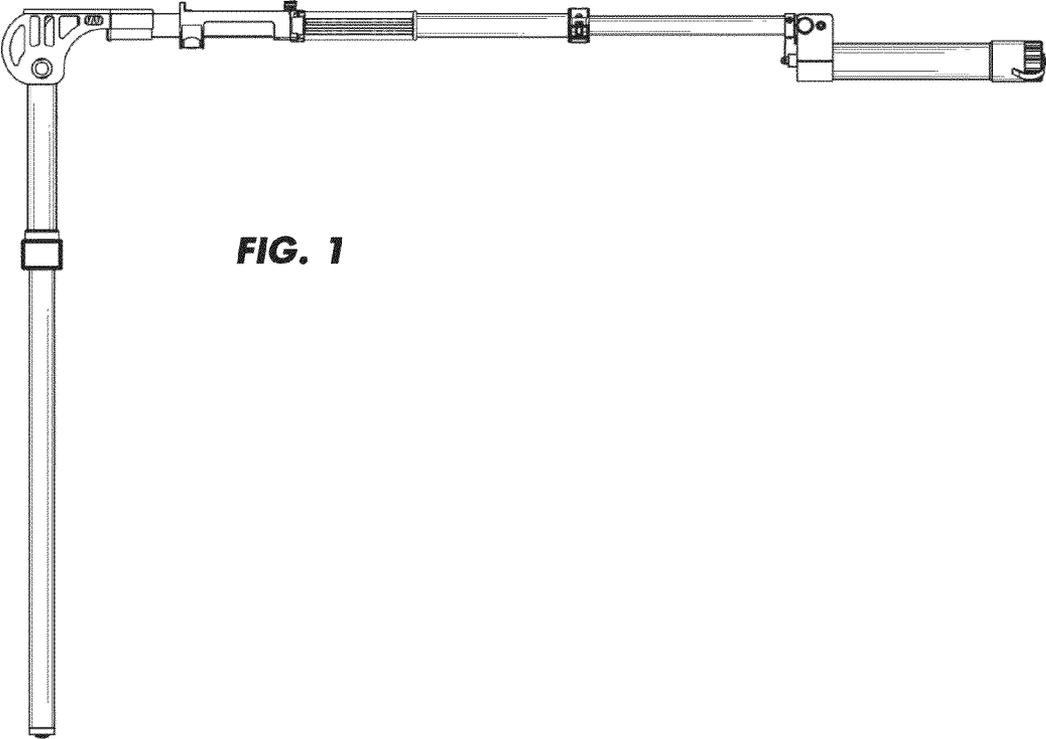

**FIG. 1**

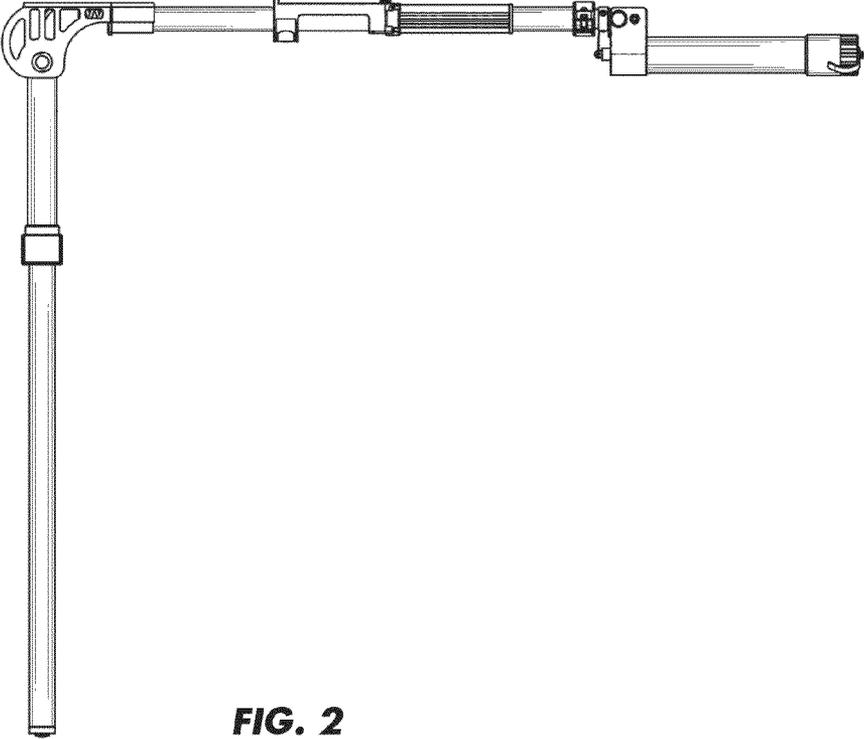

**FIG. 2**

