

(19)



(11)

EP 4 182 512 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

08.05.2024 Bulletin 2024/19

(51) International Patent Classification (IPC):

E04C 2/24 ^(2006.01) **E04C 2/52** ^(2006.01)
E04C 2/00 ^(2006.01)

(21) Application number: **21742408.4**

(52) Cooperative Patent Classification (CPC):

E04C 2/243; E04C 2/521; E04C 2/525;
E04C 2002/004

(22) Date of filing: **13.07.2021**

(86) International application number:

PCT/EP2021/069476

(87) International publication number:

WO 2022/013228 (20.01.2022 Gazette 2022/03)

(54) **MULTI-LAYER WALL ELEMENT FOR BUILDING UP DRYWALLS AS WELL AS DRYWALL COMPRISING THE WALL ELEMENT**

MEHRSCICHTIGES WANDELEMENT ZUM AUFBAU VON TROCKENWÄNDEN SOWIE TROCKENWAND MIT DEM WANDELEMENT

ÉLÉMENT DE PAROI MULTICOUCHE POUR LA CONSTRUCTION DE CLOISONS SÈCHES ET CLOISON SÈCHE COMPRENANT L'ÉLÉMENT DE PAROI

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **KAPLAN, Benjamin**
69514 Laudenbach (DE)
- **SCHILLING, Thomas**
76669 Bad Schönborn (DE)
- **CHRISTMANN, Frank**
64668 Rimbach (DE)
- **BUGERT, Karl-Hans**
68519 Viernheim (DE)

(30) Priority: **15.07.2020 DE 102020118700**

(43) Date of publication of application:

24.05.2023 Bulletin 2023/21

(73) Proprietor: **SAINT-GOBAIN PLACO**

92400 Courbevoie (FR)

(74) Representative: **Kuhnen & Wacker**
Patent- und Rechtsanwaltsbüro PartG mbB
Prinz-Ludwig-Straße 40A
85354 Freising (DE)

(72) Inventors:

- **KRANZ, Stephan**
52066 Aachen (DE)

(56) References cited:

WO-A1-2014/033333 GB-A- 2 466 128
US-A1- 2011 203 193 US-A1- 2016 273 217

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 4 182 512 B1

Description

[0001] The invention relates to a multi-layer wall element for building up drywalls as well as to a drywall comprising at least one wall element.

[0002] WO 94/26992 discloses a connecting structure for sandwich panels. The sandwich panels have a mineral wool core provided with skin-like layers on both flat sides. At the front side, a groove and tongue structure is imparted in the mineral wool core, so that two such panels may be stuck together in the type of a groove and tongue joint. The dimensions of the groove and tongue joint are chosen such that, during the sticking together of two such panels, a compression of the mineral wool core takes place locally at the front side.

[0003] DE 20 2009 001 212 U1 discloses a heat insulating board, in particular a walkable, rectangular heat insulating board which is composed of three board. A core board is formed as a polystyrene hard foam board. A bottom-side board is also formed as a polystyrene hard foam board. A cover board is formed of a cover board that is thinner relative to the other boards and is in particular mineral-bound. The boards are arranged to be offset from each other such that a groove is formed at two sides and a tongue is formed at two sides.

[0004] DE 20 2004 010 695 U1 discloses a vacuum insulating panel which can be connected with other vacuum insulating panels in accordance with the groove and tongue principle. An evacuated interior serves as an insulation between two cover layers. The cover layers are interconnected by means of a frame and kept spaced apart from each other. Gaps produced between the cover layers when a plurality of such panels are stuck together may be bridged by means of inserts.

[0005] US 2011/0203193 A1 discloses a multi-layer wall element according to the preamble of claim 1.

[0006] It is an object of the invention to indicate an easy-to-handle wall element for building up drywalls which has increased stability and good heat and/or sound insulating properties.

[0007] Furthermore, during the building of such a drywall from wall elements in accordance with the invention it is intended to be possible that at least two wall elements can be fixed in advance with little effort.

[0008] Moreover, an outer side of a drywall to be built up is intended to be workable with usual tools/materials for achieving its surface finish (finished surface quality).

[0009] Moreover, in a particular embodiment the multi-layer wall element is to be capable of providing predefined supply channels.

[0010] Moreover, it is intended to be possible that drywalls are built up with the multi-layer wall element in accordance with the invention without additional connecting elements apart from screws.

[0011] Furthermore, it is intended that the multi-layer wall element in accordance with the invention is easy and straightforward to process especially in the do-it-yourself field.

[0012] Furthermore, a drywall is to be indicated which can be built up in a simple and low-cost manner.

[0013] The above objects concerning the wall element are solved with a multi-layer wall element for building up drywalls with the features of claim 1. Advantageous embodiments are indicated in the subclaims.

[0014] The above objects concerning the drywall are solved with a drywall with the features of claim 18.

[0015] A multi-layer wall element for building up drywalls comprises: an insulating ply with two flat sides of heat or sound insulating material which have a large surface area relative to front sides, wherein a support layer is placed with an inner flat side of the support layer against each flat side of the insulating ply, wherein a cover layer is placed against each outer flat side of the support layer, wherein the support layers are, along at least two directions R1, R2 which are oriented parallel to a plane E of the support layer and perpendicular to confining edges of the support layer, offset relative to the cover layer by at least one first or second offset amount V_1/V_1' offset amount V_i ; V_2 , the at least one of the first or second offset amounts V_1/V_1' ; V_2/V_2' being larger than zero wherein the support layers form a tongue at least along a first confining edge whereas along at least one opposite second confining edge the support layers form a groove together with the insulating ply and the cover layer.

[0016] With such a multi-layer wall element in accordance with the invention it is easily possible to implement a stable drywall which can be built up quickly by sticking together a plurality of multi-layer wall elements in the groove and tongue principle.

[0017] Furthermore, the wall elements, which each per se already form a piece of a completely finished drywall, may be processed without additional connecting elements. The awkward building up of a post and beam structure which is then finished to form a drywall by its facing with plasterboards and filling the cavity with insulation materials may be omitted.

[0018] Furthermore, it is possible to provide such prefabricated multi-layer wall elements in practically manageable sizes which are also good to handle and to use at narrow building site sections difficult to access.

[0019] With the multi-layer wall element in accordance with the invention it is thus possible to provide a simple possibility of building up drywalls without complex preliminary work which can especially be implemented in the do-it-yourself field with little technical knowledge.

[0020] It is particularly preferred that the first offset amount V_i/V_r and the second offset amount V_2/V_2' are larger than zero, so that at least two tongues and at least two grooves are formed.

[0021] With the first and second offset amounts V_1/V_1' and V_2/V_2' which are larger than zero, at two respective opposite confining edges of a multi-layer wall element, for instance, one groove and one tongue each are formed. Such wall elements can thus be stuck together in a simple manner. For the beginning of a drywall, i.e. for the lowermost row of multi-layer wall elements and/or

for the elements adjoining an existing wall for building up a drywall it may be useful not to provide such an offset at least on one side, so that near the floor a confining edge of the drywall can be established where both the cover layers and the support layers and the insulating layer are flush with each other.

[0022] Alternatively, a multi-layer wall element comprising first and second offset amounts V_1/V_r and V_2/V_2 , in both directions may, of course, also be reworked easily by cutting the corresponding regions to form a wall element that is flush on one side.

[0023] In a particular embodiment the first offset amount V_1/V_r is larger than the second offset amount V_2/V_2 .

[0024] In an embodiment in which one of the offset amounts is larger than the other offset amount, tongues of different lengths will result (an offset amount with a larger amount results in a longer tongue than an offset amount with a lower amount). In correspondence therewith, the grooves opposing the corresponding tongues will also be of different depths.

[0025] If the first offset amount V_1/V_1 , i.e. the offset amount defined as a vertical offset amount in the scope of this application, is larger than the horizontal offset amount, it may, for instance be achieved that a deeper slide-in mount and wider overlapping of two stacked wall elements along their horizontal joint may be achieved. Such enlarged or increased slide-in mount depth along the horizontal confining edges causes only little additional effort for the builder of a drywall since the weight of a wall element supports the mating in the vertical direction. Contrary to this, a weight support does not exist in the direction of vertical joints, so that a lower slide-in mount depth may be expedient there so as to keep the corresponding mating forces low.

[0026] The first offset amount V_1/V_r may also be smaller than the second offset amount V_2/V_2 .

[0027] If the first offset amount V_1/V_r is chosen smaller than the second offset amount V_2/V_2 , i.e. the vertical offset amount smaller than the horizontal offset amount, it is possible to build up drywalls which are particularly bulge-proof in the horizontal direction from multi-layer wall elements modified this way.

[0028] In a preferred embodiment the first offset amount V_1/V_r is equal to the second offset amount V_2/V_2 .

[0029] If the horizontal and vertical (first and second) offset amounts are chosen to be equal, the slide-in mount depth is, for instance in the case of a square or a rectangular multi-layer wall element, especially with a square element, circumferentially the same, so that the orientation of the wall elements relative to each other need not necessarily be observed. In the case of a rectangular wall element it may, for instance, be expedient to raise one of the wall elements on edge, whereas other wall elements are arranged with the broadside down. Since all offset amounts are equal, the slide-in mount depths are equal everywhere.

[0030] In a further preferred embodiment the insulating

ply, the support layer and the cover layer are square or rectangular in a viewing direction on flat sides of the plies/layers.

[0031] With such a cut geometry of the individual plies/layers it is possible to implement multi-layer wall elements which are particularly good to handle and to process.

[0032] Furthermore, it may be advantageous if at least the support layer and the cover layer are of equal size in a plan view on the flat sides thereof.

[0033] With such a design it is possible, when sticking together a plurality of multi-layer wall elements, to avoid joints both between the corresponding converging support layers and between the converging cover layers.

[0034] In a further advantageous embodiment the surface area of the insulating ply is, in the top view on the flat side thereof, of equal size or slightly larger than that of the support layer, i.e. with oversize. Thus, a form fit of the insulating ply is achieved when adjacent insulating plies are stuck together, so that acoustic bridges due to lack of contact of the insulating plies are avoided. The oversize has to be chosen such that, as a function of the bulk density and/or the elasticity of the insulating ply, a form fit of the support layer is achieved. Depending on the glue chosen the glue may bridge a small gap of 1-2 mm. An oversize of at most 5 mm, preferably of at most 3 mm, is preferred.

[0035] In a particularly preferred embodiment the support layer is formed as a fiber reinforced board, in particular as a plaster fiberboard.

[0036] As a support layer, in particular a fiber reinforced board, especially a support layer formed in particular as a plaster fiber board, has proven of value. Such a fiber reinforced board provides sufficiently high bulge-proofness and expansibility. Moreover, such a board may provide sufficient strength for stapling-screwing connections or for pre-assembly screwing connections which will be explained further below.

[0037] In a preferred manner the cover layer is formed as a paper or cardboard laminated plasterboard.

[0038] With such a paper or cardboard laminated plasterboard, which is also known as gypsum plasterboard in commerce, it is possible to achieve, in a simple manner, an appearance which is customary with respect to the surface finish and comparable to a conventionally built drywall lined with plasterboards.

[0039] In a further advantageous embodiment the insulating ply is formed of a fiber material, in particular a mineral fiber material or a glass fiber material, and as a board-shaped insulating ply which comprises, in a non-installed unprocessed state, a bulk density of 50 kg/m³ or more, in particular of 60 kg/m³ and more.

[0040] In this particular embodiment it was found that the insulating ply itself does not merely function as an insulating ply, but can also be provided for a strength-endowing layer being sufficiently pressure and/or tension-proof especially in the thickness direction.

[0041] With an above-mentioned bulk density of at

least 50 kg/m³ of the insulating ply it is possible to do without additional stiffening elements in the thickness direction of the drywall to be built, so that a drywall can do without additional connecting elements with the exception of appropriate connection chemicals such as explained further below, e.g. glue.

[0042] Alternatively, also hard foam insulating materials on the basis of expanded polystyrene (EPS), extruded polystyrene (XPS), polyurethane (PUR), or polyisocyanurate (PIR) may be employed as materials of the insulating ply.

[0043] In a particular embodiment the insulating ply is glued with the support layers over the full surface area or partially.

[0044] For supporting the above-mentioned tension proofness in the thickness direction, the insulating ply is glued with the support layers e.g. over the full surface area or over part of the surface area. This may especially also contribute to the fact that the multi-layer wall element can be provided as a single manageable component.

[0045] Preferably, the cover layers are glued with the support layers over the full surface area or partially. A gluing of the cover layers with the support layers over the full surface area or over part of the surface area or punctually may be particularly recommendable so as to obtain a compact wall element as a whole.

[0046] Alternatively, the cover layers may be connected mechanically with the support layers. Clamping is particularly preferred here.

[0047] In a particularly preferred embodiment front sides of the support layer contact each other and support themselves against each other in the stuck condition of two multi-layer wall elements.

[0048] In this preferred embodiment the cut geometry is chosen such that the support layers absorb and support the generated upsetting forces for a substantial part in particular in the vertical direction. With such a measure it may also be well possible to use, for instance, chemical binders between the corresponding support layers for the additional stiffening of a drywall to be built.

[0049] In a particularly preferred embodiment front sides of adjacent cover layers form a gap therebetween in the stuck condition of two wall elements.

[0050] With this measure it is possible to produce, in the case of a drywall composed of multi-layer wall elements in accordance with the invention, at the visible outer side thereof a defined joint image which can, in a known manner, be further refined and finished with appropriate spackles and/or their processing tools, i.e. with known technologies and materials. In defined joints indeed more spackle has to be applied, but this may promote higher stability of the joint and thus guarantee longer durability of the optical overall impression of the outer side.

[0051] In a further advantageous embodiment front sides of the insulating plies contact each other in the stuck condition of two wall elements.

[0052] If the front sides of the insulating plies contact

each other in the stuck condition it is advantageous that no acoustic bridges in the form of gaps are formed between the insulating plies.

[0053] In a further preferred embodiment the multi-layer wall element is adapted with respect to its cut such that an individual element preferably weighs less than 25 kg, in particular preferably less than 20 kg.

[0054] With such a measure it is possible to provide, in particular in the do-it-yourself field, individual multi-layer wall elements which are good to handle and are transported or positioned well without complex lifting equipment.

[0055] Furthermore, it may be of advantage that the support layer and/or the insulating ply have groove-shaped channels for accommodating supply lines, e.g. electrical supply lines and/or water/heating supply lines.

[0056] With such channels it is possible to facilitate a subsequent installation of supply lines in a drywall built up with wall elements in accordance with the invention.

[0057] In the following, the invention will be explained in detail by way of example by means of the drawings. There show:

Figure 1: schematically a perspective view of a multi-layer wall element in accordance with the invention in a first embodiment;

Figure 2: schematically a cross-section through a dry-wall portion made of two multi-layer wall elements in accordance with the invention;

Figure 3: schematically a partially built drywall of two multi-layer wall elements in accordance with the invention pursuant to Figure 1.

[0058] A multi-layer wall element 1 in accordance with the invention (Figure 1) serves for building up a drywall 2 (cf. Figure 2). The construction of the wall element 1 in accordance with the invention will be explained in detail in the following by means of Figure 1.

[0059] The wall element 1 in accordance with the invention is formed in the embodiment pursuant to Figure 1 with multiple layers, in particular with 5 layers, and comprises a central insulating ply 3. A respective support layer 5 is positioned against flat sides 4 of the insulating ply 3, wherein an inner flat side 5a of the support layer 5 faces the flat side 4 of the insulating ply 3.

[0060] Flat sides are generally meant to be main sides of board-shaped elements whose surface area is distinctly larger in relation to front sides 6 of the board-shaped elements.

[0061] Respective cover layers 7 are placed against an outer flat side 5b of the support layers 5. In Figure 1 merely one of the cover layers 7 is illustrated. The other one is hidden due to the perspective illustration.

[0062] The support layer 5 and/or the support layers 5 is/are offset in at least two directions R1, R2. The directions R1 and R2 run parallel to or with parallel offset to

an imagined plane E of the support layer 5 which in turn runs to one of the inner flat side 5a or the outer flat side 5b.

[0063] Furthermore, the directions R1 and R2 be defined as running perpendicular to confining edges 8. This results in a first offset amount V_1 along the direction R1 and a second offset amount V_2 along the direction R2 by which the support layer 5 is offset relative to the cover layer 7. In the present example a first offset amount V_i/V_r equal according to amount and a second offset amount V_2/V_2' equal according to amount exists between the support layer 5 and the insulating ply 3. Due to an arrangement of this kind the support layer 5 forms, together with the remaining layers (insulating ply 3 and cover layer 7), a tongue 10 at the respective confining edges 8 illustrated in Figure 1 since it projects along the confining edges 8 over the insulating ply 3 and the cover layer 7. At the respective confining edges (not illustrated in Figure 1) opposite to the illustrated confining edges 8 the support layer 5, whose surface area has at least approximately the same, in particular the same, extension as the remaining layers (insulating ply 3 and cover layer 7), is recessed by the respective first and second offset amounts V_1, V_1', V_2, V_2' relative to the other plies (insulating ply 3 and cover layer 7), so that grooves 11 (see Figure 2) are formed there into which the tongues 10 of another wall element 1 can be stuck.

[0064] The first offset amount V_1 and the second offset amount V_2 and correspondingly the first and second offset amounts V_r and V_2' are preferably larger than zero, so that at least two tongues 10 and at least two grooves 11 are formed per multi-layer wall element 1.

[0065] The first offset amount V_1 may be larger according to amount than the second offset amount V_2 (the same applies for the corresponding first and second offset amounts V_1', V_2'). The afore-mentioned first offset amounts V_i, V_r may also be smaller than the second offset amounts V_2 and V_2' . Likewise, they may be equal.

[0066] Due to differently high offset amounts it is possible to achieve different insertion depths in mating directions in a vertical and/or horizontal mating direction between two wall elements 1. For instance, by a larger first offset amount V_i/V_r in the vertical mating direction of the drywall 2 to be built, a deepened slide-in mount of the tongues 10 in the corresponding grooves 11 may be achieved without the build-up of the drywall 2 being aggravated since in the vertical direction the weight of an upper wall element 1 relative to a lower wall element 1 facilitates their vertical mutual mating. In the horizontal direction this may possibly be more difficult under building site conditions, so that a smaller vertical second offset amount V_2, V_2' in the horizontal direction relative to the first offset amounts V_i, V_r (vertical direction) might be useful. In the horizontal mating direction no supporting gravity exists, so that in this mating direction a smaller slide-in mount may possibly provide the facilitating of assembly during the building up of a drywall 2.

[0067] In particular in the case of equal offsets $V_1' = V_2'$ and $V_1 = V_2$ and a square board cut of the different

layers (insulating ply 3, support layer 5, and cover layer 7) a predetermined orientation of the boards is irrelevant, so that a positioning effort of a wall element during the building up of a drywall 2 is avoided. Matching wall elements can always be stuck on top of each other or into each other.

[0068] A smaller first offset amount V_i/V_r in the vertical direction as compared to the horizontal second offset amount V_2 and/or V_2' may, for instance, be useful in the case of a plurality of wall elements 1 mated in advance in the horizontal direction, so that a smaller slide-in mount depth in the vertical direction facilitates the placing of a "row of wall elements" of a plurality of wall elements 1 mated in advance in the horizontal direction.

[0069] In a viewing direction on flat sides of the plies/layers 3; 5; 7 they are preferably of rectangular or square design. Any other outside cuts that may be mated to full-faced walls without gaps are theoretically also imaginable. Hexagonal edge cuts may, for instance, also be imaginable, whereas square or rectangular elements should probably be the ones that can best be handled in practice.

[0070] If a plurality of wall elements 1 are stacked as intended (cf. Figure 2), the dimensions of the individual layers 5, 7 and plies (insulating ply 3) are coordinated such that the support layers 5 of two adjacent wall elements 1 contact each other both in the horizontal and in the vertical directions, wherein preferably a material bonded connection, especially a gluing 12, is provided for building up a drywall 2.

[0071] Both in the horizontal and in the vertical directions it may be expedient that a gap 13 is provided between the cover layers 7 of adjacent wall elements 1, so that the dimensions of the cover layers 7 are expediently chosen to be somewhat smaller for achieving this object than the extension in terms of surface area of the support layers 5. The gap 13 may be expedient so that, for instance, during the jointing of the drywall 2 the achieving of the desired finished surface quality is somewhat easier to accomplish with a gap and/or the jointing material is retained better in the gap 13. Between the insulating plies 3 of two adjacent wall elements 1 a gap 13a may also be provided. It is, however, preferred that adjacent insulating plies 3 of adjacent wall elements 1 contact each other so as to avoid possible acoustic bridges due to gaps 13a generated.

[0072] As materials for the above-mentioned plies/layers come into account:

- For the insulating ply 3 in a particularly preferred manner a fiber material, in particular a mineral fiber material or a glass fiber material. In particular so as to achieve required bulge proofness of built drywalls 2 and to also achieve a sufficiently rigid design in a thickness direction of the drywall 2 to be built, it is particularly expedient to select such fiber materials, in particular mineral fiber materials or glass fiber materials, having in the unprocessed state a bulk den-

sity of 50 kg/m³ or more, in particular of 60 kg/m³ or more. The bulk density here means the bulk density that is usually indicated for the fiber plies in the delivery state.

[0073] If, during the construction of the wall elements 1 in accordance with the invention there may occur slight compressions (in the thickness direction) or expansions (in the thickness direction), the density of the fiber material available in a finished wall element 2 may deviate both to the top and to the bottom. During the manufacturing of a wall element 1 in accordance with the invention it is, however, an object to incorporate the insulating ply 3 both in the thickness direction and in two-dimensional directions of the insulating ply 3 preferably unbraced, i. e. preferably with unchanged bulk density, so that usually the indicated bulk density of, for instance, 50 kg/m³ or 60 kg/m³ or more is approximately maintained.

[0074] The insulating ply 3 is glued with the support layers 5 at the flat sides 4 thereof. Specifically if, as mentioned above, the required minimum bulk densities of the fiber materials are used, it is surprising that such gluing between the support layers and the insulating ply does not necessitate an additional stiffening of the wall element 1 in the thickness direction if a suitable insulating material (fiber material) is chosen. The bearing capacity of the insulating ply 3 itself is already sufficient in such a case for avoiding undesired compressing in the thickness direction in the degree required.

- The support layers 5 are formed in particular as fiber reinforced boards, in particular as plaster fiberboards, and comprise the highest compression strength and/or tensile strength and/or bending strength as compared to the other layers/plies.
- The cover layer 7 is formed as a paper or cardboard laminated plasterboard and forms the outermost layer of the wall element 1. Due to such a choice of material, a usual spackle material as well as a usual tool employed in drywall installation is readily usable for a further surface sealing and/or surface deflection (e.g. spackling of the surface). In other words, a drywall built up with the wall elements 1 in accordance with the invention behaves with respect to the further processing steps like a drywall with external paper or cardboard laminated plasterboards built up conventionally in post and beam structure.

[0075] It is recommended to choose the cut of the wall elements 1 such that an individual band element does not weigh more than 25 kg, preferably not more than 20 kg, so as to render its manageability on a building site, especially also in constricted environments such as, for instance, in the case of renovations of old buildings, easy to handle.

[0076] In the do-it-yourself field it is also often expedient to provide smaller, but in turn a plurality of individual

elements which are good to handle since exactly in the do-it-yourself field lifting equipment required for large elements is often not available.

[0077] Since the front sides 8 of the support layers 5 of two adjacent wall elements 1 contact each other, the intended gluing 12 contribute substantially to the overall stability of the drywall 2 built.

[0078] Until a possibly applied glue, which may, for instance, be an epoxy resin glue, an acrylic glue, or another suitable glue which is especially suited for fiber boards, has hardened it is expedient to care for advance assembly when building up a drywall 2. For this purpose it lends itself, for instance, with suitable drywall connecting elements, such as e.g. screws 15, to connect two adjacent wall elements 1 in the groove and tongue region thereof with one another, wherein the screws 15 offer good support in the higher-strength material of the support layer 5 relative to the material of the cover layer 7.

[0079] In particular Figure 3 illustrates such an assembly situation by way of example in a direction extending in the horizontal direction (first offset amount Vi).

[0080] Figure 3 also illustrates by way of example an embodiment (upper wall element 1) in which the offset amount is smaller in the horizontal direction than in the vertical direction.

[0081] Furthermore, Figure 3 illustrates an embodiment in which, for instance, a channel 16 is formed in one of the insulating plies 3 which may, for instance, be provided for the laying of cables or other supply lines (e.g. water lines).

[0082] It is to be understood that such a channel 16 may also be provided in other plies, for instance, in the support layer 5, which is, however, not shown in the Figures.

List of reference numbers

[0083]

1	wall element
2	drywall
3	insulating ply
4	flat side
5	support layer
5a	inner flat side
5b	outer flat side
6	front side
7	cover layer
8	confining edge
10	tongue
11	groove
12	gluing
13, 13a	gap
15	screw
16	channel

E plane
 R1, R2 directions
 V_1, V_1' first offset amount
 V_2, V_2' second offset amount

Claims

1. A multi-layer wall element for building up drywalls (2)

- comprising an insulating ply (3) with two flat sides (4) of heat or sound insulating material which have a large surface area relative to front sides (6),
 - wherein a support layer (5) is placed with an inner flat side (5a) of the support layer (5) against each flat side (4) of the insulating ply (3),
 - wherein a cover layer (7) is placed against each outer flat side (5b) of the support layer (5), wherein the support layers (5) are, along at least two directions (R1, R2) which are oriented parallel to a plane (E) of the support layer (5) and perpendicular to confining edges (8) of the support layer (5), offset relative to the cover layer (7) and the insulating ply (3) by at least one first or second offset amount (V_1/V_1' ; V_2/V_2') the at least one of the respective first or second offset amounts (V_1/V_1' ; V_2/V_2') being larger than zero, wherein the support layers (5) form each a tongue (10) at least along a first confining edge (8),
characterized in that along at least one opposite second confining edge (8) the offset of each support layer (5) forms a groove (11) between the insulating ply (3) and the cover layer (7).

2. The multi-layer wall element according to claim 1, **characterized in that** the first offset amount (V_1/V_1') and the second offset amount (V_2/V_2') are larger than zero, so that at least two tongues (10) and at least two grooves (11) are formed.

3. The multi-layer wall element according to any of the preceding claims, **characterized in that** the first offset amount (V_1) is equal to the second offset amount (V_2).

4. The multi-layer wall element according to claim 1 or 2, **characterized in that** the first offset amount (V_1/V_1') is not equal to the second offset amount (V_2/V_2'), i.e. the first offset amount (V_1/V_1') is larger or smaller when compared to the second offset amount (V_2/V_2').

5. The multi-layer wall element according to any of the preceding claims, **characterized in that** the insulating ply (3), the support layer (5) and the cover layer (7) are, in a viewing direction on flat sides (4; 5a; 5b)

of the plies/layers, square or rectangular.

6. The multi-layer wall element according to any of the preceding claims, **characterized in that** at least the support layer (5) and the cover layer (7) are of equal size in a top view on the flat sides thereof.

7. The multi-layer wall element according to any of the preceding claims, **characterized in that** the insulating ply (3) has, in the top view on the flat side (4) thereof, the same size as the support layer (5) or an oversize relative to the support layer (5).

8. The multi-layer wall element according to any of the preceding claims, **characterized in that** the support layer (5) is formed as a fiber reinforced board, in particular as a plaster fiberboard.

9. The multi-layer wall element according to any of the preceding claims, **characterized in that** the cover layer (7) is formed as a paper or cardboard laminated plasterboard.

10. The multi-layer wall element according to any of the preceding claims, **characterized in that** the insulating ply (3) is formed of a fiber material, in particular a mineral fiber material or a glass fiber material and comprises, as a plate-shaped insulating ply (3) in a non-installed unprocessed state, a bulk density of 50 kg/m³ or more, in particular of 60 kg/m³ and more.

11. The multi-layer wall element according to any of the preceding claims, **characterized in that** the insulating ply (3) is glued with the support layers (5) over part of the surface area or over the full surface area.

12. The multi-layer wall element according to any of the preceding claims, **characterized in that** the cover layers (7) are glued with the support layers (5) over part of the surface area or over the full surface area or mechanically connected therewith, in particular clamped.

13. The multi-layer wall element according to any of the preceding claims, **characterized in that** front sides (6) of the support layer (5) are formed and designed such that they contact each other and support themselves against each other in the stuck condition of two multi-layer wall elements (1).

14. The multi-layer wall element according to any of the preceding claims, **characterized in that** front sides (6) of adjacent cover layers (7) are formed and designed such that they form a gap therebetween in the stuck condition of two wall elements (1).

15. The multi-layer wall element according to any of the preceding claims, **characterized in that** front sides

(6) of the insulating plies (3) are formed and designed such that they contact each other in the stuck condition of two wall elements (1).

16. The multi-layer wall element according to any of the preceding claims, **characterized in that** the multi-layer wall element (1) is adapted such with respect to its cut that an individual element preferably weighs less than 25 kg, in particular preferably less than 20 kg.
17. The multi-layer wall element according to any of the preceding claims, **characterized in that** the support layer (5) and/or the insulating ply (3) have groove-shaped channels for accommodating supply lines, e.g. electrical supply lines and/or water/heating supply lines.
18. A drywall comprising at least one multi-layer wall element according to any of claims 1 to 17.

Patentansprüche

1. Mehrschichtiges Wandelement zur Erstellung von Trockenbauwänden (2)

- mit einer Dämmlage (3) mit zwei relativ zu Stirnseiten (6) großflächigen Flachseiten (4) aus wärme- und oder schalldämmenden Material,
- wobei gegen jede Flachseite (4) der Dämmlage (3) eine Tragschicht (5) mit einer inneren Flachseite (5a) der Tragschicht (5) gesetzt ist,
- wobei gegen jede äußere Flachseite (5b) der Tragschicht (5) eine Deckschicht (7) gesetzt ist, wobei

die Tragschichten (5) entlang wenigstens zwei Richtungen (R1, R2), die parallel zu einer Ebene (E) der Tragschicht (5) und senkrecht zu Begrenzungskanten (8) der Tragschicht (5) ausgerichtet sind, um mindestens einen ersten oder zweiten Versatzbetrag (V_1/V_1 ; V_2/V_2) bezüglich der Deckschicht (7) und der Dämmlage (3) versetzt sind, wobei der mindestens eine des entsprechenden ersten oder zweiten Versatzbetrags (V_1/V_1 ; V_2/V_2) größer als Null ist, wobei die Tragschichten (5) wenigstens entlang einer ersten Begrenzungskante (8) jeweils eine Feder (10) bilden, **dadurch gekennzeichnet, dass** entlang zumindest einer gegenüberliegenden zweiten Begrenzungskante (8) der Versatz jeder Tragekante (5) eine Nut (11) zwischen der Dämmlage (3) und der Deckschicht (7) bildet.

2. Mehrschichtiges Wandelement nach Anspruch 1, **dadurch gekennzeichnet, dass** der erste Versatzbetrag (V_1/V_1) und der zweite Versatzbetrag (V_2/V_2) größer als Null sind, so dass wenigstens zwei Federn

(10) und wenigstens zwei Nuten (11) ausgebildet sind.

3. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** der erste Versatzbetrag (V_1) gleich dem zweiten Versatzbetrag (V_2) ist.
4. Mehrschichtiges Wandelement nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** der erste Versatzbetrag (V_1/V_1) nicht gleich dem zweiten Versatzbetrag (V_2/V_2) ist, d.h. der erste Versatzbetrag (V_1/V_1) im Vergleich zu dem zweiten Versatzbetrag (V_2/V_2) größer oder kleiner ist.
5. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** die Dämmlage (3), die Tragschicht (5) und die Deckschicht (7) in einer Blickrichtung auf Flachseiten (4; 5a; 5b) der Lagen/Schichten quadratisch oder rechteckig sind.
6. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** wenigstens die Tragschicht (5) und die Deckschicht (7) in einer Draufsicht auf deren Flachseiten gleich groß sind.
7. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** die Dämmlage (3) in der Draufsicht auf deren Flachseite (4) die gleiche Größe wie die Tragschicht (5) oder ein Übermaß zu der Tragschicht (5) aufweist.
8. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** die Tragschicht (5) als faserverstärkte Platte, insbesondere als Gipsfaserplatte ausgebildet ist.
9. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** die Deckschicht (7) als papier- oder pappkaschierte Gipsplatte ausgebildet ist.
10. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** die Dämmlage (3) aus einem Faserwerkstoff, insbesondere einem mineralischen Faserwerkstoff oder einem Glasfaserwerkstoff ausgebildet ist und als plattenförmige Dämmlage (3) in einem nicht verbauten Rohzustand eine Rohdichte von 50 kg/m^3 oder mehr, insbesondere von 60 kg/m^3 und mehr aufweist.
11. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet,**

zeichnet, dass die Dämmlage (3) mit den Tragschichten (5) teil- oder vollflächig verklebt ist.

12. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** die Deckschichten (7) mit den Tragschichten (5) teil- oder vollflächig verklebt oder mechanisch verbunden, insbesondere geklammert sind. 5
13. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** Stirnseiten (6) der Tragschicht (5) derart ausgebildet und eingerichtet sind, dass sie sich im zusammengesteckten Zustand zweier mehrschichtiger Wandelemente (1) gegenseitig berühren und gegeneinander abstützen. 10
14. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** Stirnseiten (6) benachbarter Deckschichten (7) derart ausgebildet und eingerichtet sind, dass sie im zusammengesteckten Zustand zweier Wandelemente (1) zwischen sich einen Spalt bilden. 15 20 25
15. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** Stirnseiten (6) der Dämmlagen (3) derart ausgebildet und eingerichtet sind, dass sie sich im zusammengesteckten Zustand zweier Wandelemente (1) berühren. 30
16. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** das mehrschichtige Wandelement (1) hinsichtlich seines Beschnittes derart angepasst ist, dass ein Einzelement bevorzugt weniger als 25 kg, insbesondere bevorzugt weniger als 20 kg wiegt. 35 40
17. Mehrschichtiges Wandelement nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** die Tragschicht (5) und/oder die Dämmlage (3) nutzförmige Kanäle zur Aufnahme von Versorgungsleitungen, z. B. elektrische Versorgungsleitungen und/oder Wasser-/Heizungsversorgungsleitungen besitzt. 45
18. Trockenbauwand, aufweisend wenigstens ein mehrschichtiges Wandelement nach einem der Ansprüche 1 bis 17. 50

Revendications

1. Élément mural multicouche pour la construction de cloisons sèches (2) 55

- comprenant une couche isolante (3) avec deux faces plates (4) en matériau d'isolation thermique ou acoustique qui ont une grande surface par rapport aux faces avant (6),
 - dans lequel une couche de support (5) est placée avec une face plate intérieure (5a) de la couche de support (5) contre chaque face plate (4) de la couche isolante (3),
 - dans laquelle une couche de couverture (7) est placée contre chaque face plate extérieure (5b) de la couche de support (5), dans laquelle les couches de support (5) sont, le long d'au moins deux directions (R1, R2) orientées parallèlement à un plan (E) de la couche de support (5) et perpendiculairement aux bords de confinement (8) de la couche de support (5), décalées par rapport à la couche de couverture (7) et à la couche isolante (3) d'au moins une première ou deuxième valeur de décalage (V_1/V_1' ; V_2/V_2'), l'une au moins des premières ou secondes valeurs de décalage respectives (V_1/V_1' ; V_2/V_2') étant supérieure à zéro, les couches de support (5) formant chacune une languette (10) au moins le long d'un premier bord de confinement (8),
caractérisé par le fait que le long d'au moins un deuxième bord de confinement opposé (8), le décalage de chaque couche de support (5) forme une rainure (11) entre la couche isolante (3) et la couche de couverture (7).

2. L'élément mural multicouche selon la revendication 1, **caractérisé par le fait que** le premier décalage (V_1/V_1') et le second décalage (V_2/V_2') sont supérieurs à zéro, de sorte qu'au moins deux languettes (10) et au moins deux rainures (11) sont formées.
3. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait que** le premier décalage (V_1) est égal au second décalage (V_2).
4. L'élément mural multicouche selon la revendication 1 ou 2, **caractérisé par le fait que** le premier décalage (V_1/V_1') n'est pas égal au second décalage (V_2/V_2'), c'est-à-dire que le premier décalage (V_1/V_1') est plus grand ou plus petit par rapport au second décalage (V_2/V_2').
5. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait que** la couche isolante (3), la couche de support (5) et la couche de couverture (7) sont, dans une direction de vue sur les faces plats (4 ; 5a ; 5b) des couches/plaques, carrées ou rectangulaires.
6. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait qu'au**

moins la couche de support (5) et la couche de couverture (7) sont de taille égale en vue de dessus sur leurs faces plates.

7. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé en ce que** la couche isolante (3) a, en vue de dessus sur sa face plat (4), la même taille que la couche de support (5) ou une taille supérieure à celle de la couche de support (5). 5 10
8. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait que** la couche de support (5) est constituée d'un panneau renforcé de fibres, en particulier d'un panneau de fibres de plâtre. 15
9. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait que** la couche de couverture (7) est constituée d'une plaque de plâtre stratifiée en papier ou en carton. 20
10. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé en ce que** la couche isolante (3) est formé d'un matériau fibreux, en particulier d'un matériau fibreux minéral ou d'un matériau fibreux de verre et comprend, en tant que couche isolante (3) en forme de plaque à l'état non installé et non transformé, une densité apparente de 50 kg/m³ ou plus, en particulier de 60 kg/m³ ou plus. 25 30
11. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait que** la couche isolante (3) est collée avec les couches de support (5) sur une partie de la surface ou sur la totalité de la surface. 35
12. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait que** les couches de couverture (7) sont collées avec les couches de support (5) sur une partie de la surface ou sur la totalité de la surface ou reliées mécaniquement à celles-ci, en particulier par serrage. 40
13. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait que** les faces avant (6) de la couche de support (5) sont formées et conçues de manière à ce qu'elles se touchent et s'appuient l'une contre l'autre à l'état collé de deux éléments muraux multicouches (1). 45 50
14. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait que** les faces avant (6) des couches de couverture (7) adjacentes sont formés et conçus de manière à former un espace entre elles à l'état collé de deux éléments muraux (1). 55

15. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait que** les faces avant (6) des couches isolantes (3) sont formées et conçues de manière à ce qu'elles se touchent à l'état collé de deux éléments muraux (1).

16. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait que** l'élément mural multicouche (1) est adapté de telle sorte, en ce qui concerne sa coupe, qu'un élément individuel pèse de préférence moins de 25 kg, en particulier de préférence moins de 20 kg.

17. L'élément mural multicouche selon l'une des revendications précédentes, **caractérisé par le fait que** la couche de support (5) et/ou la couche isolante (3) comportent des canaux en forme de rainure pour accueillir des conduites d'approvisionnement, par exemple des conduites d'alimentation électrique et/ou des conduites d'alimentation en eau/chauffage.

18. Cloison sèche comprenant au moins un élément mural multicouche selon l'une des revendications 1 à 17.

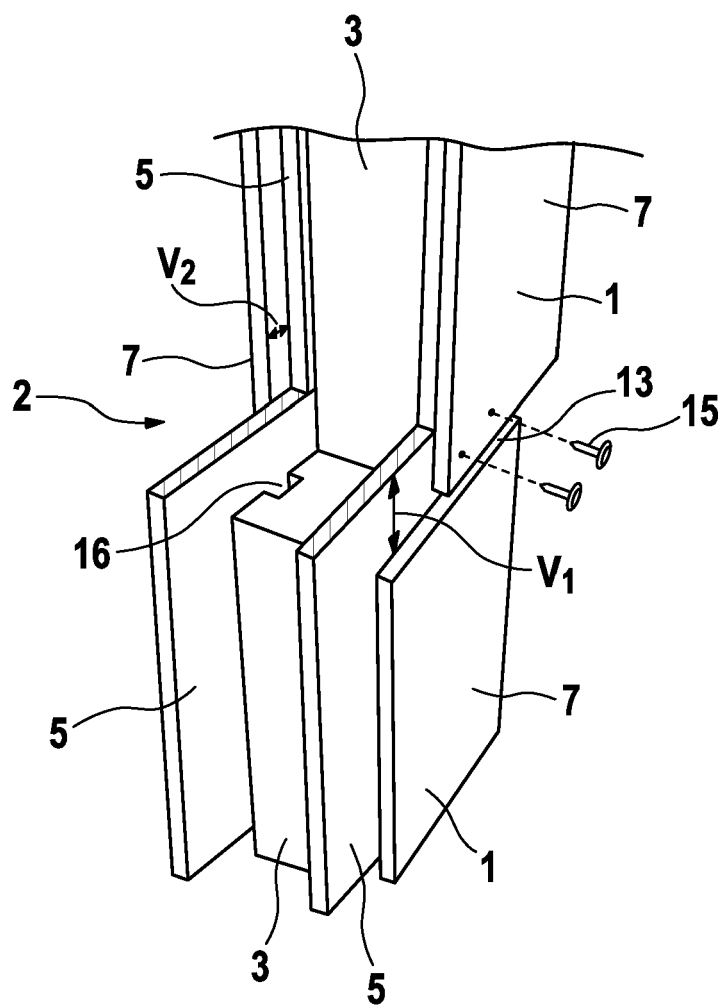


Fig. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9426992 A [0002]
- DE 202009001212 U1 [0003]
- DE 202004010695 U1 [0004]
- US 20110203193 A1 [0005]