



- (51) **International Patent Classification:**
E21B 17/00 (2006.01) *E21B 19/24* (2006.01)
E21B 17/20 (2006.01)
- (21) **International Application Number:**
PCT/US2014/057493
- (22) **International Filing Date:**
25 September 2014 (25.09.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14/037,827 26 September 2013 (26.09.2013) US
- (71) **Applicant (for CA only):** **SCHLUMBERGER CANADA LIMITED** [CA/CA]; 125 - 9 Avenue SE, Calgary, Alberta T2G 0P6 (CA).
- (71) **Applicant (for FR only):** **SERVICES PETROLIERS SCHLUMBERGER** [FR/FR]; 42 rue Saint Dominique, F-75007 Paris (FR).
- (71) **Applicant (for GB, JP, NL only):** **SCHLUMBERGER HOLDINGS LIMITED**; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola, Virgin Islands, British, 1110 (VG).
- (71) **Applicant (for all designated States except AE, AO, BH, CA, CN, FR, GB, GH, IN, JP, LY, MA, MZ, NA, NG, NL, PH, SD, SY, US, VN):** **SCHLUMBERGER TECHNOLOGY B.V.** [NL/NL]; Parkstraat 83-89, NL-2514 JG The Hague (NL).
- (71) **Applicant (for AE, AO, BF, BH, BJ, CF, CG, CI, CM, CN, GA, GH, GN, GQ, GW, IN, KM, LY, MA, ML, MR, MZ, NA, NE, NG, PH, SD, SN, SY, TD, TG, VN only):** **PRAD RESEARCH AND DEVELOPMENT LIMITED**; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola, Virgin Island, British, 1110 (VG).
- (71) **Applicant (for US only):** **SCHLUMBERGER TECHNOLOGY CORPORATION** [US/US]; 300 Schlumberger Drive, Sugar Land, Texas 77478 (US).
- (72) **Inventor:** **GOURMELON, Pierre Olivier**; 1108 Lakin St., Houston, Texas 77007 (US).
- (74) **Agents:** **GROVE, Trevor G.** et al.; 10001 Richmond Avenue, IP Administration Center of Excellence, Room 4720, Houston, Texas 77042 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,

[Continued on next page]

(54) **Title:** METHOD AND APPARATUS TO ENABLE TOOLSTRING TO NEGOTIATE OBSTRUCTIONS DOWNHOLE

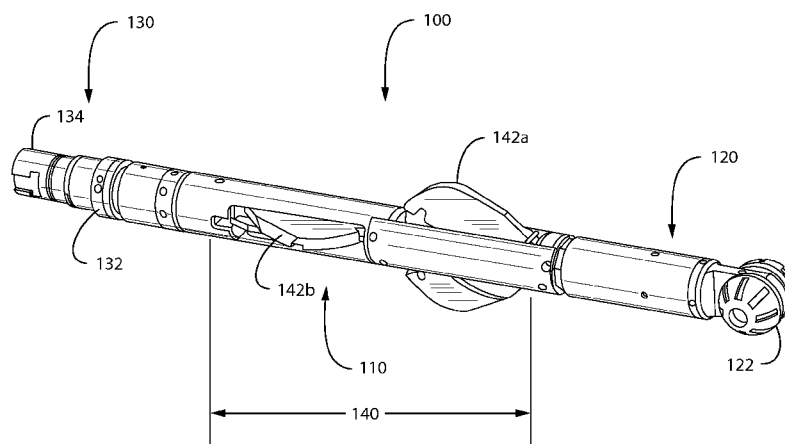


FIG. 1

(57) **Abstract:** An apparatus to allow a toolstring to negotiate obstructions in a well includes an elongated body, a centralizer connected with the elongated body; and a nose connected with an end of the elongated body. The nose actuates the centralizer when moved towards the centralizer.



TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

METHOD AND APPARATUS TO ENABLE TOOLSTRING TO NEGOTIATE OBSTRUCTIONS DOWNHOLE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This Application claims benefit and priority to United States Patent Application No. 14/037827, entitled "Method and Apparatus to Enable Toolstring to Negotiate Obstructions Downhole", which was filed on September 26, 2013, the entirety of which is incorporated herein by reference.

FIELD OF THE DISCLOSURE

[0002] The disclosure generally relates to an apparatus, system, and method of enabling a toolstring to negotiate obstructions in a well.

BACKGROUND

[0003] During well operations it is often necessary to deploy toolstrings into a well. The toolstrings provide the tools required to service the well or perform other operations within the well. Wireline, slickline, and other cables are often used to convey the toolstring. Wells may, however, develop washouts or have other obstructions making it difficult to convey the toolstring.

[0004] A need, therefore, exists for an apparatus and method of negotiating obstructions in a well, allowing the toolstring to be deployed without the use of auxiliary conveyance devices.

SUMMARY

[0005] An embodiment of an apparatus to allow a toolstring to negotiate obstructions in a well includes an elongated body. The elongated body has a centralizer and a nose connected therewith. The nose can be connected with

an end of the elongated body. The nose is configured to actuate the centralizer when moved towards the centralizer.

[0006] An embodiment of a method of negotiating obstructions while running a toolstring in a well includes running a toolstring into a well, and encountering an obstruction in the well. The obstruction applies an axial force to a nose of an apparatus located at the distal end of the toolstring, and the axial force moves the nose, actuating a centralizer.

[0007] An embodiment of a system for use in a well includes a toolstring. An apparatus is connected with the toolstring. The apparatus allows the toolstring to negotiate obstructions in a well. The apparatus comprises an elongated body; a centralizer connected with the elongated body; and a nose connected with an end of the elongated body. The nose actuates the centralizer when moved towards the centralizer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 depicts an embodiment of the apparatus.

[0009] FIG. 2 depicts an embodiment of a pair of arms with wheels located at the ends thereof.

[0010] FIG. 3 depicts an embodiment of an apparatus connected with a toolstring in a well.

[0011] FIG. 4 depicts the apparatus and toolstring of FIG. 3 in the well when an obstruction is encountered.

[0012] FIG. 5 depicts the apparatus and toolstring of FIG. 4 in the well after the obstruction is negotiated.

[0013] FIG. 6 is a schematic cross-sectional view of an embodiment of the apparatus.

[0014] FIG. 7 depicts an embodiment of a method of negotiating obstructions while running a toolstring in a well.

DETAILED DESCRIPTION OF THE INVENTION

[0015] Certain examples are shown in the above-identified figures and described in detail below. In describing these examples, like or identical reference numbers are used to identify common or similar elements. The figures are not necessarily to scale and certain features and certain views of the figures may be shown exaggerated in scale or in schematic for clarity and/or conciseness.

[0016] The example apparatus to allow a toolstring to negotiate obstructions in a well includes a nose and centralizer connected with an elongated body. The nose can be connected with the elongated body and configured to move relative to the elongated body.

[0017] The centralizer can be a bow spring, a plurality of arms that radially extend from within the elongated body; or another mechanically actuated centralizing device.

[0018] In an embodiment, the plurality of arms can have wheels located at the ends thereof. The arms can be set up as two pairs, with the leading pair sweeping backwards and the trailing pair sweeping forwards, enabling the arms to avoid self-locking while running into the well, or pulling out of the well.

[0019] The nose can be configured to move towards the centralizer and actuate the centralizer. For example, the nose can have a shoulder that transfers force applied to the nose from an obstruction in a well to a bow spring centralizer; thereby, expanding the bow spring centralizer.

[0020] In another, but non-limiting, example the nose can have rods, sliding sleeves, or the like operatively connected therewith, and the rods, sliding sleeves, or the like can engage sliders located in the elongated body; thereby, transmitting force to the sliders; the sliders can be connected with a plurality of arms and can rotate the arms from within the elongated body.

[0021] The nose can have any configuration that allows the nose to actuate the centralizer when axial force is applied to the nose by an obstruction in the well. One skilled in the art would be able to identify such configurations without undue experimentation with the aid of this disclosure.

[0022] In embodiments, the arms can be extended by pegs which slide in the axial direction of the tool as the nose is compressed. These pegs push against a slot in each arm. The slots on the rear arms are set in the opposite direction as all four pegs move together. These pegs are actuated by the nose as the nose moves towards the arms. For example, the nose can have sliding sleeves or push rods connected therewith that push on the pegs.

[0023] In an embodiment of the apparatus, a return mechanism can be located between the nose and the centralizer. The return mechanism can be any device capable of storing potential energy and converting the potential energy into kinetic energy to return the nose after axial force from the obstruction is removed from the nose. An illustrative return mechanism is a spring.

[0024] In an embodiment of the apparatus, the nose can be located at one end of the elongated body and a connection member can be located at another end of the elongated body. The connection member can be configured to connect the apparatus to a toolstring and allow the nose and elongated body to move radially relative to the toolstring. For example, the connection member can be a ball joint hinge or other similar connection.

[0025] An example system for use in a well can include a toolstring. The toolstring can include components or tools for performing operations in a well. The toolstring can be connected with an apparatus. The apparatus can allow or aid the toolstring in negotiating the well. The toolstring can be used in horizontal, deviated, and vertical wells. The system can be used in cased wells and open hole wells. The toolstring can be deployed using a cable operatively connected with a deployment device.

[0026] Turning now to the FIGS, FIG 1 depicts an embodiment of the apparatus. The apparatus **100** can have an elongated body **110**. A connection member **130** and a nose **120** can be connected with the elongated body **110**. A centralizer **140** can be located on the elongated body **110**.

[0027] The connection member **130** can have a connection end **134** and a ball joint **132** at another end. The ball joint **132** connects with the elongated

body **110** and the connection member **130** connects with a toolstring or other tubular member.

[0028] The nose **120** is connected with the elongated body **110** and is configured to axially move with respect to the elongated body **110**. The nose **120** is configured to move towards the centralizer **140** and actuate the centralizer **140** using mechanical force. A pair of rollers **122** can be connected with the nose **120**. The pair of rollers **122** can reduce friction at the nose **120**. The rollers can be a pair of hemispheres that are elongated a bit to favor a lower friction roller position (e.g. with the surface of contact parallel to the roller's axle). Also, the size of the rollers can be sized to cater to different hole sizes while acting as a centralizer.

[0029] The centralizer **140** can be any device that can be radially expanded to center the apparatus **100** within a well. The centralizer, in FIG. 1, is depicted as a first pair of arms **142a** and a second pair of arms **142b**. The pairs of arms **142a** and **142b** can be radially expanded to center the apparatus **100**. The pairs of arms **142a** and **142b** can rest or reside in whole or part in the elongated body **110** when not expanded. In an embodiment, the arms can have hardened skids located thereon.

[0030] FIG. 2 depicts an embodiment of a pair of arms with wheels located at the ends thereof. The depicted pair of arms **142** has a first arm **242a** and a second arm **242b**. The first arm **242a** can have a first wheel **210a** connected therewith, and the second arm **242b** can have a second wheel **210b** connected therewith. An actuator **220** can be connected with the arms **242a** and **242b**.

[0031] The arms **242a** and **242b** are depicted assembled in such a way that they are self-cleaning. The arms **242a** and **242b** can be made from any material. Illustrative materials include: steel, aluminum, composites, or the like.

[0032] FIG. 3 depicts an embodiment of an apparatus connected with a toolstring in a well. FIG. 4 depicts the apparatus and toolstring of FIG. 3 in the well when an obstruction is encountered. FIG. 5 depicts the apparatus and toolstring of FIG. 4 in the well after the obstruction is negotiated.

[0033] Referring to FIGS 3 to 5, the apparatus **100** can connect with a toolstring **310**. The apparatus **100** and toolstring **310** can be run into the well **300**. The toolstring **310** can include a plurality of downhole tools connected with one another. The downhole tools can include logging tools, perforating tools, or other downhole tools.

[0034] The well **300** can have an obstruction **302** therein. The obstruction **302** can be a ledge, debris, or the like. The obstruction can be due to a washout in the well **300**.

[0035] The nose **120** contacts the obstruction **302**, and an axial force is imparted to the nose **120** from the obstruction **302**. The axial force moves the nose **120**, and the nose **120** transfers the force to the pair of arms **142a** and **142b**, radially expanding the arms. The arms centralize the nose **120**, and the pair of rollers **122** starts traversing the obstruction **302**.

[0036] The ball joint **132** allows the nose **120** to move relative to the toolstring **310**. Accordingly, the toolstring **310** is able to navigate the obstruction **302** by using mechanics and force already present in the well. The apparatus **100** allows navigation of the obstruction and does not require any auxiliary power, such as hydraulic power or electric power.

[0037] The toolstring **310** and nose **120** continue traversing the well **300** and eventually the nose **120** passes the obstruction **302**. The nose **120**, now that the axial force from the obstruction **302** is removed, moves away from the pairs of arms **142a** and **142b**, and the pair of arms **142a** and **142b** can return to their original unexpanded state. Force from the interaction of the pair of arms **142a** and **142b** with walls of the well **300**, a return mechanism, or both can move the pair of arms **142a** and **142b** to an unexpanded position.

[0038] FIG. 6 is a schematic cross-sectional view of an embodiment of the apparatus. The apparatus **100** can have the nose **120**, the centralizer **140**, and the connection member **130** connected with the elongated body **110**. The nose **120** can have push rods **622** connected therewith.

[0039] A return mechanism **630** can be located between the nose **120** and the centralizer **140**. The push rods **622** can actuate the centralizer **140** as the nose moves due to an axial force being applied to it. The return mechanism

630 can urge the nose **120** away from the centralizer **140** once the axial force is removed from the nose **120**. The return mechanism **622** and force from the interaction of the centralizer with walls of the well can move the centralizer to an unexpanded position.

[0040] In an embodiment, two push rods can be connected with the nose. A first pair of arms can be operatively connected with a first actuator, such as a first sliding block, and a second pair of arms can be operatively connected with a second actuator, such as a second sliding block.

[0041] The first sliding block can have two holes formed therethrough. The holes can be aligned with the push rods. The two holes can be configured such that force from the push rods are transferred to the first sliding block, causing the first sliding block to move as the push rods are in the two holes.

[0042] Accordingly, the push rods can extend into the holes when the nose is pushed back. The push rods can pass through the holes and transfer force from the nose to the first actuator.

[0043] The push rods can operatively encounter the second actuator after passing through the first actuator. The push rods can move the second actuator when engaged therewith. The push rods can still be moving the first actuator at the same time that they are moving the second actuator.

[0044] The second actuator can be void of holes, have indents, have two holes formed therein, or combinations thereof. If the second actuator has two holes formed therein, the two holes can be operatively aligned with the push rods. The two holes in the second actuator can pass completely through a body of the second actuator or a portion of the way through the body of the second actuator.

[0045] In another embodiment, the push rods can encounter the first actuator. The push rods can move the first actuator. A part of the first actuator or a component connected with the first actuator can engage the second actuator when the first actuator is in a desired location. The desired location can be when the first actuator is in a start position, allowing the first pair of arms and second pair of arms to deploy concurrently. The desired location

can be a distance from the start location, allowing the first pair of arms to start deploying before the second pair of arms.

[0046] FIG. 7 depicts an embodiment of a method of negotiating obstructions while running a toolstring in a well.

[0047] The method **700** is depicted as a plurality of blocks or operations. The method **700** includes running a toolstring into a well (Block **710**). The toolstring can be run into the well using a cable.

[0048] The cable can be a wireline, slickline, or the like. The cable can be connected with a drum and supported by a derrick. The drum can deploy the cable.

[0049] A capstan can be located between the drum and derrick, and the capstan can reduce the tension on the cable. In another embodiment, a winch or other device can be used to deploy the cable.

[0050] The method also includes encountering an obstruction in the well (Block **712**). The obstruction can be encountered as the toolstring is deployed. The obstruction can be a nipple, a washout, a ledge, debris, or the like. The obstruction applies an axial force to a nose of an apparatus located at the distal end of the toolstring, moving the nose.

[0051] The method also includes actuating a centralizer when the nose is moved (Block **714**). The centralizer can be actuated when mechanical force is transferred from the nose to the centralizer.

[0052] The method can also include moving the apparatus relative to the toolstring when the centralizer is actuated (Block **716**). For example, the nose can be connected with the toolstring by a ball joint or the like, allowing for the nose to move radially relative to the toolstring.

[0053] Although example assemblies, methods, systems have been described herein, the scope of coverage of this patent is not limited thereto. On the contrary, this patent covers every method, apparatus, and article of manufacture fairly falling within the scope of the appended claims either literally or under the doctrine of equivalents.

What is claimed is:

1. An apparatus to allow a toolstring to negotiate obstructions in a well, wherein the apparatus comprises:

an elongated body;

a centralizer connected with the elongated body; and

a nose connected with an end of the elongated body, wherein the nose actuates the centralizer when moved towards the centralizer.

2. The apparatus of claim 1, wherein the centralizer is a plurality of arms.

3. The apparatus of claim 2, wherein each of the arms of the plurality of arms has a wheel connected therewith.

4. The apparatus of claim 1, further comprising:
a return mechanism between the nose and centralizer.

5. The apparatus of claim 1, further comprising:
a connection member located at another end of the elongated body.

6. The apparatus of claim 1, further comprising:
a pair of rollers located on the nose.

7. The apparatus of claim 6, wherein the pair of rollers comprises two spherical rollers.

8. A method of negotiating obstructions while running a toolstring in a well, wherein the method comprises:
- running a toolstring into a well;
 - encountering an obstruction in the well, wherein the obstruction applies an axial force to a nose of an apparatus located at the distal end of the toolstring, moving the nose; and
 - actuating a centralizer when the nose is moved.
9. The method of claim 8, wherein the centralizer moves the apparatus relative to the toolstring.
10. A system for use in a well, wherein the system comprises:
- a toolstring; and
 - an apparatus connected with the toolstring, wherein the apparatus allows the toolstring to negotiate obstructions in a well, and wherein the apparatus comprises:
 - an elongated body;
 - a centralizer connected with the elongated body; and
 - a nose connected with an end of the elongated body, wherein the nose actuates the centralizer when moved towards the centralizer.
11. The system of claim 10, wherein the centralizer is a plurality of arms.
12. The system of claim 12, wherein each of the arms of the plurality of arms has a wheel connected therewith.

13. The system of claim 11, further comprising:
a return mechanism between the nose and centralizer.

14. The system of claim 11, further comprising:
a connection member located at another end of the elongated body.

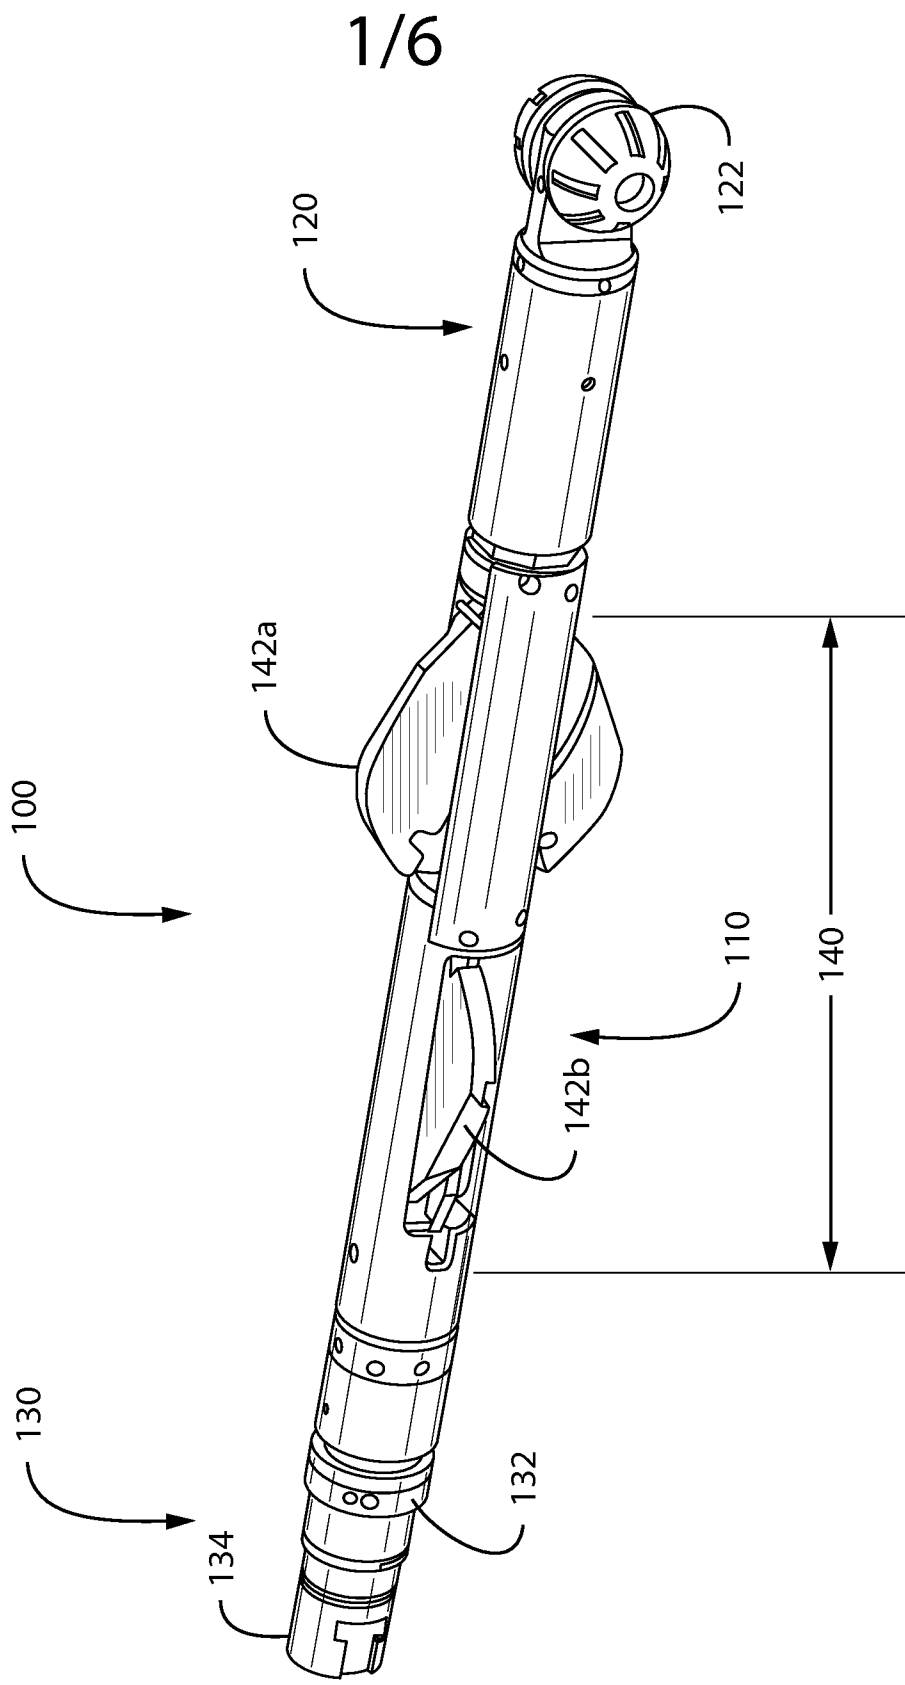


FIG. 1

2/6

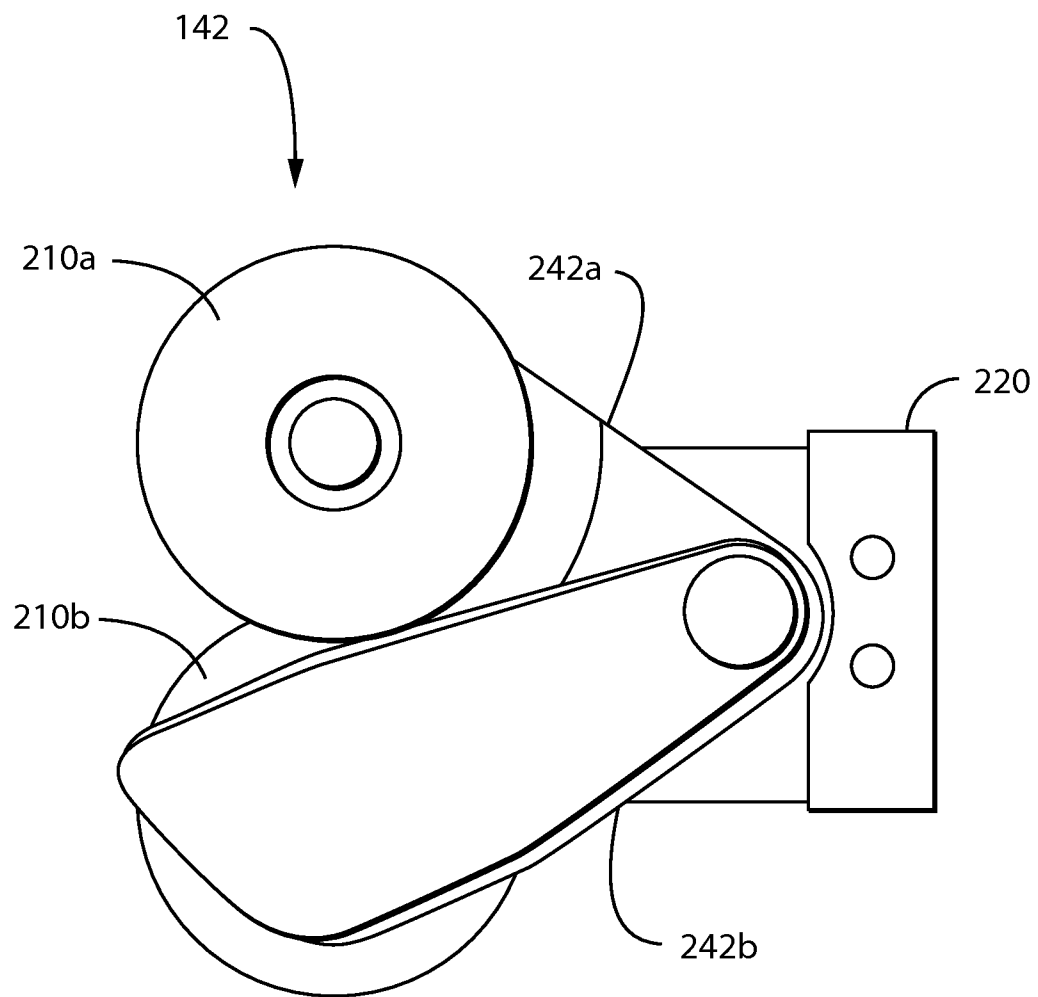


FIG. 2

3/6

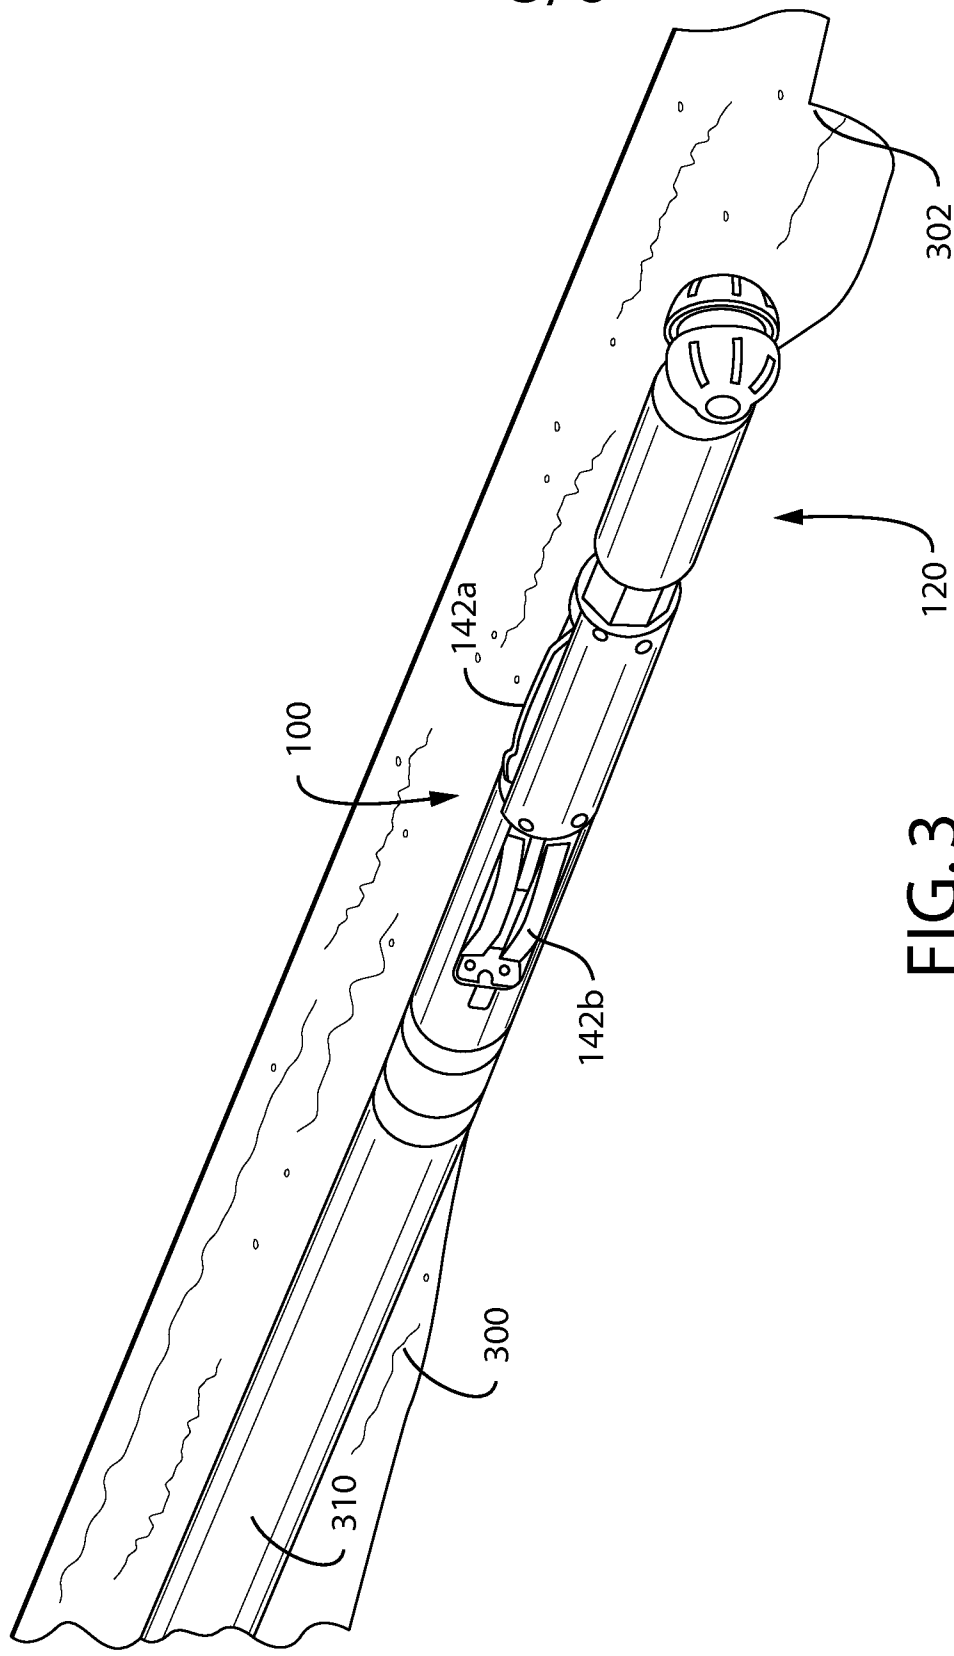


FIG. 3

4/6

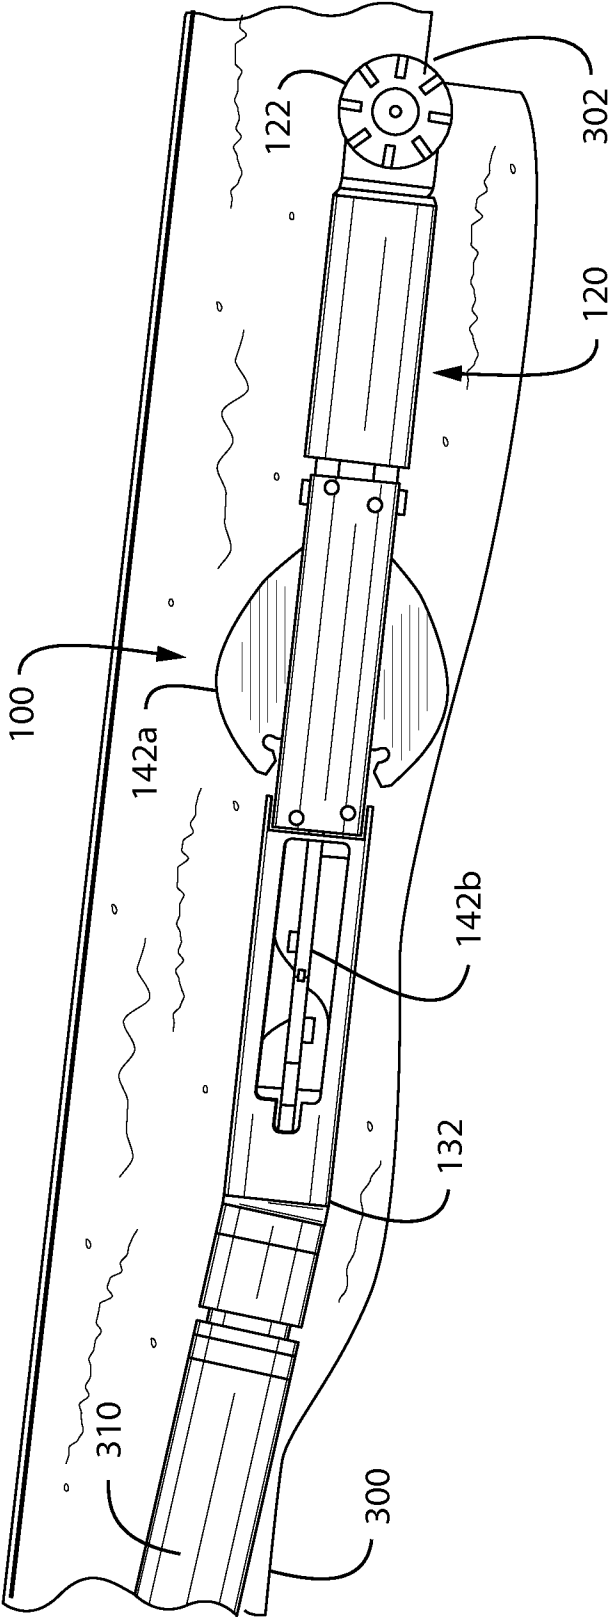


FIG. 4

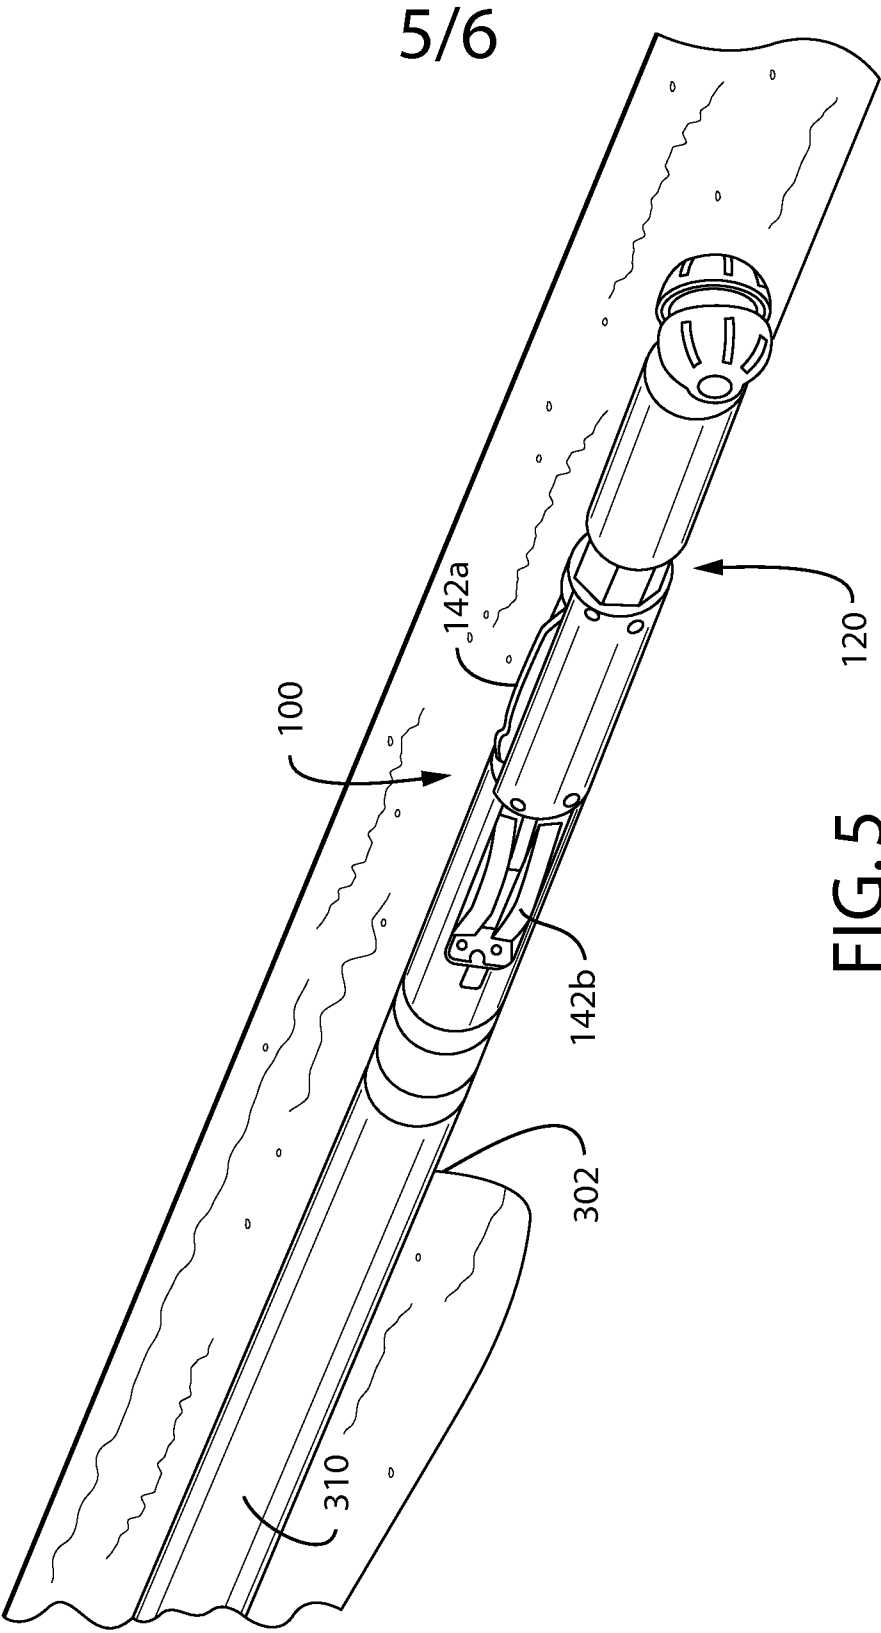


FIG. 5

6/6

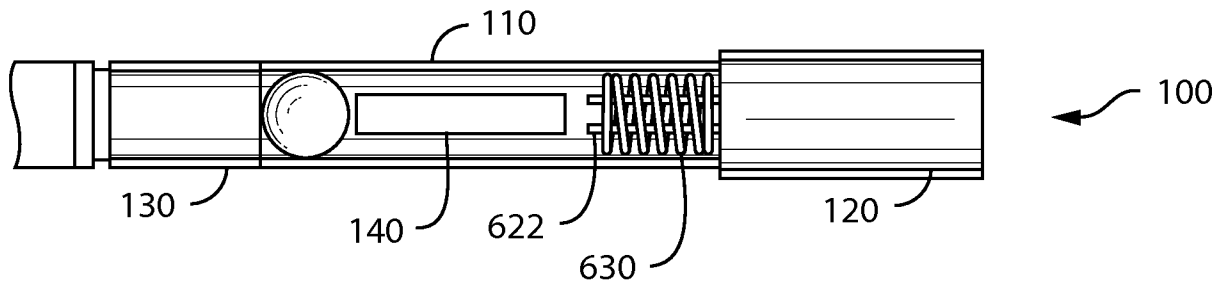


FIG. 6

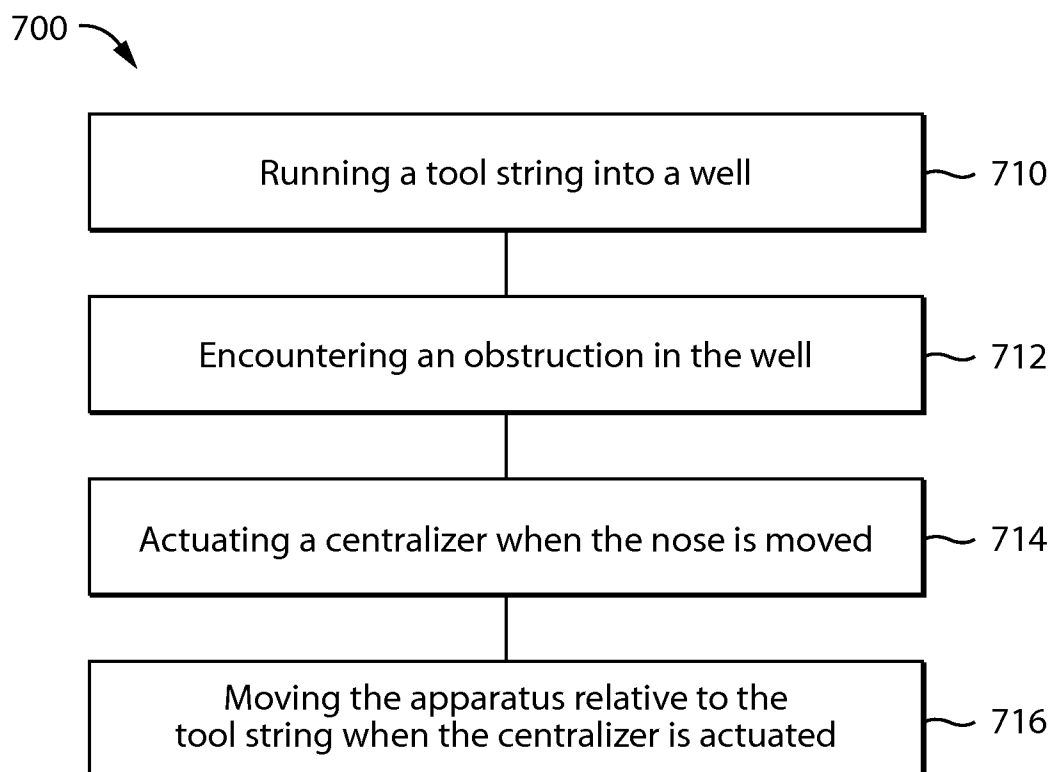


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/057493**A. CLASSIFICATION OF SUBJECT MATTER****E21B 17/00(2006.01)i, E21B 17/20(2006.01)i, E21B 19/24(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 17/00; E21B 23/14; G01V 3/28; E21B 17/10; E21B 47/01; E21B 47/02; E21B 29/00; E21B 17/20; E21B 19/24

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: toolstring, body, nose, centralizer, arms, return mechanism, obstruction and roller

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2013-067255 A1 (QATAR FOUNDATION et al.) 10 May 2013 See paragraphs [0046]–[0094]; claims 18–19; and figures 2A–7C, 12.	1–14
A	US 2008-0135293 A1 (TASHIRO et al.) 12 June 2008 See claims 1–3, 30–32 and figures 7–9B, 15–17D.	1–14
A	US 5355950 A (ZWART, KLAAS) 18 October 1994 See claims 1–2 and figures 1–5.	1–14
A	US 4830105 A (PETERMANN, STEVEN G.) 16 May 1989 See claims 1–3 and figures 1–2.	1–14
A	US 2006-0157246 A1 (ZEER, ROBERT L.) 20 July 2006 See claims 1, 17 and figures 10a–11d.	1–14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 December 2014 (30.12.2014)

Date of mailing of the international search report

07 January 2015 (07.01.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Jong Kyung

Telephone No. +82-42-481-3360



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/057493

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2013-067255 A1	10/05/2013	AU 2012-332346 A1 CA 2854465 A1 EP 2773849 A1 US 2013-299188 A1 WO 2013-067255 A4	22/05/2014 10/05/2013 10/09/2014 14/11/2013 04/07/2013
US 2008-0135293 A1	12/06/2008	CA 2671170 A1 US 7757782 B2 WO 2008-068561 A1	12/06/2008 20/07/2010 12/06/2008
US 5355950 A	18/10/1994	CA 2102317 C EP 0585315 A1 EP 0585315 B1 WO 92-21850 A1	17/07/2001 09/03/1994 14/08/1996 10/12/1992
US 4830105 A	16/05/1989	None	
US 2006-0157246 A1	20/07/2006	CA 2532929 A1 CA 2532929 C US 7387175 B2 WO 2005-061845 A1	07/07/2005 18/12/2007 17/06/2008 07/07/2005