



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2583288 C 2012/08/21

(11)(21) **2 583 288**


(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2004/10/08
(87) Date publication PCT/PCT Publication Date: 2006/04/20
(45) Date de délivrance/Issue Date: 2012/08/21
(85) Entrée phase nationale/National Entry: 2007/04/05
(86) N° demande PCT/PCT Application No.: EP 2004/011296
(87) N° publication PCT/PCT Publication No.: 2006/039934

(51) Cl.Int./Int.Cl. *H04L 12/14* (2006.01)
(72) Inventeur/Inventor:
FOELL, UWE, DE
(73) Propriétaire/Owner:
NOKIA SIEMENS NETWORKS GMBH & CO. KG, DE
(74) Agent: SIM & MCBURNEY

(54) Titre : PROCEDE POUR CONFIGURER DES PROCESSUS DE TAXATION SUR DES ELEMENTS DE RESEAU
(54) Title: METHOD FOR CONFIGURING BILLING PROCESSES IN NETWORK ELEMENTS

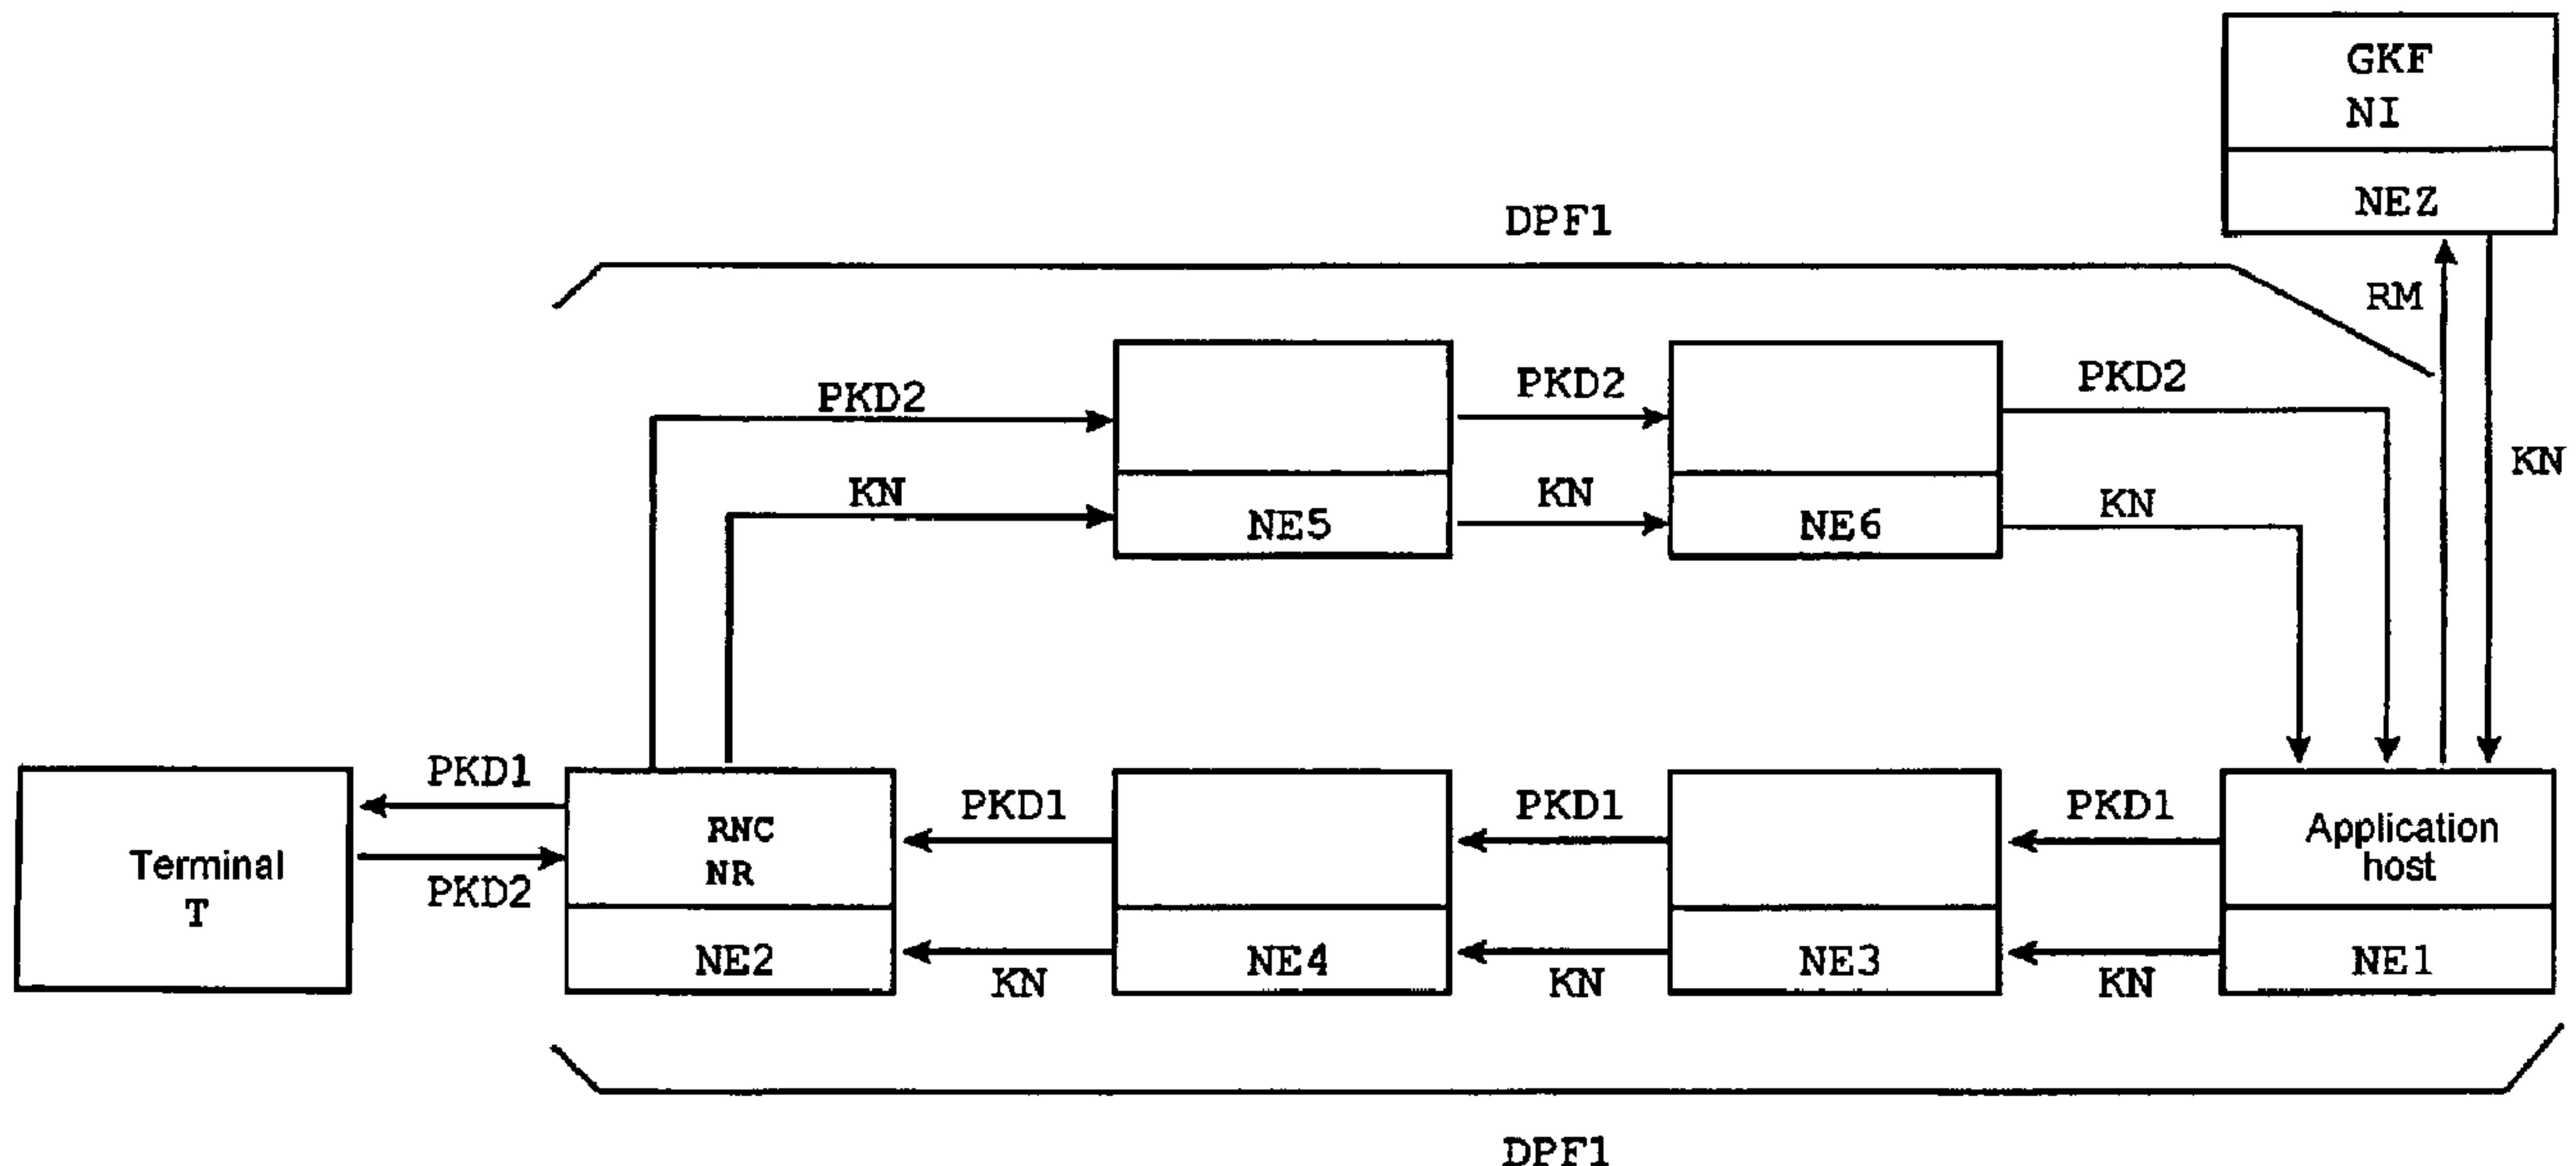

(57) Abrégé/Abstract:

The invention relates to a method for configuring billing processes in the network elements of a data path for the transmission of packet data in a communications system. According to said method, network elements that are located between a first and a second element of the data path are configured and the packet data transmission that is associated with a terminal is carried out between the first network element and the second network element via the data path. The terminal transmits or receives the associated packet data transmission via the second network element. In a central third network element, which is not assigned to the data path, a stored billing control function generates a configuration message, which is used to configure the network elements. The configuration message is transmitted to the network elements of the data path, said network elements at least partially evaluating the configuration message for initialisation and configuration purposes.

ABSTRACT

The invention relates to a method for configuring billing processes in the network elements of a data path for the transmission of packet data in a communications system. According to said method, network elements that are located between a first and a second element of the data path are configured and the packet data transmission that is associated with a terminal is carried out between the first network element and the second network element via the data path. The terminal transmits or receives the associated packet data transmission via the second network element. In a central third network element, which is not assigned to the data path, a stored billing control function generates a configuration message, which is used to configure the network elements. The configuration message is transmitted to the network elements of the data path, said network elements at least partially evaluating the configuration message for initialisation and configuration purposes.

Description

Method for configuring billing processes in network elements

The invention relates to a method for configuring billing processes in network elements of a data path for the transmission of packet data in a communications system in accordance with the preamble of claim 1.

Packet data services are known which use what is known as "IP Layer 3" of the "Open Systems Interconnection Reference, OSI" model within a communications network for example. This model serves as a reference model of the international Standards Organization ISO for networks in order to define an open communication using interface standards.

Billing data recording for a data service, for example for a packet data service, is based in this case on an independent and non-synchronized detection by network elements which are used to execute the data service. The network elements involved in the transmission of a data service in such cases each have assigned billing processes which are used for recording billing data. The billing data is collected in network elements provided especially for the purpose in order to create a service-oriented or service-specific billing.

The network elements involved in billing data recording have a unique correlation identifier to allow them identify all billing data pertaining to a concrete service usage.

The correlation identifier is entered in the billing data so that billing data can be linked together by a central entity and processed together for billing.

A central problem of this type of billing is the distribution of the unique correlation identifier to the respective network

elements. The network elements involved in executing a service generally operate on different network layers, for example on layers of the OSI model - Layer 2, Layer 3 or Layer 7.

Additional problems during billing data recording are caused if the network elements are arranged in different areas of the network, for example if they are arranged in a "Packet Switched, PS" domain or in an "IP Multimedia Subsystem, IMS".

Furthermore it is possible for the network elements involved in the execution of a packet data service to be separated from each other by technology boundaries. Thus for example some of the network elements can be based on the "Universal Mobile Telecommunication system, UMTS" whereas others can be based on the "Wireless Local Area Network, WLAN".

In these outlined cases a mechanism for distribution of the respective correlation identifier must be defined and standardized, which means that rapid introduction of new services involves great expense. Thus for example the known "Multi Media Service, MMS" for prepaid subscribers has for a long time not been able to be provided because the required billing data recording methods are not offered. The method for distribution of the correlation identifiers for billing data recording are thus only able to be implemented at great expense, since billing data is collected in the network elements involved and resulting billing data records must be forwarded to a central entity. The central entity for its part must determine from an incoming flood of data those billing data records which belong together, and needs a great deal of time to evaluate them.

Methods for billing data recording or methods for configuration of billing processes at the network elements involved are discussed for example by the "Internet

Engineering Task Force, IETF" within the framework of the project "Next Steps in Signaling, NSIS", with underlying Internet routing methods being used to find network elements of a data path.

Methods for configuration of billing processes are known from "Signal of QoS Measurements", by Couturier, IETF Standard Working Draft, Internet Engineering Task Force, IETF, CH, May 2003, XP 015000601, ISSN 0000-0004, and from "NSLP for Accounting Configuration Signaling", Dressler et al., Internet Draft, 'Online!', 11.07.2004, XP 002333853.

The object of the present invention is to implement a simple and quick-to-execute method for configuration of billing processes on network elements, to enable billing data to be recorded for a packet data service in a communications network.

The knowledge underlying the invention is that different routes or data paths are used for the packet data transmission for the routing which is typically to be executed asymmetrically for a packet data service. In general the packet data is transmitted between a terminal, for example a radio communication terminal on one side, and an application host on the other side, in two directions, and thereby over two data paths.

Since the current routing methods can only address the respective network element of a data path in one direction, a configuration for billing data recording is not possible from the network element side between the two end points - terminal on one side and application host on the other side. Configuration from the terminal side is excluded for reasons of security. A configuration by the application host is not able to be easily implemented for reasons of cost and time.

These problems are avoided in the inventive method. In

accordance with the invention, a billing control function which is held in a central network element is used for configuring the network elements of a data path. In such cases this central network element is not a component of the data path, i.e. the packet data transmission in question is not undertaken via the central network element.

The billing control function forms a configuration message for configuration of the network elements and is started for example when a service is requested. The configuration message is transmitted via the application host as the first network element to the network element of the data path to be configured. Those network elements which are to be configured evaluate the configuration message for an initialization, whereas other network elements of the data path forward the configuration message.

The "Network Link Services Protocol, NLSP", known per se, is preferably, but not exclusively used with the communications network to transmit the configuration message together with further signaling messages to the network elements.

In accordance with the invention, not the terminal but an upstream network element assigned to the terminal is used as the ingress node for the data path. Accordingly the configuration message is formed by the central network element and not by the application host used as a further ingress node for the data path. These measures guarantee both the security of the billing data recording and also the high processing speed of the application host.

A central billing control function is implemented with the aid of the inventive method for storage of configuration rules.

Accordingly, in one aspect of the invention there is provided a

method for configuring billing processes in network elements of a data path for a packet data transmission in a communications system, in which network elements of the data path arranged between a first and a second network element are configured, in which the packet data transmission assigned to a terminal from the first network element to the second network element is executed via the data path and the terminal sends or receives the assigned packet data transmission via the second network element, in which a billing control function stored on a central third network element that is not assigned to the data path forms a configuration message for configuration of the network elements and the configuration message is transmitted via the first network element to the network elements of the data path, and the network elements at least partly evaluate the configuration message for initialization and configuration, wherein the configuration message is assigned by the terminal an IP address or port address of the first network element as its destination address, with which the packet data transmission from the terminal via the second network element and via a further data path to the first network element is defined, and wherein the configuration message is transmitted to network elements of the further data path and these network elements at least partly evaluate the configuration message for initialization and configuration.

The invention will now be explained in greater detail with reference to a drawing. FIG. 1 shows the inventive method with

reference to a communications network.

In this diagram the communications network features network elements NE1 to NE6, a central network element NEZ and a terminal T, with a first network element NE1 being embodied as an application host and a second network element NE2 as a Radio Network Controller RNC.

A billing control function GKF is stored or implemented on the central network element NEZ. For a requested packet data transmission PKD1, PKD2 between the first network element NE1 and the terminal T which is undertaken via the second network element NE2, a configuration message KM is formed by the billing control function GKF, which is used for configuration of the network elements NE3, NE4, NE5 and NE6. The configuration message KN is transmitted to network element NEx of a first data path DPF1, with the first data path DPF1 including network elements NE1, NE3, NE4 and NE2.

An assigned first packet data transmission PKD1 is undertaken along the first data path DPF1 from first network element NE1 via the network elements NE3 and NE4 and via the second network element NE2 to terminal T, with terminal T being assigned to the second network element NE2.

The configuration message KN uses an IP address or a port address of the terminal T as its destination address, which also defines the first packet data transmission PKD1 from the first network element NE1 to terminal T.

A receive function is implemented on the second network element NE2 which makes it possible to send back the configuration message KN from the second network element NE2 to the first network element NE1 via a further second data path DPF2 within the framework of a second packet data

transmission PKD2.

The configuration message KN is transmitted to network element NE_x of the second data path DPF2, with the second data path DPF2 including the network elements NE2, NE5, NE6 and NE2.

For this purpose the configuration message KN is assigned by the terminal an IP address or port address of the first network element NE1, with which the second packet data transmission PKD2 from terminal T via the second network element NE2 and via the second data path DPF2 to the first network element NE1 is defined.

The second packet data transmission PKD2 is undertaken along the second data path DPF2 from terminal T via the second network element NE2 and the network elements NE5 and NE6 to the first network element NE1.

In the case depicted here, the network elements NE3 to NE6 receive the respective configuration message KN and evaluate this for initialization and configuration. However in such cases it is also possible for a few network elements - not shown here - to simply forward the configuration message KN.

Subsequently collected billing data RM is notified back to the central network element NEZ.

For the case of a number of parallel transmissions, known as sessions, between the first network element NE1 embodied as an application on the one side and the terminal T on the other side, the respective data paths are defined using a number of what are referred to as session identities.

Advantageously the protocol NLSP is used for transmission of the configuration message KN. In this case, in accordance with the NSIS terminology, the Radio Network Controller RNC forms

an NSIS Receiver NR and the central network element NEZ an NSIS Initiator NI.

What is claimed is:

1. A method for configuring billing processes in network elements of a data path for a packet data transmission in a communications system,

in which network elements of the data path arranged between a first and a second network element are configured,

in which the packet data transmission assigned to a terminal from the first network element to the second network element is executed via the data path and the terminal sends or receives the assigned packet data transmission via the second network element,

in which a billing control function stored on a central third network element that is not assigned to the data path forms a configuration message for configuration of the network elements and the configuration message is transmitted via the first network element to the network elements of the data path, and the network elements at least partly evaluate the configuration message for initialization and configuration,

wherein the configuration message is assigned by the terminal an IP address or port address of the first network element as its destination address, with which the packet data transmission from the terminal via the second network element and via a further data path to the first network element is defined, and

wherein the configuration message is transmitted to network elements of the further data path and these network elements at least partly evaluate the configuration message for initialization and configuration.

2. The method as claimed in claim 1, wherein the configuration message uses an IP address or port address of the terminal as its destination address, with which the packet data transmission from the first network element to the terminal is defined.

3. The method as claimed in claim 1 or 2, wherein the configuration message is transmitted to the network elements using an NLSP protocol.

4. The method as claimed in claim 1 or 2, wherein an application host is used as the first network element.

5. The method as claimed in claim 1 or 2, wherein a radio communication terminal of a radio communication system is used as the terminal.

6. The method as claimed in claim 5, wherein a control device of the radio communication system is used as the second network element.

7. The method as claimed in claim 6, wherein a Radio Network Controller of the radio communications system is used as the control device.

