



(22) Date de dépôt/Filing Date: 2002/12/13

(41) Mise à la disp. pub./Open to Public Insp.: 2004/05/27

(45) Date de délivrance/Issue Date: 2008/12/02

(30) Priorité/Priority: 2002/11/27 (US60/429,772)

(51) Cl.Int./Int.Cl. *E05B 65/46* (2006.01)


(72) Inventeur/Inventor:  
HOFFMAN, KEITH A., US

(73) Propriétaire/Owner:  
KNAPE & VOGT MANUFACTURING CO., US

(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : MECANISME DE VERROUILLAGE POUR CLASSEURS A TIROIRS LATERAUX

(54) Title: INTERLOCK MECHANISM FOR LATERAL FILE CABINETS

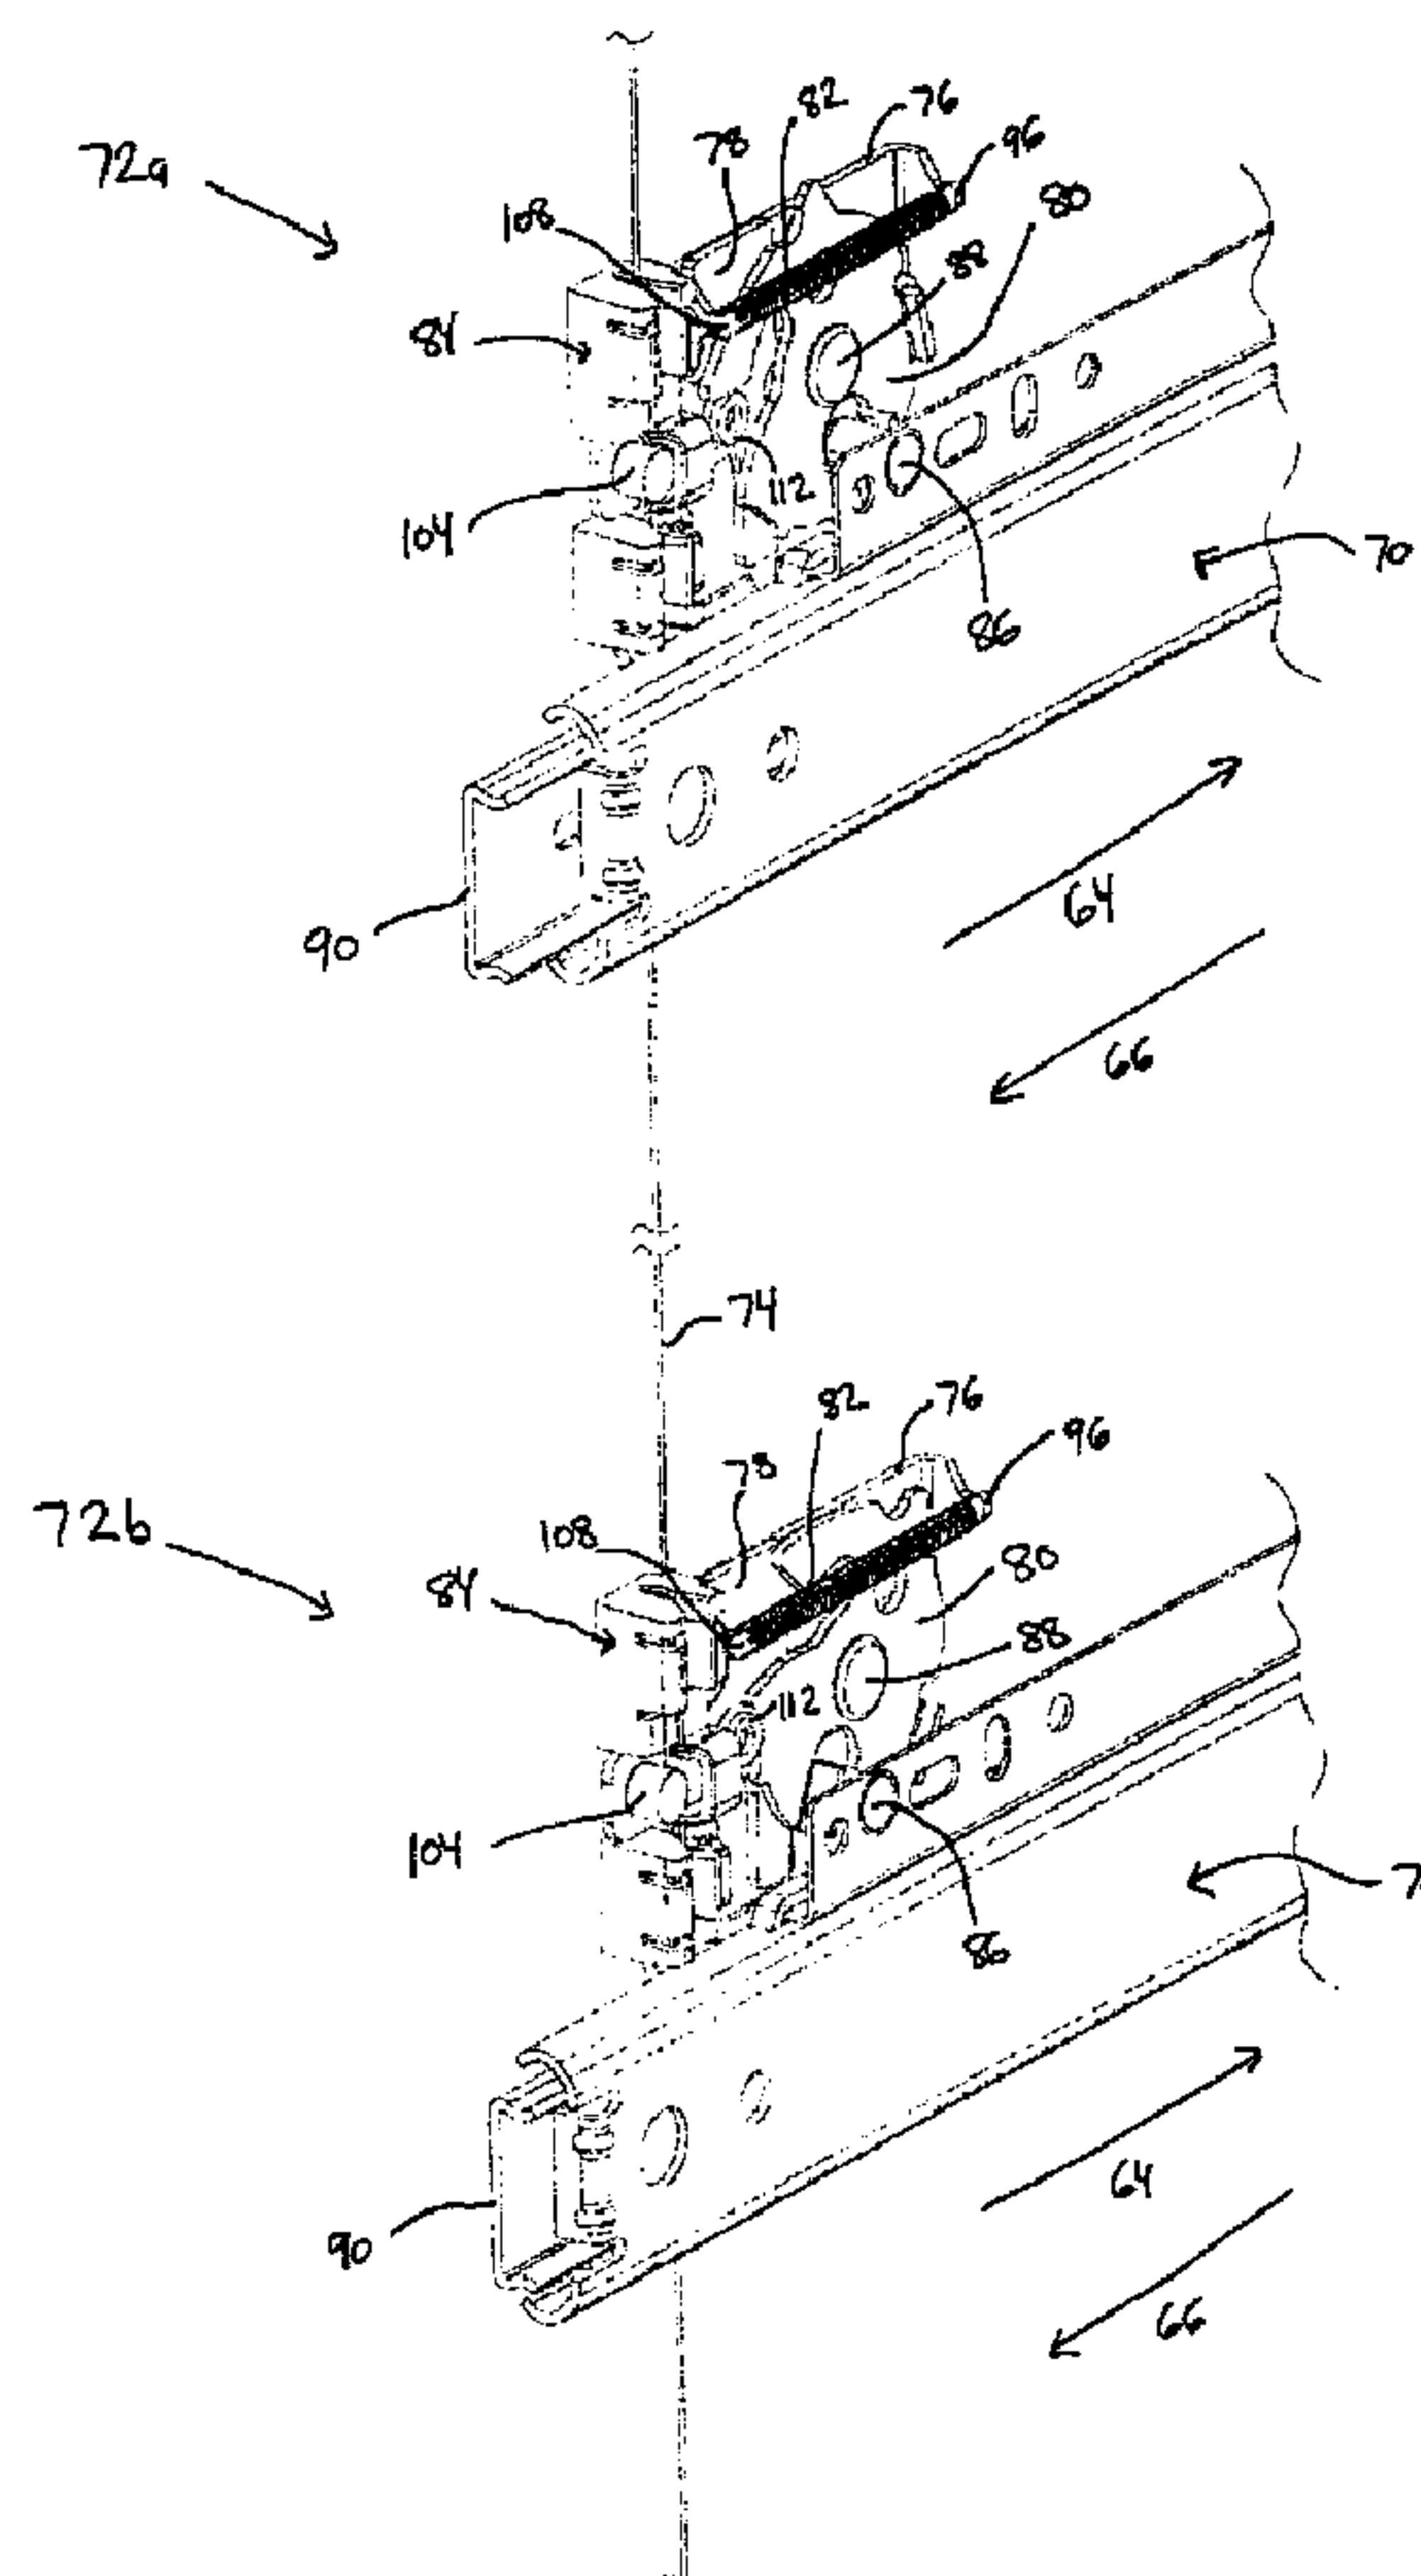

(57) Abrégé/Abstract:

The invention relates to interlocks for file cabinets and the like which generally prevent more than one drawer from being opened at a given time. The interlocks include a elongated, flexible member which is changeable from a high slack condition to a low slack



(57) **Abrégé(suite)/Abstract(continued):**

condition. In the low slack condition, the interlocks prevent their associated drawers that are closed from being opened. In the high slack condition, the interlocks allow their associated drawer to be opened. The interlocks may be used in conjunction with a lock that selectively changes the cable from a high slack condition to a low slack condition and vice versa. The interlocks may be constructed to exert a force on the cable that is independent of the pulling force exerted on a locked drawer. Alternatively, the interlocks may be constructed to exert a force on the elongated, flexible member that is a small fraction of the pulling force exerted on a locked drawer.

### **ABSTRACT OF THE DISCLOSURE**

The invention relates to interlocks for file cabinets and the like which generally prevent more than one drawer from being opened at a given time. The interlocks include a elongated, flexible member which is changeable from a high slack condition to a low slack condition. In the low slack condition, the interlocks prevent their associated drawers that are closed from being opened. In the high slack condition, the interlocks allow their associated drawer to be opened. The interlocks may be used in conjunction with a lock that selectively changes the cable from a high slack condition to a low slack condition and vice versa. The interlocks may be constructed to exert a force on the cable that is independent of the pulling force exerted on a locked drawer. Alternatively, the interlocks may be constructed to exert a force on the elongated, flexible member that is a small fraction of the pulling force exerted on a locked drawer.

## INTERLOCK MECHANISM FOR LATERAL FILE CABINETS

### Background of the Invention

The present invention relates to filing cabinets, and more particularly to mechanisms adapted to prevent one or more of the drawers in the filing cabinet from being opened.

It has been known in the past to include interlock mechanisms on filing cabinets that prevent more than one drawer in the cabinet from being opened at a single time. These interlock mechanisms are generally provided as safety features that are intended to prevent the filing cabinet from accidentally falling over, a condition that may be more likely to occur when more than one drawer in the cabinet is open. By being able to open only a single drawer at a given time, the ability to change the weight distribution of the cabinet and its contents is reduced, thereby diminishing the likelihood that the cabinet will fall over.

In addition to such interlocks, past filing cabinets have also included locks that prevent any drawers from being opened when the lock is moved to a locking position. These locks are provided to address security issues, rather than safety issues. These locks override the interlocking system so that if the lock is activated, no drawers may be opened at all. If the lock is not activated, the interlock system functions to prevent more than one drawer from being opened at the same time. Oftentimes the system that locks all of the drawers and the interlock system that locks all but one of the drawers are at least partially combined. The combination of the locking system with the interlocking system can provide cost reductions by utilizing common parts.

Past locking and interlocking mechanisms, however, have suffered from a number of disadvantages. One disadvantage is the difficulty of changing the drawer configurations within a cabinet. Many filing cabinets are designed to allow different numbers of drawers to be housed within the cabinet. For example, in the cabinet depicted in FIG. 1, there are three drawers in the cabinet. For some cabinets, it would be possible to replace these three drawers with another number of drawers having the same total height as the three original drawers. This reconfiguration of the drawers is accomplished by removing the drawer slides on each side of the

drawer and either repositioning the drawer slides at the newly desired heights, or installing new drawer slides at the new heights. Many drawer slides include bayonet features that allow the drawer slides to be easily removed and repositioned within the cabinet.

In the past, such reconfiguring of the drawers in a cabinet has been a difficult task because the interlocking and/or locking system for the drawers could not easily be adjusted to match the newly configured filing cabinet. For example, U.S. Patent No. 6,238,024 issued to Sawatzky discloses an interlock system that utilizes a series of rigid rods that are vertically positioned between each drawer in the cabinet. The height of these rods must be chosen to match the vertical spacing between each of the drawers in the system. If the cabinet is to be reconfigured, then new rods will have to be installed that match the height of the new drawers being installed in the cabinet. Not only does this add additional cost to the process of reconfiguring the cabinet, it complicates the reconfiguring process by requiring new parts of precise dimensions to be ordered. Finding these precisely dimensioned parts may involve extensive searching and/or measuring, especially where the manufacturer of the rods is not the same entity that produced the new drawers being installed, or the manufacturer of the rods has ceased producing the parts, or has gone out of business.

Another difficulty with systems like that disclosed in the Sawatzky patent is the precise manufacturing that may be required to create these rigid rods. These interlock systems only work if the rods have heights that fall within a certain tolerance range. This tolerance range, however, decreases as more interlocks are installed in a given cabinet. In other words, the tolerance of the heights of these rods is additive. In order to function properly, a cabinet with ten drawers will therefore require smaller tolerances in the rods than a two drawer cabinet. In order to create rods that can be universally used on different cabinets, it is therefore necessary to manufacture the rods within the tight tolerances required by the cabinet having the greatest expected number of drawers. These tight tolerances tend to increase the cost of the manufacturing process.

Another difficulty with past interlock and lock systems for file cabinets has been the expense involved in creating a locking system that will withstand high forces exerted on the drawers. The Business and Institutional Furniture Manufacturer's Association (BIFMA) recommends that lock systems for file cabinets be able to withstand 50 pounds of pressure on a drawer. Thus, if a file cabinet does not exceed this standard, thieves can gain access to the

contents of a lock drawer by pulling the drawer outwardly with more than fifty pounds of force. Many users of file cabinets, however, desire their locking system to be able to withstand much greater forces than this before failure. Increasing the durability of the locking system often adds undesired expense to the cost of building the system.

A number of prior art interlock systems have used cables or straps as part of the interlocking system. Such systems, however, have suffered from other disadvantages. For example, U.S. Patent No. 5,199,774 issued to Hedinger et al. discloses an interlock and lock system that uses a cable. The slack in the cable is decreased when a drawer is opened. The amount of slack of the cable is carefully chosen during the installation of the drawer lock so that there is just enough in the system to allow only one drawer to be opened at a time. The interlock on whatever drawer is opened takes up this available slack in the cable, which prevents other drawers from being opened at the same time. A similar system is disclosed in U.S. Patent No. 5,062,678 issued to Westwinkel. This system uses a strap instead of a cable. Both systems suffer from the fact that excessive amounts of force may be easily transferred to either the cable or the strap. In other words, the cable or the strap itself are what resist the pulling force that a person might exert on a closed drawer when either the lock is activated, or another drawer is opened. The tensile strength of the cable or strap therefore determines how much force must be exerted to overcome the interlock or lock. In fact, in the interlock of Westwinkel, the system appears to be constructed so that the pulling force exerted by a person on a locked drawer will be amplified before being applied to the strap. The strap must therefore have a greater tensile strength than the highest rated pulling force that the lock or interlock system can resist. Increasing the strength of the cables or straps typically tends to increase their cost, which is desirably avoided.

In light of the foregoing, the desirability of an interlock and lock system that overcomes these and other disadvantages can be seen.

### **Summary of the Invention**

Accordingly, the present invention provides an interlock and lock that reduces the aforementioned difficulties, as well as other difficulties. The interlock and lock of the present invention allow relatively low-tensile strength cables or flexible members to be used in systems which provide high resistance to theft and breakdown. The system of the present invention

further allows changes to cabinet configurations to be easily implemented with little or no additional work required to integrate the new cabinet configuration into the interlock or lock system. The present invention provides a simple construction for locks and interlocks that can be easily manufactured without excessively restrictive tolerances, and which can be easily installed in cabinets.

According to one aspect of the present invention, an interlock for a cabinet drawer is provided. The drawer is movable in the cabinet in a first direction toward an open position and in a second, opposite direction toward a closed position. The interlock includes an elongated, flexible member, a rotatable lever, an engagement member, and a biasing member. The lever is adapted to alter the amount of slack in the elongated, flexible member. The lever is rotatable between a first position and a second position. The first position creates a low amount of slack in the elongated, flexible member, and the second position allows a high amount of slack to be present in the elongated, flexible member. The engagement member is attached to the drawer and positioned to cause the rotatable lever to rotate toward the first position when the drawer is initially moved from the closed position in the first direction. The biasing member is positioned adjacent the lever and adapted to exert a biasing force that tends to prevent the lever from rotating from the first position to the second position until the drawer is moved in the second direction to the closed position.

According to another aspect of the present invention, an interlock is provided that includes a cable, a slack take-up mechanism, a cam, and a biasing member. The slack take-up mechanism is engageable with the cable and movable between a high slack position and a low slack position. The low slack position causes the cable to exist in a low slack condition. The high slack position allows the cable to exist in a high slack condition. The cam is operatively coupled to the slack take-up mechanism and to the drawer. The cam is adapted to switch the slack take-up mechanism from the high slack position to the low slack position when the drawer is moved in the first direction toward the open position. The biasing member is adapted to exert a force against the take-up mechanism that urges the slack take-up mechanism toward the low slack position. The force of the biasing member may have a magnitude that is independent of the magnitude of the force exerted on the drawer in the first direction.

According to still another aspect of the present invention, an interlock is provided. The interlock includes a cable, a rotatable lever, an engagement member, and a retainer. The lever is

adapted to change the cable between high and low slack conditions. The engagement member is attached to the drawer and positioned to cause the lever to rotate to a first position that changes the cable to a low slack condition when the drawer is initially moved in the first direction from the closed position. The engagement member is also positioned such that a first force exerted on the drawer in the first direction is translated by the lever to a second force on the cable, which is less than the first force. The retainer is adapted to retain the rotatable lever in the first position while the drawer is moved to the open position.

According to still another aspect of the present invention, a locking and interlocking system for a cabinet is provided. The system includes a lock, a first cable, a second cable, a first interlock, and a second interlock. The first cable extends between at least a first and second drawer. The first cable is changeable from a high slack to a low slack condition. The second cable extends between the lock and the first drawer. The lock is adapted to change the second cable from a high slack to a low slack condition. The first interlock is in communication with the first and second cables and adapted to change both said first and said second cables from the high slack to the low slack condition whenever the first drawer is opened. The first interlock is further adapted to prevent the first drawer from opening whenever the first or second cables are in the low slack condition. The second interlock is in communication with the first cable and adapted to change the first cable from the high slack to the low slack condition whenever the second drawer is opened. The second interlock is further adapted to prevent the second drawer from opening whenever the first cable is in the low slack condition.

According to still other aspects of the present invention, the interlocks may include a stop that prevents the lever from rotating to the first position when the cable is in the low slack condition. The lever may further be configured to exert a force against the cable that does not increase as the magnitude of the force exerted on the drawer in the first direction increases. The interlock may be in communication with a lock that is adapted to selectively alter the condition of the cable. The interlocks may be secured to drawer slides that are removable from the cabinet. A cable guide may be included as part of the interlock to snap-fittingly receive the cable and retain it in engagement with the interlock.

The various aspect of the present invention provides an interlock and lock system that is versatile, resistant to high forces, and easily installed. These and other benefits of the present

invention will be apparent to one skilled in the art in light of the following written description when read in conjunction with the accompanying drawings.

### **Brief Description of the Drawings**

FIG. 1 is a perspective view of a cabinet with three drawers in a closed position;

FIG. 2 is a perspective view of the cabinet of FIG. 1 illustrated with one drawer moved to an open position;

FIG. 3 is a side, elevational view of an interlock and drawer slide according to a first embodiment of the present invention;

FIG. 4 is a perspective view of a pair of interlocks according to the first embodiment of the present invention;

FIG. 5 is a side, elevational view of the pair of interlocks of FIG. 4;

FIG. 6 is a perspective, exploded view of the interlock of FIG. 3;

FIG. 7 is a perspective view of the interlock of FIG. 3 illustrated without a drawer slide attached;

FIG. 8 is a perspective view of an attachment plate of the interlock of FIG. 3;

FIG. 9 is a plan view the attachment plate of FIG. 8;

FIG. 10 is a side, elevational view of the attachment plate of FIG. 8;

FIG. 11 is a perspective view of a sliding plate of the interlock of FIG. 3;

FIG. 12 is a plan view of the sliding plate of FIG. 11;

FIG. 13 is a side, elevational view of the sliding plate of FIG. 11;

FIG. 14 is a perspective view of a cam of the interlock of FIG. 3;

FIG. 15 is a plan view of the cam of FIG. 14;

FIG. 16 is a side, elevational view of the cam of FIG. 14;

FIG. 17 is a perspective view of an engagement member of the interlock of FIG. 3;

FIG. 18 is a front, elevational view of the engagement member of FIG. 17;

FIG. 19 is a perspective view of a rivet of the interlock of FIG. 3;

FIG. 20 is a side, elevational view of a spring of the interlock of FIG. 3;

FIG. 21 is a perspective view of a cable guide of the interlock of FIG. 3;

FIG. 22 is a bottom view of the cable guide of FIG. 21;

FIG. 23 is a plan view of the cable guide of FIG. 21;

FIG. 24 is a side, elevational view of the interlock and drawer slide of FIG. 3 illustrated with the interlock in a locked position;

FIG. 25 is a side, elevational view of the drawer slide and interlock of FIG. 3 illustrating the interlock in a position in which two drawers are being simultaneously pulled toward an open position;

FIG. 26 is a side, elevational view of the drawer slide and interlock of FIG. 3 illustrating the interlock in an open position with the drawer slide contacting the cam;

FIG. 27 is a side, elevational view of the drawer slide and interlock of FIG. 3 illustrating the interlock in an unlocked position, and the drawer slide disengaged from the cam;

FIG. 28 is a side, elevational view of a drawer slide and interlock according to a second embodiment of the present invention;

FIG. 29 is a bottom view of the drawer slide and interlock of FIG. 28;

FIG. 30 is a side, elevational view of the drawer slide and interlock of FIG. 28 taken from a side opposite to that of FIG. 28;

FIG. 31 is a front, elevational view of the interlock of FIG. 28;

FIG. 32 is a perspective, exploded view of the components of the interlock of FIG. 28;

FIG. 33 is a perspective view of a lever of the interlock of FIG. 28;

FIG. 34 is a plan view of the lever of FIG. 33;

FIG. 35 is a side, elevational view of the lever of FIG. 33;

FIG. 36 is a perspective view of a cam of the interlock of FIG. 28;

FIG. 37 is a side, elevational view of the cam of FIG. 36;

FIG. 38 is a plan view of the cam of FIG. 36;

FIG. 39 is a side, elevational view of the cam of FIG. 36 taken from a side different from that of FIG. 37;

FIG. 40 is a perspective view of a cable guide of the interlock of FIG. 28;

FIG. 41 is a front, elevational view of the cable guide of FIG. 40;

FIG. 42 is a bottom view of the cable guide of FIG. 40;

FIG. 43 is a partial, perspective view of a drawer slide member with an engagement member for engaging the interlock of FIG. 28;

FIG. 44 is a side, elevational view of the spring of the interlock of FIG. 28;  
 FIG. 45 is a perspective view of a rivet of the interlock of FIG. 28;  
 FIG. 46 is a perspective view of another rivet of the interlock of FIG. 28;  
 FIG. 47 is a side, elevational view of the interlock of FIG. 28 illustrated in a locked position;

FIG. 48 is a side, elevational view of the interlock of FIG. 28 illustrated in a position in which two drawers are being simultaneously pulled toward the open position;

FIG. 49 is a side, elevational view of the interlock of FIG. 28 illustrating the interlock in an unlocked position with the engagement member in contact with the cam;

FIG. 50 is a side, elevational view of the interlock of FIG. 28 illustrated in an unlocked position in which the engagement member of the slide has moved out of engagement of the cam;

FIG. 51 is a perspective view of a lock illustrated in a locked position;

FIG. 52 is a side, elevational view of the lock of FIG. 51;

FIG. 53 is a perspective view of the lock of FIG. 51 illustrated in an unlocked position;

FIG. 54 is a side, elevational view of the lock of FIG. 53;

FIG. 55 is a perspective, exploded view of the lock of FIG. 51; and

FIG. 56 is a side, sectional view of a cabinet and interlock system according to one aspect of the present invention.

### **Detailed Description of the Invention**

The present invention will now be described with reference to the accompanying drawings wherein the reference numerals in the following written description correspond to like numbered elements in the several drawings. The present invention relates to locks and interlocks that may be used with file cabinets, such as the file cabinet 60 depicted in FIGS. 1 and 2. File cabinet 60 includes three drawers 62a-c that are essentially stacked on top of each other in file cabinet 60. Each drawer can be pulled in a first direction 64 toward an open position. The lower most drawer 62c in FIG. 2 is illustrated in the open position. When it is time to close this drawer, it can be pushed in a second direction 66 back to its closed position. The interlocking system of the present invention prevents more than one drawer from being opened at a single time. While only three drawers are illustrated in file cabinet 60, the present invention is

applicable to cabinets having any number of drawers. The present invention also includes a locking system that overrides the interlocking system. That is, when the locking system is activated, no drawers can be opened at any time. When the locking system is deactivated, the interlocking system is activated and prevents more than one drawer from being opened at a single time. The locking system may be activated by inserting a key into a keyhole 68 positioned at any suitable location on the file cabinet. The locking and interlocking system are highly integrated so that many of the components of the interlocking system are also used in the locking system.

The interlocks of the present invention may be advantageously combined or attached to the drawer slides in which drawers 62 slidably move between their open and closed position. An example of one of these drawer slides 70 is depicted in FIG. 2 for the lower most drawer 62c. Each drawer 62 includes two drawer slides 70, one positioned on one side of the drawer and another positioned on the opposite side of the drawer. While the interlocks of the present invention can be placed at other locations besides on drawer slide 70, the attachment of the interlocks to the drawer slide 70 allows the interlocks to be simultaneously removed and repositioned when the drawer slides 70 are removed and repositioned. This greatly facilitates the reconfiguration of a file cabinet 60 with differently sized drawers 62.

An interlock 72 according to a first embodiment of the present invention is depicted in FIG. 3. Interlock 72 is attached to a drawer slide 70. Interlock 72 is operatively coupled to a cable 74 that runs vertically inside of cabinet 60. In general, interlock 72 operates according to the amount of slack in cable 74. Specifically, cable 74 has two different basic levels of slack. When no drawers are opened and the lock is not activated, cable 74 has a high amount of slack in it. When a single drawer is opened, interlock 72 takes up most or all of the slack in cable 74 and creates a second, lower level of slack in cable 74. The lower level of slack in cable 74 is such that no other drawers in the cabinet 60 can be opened. This lower level of slack may be zero, or may include a small amount of slack. When the open drawer is closed, more slack in the cable 74 returns and any other single drawer may thereafter be opened. If a lock is included with the cabinet 60, the lock is adapted to alter the slack in cable 74. When in the locked position, the lock removes most or all of the slack in cable 74. When in the unlocked condition, the lock allows cable 74 to have sufficient slack so that a single drawer may be opened. Interlocks 72 are thus designed to only allow their associated or attached drawer to be opened when cable 74 has

sufficient slack. Further, they are designed to remove substantially all of the slack in cable 74, if their associated drawer is opened. The detailed construction of interlock 72, as well as how they accomplish the aforementioned functions, will now be described.

As illustrated in FIG. 6, interlock 72 generally includes an attachment plate 76, a sliding plate 78, a rotatable cam or lever 80, a spring 82, a cable guide 84, an engagement member 86, and a rivet 88. Attachment plate 76 is a stationary part that secures interlock 72 to drawer slide 70. Specifically, attachment plate 76 is secured to a stationary portion 90 of drawer slide 70. Stationary portion 90 is illustrated in FIGS. 4 and 5. Stationary portion 90 is, in turn, secured to appropriate attachment structures within file cabinet 60. Those attachment structures may allow drawer slide 70 to be easily removed and repositioned inside of cabinet 60. Attachment plate 76 may be secured to stationary portion 90 of drawer slide 70 in any suitable fashion, such as by welding, or the use of fasteners.

Attachment plate 76 includes a plurality of fastener holes 92 which may be used to receive rivets, screws, or other fasteners to secure attachment plate 76 to stationary portion 90 of drawer slide 70. Attachment plate 76 is depicted in detail in FIGS. 6 and 8-10. Attachment plate 76 further includes a rivet hole 94 which receives rivet 88. Rivet 88 secures cam 80 to attachment plate 76 in a rotatable fashion. Stated alternatively, cam 80 is attached to attachment plate 76 in such a manner that it can rotate about the axis generally defined by rivet 88. Attachment plate 76 further includes a spring attachment nub 96 to which one end of spring 82 is attached. Attachment plate 76 also includes a pair of bent flanges 98. Bent flanges 98 are received inside of cable guide 84 and used to secure cable guide 84 to attachment plate 76. Each flange 98 includes a shoulder 100 that retains cable guide 84 on attachment plate 76 after they have been attached, as will be explained in more detail below.

Sliding plate 78, which is depicted in detail in FIGS. 6 and 11-13, is positioned between attachment plate 76 and cam 80. Sliding plate 78 slides linearly in a direction parallel to first and second directions 64 and 66. When a drawer 62 is initially opened, sliding plate 78 slides linearly in first direction 64. As the drawer fully closes, sliding plate 78 slides back to its original position in second direction 66. Sliding plate 78 includes an elongated aperture 102 that receives rivet 88. Because elongated aperture 102 has a length much greater than the diameter of rivet 88, sliding plate 78 can slide along rivet 88 while still being supported by rivet 88. Sliding plate 78 includes an engagement lug 104 positioned at an end generally opposite to elongated

aperture 102. Engagement lug 104 engages cable 74 generally along its side that faces toward elongated aperture 102. The side of sliding plate 78 adjacent engagement lug 104 is supported in a channel 106 defined by cable guide 84. When sliding plate 78 slides in first direction 64, engagement lug 104, which is in engagement with cable 74, decreases the slack in cable 74. Thus, when a drawer is open, sliding plate 78 and engagement lug 104 remove most or all of the slack from cable 74. This will be described in more detail below.

Sliding plate 78 further includes a spring attachment nub 108. Spring attachment nub 108 is used to attach the other end of spring 82 to sliding plate 78. When spring 82 is connected between attachment nubs 108 and 96, spring 82 exerts a force that tends to urge attachment nubs 96 and 108 toward each other in a direction generally parallel to first direction 64. The movement of sliding plate 78 toward spring attachment nub 96 of attachment plate 76 is limited by an interior surface 110 of elongated aperture 102. When interior surface 110 contacts rivet 88, sliding plate 78 can no longer be moved any further in first direction 64. As will be described in more detail herein, spring 82 exerts the slack-removal force on cable 74, by way of engagement lug 104 when a drawer is opened. Depending on the physical construction of interlock 72, as well as the type of cable 74 chosen, spring 82 may be desirably chosen to exert a force against sliding plate 78 of one to two pounds in a first direction 64 when a drawer is open. Other amounts of force can also be used within the scope of the present invention. The amount of this force should be sufficient to overcome the cumulative friction between the cable and all of the parts it is in contact with in interlock 72, as well as the other interlocks within the cabinet. Stated alternatively, spring 82 should be sufficiently strong to remove or reduce the slack in cable 82 by pulling sliding plate 78 sufficiently far in first direction 64 to allow an embossment 112, described below, to fit into a channel 120 on cam 80. Once positioned therein, a surface 121 in channel 130 prevents sliding plate 78 from retreating in second direction 66 until the drawer is closed. This retains cable 74 in a low slack condition whenever any other drawers are attempted to be opened.

As mentioned, sliding plate 78 further includes an embossment 112 on a side 114 that faces cam 80. Embossment 112 is positioned between elongated aperture 102 and engagement lug 104. Embossment 112 interacts with cam 80 in a manner that will be described in more detail herein. In general, cam 80 acts as a switch for moving sliding plate 78 between a slack-removal position, in which a force is exerted on cable 74, and a slack position, in which no force

is exerted on cable 74. This switching occurs when the drawer associated with interlock 72 is opened or closed. This switching utilizes embossment 112, as explained more below.

Cam 80, which is depicted in more detail in FIGS. 6 and 14-16, includes a central aperture 116 which receives rivet 88. As mentioned previously, cam 88 is rotatable about rivet 88. Cam 80 includes a pair of spaced flanges 118 that define a channel 120 therebetween. Channel 120 selectively receives engagement member 86. Engagement member 86 is attached to the drawer 62 such that it will move linearly in first direction 64 when the drawer is open, and in second direction 66 when the drawer is closed. Cam 80 translates this linear motion into a rotational motion. Cam 80 includes a first surface 122 that engages embossment 112 whenever the associated drawer is fully closed. Raised shoulders 124a and b are defined adjacent each end of first surface 122. Raised shoulders 124a and b tend to maintain embossment 112 on first surface 112 and thereby resist inadvertent rotation of cam 80.

From the position illustrated in FIG. 6, cam 80 is generally rotatable in a direction 126. This rotation in direction 126 is activated by the associated drawer being pulled toward the open position. When the drawer is so pulled, engagement member 86 begins to move in first direction 64. Because engagement member 86 is housed within channel 120, this movement in first direction 64 causes cam 80 to begin to rotate in direction 126. As this rotation continues, raised shoulder 124a of cam 80 comes into contact with embossment 112. In order for the rotation of cam 80 to continue, sliding plate 78 must be pushed in second direction 66 a small amount in order to provide clearance for embossment 112 to overcome shoulder 124a. Shoulder 124a is an optional feature that, if provided, helps to ensure that the drawer stays shut after it is closed. If the drawer is shut hard enough to create a rebounding force that would otherwise cause the drawer to open back up again, at least partially, shoulder 124a provides sufficient resistance to generally prevent this rebounding force to open the drawer. Shoulder 124a thus serves to maintain a drawer in the closed position until a user exerts sufficient force on a drawer to move embossment 112 past shoulder 124a.

After embossment 112 has overcome raised shoulder 124a, the force of spring 82 tends to pull sliding plate 78 in first direction 64. If cable 74 is in a low slack condition, however, sliding plate 78 will not be able to move in first direction 64 because engagement lug 104 will be prevented from moving in first direction 64 by the low slack cable. If the cable has little slack, further rotation of cam 80 in direction 126 will only be able to continue until a stop surface 128

on cam 80 abuts against embossment 112. This condition is illustrated in FIG. 7. Once stop surface 128 comes into contact with embossment 112, further rotation of cam 80 in direction 126 is impossible. The degree of rotation of cam 80 when embossment 112 is in engagement with stop surface 128 is insufficient to allow engagement member 86 to exit from channel 120. If a person attempts to open the associated drawer, the force they exert in the first direction will be transferred from engagement member 86 to cam 80. Cam 80 will transfer this force to embossment 112 via its contact with stop surface 128. Due to the construction of cam 80, the force exerted by stop surface 128 against embossment 112 will generally be a vertical force that is perpendicular to first direction 64. The force exerted on sliding plate 78 through embossment 112 will therefore not tend to move sliding plate 78 in either first direction 64 or second direction 66. The pressure of stop surface 128 against embossment 112 will therefore not create any forces on engagement lug 104. Cable 74 is therefore shielded from the forces exerted on the drawer when the cable is in a low slack condition. Surface 121 of channel 120 prevents cable 74 from pulling plate 78 in direction 66 as another drawer is attempted to be opened.

If cable 74 is not in a low slack condition when cam 80 rotates in direction 126, then sliding plate 78 will be free to move in first direction 64 after embossment 112 has cleared raised shoulder 124a. This movement of sliding plate 78 in first direction 64 will cause embossment 112 to also move in first direction 64. This movement of embossment 112 will allow it to fit into a channel 130 defined on cam 80. Channel 130 is suitably dimensioned to allow cam 80 to continue to rotate until channel 120 is angled enough to allow engagement member 86 to exit channel 120. Thus, the drawer can be opened. The movement of embossment 112 into channel 130, which is caused by the biasing force of spring 82, will also cause engagement lug 104 to move in first direction 64. The movement of engagement lug 104 in first direction 64 will remove the slack in cable 74 and change the cable to a low slack condition. No other drawers will therefore be able to be opened simultaneously.

When the associated drawer is closed, engagement member will cause cam 80 to rotate in a direction opposite to the direction of its rotation when the drawer is opened. This closing rotation will cause a surface 131 on cam 80 to engage embossment 112. This engagement pushes embossment 112, and consequently sliding plate 74 in second direction 66. In order to avoid requiring excessive force to close the drawer, surface 131 may be angled at about 45

degrees when it contacts embossment 112. This allows sliding plate 78 to be pushed in second direction 66 without excessive forces.

Engagement member 86, which is depicted in more detail in FIG. 17, is attached to an elongated member 132. Elongated member 132 is fixedly secured to the drawer. Elongated member 132 is positioned on top of the drawer slide 70. Elongated member 132 includes various apertures that may be used to secure it to the drawer 62. Elongated member 132 includes a lower flange 134 that may be used to mount member 132 to drawer slide 70 (FIG. 18). Rivet 88 and spring 82 are depicted in FIGS. 19 and 20, respectively.

Cable guide 84, which is depicted in more detail in FIGS. 21-23 serves to ensure that cable 74 is properly maintained in contact with engagement lug 104 of sliding plate 78. Cable guide 74 may be manufactured of molded plastic. Cable guide 84 preferably snap-fittingly receives cable 84 so that cable 74 may be easily threaded into guide 84 with little danger of cable 74 becoming unthreaded. Cable guide 84 includes an upper and lower portion 136a and b. Channel 106 is defined between upper and lower portions 136a and b. As has been described, channel 106 provides clearance for sliding plate 78 and engagement lug 104. Cable guide 84 includes two glide surfaces 138 that provide support to sliding plate 78. Each portion 136a and b further includes an aperture 140. Apertures 140 receive bent flanges 98 of attachment plate 76 when cable guide 84 is attached thereto.

Apertures 140 are spaced apart in a vertical direction a distance that is slightly smaller than the vertical distance between shoulders 100 on flanges 98 of attachment plate 76. Thus, when flanges 98 are inserted into apertures 140, shoulders 100 contact and press against inner surfaces 142 of apertures 140. The dimensions of shoulders 100 force inner surfaces 142 to flex inwardly towards each other. When flanges 98 have been completely inserted into apertures 140, shoulders 100 have moved past inner surfaces 142, allowing them to flexibly snap back to their unstressed position. Shoulders 100 contact surfaces 144 of cable guide 84. Shoulders 100 thus prevent flanges 98 from being retracted out of apertures 140 without flexing inner surfaces 142 towards each other. Because shoulders 100 do not have a cam surface that facilitates removal of flanges 98 from apertures 140, cable guide 84 is securely retained on flanges 98 of attachment plate 76. After cable guide 84 is secured to flanges 98, sliding plate 78 is inserted into channel 106 between top and bottom portions 136a and b of cable guide 84. When sliding plate 78 is so positioned in channel 106, top and bottom portions 136a and b are substantially prevented from

flexing toward each other by sliding plate 78's contact with glide surfaces 138. Cable guide 84 is therefore securely retained on attachment plate 76.

Cable 74 is easily threaded into cable guide 84 by moving cable 74 in direction 146 into channel 106 (FIG. 21). Movement of cable 74 in this direction causes the cable 74 to come in contact with two flexible arms 148. As cable 74 is further pushed against flexible arms 148, flexible arms 148 begin to flex out of the way until sufficient clearance is provided for cable 74 to pass by flexible arms 148. As soon as cable 74 passes by arms 148, they snap back to their unflexed condition. In this unflexed condition, cable 74 is prevented from being retracted out of channel 106 in a direction opposite the direction 146 by flexible arms 148. If an interlock 72 is to be removed from the inside of a cabinet, cable 74 can be easily removed from cable guide 84 by manually pressing flexible arms 148 in direction 146. Flexible arms 148 are pressed until sufficient clearance is provided for cable 74 to be retracted out of guide 84 in a direction generally opposite to direction 146.

FIGS. 4 and 5 illustrate a pair of interlocks 72a and b in different conditions. The cable 74 in FIGS. 4 and 5 is in a low slack condition. The drawer that is attached to the drawer slide of interlock 72b is in a closed position. As has been described previously, first surface 122 of cam 80 is in contact with embossment 112 in this position. The drawer corresponding to interlock 72a illustrates the condition of interlock 72a when this drawer is trying to be opened and cable 74 is already in a low slack condition due to either a lock or another interlock having its drawer open (not shown). Because cable 74 is in a low slack condition, engagement lug 104 of sliding plate 78 (of interlock 72a) is prevented from moving further in first direction 64 than that illustrated in FIGS. 4 and 5. Because sliding plate 78 cannot move further in first direction 64, embossment 112 of sliding plate 78 cannot move out of the way of stop surface 128 on cam 80. Embossment 112 thus prevents cam 80 from further rotation while cable 74 is in the low slack condition. Because cam 80 cannot rotate any further, engagement member 86 cannot disengage from channel 120 of cam 80. The drawer therefore cannot be opened. As noted, cable 74 of FIGS. 4 and 5 is in the low slack condition due to another interlock with an opened drawer (not shown) that is in communication with cable 74. Alternatively, cable 74 could be in the low slack condition because it is in communication with a lock that has moved to the locking position. FIG. 7 also illustrates an interlock 72 for a drawer that is trying to be opened when cable 74 is in

the low slack condition. Again, the low slack condition of cable 74 is due to either a lock or another interlock that is not shown in FIG. 7.

FIGS. 3 and 24-27 illustrate interlock 72 in its various positions according to different drawer conditions. FIG. 3 illustrates interlock 72 when the associated drawer is closed. FIG. 24 illustrates interlock 72 when the cable 74 has been changed to the low slack condition by an un-illustrated interlock or lock and the drawer associated with interlock 72 is trying to be pulled open. The drawer is prevented from being opened by the engagement of stop surface 128 with embossment 112. Because stop surface 128 presses vertically down on embossment 112, sliding plate 78 does not experience a linear force in either first or second direction 64 or 66. Whatever force is exerted against the drawer in first direction 64 is therefore not translated to cable 74. Rather, cable 74 only experiences a tensioning force from interlock 72 that is due to spring 82 acting to pull engagement lug 104 in first direction 64. The tensile strength of cable 74 therefore does not appreciably limit the amount of force that can be applied to trying to open the locked door before the interlock system fails. Interlock 72 of the present invention may resist up to 150 pounds of force on a drawer, or more, before it fails. Further, this failure point will be due to cam 80 and its interaction with either embossment 112 or engagement member 86, not the tensile strength of cable 74. Interlock 72 thus shields cable 74 from the forces that are applied in first direction 64 to open locked drawers.

FIG. 25 depicts interlock 72 in the position it would move to when a person was trying to simultaneously open two drawers in the cabinet. Because no single drawer is fully open, cable 74 includes sufficient slack to allow embossment 112 to almost move past stop surface 128. However, embossment 112 cannot totally clear stop surface 128, and neither drawer will be able to be opened in this situation due to the partial engagement of stop surface 128 with embossment 112.

FIG. 26 illustrates an interlock 72 in which the drawer associated with interlock 72 is partially open. As can be seen, embossment 112 has moved into channel 130 of cam 80. This has allowed cam 80 to rotate sufficiently to allow engagement member 86 to disengage from cam 80. The complete disengagement of engagement member 86 from cam 80 is illustrated in FIG. 27. FIG. 27 illustrates the condition of interlock 72 when the drawer is open to a greater extent than that depicted in FIG. 26. When the drawer of interlock 72 is moved back to its closed position, cam 80 must be oriented so that engagement member 86 can slide back into

channel 120. In order to prevent cam 80 from inadvertently rotating out of this orientation while the drawer is fully opened, cam 80 can be appropriately weighted so that it is unlikely to rotate when engagement member 86 is disengaged. This weighting can be adjusted by cutting holes in cam 80 at appropriate locations to remove weight, such as hole 127 (FIGS. 14-16). Another flange, such as flange 129 (FIGS. 14-16) may also be added to increase the weight of cam 80 on a selected side of its pivot axis. Flange 129 may also be used to provide additional structural strength to cam 80 to help resist excessive pulling forces from engagement member 86 when the drawer is locked, but being attempted to be opened.

An interlock 72' according to a second embodiment of the present invention is depicted, either partially or wholly, in FIGS. 28-50. Interlock 72', like interlock 72, is adapted to be attached directly to a drawer slide 70'. While both interlocks 72 and 72' are depicted attached to the back ends of drawer slides 70 and 70', it will be appreciated that they can be attached to the drawer slides at any desirable location along the drawer slides' length, or they can be attached directly to the cabinet. Interlock 72' operates in conjunction with a cable 74 in the same manner that interlock 72 operates. Specifically, interlock 72' allows only a single drawer to be open at a given time. If a lock is included in the cabinet, the lock is in communication with cable 74 and can change the amount of slack in cable 74. If the lock is activated, cable 74 has little or no slack, and none of the drawers may be opened. Interlock 72' differs from interlock 72 in that a small portion of the pulling force exerted on a drawer in first direction 64 is transmitted to cable 74. Nevertheless, the amount of force transmitted is so small that a cable 74 having a relatively low tensile strength can still be used in a cabinet which provides strong resistance to its locking system being overcome.

Interlock 72' operates according to the same general principal as interlock 72. Specifically, cable 74 is installed within the cabinet with a certain amount of slack. When the first drawer of the cabinet is opened, the associated interlock 72' removes most or all of the slack from cable 74. As long as this drawer remains open, cable 74 remains in a low slack condition. The low slack condition of cable 74 prevents any other drawers from simultaneously being opened. When the one drawer is closed, cable 74 returns to its high slack condition. At that point, any other single drawer may be opened, or the same drawer may be opened again. If a lock is included, the lock is adapted to remove most or all of the slack from cable 74 when the

lock is activated. In this activated state, no drawers may be opened in the cabinet. The detailed construction and operation of interlock 72' will now be described.

For purposes of description, components of interlock 72' that are similar to components in interlock 72 will be described with the same reference numeral followed by the prime (') symbol. Components of interlock 72' that are substantially different from components of interlock 72 will be described with a completely new reference numeral. As can be easily seen in FIG. 32, interlock 72' is attached to stationary portion 90' of drawer slide 70'. Stationary portion 90' is fixedly secured to the interior of cabinet 60. Stationary portion 90' includes an upper aperture 150 and a lower aperture 152. Upper aperture 150 receives a first rivet 154 that pivotally secures a lever 156 to stationary portion 90'. Lower aperture 152 receives a second rivet 158 that pivotally secures a cam 160 to stationary portion 90'. Interlock 72' further includes a cable guide 84' that is mounted to a pair of flanges 98' on stationary portion 90' in generally the same manner that cable guide 84 is mounted to attachment plate 76 of interlock 72. Interlock 72' further includes a spring 82' and an engagement member 86'. Engagement member 86' comprises a flange 162 that extends off of a slidable portion 164 of drawer slide 70'. Slidable portion 164 is slidable with respect to stationary portion 90' by way of a plurality of ball bearing cages 166 that house a plurality of ball bearings in contact with both slidable portion 164 and stationary portion 90' of drawer slide 70' (FIGS. 28-29). Slidable portion 164 is adapted to be secured to a drawer. Slidable portion 164 may include a plurality of attachment flanges 168 used to releasably secure slidable portion 164 to the drawer. Similarly, stationary portion 90' may also include a plurality of attachment flanges 170 used to releasably secure stationary portion 90' to the interior of the cabinet.

Lever 156, which is illustrated in more detail in FIGS. 32-35, is pivotable about a pivot axis generally defined by first rivet 154. Lever 156 includes an aperture 172 for receiving first rivet 154. Lever 156 includes a spring attachment nub 174 over which one end of spring 82' is secured. Lever 156 further includes an engagement lug 104' that engages cable 74. When lever 156 rotates about its pivot axis 176 in a direction 178 (FIG. 32), engagement lug 104' pulls against cable 74 decreasing the slack in cable 74. Spring 82' exerts a force on lever 156 that tends to resist rotation in direction 178.

Lever 156 includes an inner surface portion 180 and a crest 182. When a drawer is initially opened, cam 160 abuts against crest 182 and exerts a rotational force on lever 156. If

cable 74 is not in a low slack condition, cam 160 pushes against crest 182 until lever 156 is rotated sufficiently to put cam 160 in contact with inner surface portion 180. This will be described in more detail below.

Cam 160, which is depicted in detail in FIGS. 32 and 36-39 is rotationally secured to stationary portion 90' of drawer slide 70' by way of second rivet 158. Cam 160 includes a recess 184 into which engagement member 86' fits when the associated drawer is in the closed position. Recess 184 includes a contact surface 186 which contacts engagement member 86' when the associated drawer is pulled in the first direction 64. When a drawer is pulled in first direction 64, engagement member 86' engages contact surface 186 and imparts a rotational force on cam 160. This rotational force is generally in the direction 188 (FIG. 32). Rotational direction 188 is the opposite of rotational direction 178. The rotation of cam 160 in direction 188 causes an edge 190 of cam 160 to press against crest 182 of lever 156. If sufficient rotational force is exerted on cam 160, edge 190 will push against lever 156 sufficiently to allow edge 190 to pass by the crest 182 on lever 156. Crest 182 may have an arced or radial surface that allows edge 190 to overcome it without an excessive force spike.

The rotation of cam 160 in direction 188 causes lever 156 to rotate in direction 178 (FIG. 32). The rotation of lever 156 takes up any slack in cable 74 by way of engagement member 86'. If cable 74 is already in a low slack condition, lever 156 will be prevented from rotating sufficiently far enough to allow edge 190 of cam 160 to reach inner surface portion 180 of lever 156. The full rotation of cam 160 will therefore be prevented. Engagement member 86' of slidable portion 164 of drawer slide 70' will therefore not be able to disengage from recess 184 in cam 160. Drawer slide 70' will therefore not be able to slide, and the attached drawer will not be able to open.

When cable 74 is changed to the low slack condition by another interlock or lock, cam 160 cannot rotate further than the position depicted in FIG. 31. If cable 74 is not already in a low slack condition, then cam 160 will be able to rotate sufficiently far so that edge 190 contacts inner surface portion 180. When edge 190 is in contact with inner surface 180, cam 160 has rotated sufficiently far to allow engagement member 86' to disengage out of recess 184. Slide 70' is therefore free to slide and the attached drawer can be fully opened. When the drawer is fully open, spring 82' exerts a force on lever 156 in a direction opposite to rotational direction 178. This rotational force tends to maintain edge 190 in frictional contact with inner surface

portion 180. This prevents edge 190 from sliding back to contact with crest 182 before the drawer is fully closed, and this maintains cam 160 in the proper rotational attitude for recess 184 to accept engagement member 86'. When the drawer is being closed, engagement member 86' eventually comes into contact with a contact surface 194 defined on cam 160. As the drawer is fully closed, engagement member 86' pushes against contact surface 194 to thereby cause cam 160 to rotate in a rotational direction that is opposite to direction 188. This rotation causes edge 190 to move out of contact with surface portion 180 and into contact with crest 182. This, in turn, allows lever 156 to rotate in a direction opposite to direction 178. This rotation causes engagement lug 104' to decrease the force on cable 74. The closing of the drawer therefore decreases any tension in cable 74 and increases its slack.

In addition to maintaining cam 160 in its proper rotational orientation when a drawer is opened, spring 82' helps prevent the drawers from rebounding open, or partially open, after they are slammed shut. Without spring 82', it might be possible for a drawer to be slammed shut with sufficient force such that the rebound of the drawer in first direction 64 might rotate cam 160 and allow the drawer to open up again. Spring 82' helps prevent such rebounding of the drawers into the open position by biasing lever 156 in a direction that resists the rotation of cam 160. The amount of biasing is sufficient to generally overcome the amount of force typically present in a drawer rebound. The drawers therefore don't rebound open, but rather only open when a user applies sufficient force to overcome the biasing resistance that spring 82' exerts.

Cam 160 includes a sloped surface 196 that helps ensure that engagement member 86' is successfully guided back into recess 184 when a drawer is closed. If engagement member 86' contacts sloped surface 196, it will exert a rotational force on cam 160 that tends to rotate cam 160 so that recess 184 is properly aligned for receiving engagement member 86'. Cam 160 further includes chamfered surfaces 198a and b. Chamfered surfaces 198 are designed to urge slidable portion 164 of drawer slide 70' into proper axial alignment with cam 160. Stated alternatively, if slidably portion 164 of drawer slide 70' is compressed toward stationary portion 90', chamfered surface 198 will contact an end flange 200 on slidable portion 164 and urge it away from stationary portion 90' (FIG. 32). Second chamfered surface 198b will continue to urge slidable portion 164 away from stationary portion 90' as the drawer is completely closed. Chamfered surfaces 198a and b therefore serve to help maintain the proper spacing of stationary portion 90' with respect to slidable portion 164.

Cam 160 further includes a slide surface 202 that contacts a respective slide surface 204 on lever 156 (FIGS. 33-39). Slide surfaces 202 and 204 help ensure that cam 160 and lever 156 maintain the proper axial position with respect to each other as they are rotated. Edge 190 of cam 160 may preferably be arced with a radius of .04 inches. Crest 182 may also be arced with a radius of .06 inches. Other values may, of course, be used. Rounding edge 190 and crest 182 reduces the amount of force necessary to open the drawer. However, rounding these surfaces excessively will cause more of the force exerted on a locked drawer to be transferred to the cable 74.

Cable guide 84', which is depicted in detail in FIGS. 40-42, operates in a similar manner to cable guide 84. The description of cable guide 84 is therefore generally applicable to cable guide 84' and will not be repeated herein. Cable guide 84' differs from cable guide 84 in that cable guide 84' includes a spring attachment nub 206 that is not present in cable guide 84. Spring attachment nub 206 holds an end of spring 82' opposite spring attachment nub 174 on lever 156. Cable guide 84' also does not include apertures 140 for receiving flanges 98' that extend completely through cable guide 84'. Instead, cable guide 84' includes recesses that receive flanges 98' and that interact with the shoulders 100' to secure guide 84' to stationary portion 90'. These recesses are defined on the bottom of cable guide 84' and do not extend all the way through cable guide 84'. In all other respects, cable guide 84' is generally the same as cable guide 84. Cable guide 84' allows cable 74 to be snap-fittingly received in channel 106 by way of flexible arms 148'.

FIG. 43 depicts slidable portion 164 of drawer slide 70' in more detail. FIG. 44 depicts spring 82' in more detail. FIGS. 45 and 46 depict first and second rivets 154 and 158 respectively. Second rivet 158 includes a sloped undersurface 159 (FIG. 45) that helps to maintain slideable portion 164 of the drawer slide, as well as the attached drawer, in proper alignment with the stationary portion 90'. If the drawer is subjected to pulling forces, or other types of forces, that tend to cause the drawer to rack or twist (especially if made out of metal), these forces may move the back end of slideable portion 164 away from stationary portion 90. In such instances, end flange 200 will come into contact with sloped undersurface 159 of rivet 158 as the drawer is closed. The sloped nature of surface 159 will create a force on end flange 200 of slideable portion 164 that pushes the back end of slideable portion 164 toward stationary portion 90 in a direction generally parallel to pivot axis 176. This helps maintain the proper alignment of

the drawer when it is closed. End flange 200 may be chamfered to correspond to the angle of undersurface 159 in order to more easily force the drawer into the proper alignment.

Undersurface 159 also helps to ensure that engagement member 86' stays aligned with cam 160 so that engagement member 86' properly engages cam 160. Without rivet 158 and undersurface 159, it might be possible for a drawer to become excessively racked such that engagement member 86' no longer contacted cam 160 when the drawer was opened and closed. Undersurface 159 prevents this possibility.

The head of rivet 158 preferably does not extend farther away from the stationary portion 90' than does slideable portion 164. Rivet 158 therefore does not obstruct the drawer attached to slideable portion 164 and the back end of the drawer may extend all the way back to the back end of the drawer slide. Interlock 72' therefore does not put any space limitations on the dimensions of the drawer other than those required by the drawer slide.

As mentioned previously, interlock 72' is designed to transfer only a small fraction of a pulling force exerted on a drawer onto cable 74. This reduction in forces can best be understood with reference to FIG. 31. FIG. 31 illustrates interlock 70' in the position it would be in when the attached drawer is being pulled in the open direction while cable 74 is in a taut or low slack condition. The tautness of cable 74 prevents interlock 70' from allowing the drawer to be opened. FIG. 31 depicts interlock 72' with slidable portion 164 and second rivet 158 removed in order to illustrate the underlying structure. Line 208 represents the moment arm of cam 160 as it pivots about its pivot point 210 (corresponding to the center of rivet 158). Line 212 represents the moment arm of lever 156 as it pivots about its pivot point 214 (corresponding to the center of rivet 154). For purposes of discussing the forces applied to interlock 72', it will be assumed that the cable 74 depicted in FIG. 31 is already in a low slack condition due to either an associated lock being activated, or another interlock having allowed another drawer to be opened. Interlock 72' depicted in FIG. 31 therefore must prevent its attached drawer from opening in order to function properly. If a person exerts a strong pulling force on the drawer attached to interlock 72' of FIG. 31, this force will be greatly reduced when it is eventually applied to cable 74. The pulling force exerted on the drawer in first direction 64 is transmitted to cam 160 by engagement member 86'. Engagement member 86' engages cam 160 generally in recess 184. The pulling force exerted on the drawer, which is illustrated by the arrow  $F_D$ , acts on moment arm 208 at a point D. This point corresponds to the location where engagement member

86' contacts first surface 186 of recess 184. Force  $F_D$  will cause cam 160 to rotate generally in a counter clock-wise direction, as depicted in FIG. 31. This rotation will cause edge 190 of cam 160 to push against crest 182 of lever 156 with a force of  $F_C$ .  $F_C$  refers to the amount of force exerted by cam 160 on lever 156. Because force  $F_C$  will be applied by cam 160 at a location that is farther away from pivot point 210 on moment arm 208, force  $F_C$  will be less than force  $F_D$ .

The force  $F_C$  will be applied to moment arm 212 of lever 156 at a position C. Position C is located on moment arm 212 at a position that is relatively close to pivot point 214. Force  $F_C$  will be transferred via lever 156 to cable 74 at a point T. Point T refers to the position where engagement lug 104' engages cable 74. Because point T is substantially farther away from pivot point 214 along moment arm 212, the magnitude of force  $F_T$  will be significantly less than the magnitude of force  $F_C$ . Further, the spring 81' will exert a force  $F_S$  along lever 156 at a point S. This force  $F_S$  acts in opposition to the force  $F_T$ . Because point S is farther away from pivot point 214 along moment arm 212, a smaller amount of force  $F_S$  is necessary to cancel out the force  $F_T$ . The force  $F_T$  that is exerted against cable 74 will therefore be greatly reduced as compared to the force  $F_D$  that is exerted on the drawer. The tensioning force  $F_T$  may be as little as  $1/20^{\text{th}}$ , or less, of the magnitude of the force  $F_D$ . Cable 74 can therefore resist drawer-pulling forces that greatly exceed its maximum tensile strength.

In addition to transferring only a fraction of the force of  $F_D$  to cable 74, the arrangement of cam 160 and lever 156 also magnifies the movement of engagement lug 104' with respect to the rotation of cam 160. Stated alternatively, if the attached drawer is moved in first direction 64 a small distance A that causes cam 160 to partially rotate, the distance that engagement lug 104' moves in first direction 64 will be greater than the distance A. For example, if the drawer is moved in first direction 64 for .05 inches, this may cause engagement lug 104' to move .65 inches. This feature decreases the amount of slack in the locked drawers that might otherwise be present. A drawer that is locked will therefore only be able to be pulled a small distance before taut cable 74 prevents it from being opened. Interlock 72' can thus prevent drawers from being opened even for the small distance that might easily allow a screw driver, or other lever mechanism, to be inserted between the drawer and the cabinet.

FIGS. 47-50 depict interlock 72' in several different states. In FIG. 47, interlock 72' is in the position it would be if someone were pulling on the attached drawer while the cable 74 (not shown) was in a low slack condition. The cable 74 would therefore prevent cam 160 in lever

156 of interlock 72' from rotating further than that depicted in FIG. 47. FIG. 48 depicts the position of interlock 72' when the drawer is trying to be pulled open simultaneously with another drawer. When two drawers are trying to be opened simultaneously, lever 156 can rotate more than it can in FIG. 47. However, the rotation of lever 156 is insufficient to allow edge 190 of cam 160 to travel past crest 182. Cam 160 therefore does not rotate sufficiently to allow engagement lever 86' to disengage from recess 184. Therefore, neither drawer being simultaneously pulled will allow it to be opened.

FIG. 49 depicts interlock 72' in its condition when engagement member 86' has just begun to disengage from recess 184. Engagement member 86' has moved to a greater extent than in FIGS. 47 and 48. This greater movement creates a sufficient force against cable 74 (not shown) to put the cable in a low slack condition, thereby preventing other drawers from being opened simultaneously. FIG. 50 depicts an interlock 72' in which the drawer has opened sufficiently far to disengage engagement member 86' from recess 184.

An example of a lock 216 that may be used in conjunction with the present invention is depicted in FIGS. 51-55. Lock 216 selectively changes the condition of cable 74 from a high slack condition to a low slack condition. Lock 216 includes a hole 260, which may be a keyhole, into which a key may be inserted, or which may receive a bar that is coupled to a conventional lock cylinder. If hole 260 is a keyhole, insertion of the proper key therein allows a key cylinder 218 to be rotated by the key. If hole 260 receives a bar, which may be desirable where lock 216 is positioned at the back end of the cabinet, the bar is coupled to any conventional lock in a manner that causes the bar to be able to rotate about its longitudinal axis when the proper key is inserted into the conventional lock. In either situation, key cylinder 218 therefore will rotate when a proper key is used. Key cylinder 218 includes a pin 220 that moves in a cam track 222 defined in a reciprocating member 224. Reciprocating member 224 is snap-fittingly attached to a cover 226 by way of a flexible arm 228. Flexible arm 228 fits into an aperture 230 defined in cover 226. Flexible arm 228 includes a shoulder 232 that retains reciprocating member 224 to cover 226 when the two are snap fit together. The snap fitting occurs when flexible arm 228 initially contacts cover 226. A cam surface 234 causes flexible arm 228 to flex as reciprocating member 224 is initially pushed toward cover 226. After the two are completely secured together, flexible arm 228 snaps back to its unflexed condition in which shoulder 232 prevents the two members from being separated. Reciprocating member 224 includes a pair of apertures 236.

Cable 74 may be secured to one of the apertures 236. When key cylinder 218 is rotated toward a locking condition, reciprocating member 224 moves vertically upward with respect to cover 226 (FIGS. 51-52). This vertical movement decreases the slack in cable 74 such that no drawers in the cabinet may be opened. When lock 216 is unlocked, the unlocking rotation of key cylinder 218 moves reciprocating member 224 vertically downward with respect to cover 226 (FIGS. 53-54). This creates sufficient slack in cable 74 for a single drawer to be opened. Cover 226 may be securely fastened inside of cabinet 60 in any suitable manner.

Lock 216 could be modified so that reciprocating member 224 utilized a spring or other structure that selectively increased or decreased the tension on cable 74. In other words, rather than having reciprocating member 224 absolutely move to its raised position when the key is rotated to the locked position, lock 216 could be modified to include a spring, or other biasing force, that urged member 224 towards its upper, locked position. If no drawers were open, this biasing force would be sufficient to raise member 224 to its locked position. If one drawer were open, this biasing force would be insufficient to move the member 224 to its upper position because the cable would be in its low slack condition, thereby preventing member 224 from moving upward while the drawer was opened. As soon as a drawer was closed, however, the biasing force would move member 224 to its locked position and remove the slack in the cable that was created by the drawer closing. This arrangement allows the lock to be switched to the locked position while a drawer is still open. Once the drawer closed, it would immediately be locked and not able to be opened until the lock 216 was deactivated. The modified lock 216 thus would allow the cabinet to be locked while a drawer was still open, and as soon as the open drawer was closed, it would immediately lock. Thereafter, no drawers could be opened until the lock was deactivated. The biasing force exerted on reciprocating member 224 in modified lock 216 should be sufficient to remove the slack in cable 74 when all the drawers are closed and to maintain the cable in the locked, low slack condition when pulling forces are exerted against one or more locked drawers.

Lock 216 may be further modified to include a solenoid, or other electrically controlled switch, that controls the movement of reciprocating member 224 between its locked and unlocked position. The solenoid could be controlled remotely by a user using a hand-held device that transmitted wireless signals to a receiver in the cabinet that controlled the solenoid. The control could be carried out in a conventional manner, such as in the manner in which remote,

keyless entry systems work on many current automobiles. Alternately, the cabinet could include a keypad, or other input device, in which the locking or unlocking of the cabinet was controlled by information, such as a code or password, input by a user.

While other materials may be used, interlock 72 may be made primarily of metal. Specifically, attachment plate 76, sliding plate 78, cam 80, and rivet 88 may all be made of metal, such as steel, or any other suitable metal. Engagement member 86 may be made of metal or any other suitable material. Cable guide 84 may be made from molded plastic, or any other suitable material. Drawer slide 70 is preferably made of metal, such as steel, with the exception of the ball bearing cages 166 for the ball bearings, which may be made of plastic. Lever 156, cam 160, and cable guide 84' of interlock 72' may all be made of plastic. First and second rivets 154 and 158, stationary portion 90' of drawer slide 70', and slidable portion 164 of drawer slide 70' may all be made of metal, such as steel. Spring 82 of interlock 72 may exert a force of approximately 1.5 pounds. Spring 82' of interlock 72' may exert a force of approximately .5 pounds. Other spring strength may, of course, be used. Cable 74 may be a steel cable composed of seven strands, with each strand made of seven individual filaments. Cable 74 may have a tensile strength of 40 pounds. Cable 74 may preferably be made of stainless steel and include a vinyl coating. The diameter of cable 74 after coating may be .024 inches, although other dimensions can be used. To avoid kinking of cable 74, surfaces that come in contact with cable 74, such as engagement lug 104, may be curved with a radius of at least .125 inches to help reduce the possibility of kinking. As several possible alternatives to steel, cable 74 could be a string, a plastic based line, such as those used as fishing lines, or any other elongated, flexible member with suitable tensile strength.

A single interlock 72 or 72' is all that is needed for each drawer in the cabinet. The opposite drawer slide can thus be a regular drawer slide with no interlock attached. Interlocks 72 and 72', of course, can be attached directly to the cabinet, rather than integrated with the drawer slide. During the installation of the interlock system into a cabinet, the slack in the cable may be easily set by securing one end of the cable, opening a single drawer, and then pulling the cable until substantially all of its slack is removed. The cable is then secured in that condition. When the drawer is thereafter closed, the cable will have sufficient slack to allow only a single drawer to be opened at a time. Alternatively, cables 74 could be manufactured at a preset length to fit different cabinet heights. The installer of the interlocks therefore could simply fasten the cable

in the desired location and the length of the cable will create the appropriate slack to allow a single drawer to be opened. Once the appropriate length of a cable is determined for a given cabinet height, cables could be easily mass-produced by a manufacturer by simply cutting them to the appropriate lengths.

An interlock system 240 is depicted in FIG. 56. Interlock system 240 is depicted on cabinet 60, which includes three drawers 62a-c. Interlock system 240 includes three interlocks 72. It will of course be understood that interlocks 72 could be replaced with interlocks 72'. An upper lock 216a and a lower lock 216b are included. Upper lock 216a is adapted to selectively lock the uppermost two drawers 62a and b. Lower lock 216b is adapted to selectively lock the lower drawer 62c. An interlock cable 74a extends vertically within cabinet 60 and runs through each of the interlocks 72 for each of the drawers 62a-c. Cable 74a is attached within the cabinet at attachment points 242, which comprise any suitable means for attaching cable 74a within cabinet 60. These means may include a screw, a bolt, or other means. An upper cable 74b runs vertically from upper lock 216a through the two interlocks 72 of the uppermost two drawers 62a and b. The lower end of upper cable 74b is secured at an attachment point 244, which may be positioned above lowermost drawer 62c. Alternatively, attachment point 244 may be positioned below drawer 62c, but cable 74b should not run through interlock 72 of lowermost drawer 62c. Lower cable 74c extends vertically from lower lock 216b to the bottom of cabinet 60. Lower cable 74c is secured to the bottom of cabinet 60 at an attachment point 74c. The interlock 72 of upper drawer 62a and b thus have two cables 74a and b passing through them. Cable 74a and b may be threaded through interlock 72 in the same manner as has been described previously. Specifically, both cables 74a and b may be threaded through cable guides 84 and around engagement lug 104.

When either cable 74a or b is in the low slack condition, interlock 72 will prevent the associated drawers 62a or b from being opened. If both cables 74a and b are in the low slack condition, interlock 72 will also, of course, prevent the associated drawers 62a or b from being opened. Because cable 72a also runs through the interlock associated with the lowermost drawer 62c, only one drawer in the entire cabinet may be opened at a given time. Cable 74c, which runs through the interlock 72 of the lowermost drawer 62c, allows the lowermost drawer 62c to be selectively locked independently of the locking of the uppermost two drawers 62a and b. Cables 74a and c, which run through interlock 72 of the lowermost drawer 62c, may be run side by side

through interlock 72 in the same manner that has been described above. Alternatively, an additional engagement lug 104 may be provided on all of the interlocks that extends outwardly in an opposite direction to engagement lug 104. Cable guide 84 may be modified to include a second channel to accommodate the second cable and align it with the added engagement lug. Other modifications may be made to accommodate the second cable. System 240 allows the two upper drawers to be locked independently of the lower-most drawer while only a single drawer may be opened at any time if either or both of the locks are not activated.

While the present invention has been described in terms of the preferred embodiments depicted in the drawings and discussed in the above specification, it will be understood by one skilled in the art that the present invention is not limited to these particular preferred embodiments, but includes any and all such modifications that are within the spirit and scope of the present invention as defined in the following claims.

**CLAIMS:**

1. An interlock for a drawer positionable within a cabinet, said drawer being movable in the cabinet in a first direction toward an open position and in a second, opposite direction toward a closed position, said interlock comprising:
  - an elongated, flexible member;
  - a slack take-up mechanism engageable with said elongated, flexible member and movable between a higher slack position and a lower slack position, said higher slack position allowing said elongated, flexible member to exist in a higher slack condition, said lower slack position causing said elongated, flexible member to exist in a lower slack condition;
  - a cam operatively coupled to said slack take-up mechanism and to said drawer, said cam adapted to switch the slack take-up mechanism from the higher slack position to the lower slack position when the drawer is moved in the first direction; and
  - a biasing member adapted to exert a force against said take-up mechanism that urges said slack take-up mechanism toward said lower slack position.
2. The interlock of claim 1 wherein said biasing member is a spring.
3. The interlock of claim 2 wherein said force of said biasing member has a magnitude that is independent of the magnitude of a force exerted on the drawer in said first direction.
4. The interlock of claim 3 wherein said slack take-up mechanism includes a slide movable in a linear direction generally parallel to said first direction, said slide including an engagement surface positioned to engage said cable.
5. The interlock of claim 2 further including a stop that prevents said cam from switching said slack take-up mechanism from the higher slack position to the lower slack position when the elongated, flexible member is in said lower slack condition.

6. The interlock of claim 5 wherein said cam is adapted to prevent said drawer from being moved to said open position when said cam engages said stop.
7. The interlock of claim 5 wherein said stop is an embossment.
8. The interlock of claim 1 wherein said elongated, flexible member is a cable.
9. The interlock of claim 8 further including a cable guide attached adapted to snap-fittingly receive the cable from at least one direction.
10. The interlock of claim 9 wherein said cable is in communication with at least one other drawer interlock associated with another drawer, said at least one other drawer interlock adapted to change said cable to said lower slack condition when the another drawer is moved to an open position.
11. The interlock of claim 8 wherein said cable is in communication with a lock, said lock adapted to selectively change said cable between said lower and higher slack conditions.
12. The interlock of claim 11 wherein said cable is in communication with at least one other drawer interlock associated with another drawer, said at least one other drawer interlock adapted to change said cable to said lower slack condition when the another drawer is moved to an open position.
13. The interlock of claim 8 further including a second cable in communication with a lock, said lock adapted to selectively change said second cable between lower and higher slack conditions, said drawer being prevented from being moved to the open position when said second cable is in said lower slack condition, said second cable being in operative engagement with said slack take-up mechanism.

14. A cabinet having at least one drawer movable within the cabinet in a first direction toward an open position and in a second, opposite direction toward a closed position, said cabinet comprising:

a frame adapted to support said drawer when positioned within the cabinet;

an elongated, flexible member positioned within said cabinet, said elongated, flexible member changeable between a lower slack condition and a higher slack condition;

an interlock positioned within said frame and in operative engagement with said elongated, flexible member, said interlock adapted to prevent said drawer from moving to said open position when said elongated, flexible member is in said lower slack condition and to allow said drawer to move to said open position when said elongated, flexible member is in said higher slack condition; and

a slack take-up mechanism attached to said interlock and adapted to change said elongated, flexible member from said higher slack condition to said lower slack condition when the drawer is moved from the closed position to the open position, said slack take-up mechanism adapted to exert a force on said elongated, flexible member that has a magnitude which is independent of a force applied in said first direction to the drawer when said drawer is substantially closed.

15. The cabinet of claim 14 wherein said elongated, flexible member is a cable.

16. The cabinet of claim 15 wherein said cable is in communication with at least one other drawer interlock associated with another drawer, said at least one other drawer interlock adapted to change said cable to said lower slack condition when the another drawer is moved to the open position.

17. The cabinet of claim 15 wherein said slack take-up mechanism includes a slide movable in a linear direction generally parallel to said first direction, said slide including an engagement surface positioned to engage said cable.

18. The cabinet of claim 15 wherein said slack take-up mechanism includes a biasing member adapted to exert a force against said cable that urges said cable toward said lower slack position whenever the drawer associated with said interlock is moved to the open position.

19. The cabinet of claim 18 wherein said biasing member is a spring.

20. The cabinet of claim 14 wherein said elongated, flexible member is in communication with a lock, said lock adapted to selectively change said elongated, flexible member between said lower and higher slack conditions.

21. The cabinet of claim 14 further including at least one drawer slide attached to said drawer, said drawer slide movable between an extended position corresponding to the attached drawer's open position and a retracted position corresponding to the attached drawer's closed position, said interlock mounted on said drawer slide and adapted to prevent said drawer slide from moving to said extended position when said elongated, flexible member is in said lower slack condition and to allow said drawer slide to move to said extended position when said elongated, flexible member is in said higher slack condition.

22. A cabinet having at least one drawer movable within the cabinet in a first direction toward an open position and in a second, opposite direction toward a closed position, said cabinet comprising:

a frame adapted to support said drawer when positioned within the cabinet;

an elongated, flexible member positioned within said cabinet, said elongated, flexible member changeable between a lower slack condition and a higher slack condition;

an interlock positioned within said frame and in operative engagement with said elongated, flexible member, said interlock adapted to prevent said drawer from moving to said open position when said elongated, flexible member is in said lower slack condition and to allow said drawer to move to said open position when said elongated, flexible member is in said higher slack condition; and

a slack take-up mechanism attached to said interlock and adapted to change said elongated, flexible member from said higher slack condition to said lower slack condition when the drawer is moved from the closed position to the open position, said slack take-up mechanism adapted to translate a first force exerted on the drawer in said first direction to a second force exerted on said elongated, flexible member which is less than said first force.

23. The cabinet of claim 22 wherein said elongated, flexible member is in communication with a lock, said lock adapted to selectively change said elongated, flexible member between said lower and higher slack conditions.

24. The cabinet of claim 22 wherein said second force is less than one half of said first force.

25. The cabinet of claim 22 wherein said second force is less than one fifth of said first force.

26. The cabinet of claim 22 further including at least one drawer slide attached to said drawer, said drawer slide movable between an extended position corresponding to the attached drawer's open position and a retracted position corresponding to the attached drawer's closed position, said interlock mounted on said drawer slide and adapted to prevent said drawer slide from moving to said extended position when said elongated, flexible member is in said lower slack condition and to allow said drawer slide to move to said extended position when said elongated, flexible member is in said higher slack condition.

27. The cabinet of claim 22 wherein said elongated, flexible member is a cable.

28. The cabinet of claim 27 wherein said cable is in communication with at least one other drawer interlock associated with another drawer, said at least one other drawer interlock adapted to change said cable to said lower slack condition when the another drawer is moved to the open position.

29. An interlock for a drawer positionable within a cabinet, the drawer being movable in the cabinet in a first direction toward an open position and in a second, opposite direction toward a closed position, said interlock comprising:

an elongated, flexible member;

a rotatable lever adapted to switch the amount of slack in said elongated, flexible member between a low slack condition and a high slack condition by rotating between a first and second position, respectively;

an engagement member positioned to cause said rotatable lever to rotate toward said first position when said drawer is initially moved from the closed position in the first direction; and

a biasing member positioned adjacent said lever, said biasing member adapted to exert a biasing force that tends to prevent said lever from rotating from said second position to said first position until said drawer is moved in said first direction to the open position.

30. The interlock of claim 29 wherein said biasing member is a spring.

31. The interlock of claim 30 wherein said spring is coupled to said lever.

32. The interlock of claim 29 wherein said elongated, flexible member is a cable.

33. The interlock of claim 29 wherein said elongated, flexible member is in communication with at least one other drawer interlock associated with another drawer, said at least one other drawer interlock adapted to change said elongated, flexible member from the high slack to the low slack condition when the at least one other drawer is moved to an open position.

34. The interlock of claim 33 further including a cable guide adapted to snap-fittingly receive the cable from at least one direction.

35. The interlock of claim 27 wherein said elongated, flexible member is in communication with a lock, said lock adapted to selectively change said elongated, flexible member between said low and high slack conditions.
36. The interlock of claim 35 further including a second, elongated flexible member in communication with a second lock and said lever, said second lock adapted to selectively change said second elongated, flexible member between said low and high slack conditions.
37. The interlock of claim 29 wherein said lever and said biasing member are to be mounted on a drawer slide member.
38. The interlock of claim 37 wherein said interlock is to be solely mounted to said drawer slide member.
39. The interlock of claim 29 wherein said rotatable lever is configured to translate a first force exerted on the drawer in the first direction into a second force exerted against said elongated, flexible member that is less than said first force.
40. The interlock of claim 39 wherein said second force is less than one-half of said first force.
41. The interlock of claim 39 wherein said second force is less than one-fifth of said first force.
42. The interlock of claim 41 wherein said interlock is to be secured to an end of a drawer slide.
43. The interlock of claim 39 wherein said second force is less than one-twentieth of said first force.

44. An interlock for a drawer positionable within a cabinet, the drawer being movable in the cabinet in a first direction toward an open position and in a second, opposite direction toward a closed position, said interlock comprising:

an elongated, flexible member adapted to be changeable between a high slack condition and a low slack condition;

an actuating member positioned to be operatively engageable with said elongated, flexible member, said actuating member adapted to change said elongated, flexible member to said low slack position when the drawer is opened and to allow said elongated flexible member to exist in said high slack condition when the drawer is closed, said actuating member adapted to translate a first force exerted on said drawer in said first direction to a second force on said elongated, flexible member which is less than said first force; and

said actuating member comprising a rotatable lever adapted to alter the amount of slack in said elongated, flexible member, said lever being rotatable between a low slack position and a high slack position, said low slack position creating the low slack condition in said elongated, flexible member and said high slack position allowing said elongated, flexible member to exist in the high slack condition.

45. The interlock of claim 44 wherein an engagement member is adapted to be attached to said drawer and positioned to cause said rotatable lever to rotate to said low slack position when said drawer is initially moved in the first direction from the closed position.

46. The interlock of claim 45 wherein said lever is prevented from rotating to said low slack position by said elongated, flexible member when said elongated, flexible member is in said low slack condition.

47. The interlock of claim 46 wherein when said lever is in said low slack position said drawer is prevented from being moved to said open position.

48. The interlock of claim 47 wherein said elongated, flexible member is a cable.

49. The interlock of claim 48 wherein said second force is less than one-half of said first force.

50. The interlock of claim 49 wherein said cable is in communication with a lock, said lock adapted to selectively change said cable to said low slack condition.

51. The interlock of claim 50 wherein said lever and said retainer are to be mounted to a drawer slide.

52. The interlock of claim 48 wherein said second force is less than one-tenth of said first force.

53. The interlock of claim 44 further including a retainer adapted to retain said rotatable lever in said low slack position while said drawer is moved to said open position.

54. The interlock of claim 53 wherein said retainer includes a cam member coupled to said lever.

55. The interlock of claim 44 further including a spring that exerts a force on said lever that resists movement of said lever from said high slack position to said low slack position.

56. The interlock of claim 44 wherein said cable is in communication with a lock, said lock adapted to selectively change said cable to said low slack condition such that said drawer is prevented from being moved to the open position when said cable is in said low slack condition.

57. A locking and interlocking system comprising:  
a lock;

a first elongated, flexible member to extend between at least first and second drawers, said first elongated, flexible member being changeable from a high slack condition to a low slack condition;

a second elongated, flexible member to extend between said lock and said first drawer, said lock adapted to change said second elongated, flexible member from a high slack condition to a low slack condition;

a first interlock in communication with said first and second elongated, flexible members, said first interlock adapted to change both said first and second elongated, flexible members from the high slack condition to the low slack condition, said first interlock adapted to prevent said first drawer from opening whenever said first or second elongated, flexible members are in said low slack condition; and

a second interlock in communication with said first elongated, flexible member, said second interlock adapted to change said first elongated, flexible member from the low slack to the high slack condition, said second interlock adapted to prevent said second drawer from opening whenever said first elongated, flexible member is in said low slack condition.

58. The system of claim 57 further including a second lock and a third elongated, flexible member, said second lock adapted to change said third cable from a high slack condition to a low slack condition, said third elongated, flexible member extending between said second lock and said second drawer, said second interlock further being adapted to change said third elongated, flexible member from the high slack condition to the low slack condition whenever said second drawer is opened, said second interlock further adapted to prevent said second drawer from being opened whenever said third elongated, flexible member is in said low slack condition.

59. The system of claim 58 wherein said first interlock exerts a force against said first and second elongated, flexible members that is less than one-fifth of a force exerted against said first drawer in said first direction.

60. The system of claim 59 wherein said first interlock includes a biasing member that exerts a biasing force against said first and second elongated, flexible members whenever said first drawer is moved to said open position, said biasing force being substantially constant.

61. The system of claim 60 wherein said biasing member includes a spring.

62. The system of claim 57 wherein said first interlock is to be mounted to a first drawer slide that slidably supports said first drawer and said second interlock is to be mounted to a second drawer slide that slidably supports said second drawer.

63. The system of claim 62 wherein said first and second drawer slides are to be removable from a cabinet.

64. The system of claim 57 wherein said first and second elongated, flexible members are cables.

65. An interlock for a drawer positionable within a cabinet, the drawer being movable in the cabinet in a first direction toward an open position and in a second, opposite direction toward a closed position, said interlock comprising:

an elongated, flexible member adapted to be changeable between a high slack condition and a low slack condition;

a cam member having a driving surface; and

an actuating member positioned to be operatively engageable with said elongated, flexible member, and engageable with the cam driving surface, said actuating member adapted to change said elongated, flexible member to said low slack position when the drawer is opened and to allow said elongated flexible member to exist in said high slack condition when the drawer is closed, and wherein the actuating member is adapted to move with respect to the elongated, flexible member faster than the driving surface moves when the drawer is initially being moved toward an open position.

- 66. The interlock of claim 65 wherein the actuating member further comprises a rotatable lever.
- 67. The interlock of claim 65 wherein the cam member is rotatable.
- 68. The interlock of claim 65 further comprising a spring that exerts a force on said actuating member.
- 69. The interlock of claim 65 wherein the actuating member is adapted to move a distance with respect to the elongated, flexible member at least five times greater than the distance the drawer moves when initially being moved toward an open position.

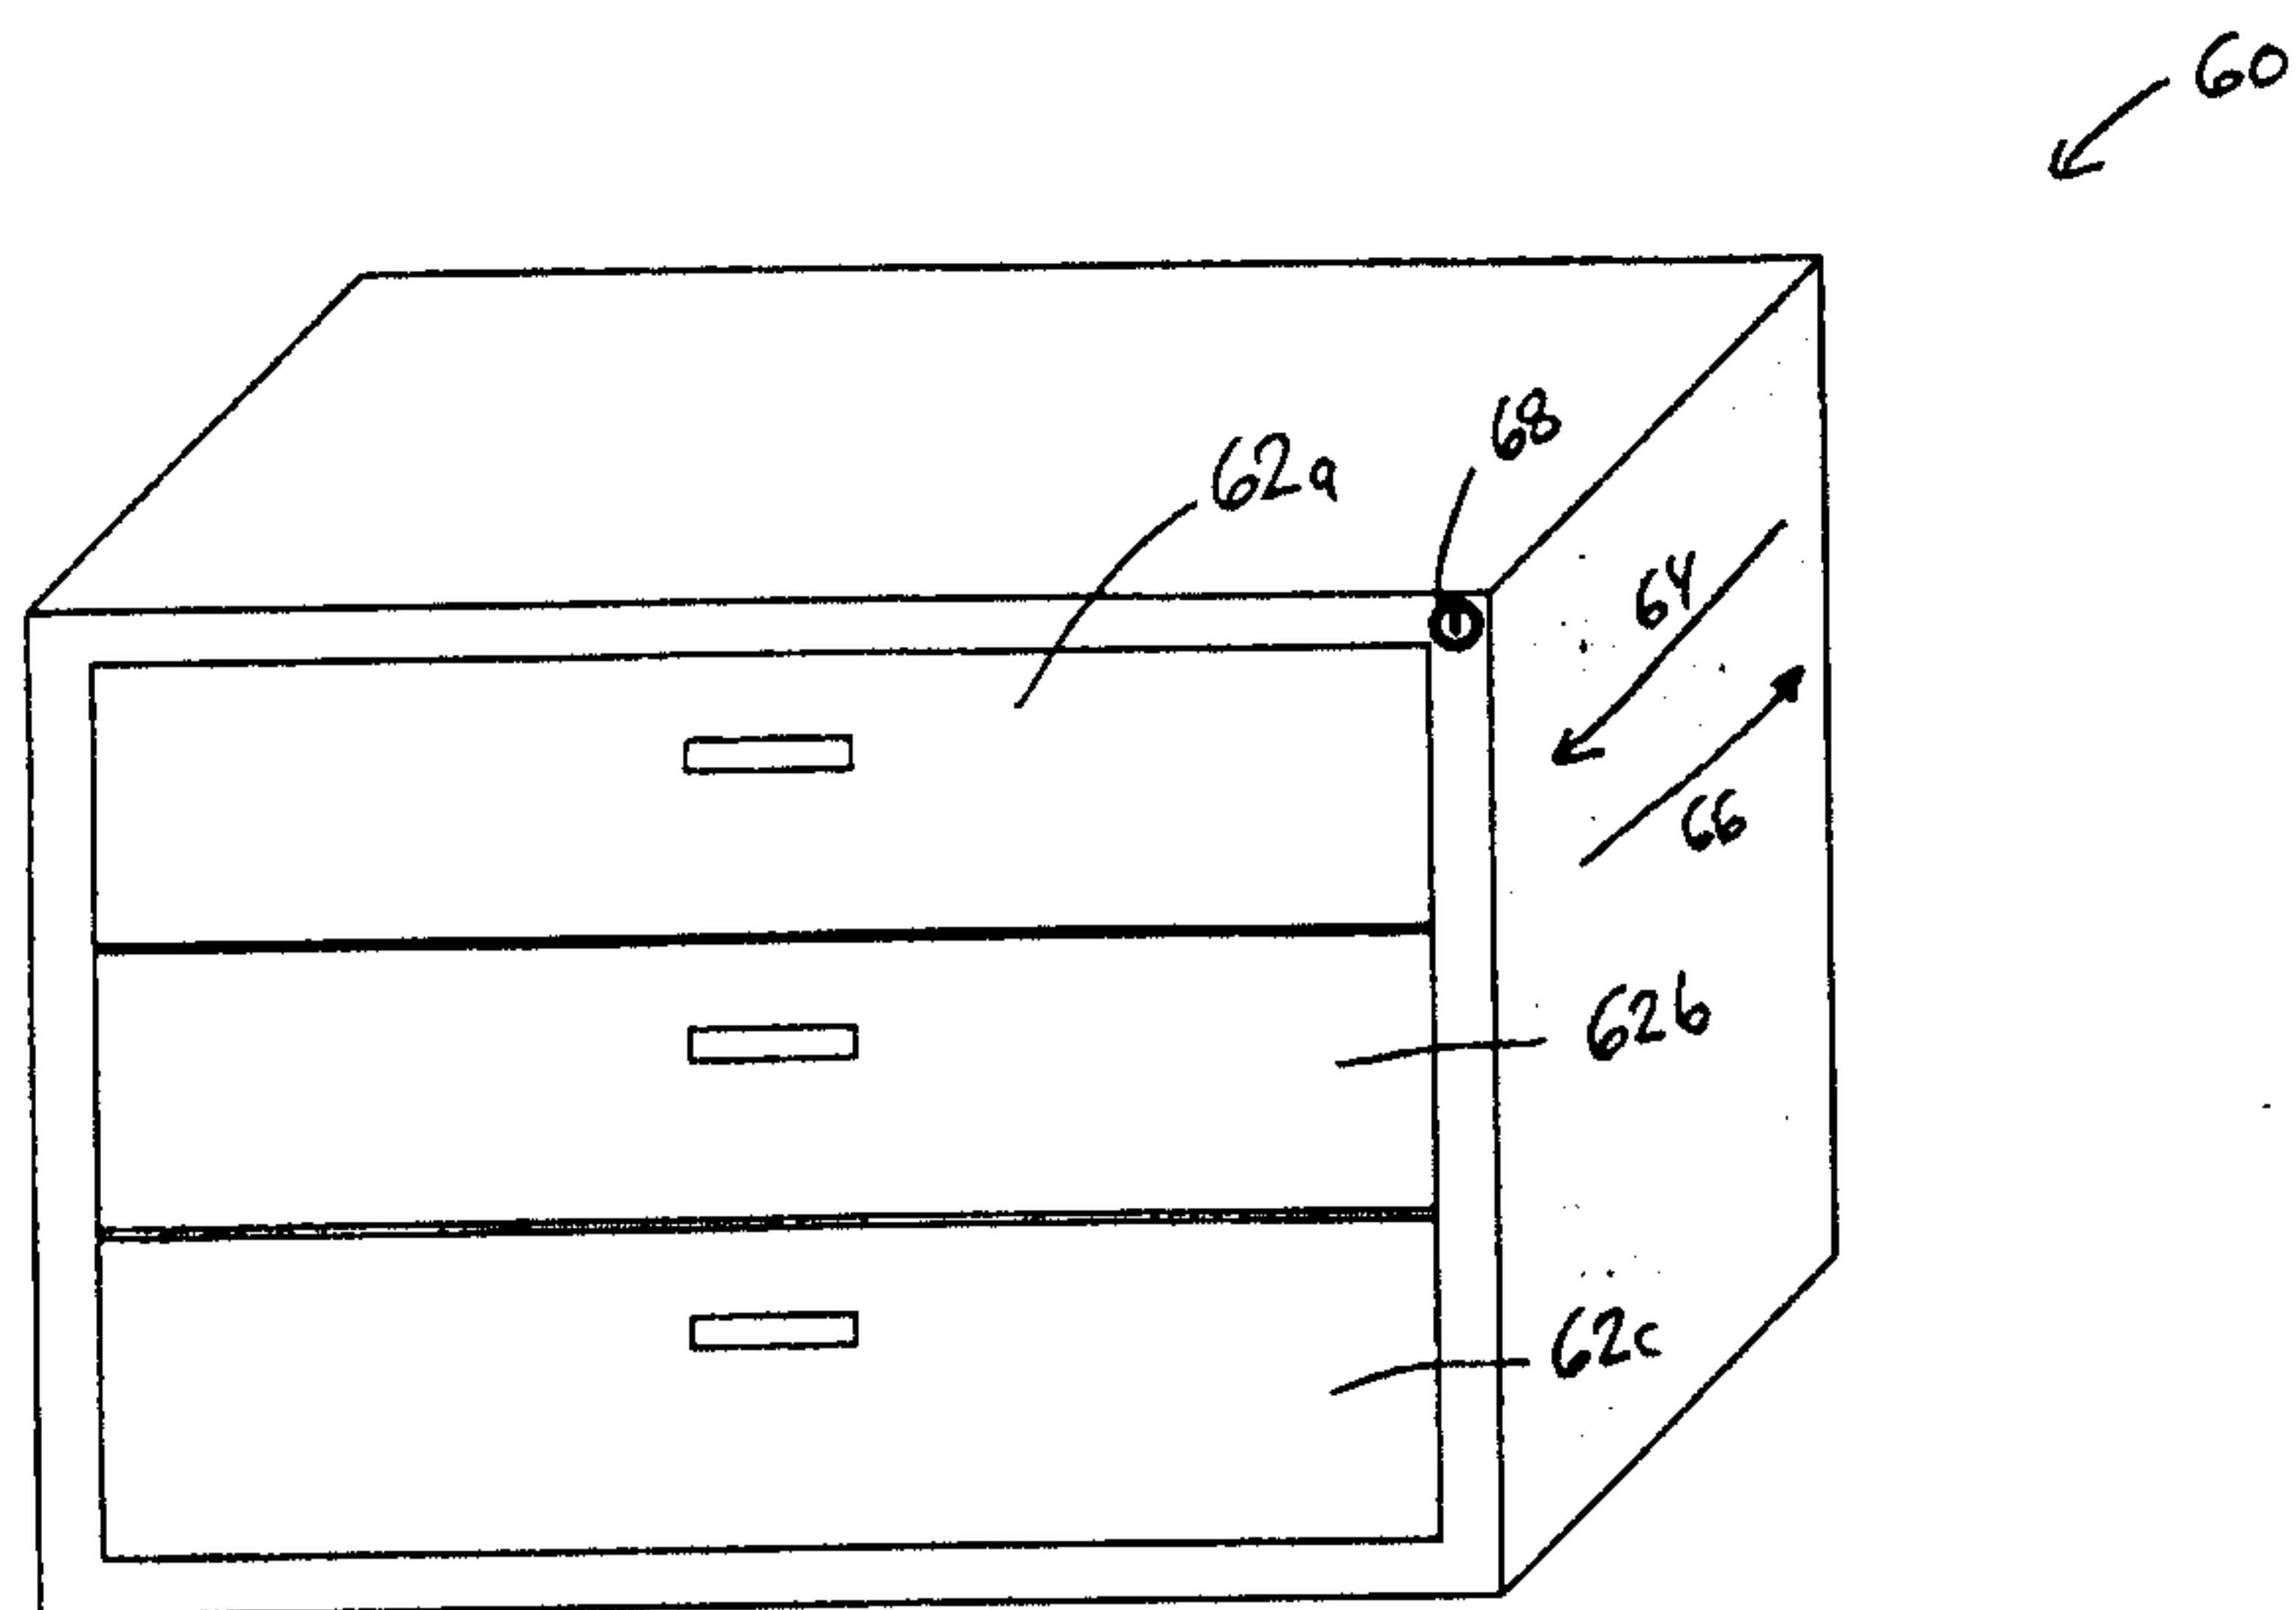


FIG. 1



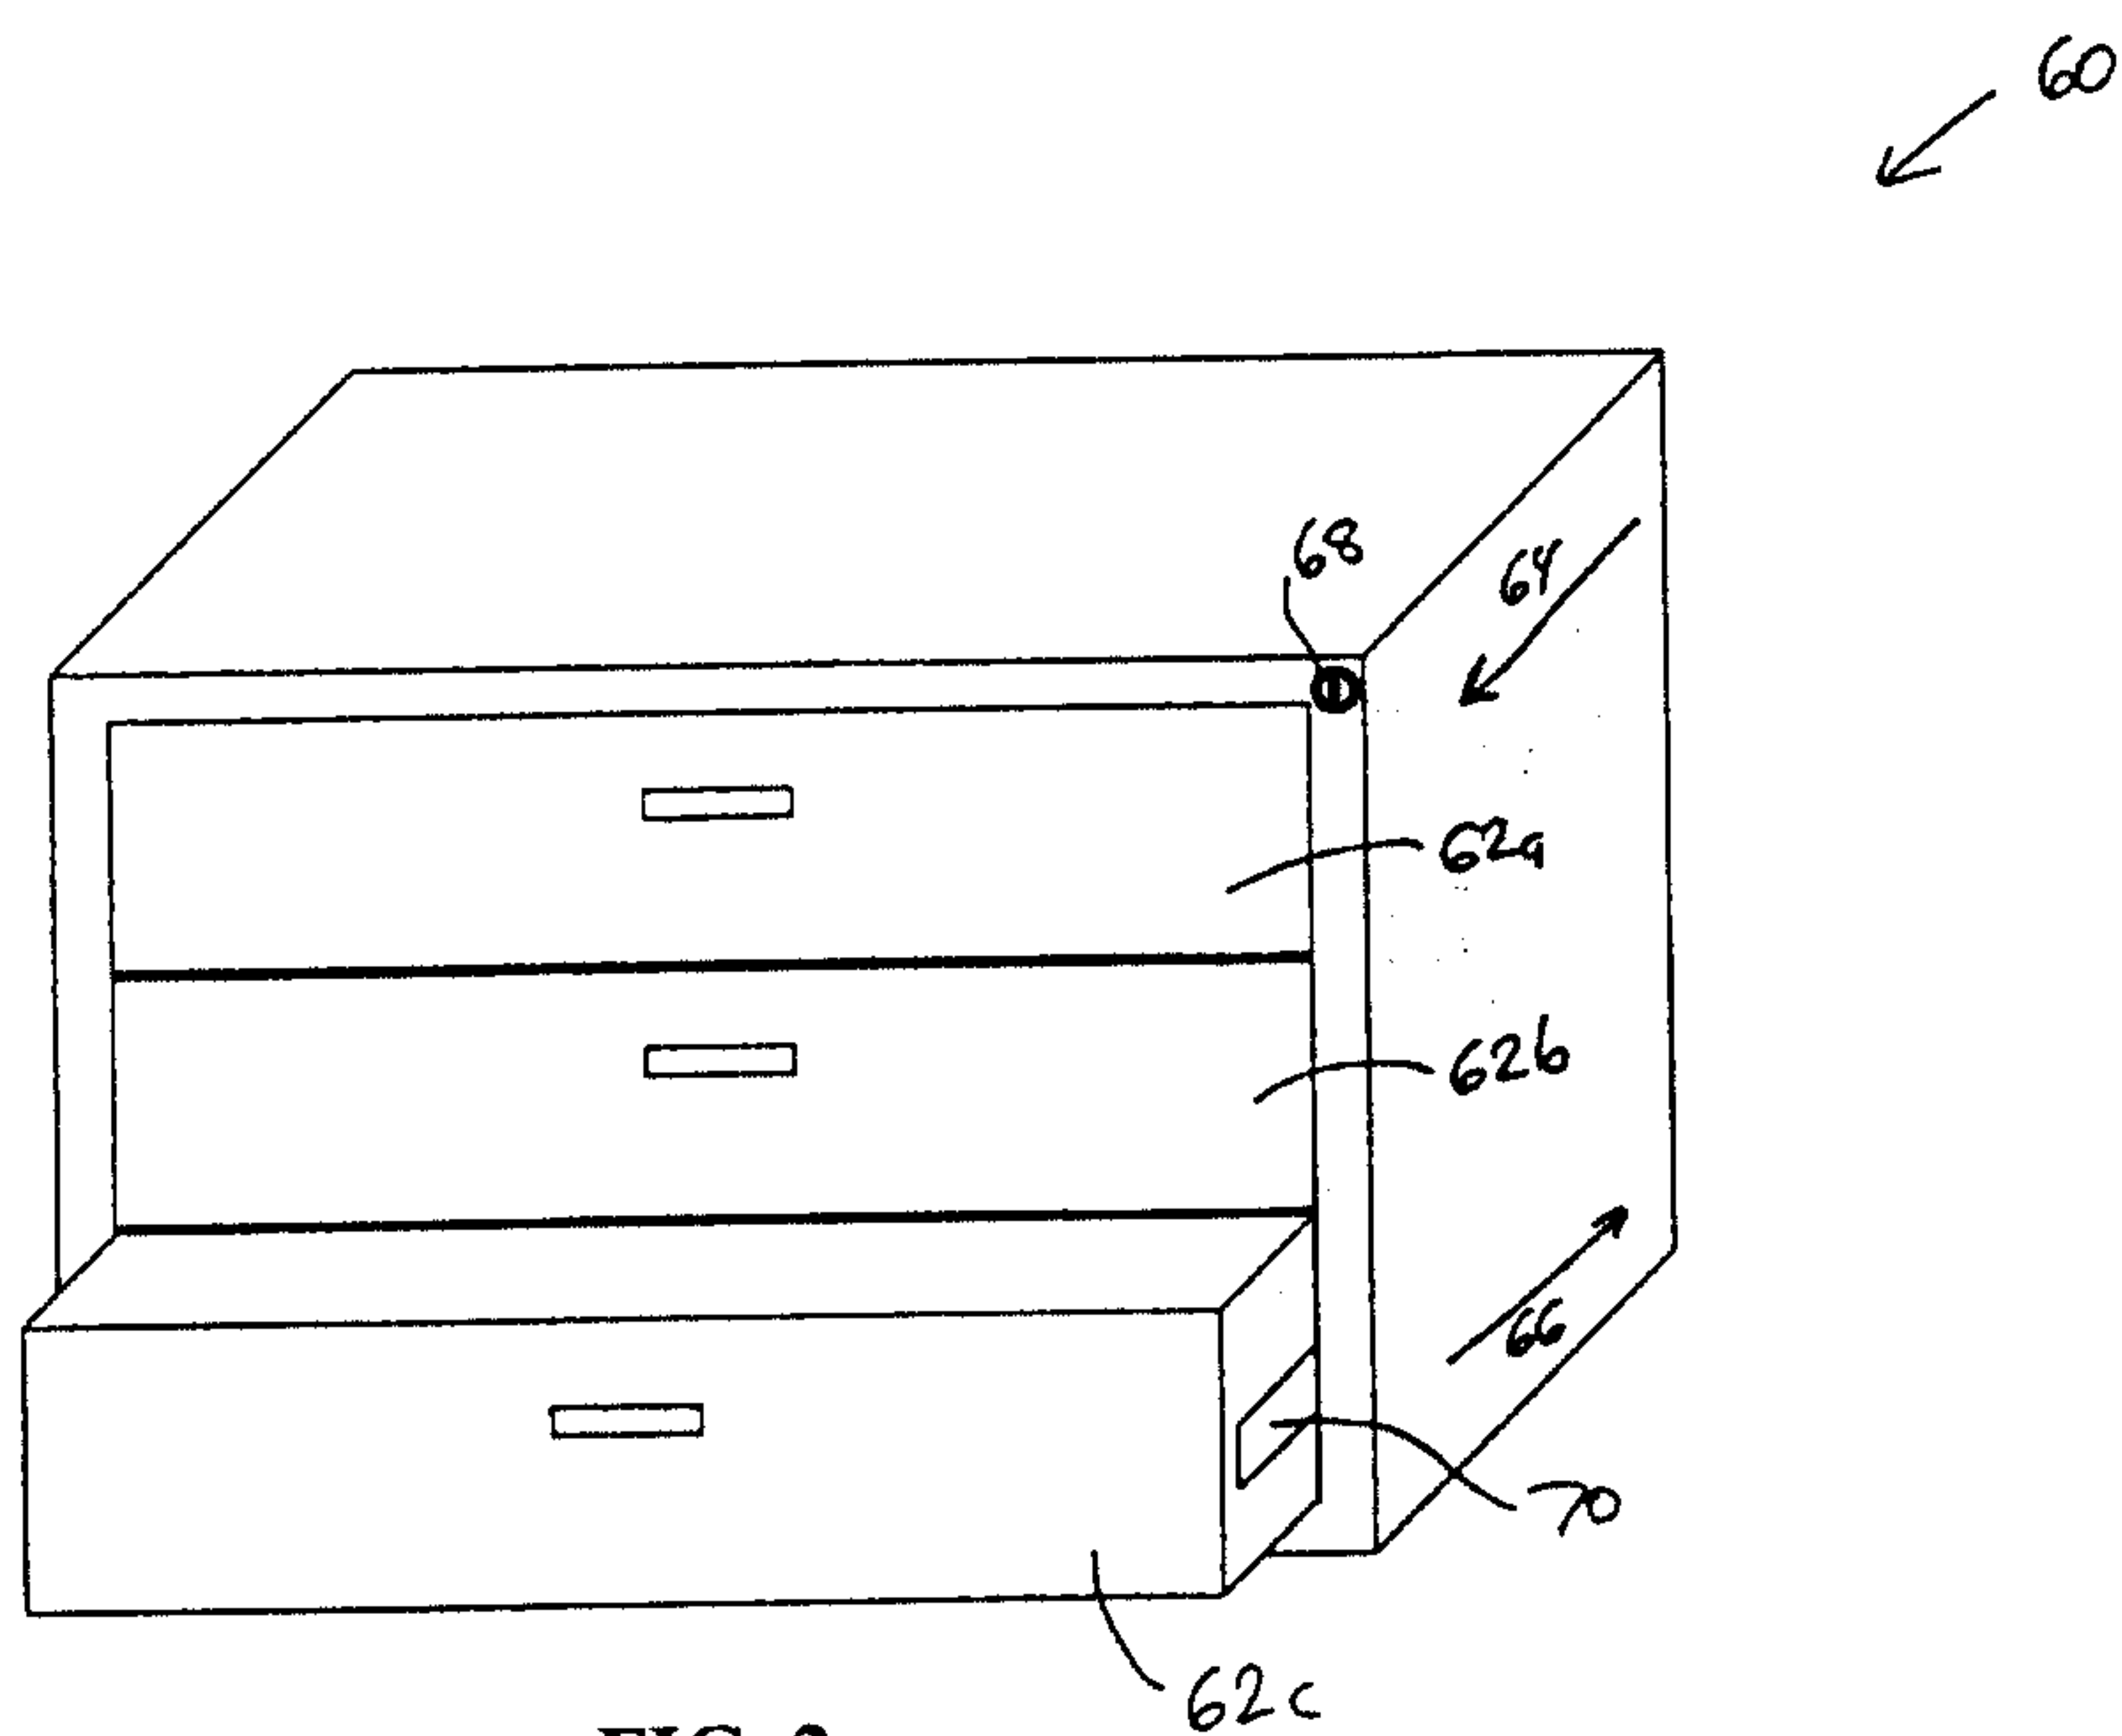


FIG. 2


Borden Ladner Gervais LLP / s.r.l.

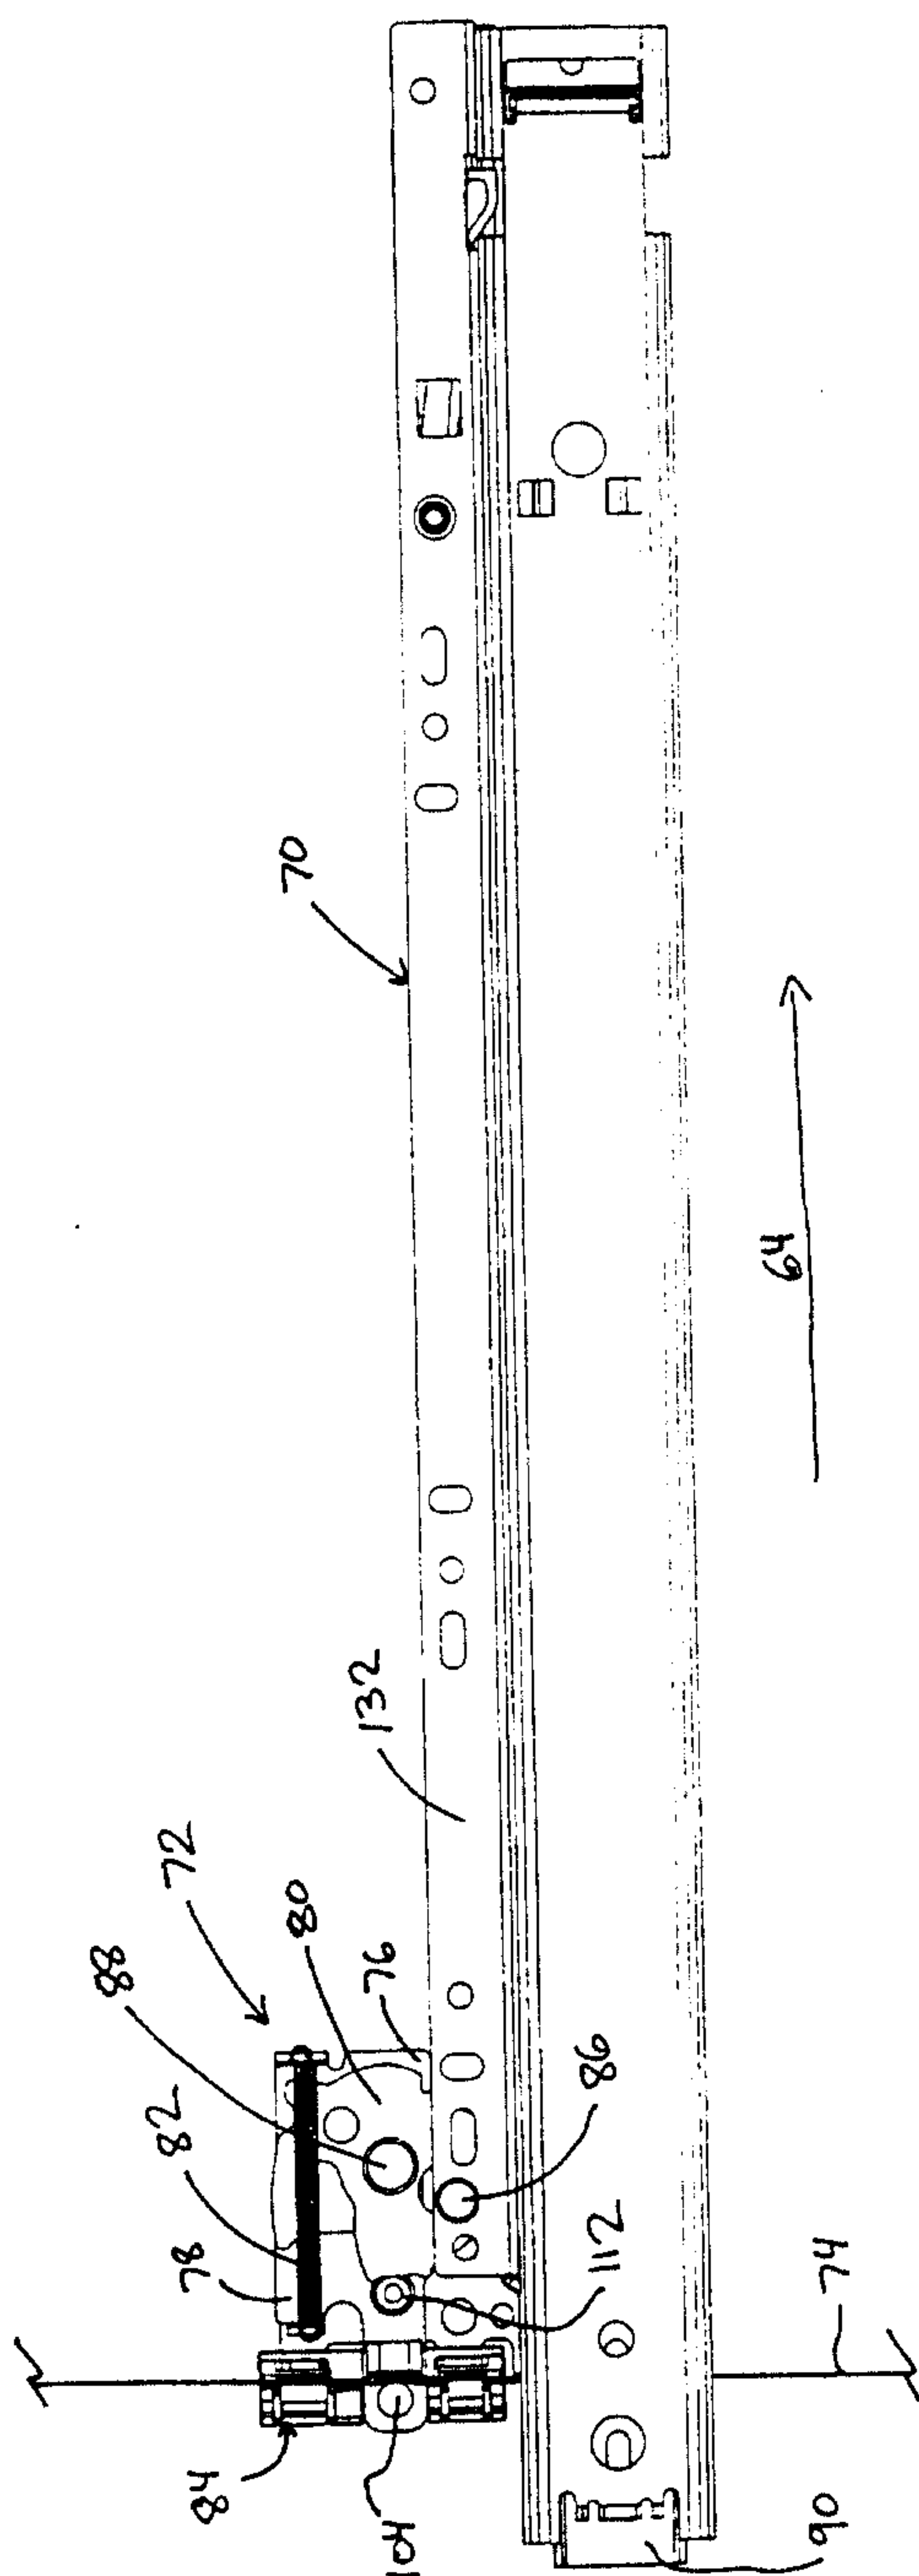


*Borden Ladner Gervais LLP / s.r.l.*

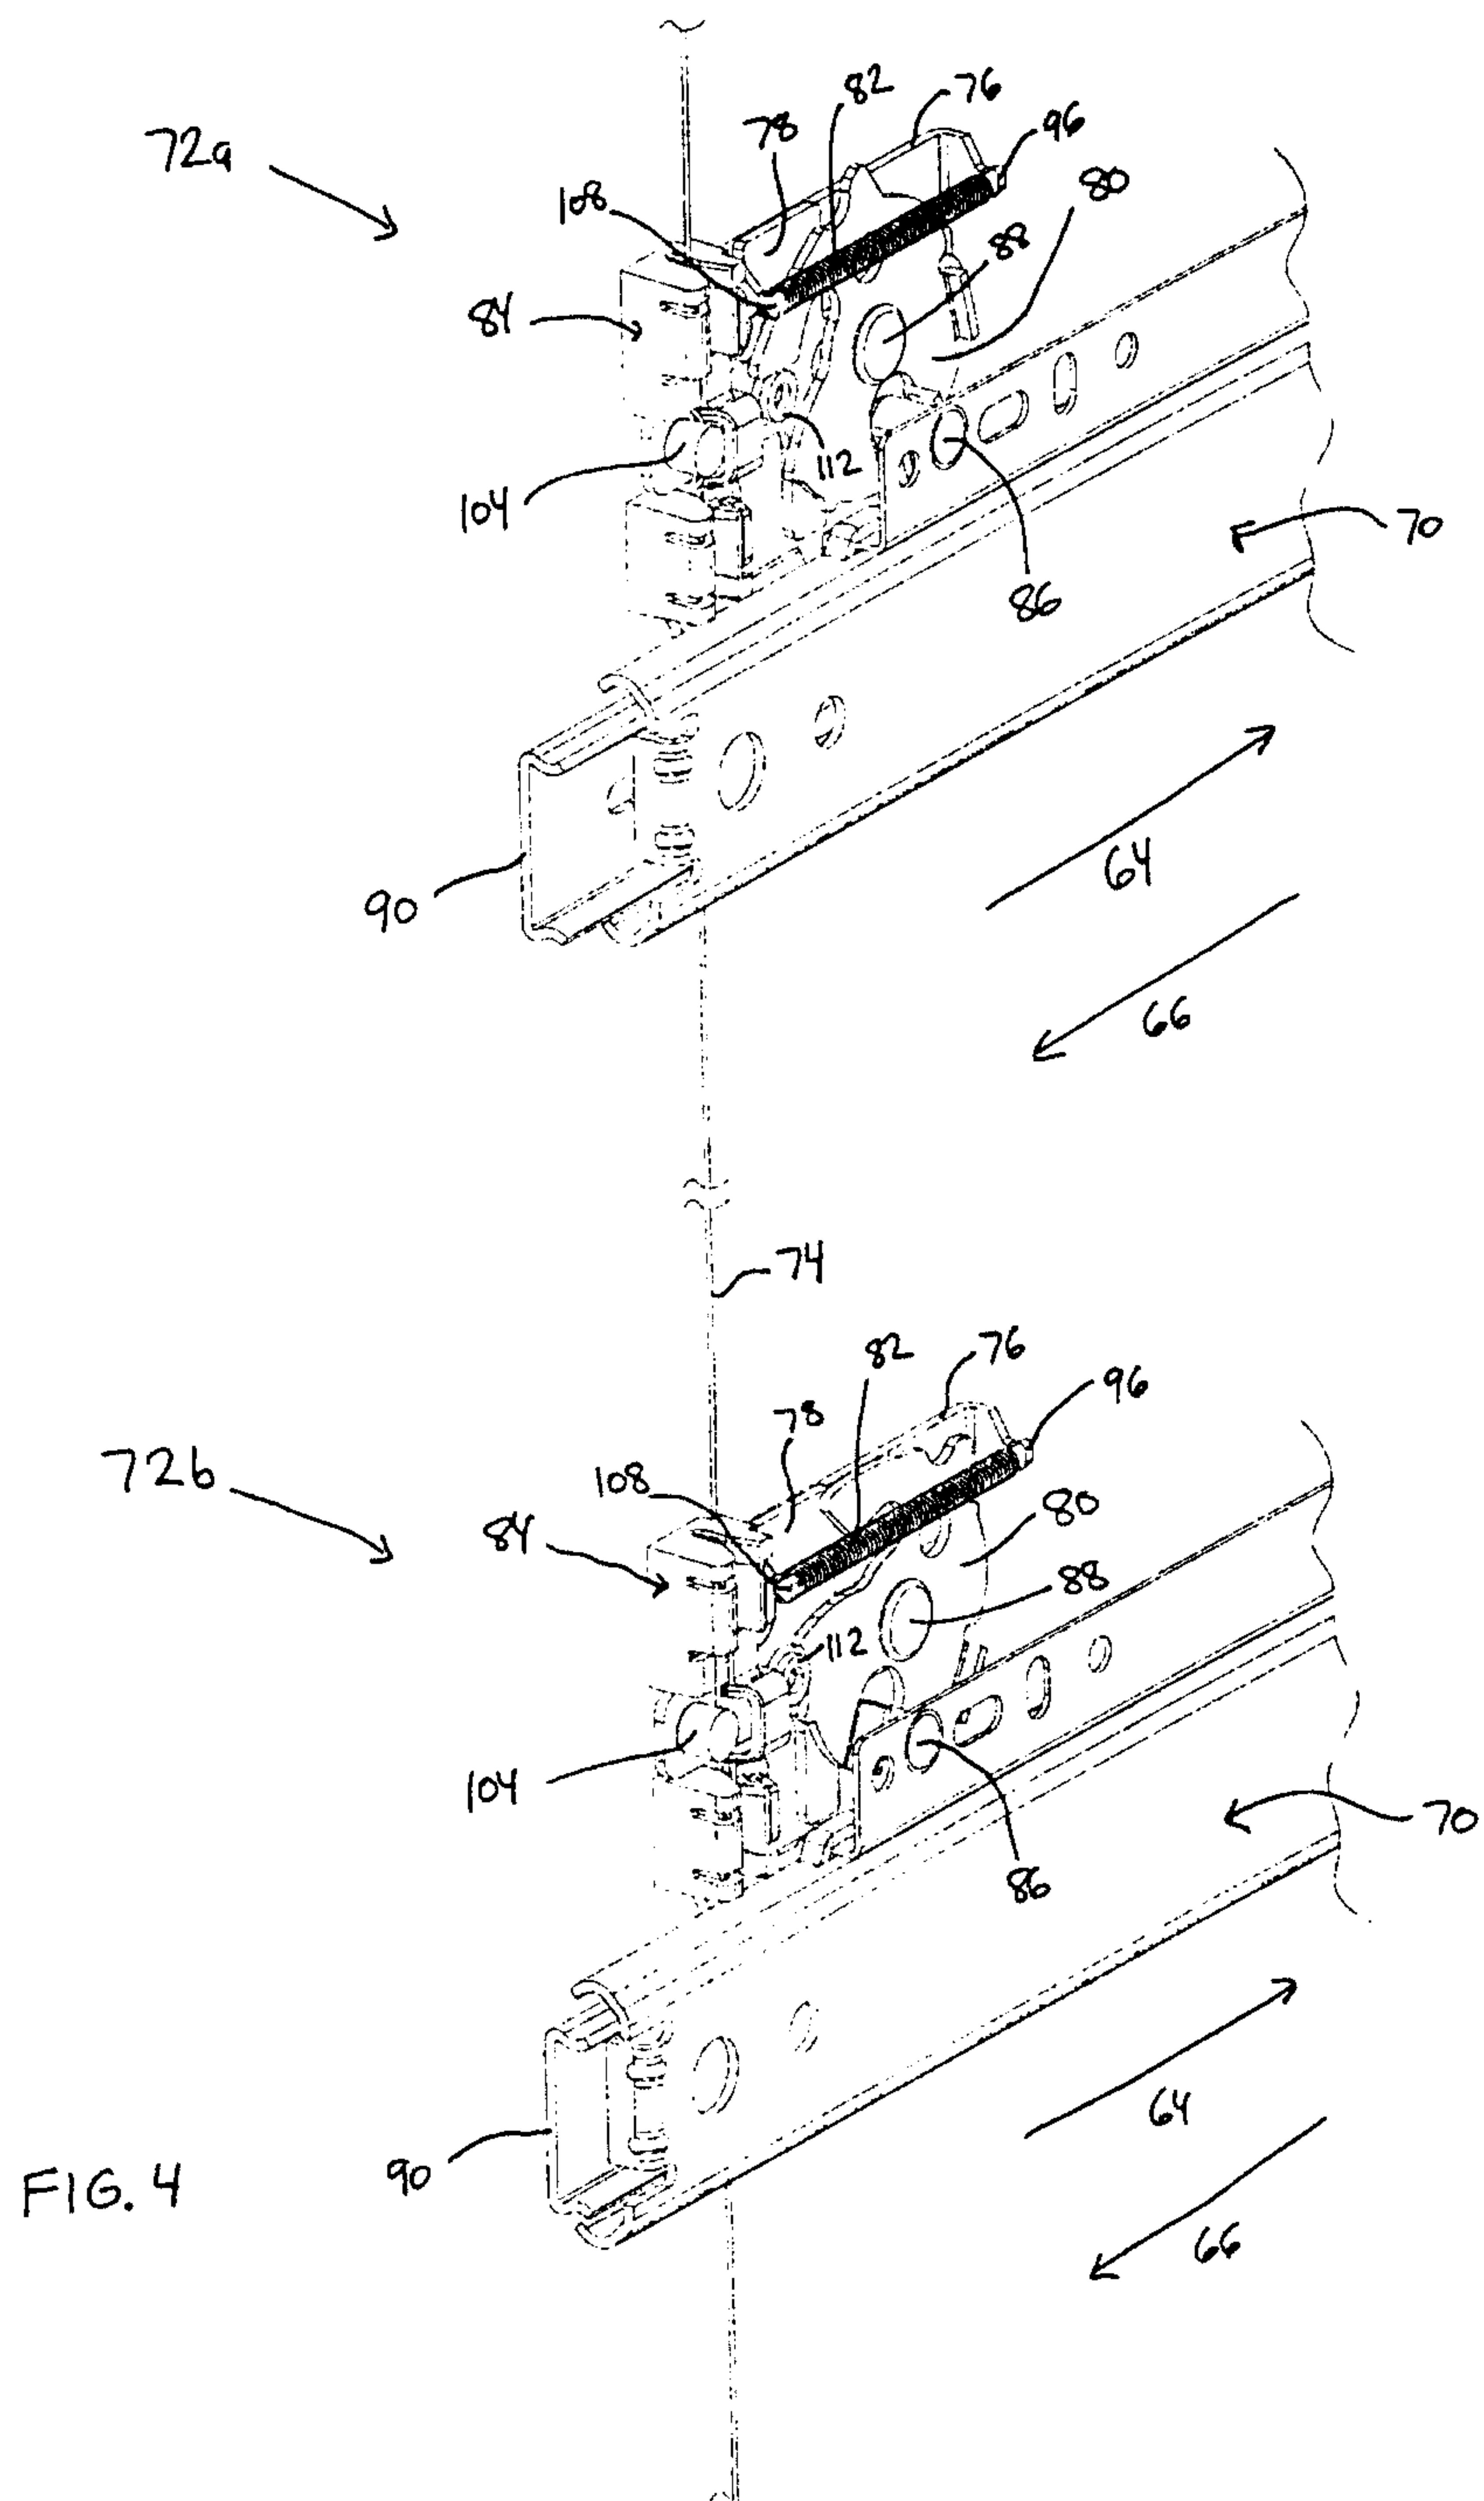

Borden Ladner Gervais LLP / s.r.l.

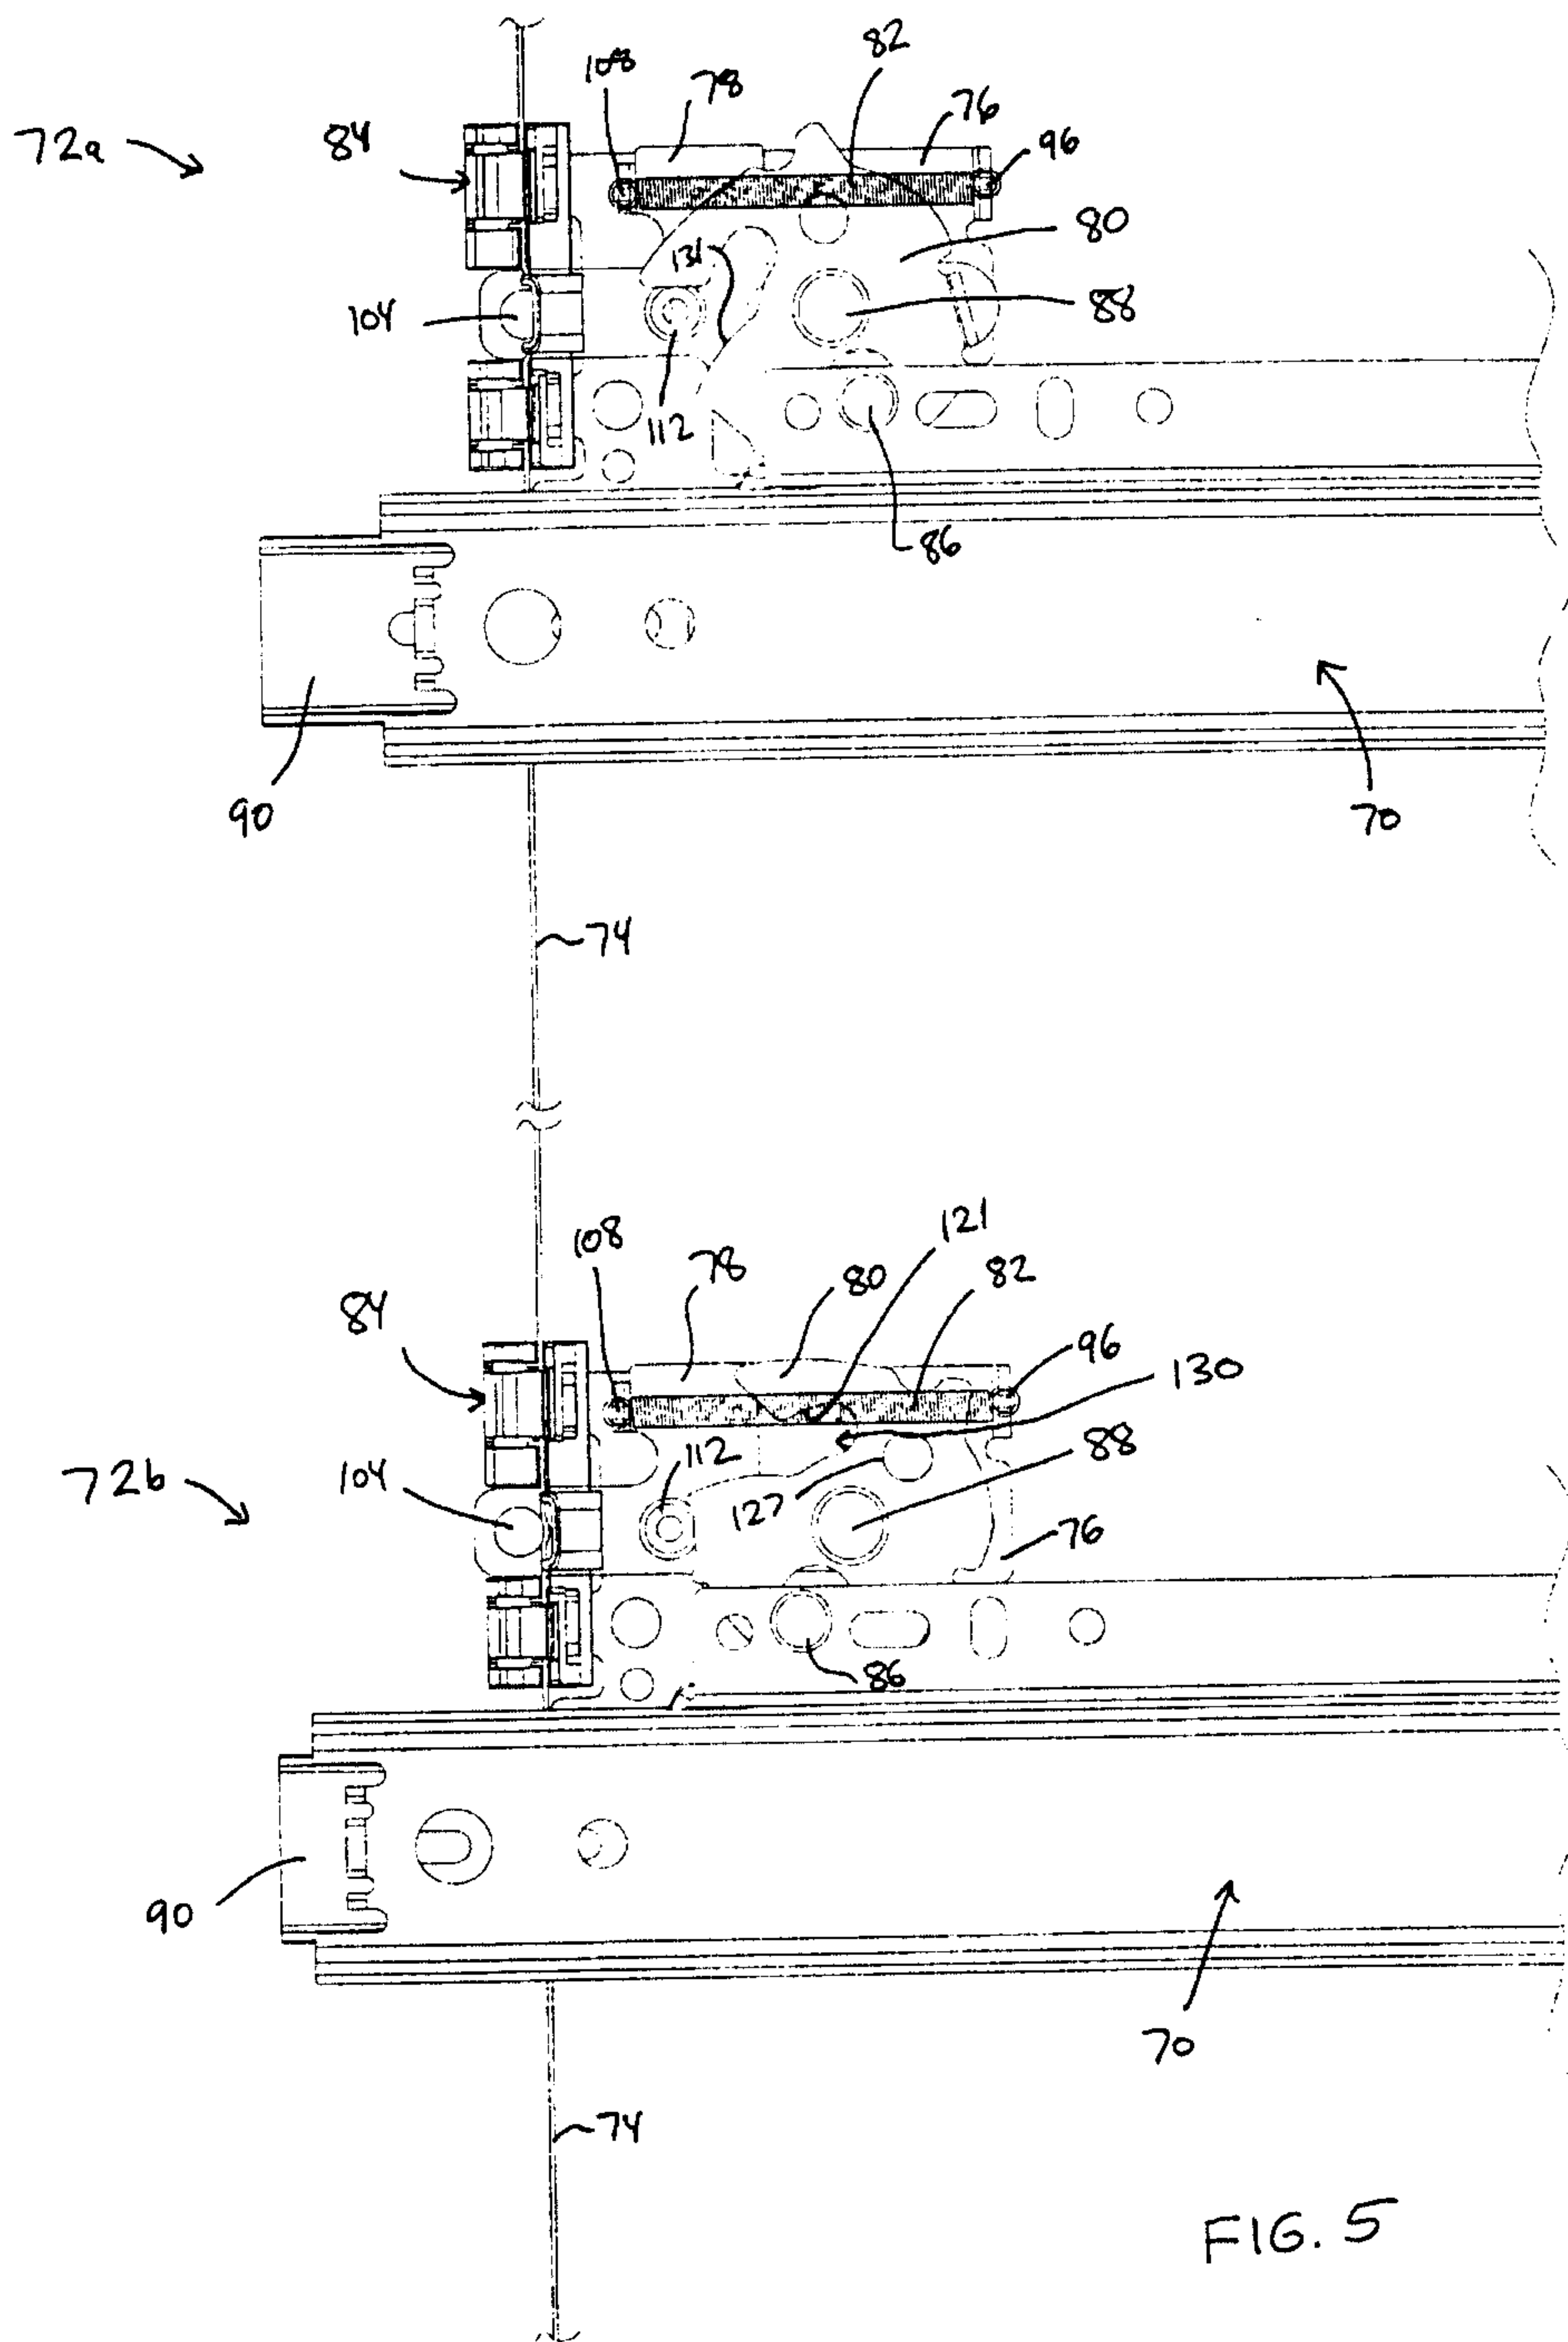

Borden Ladner Gervais LLP / s.r.l.

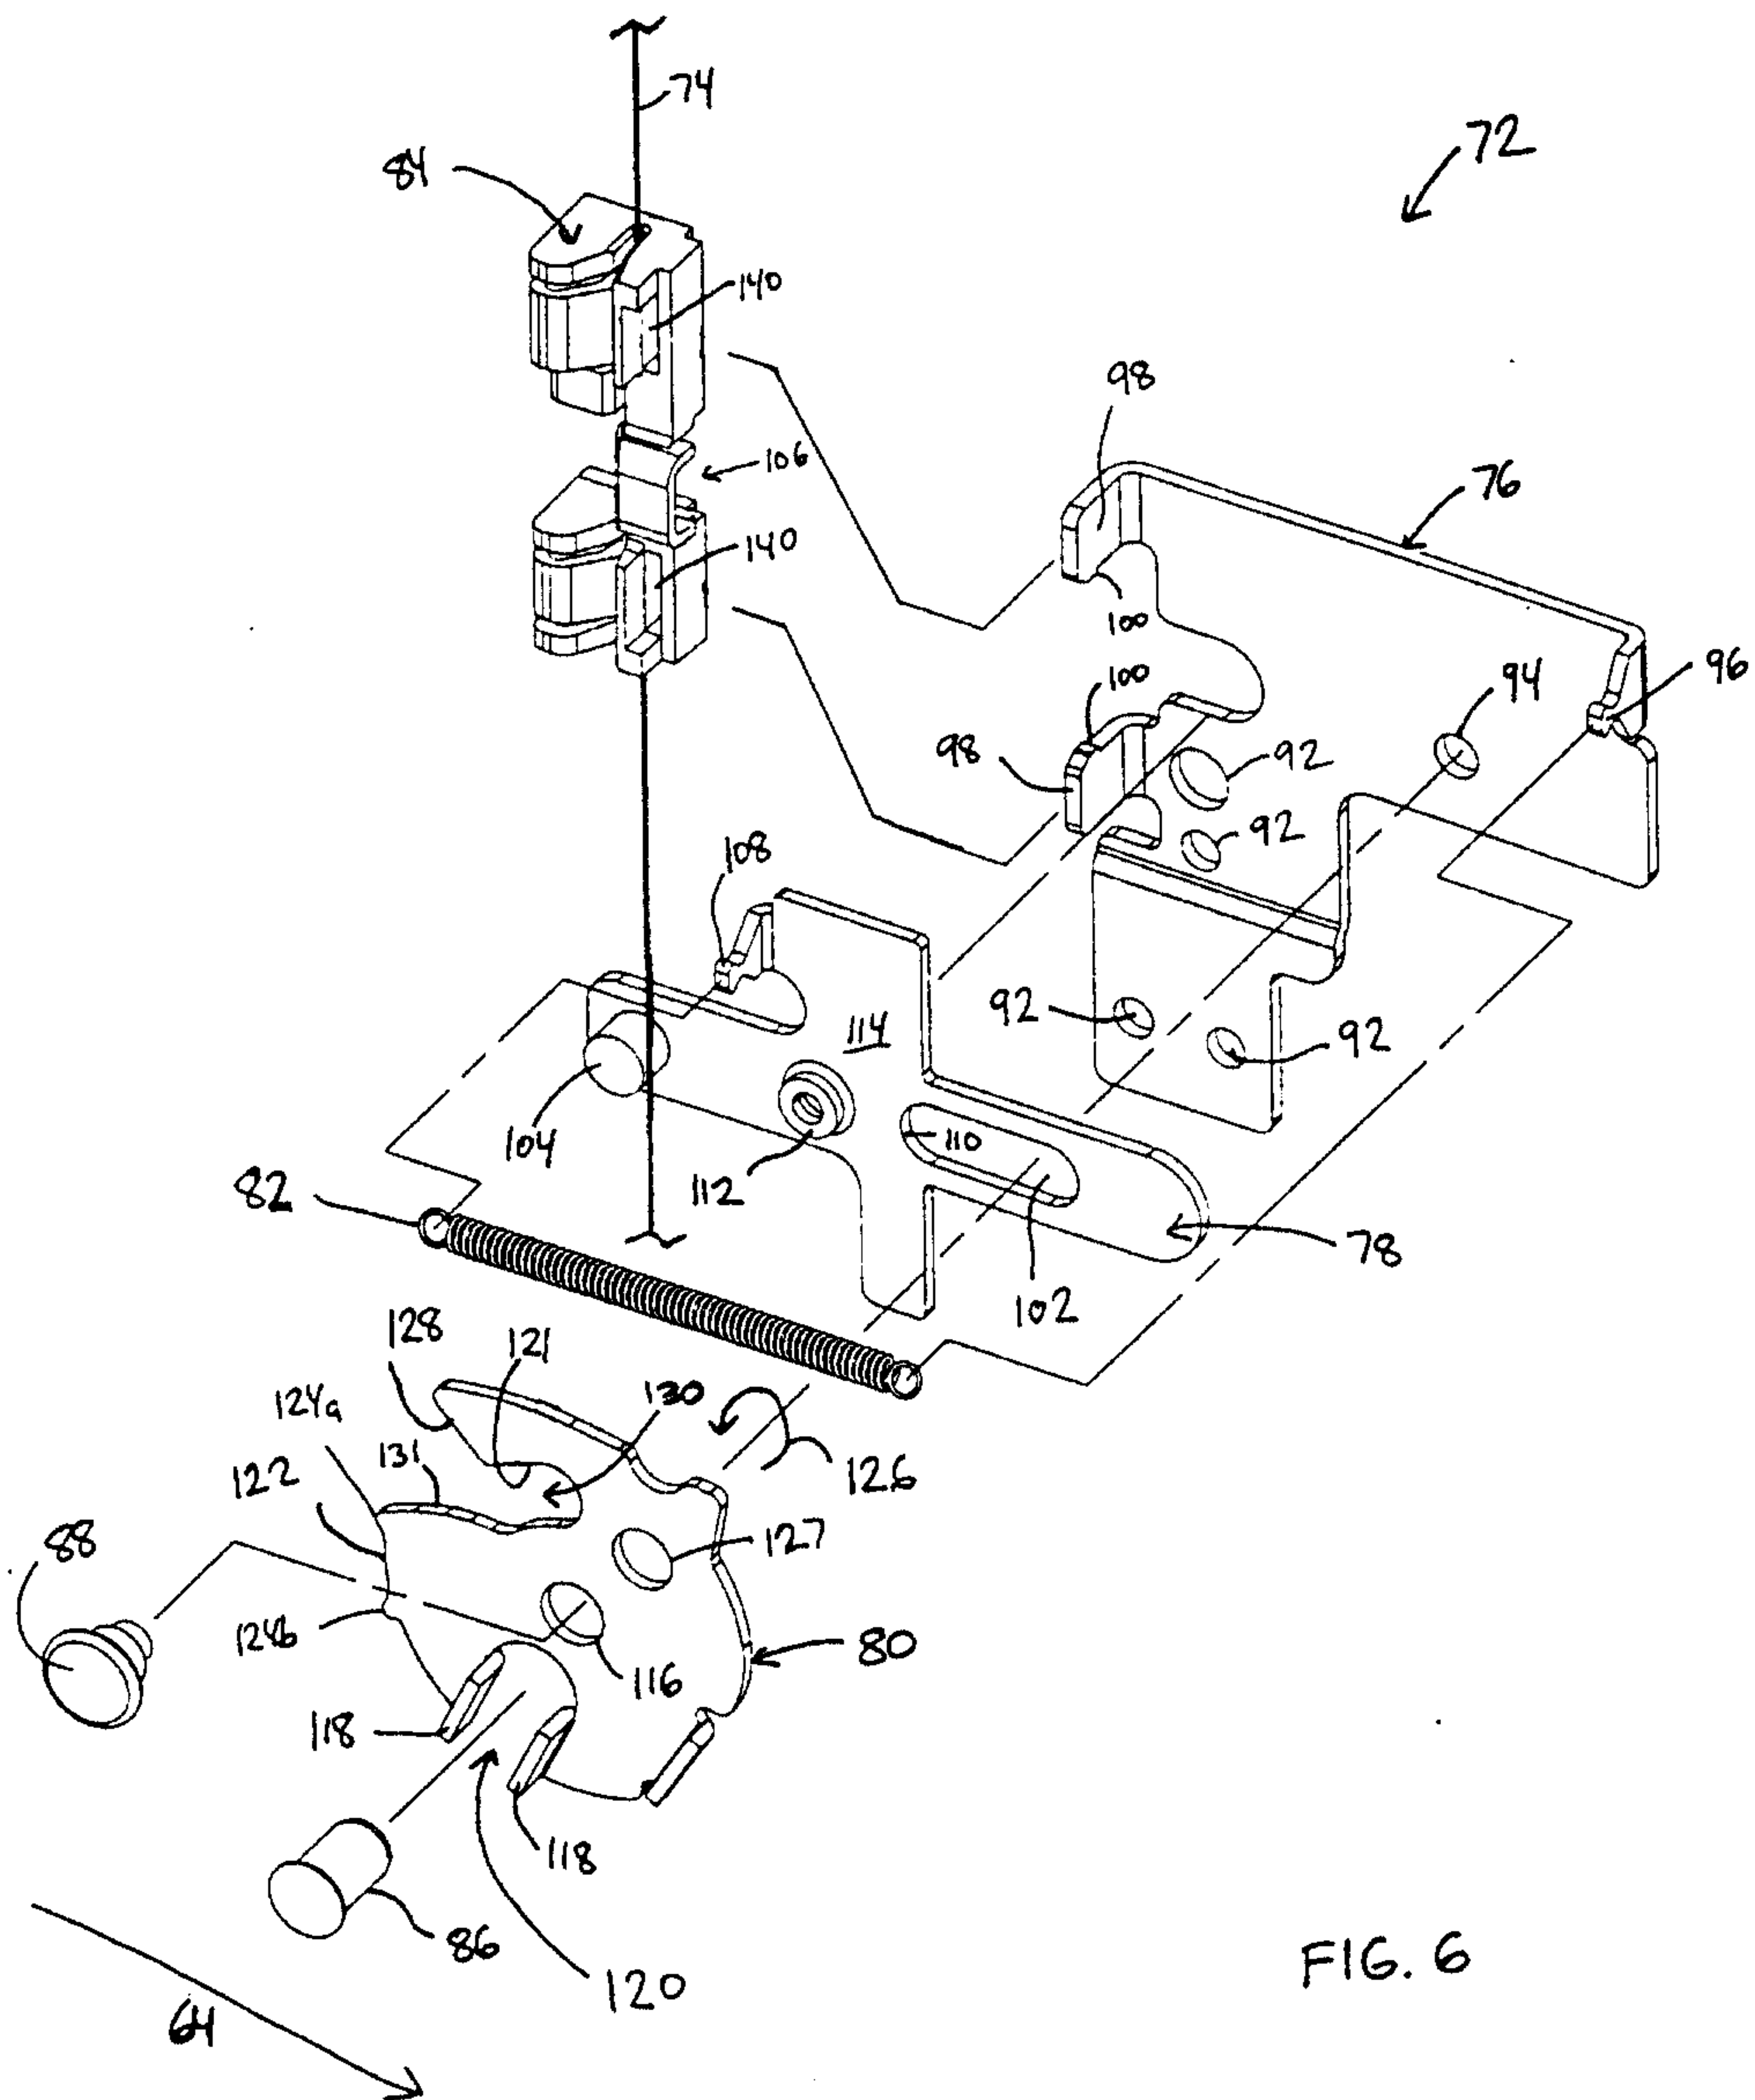

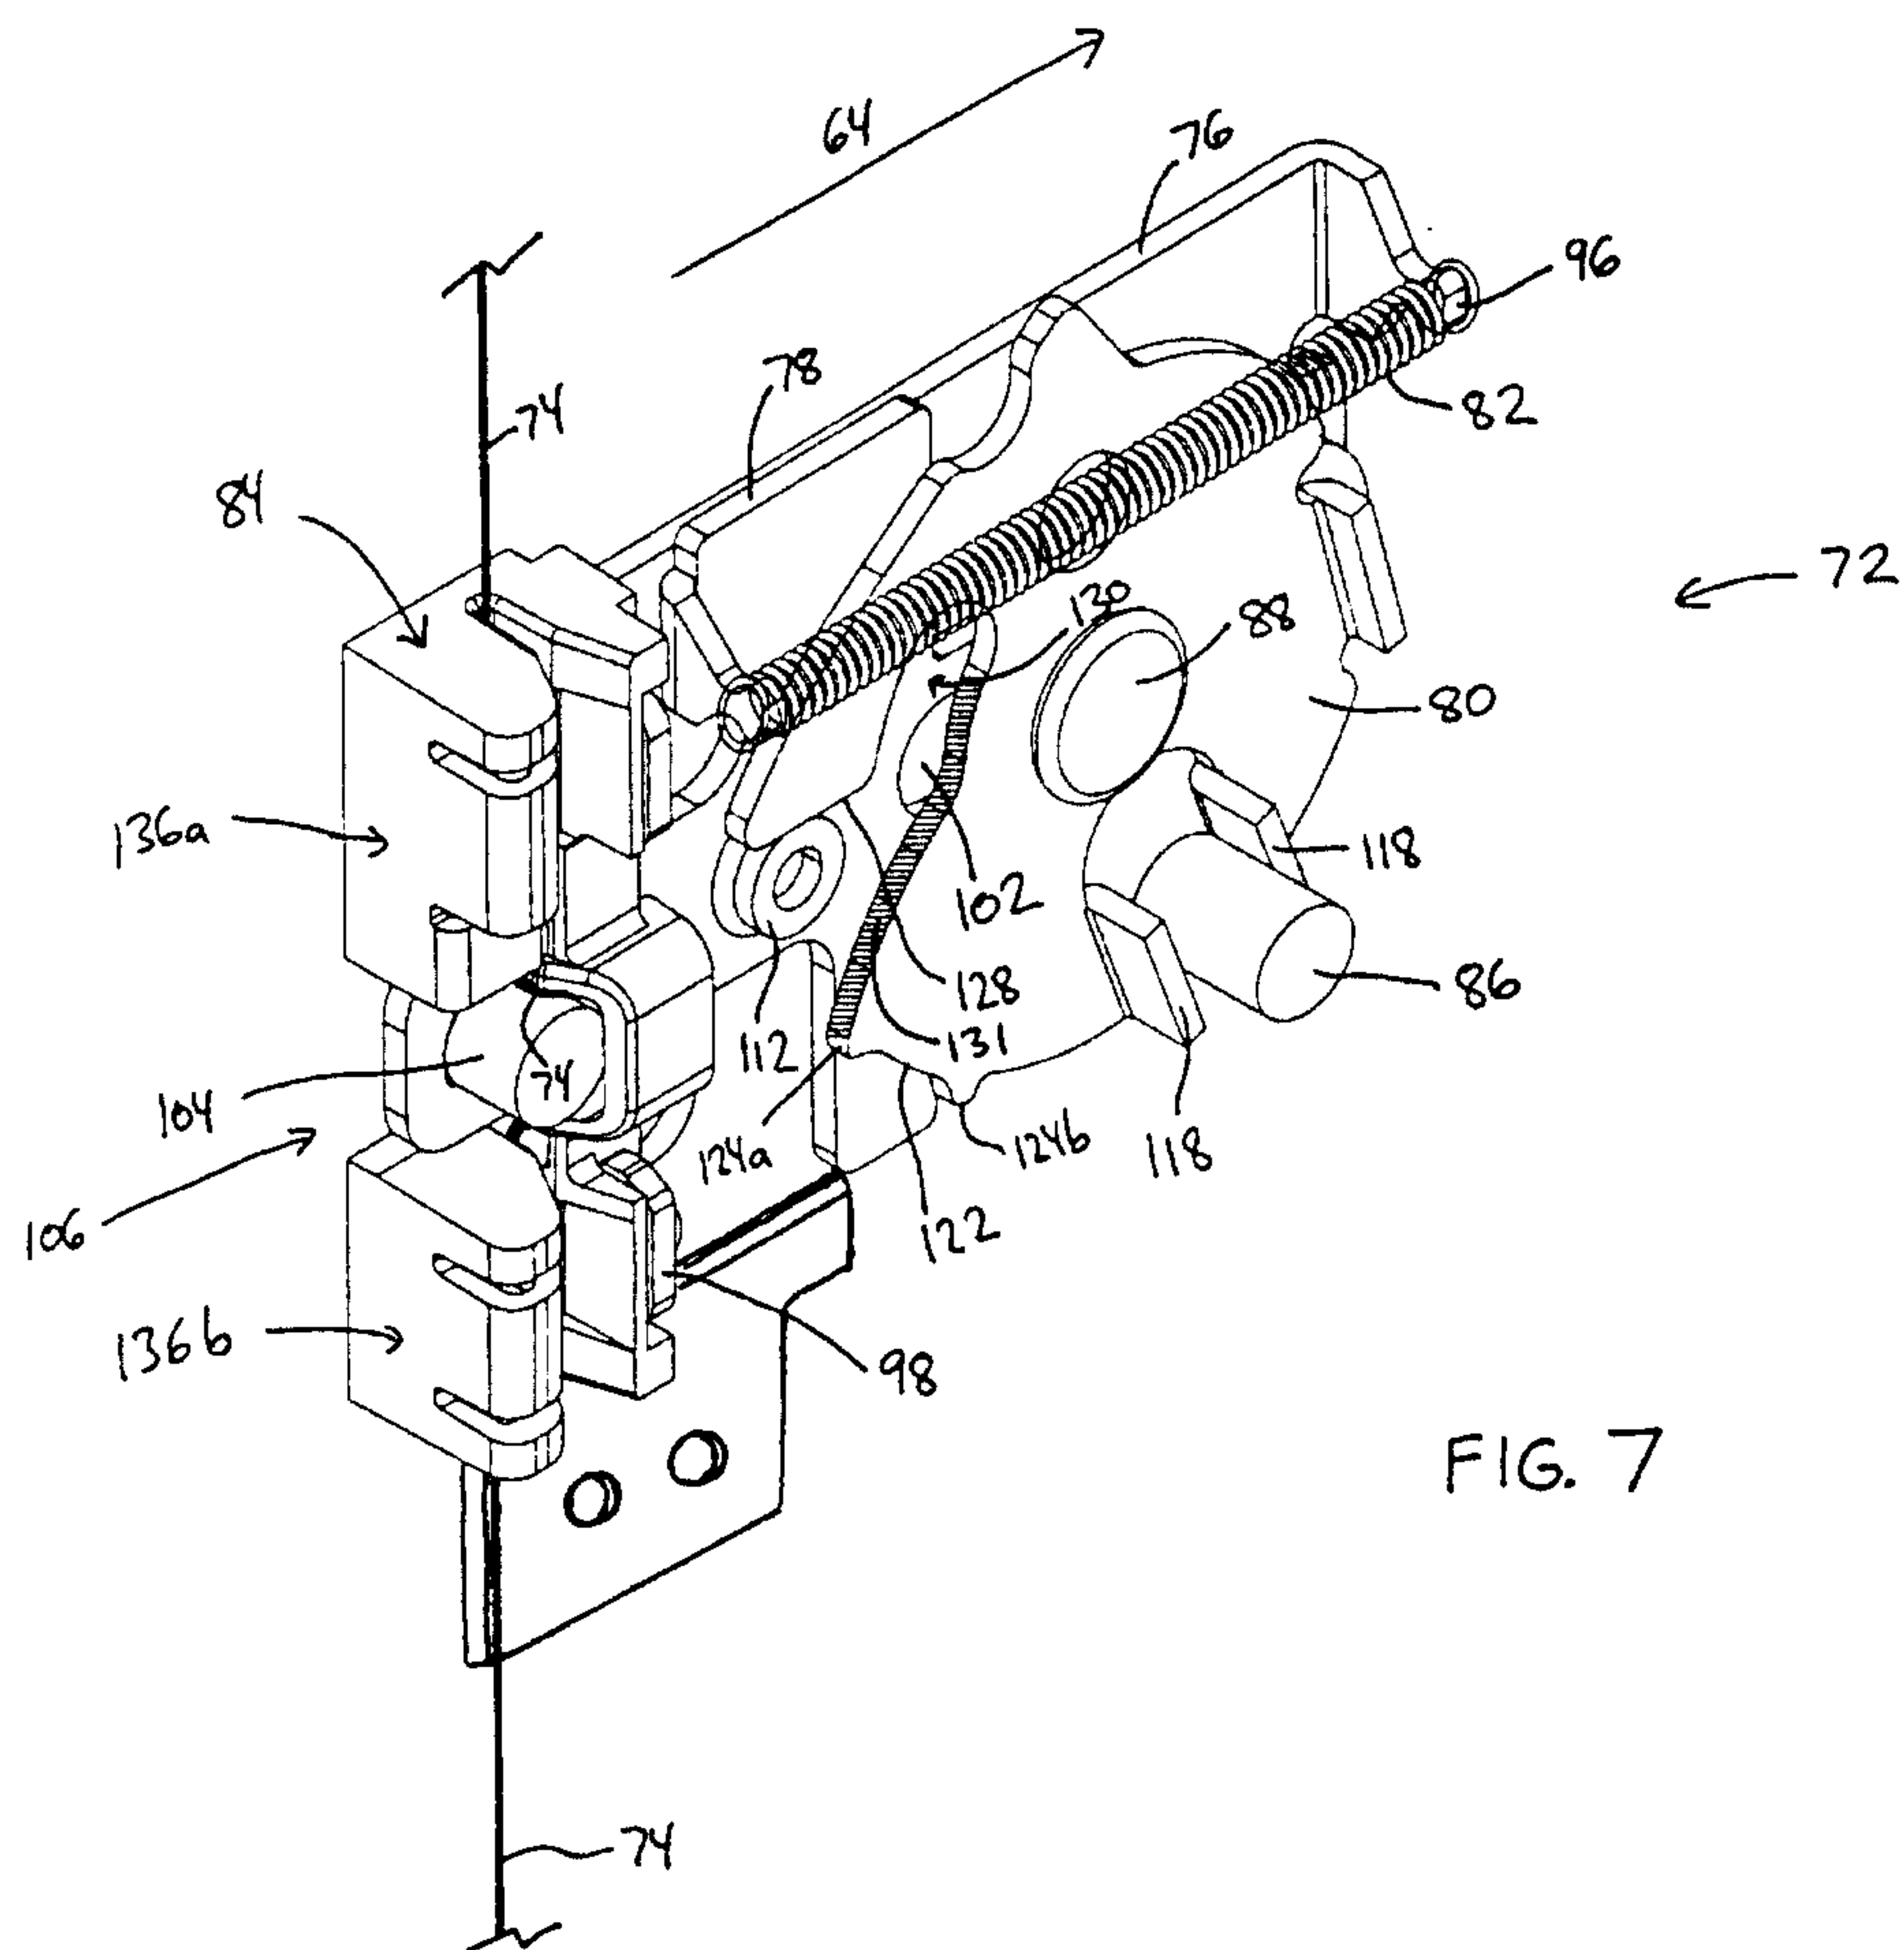
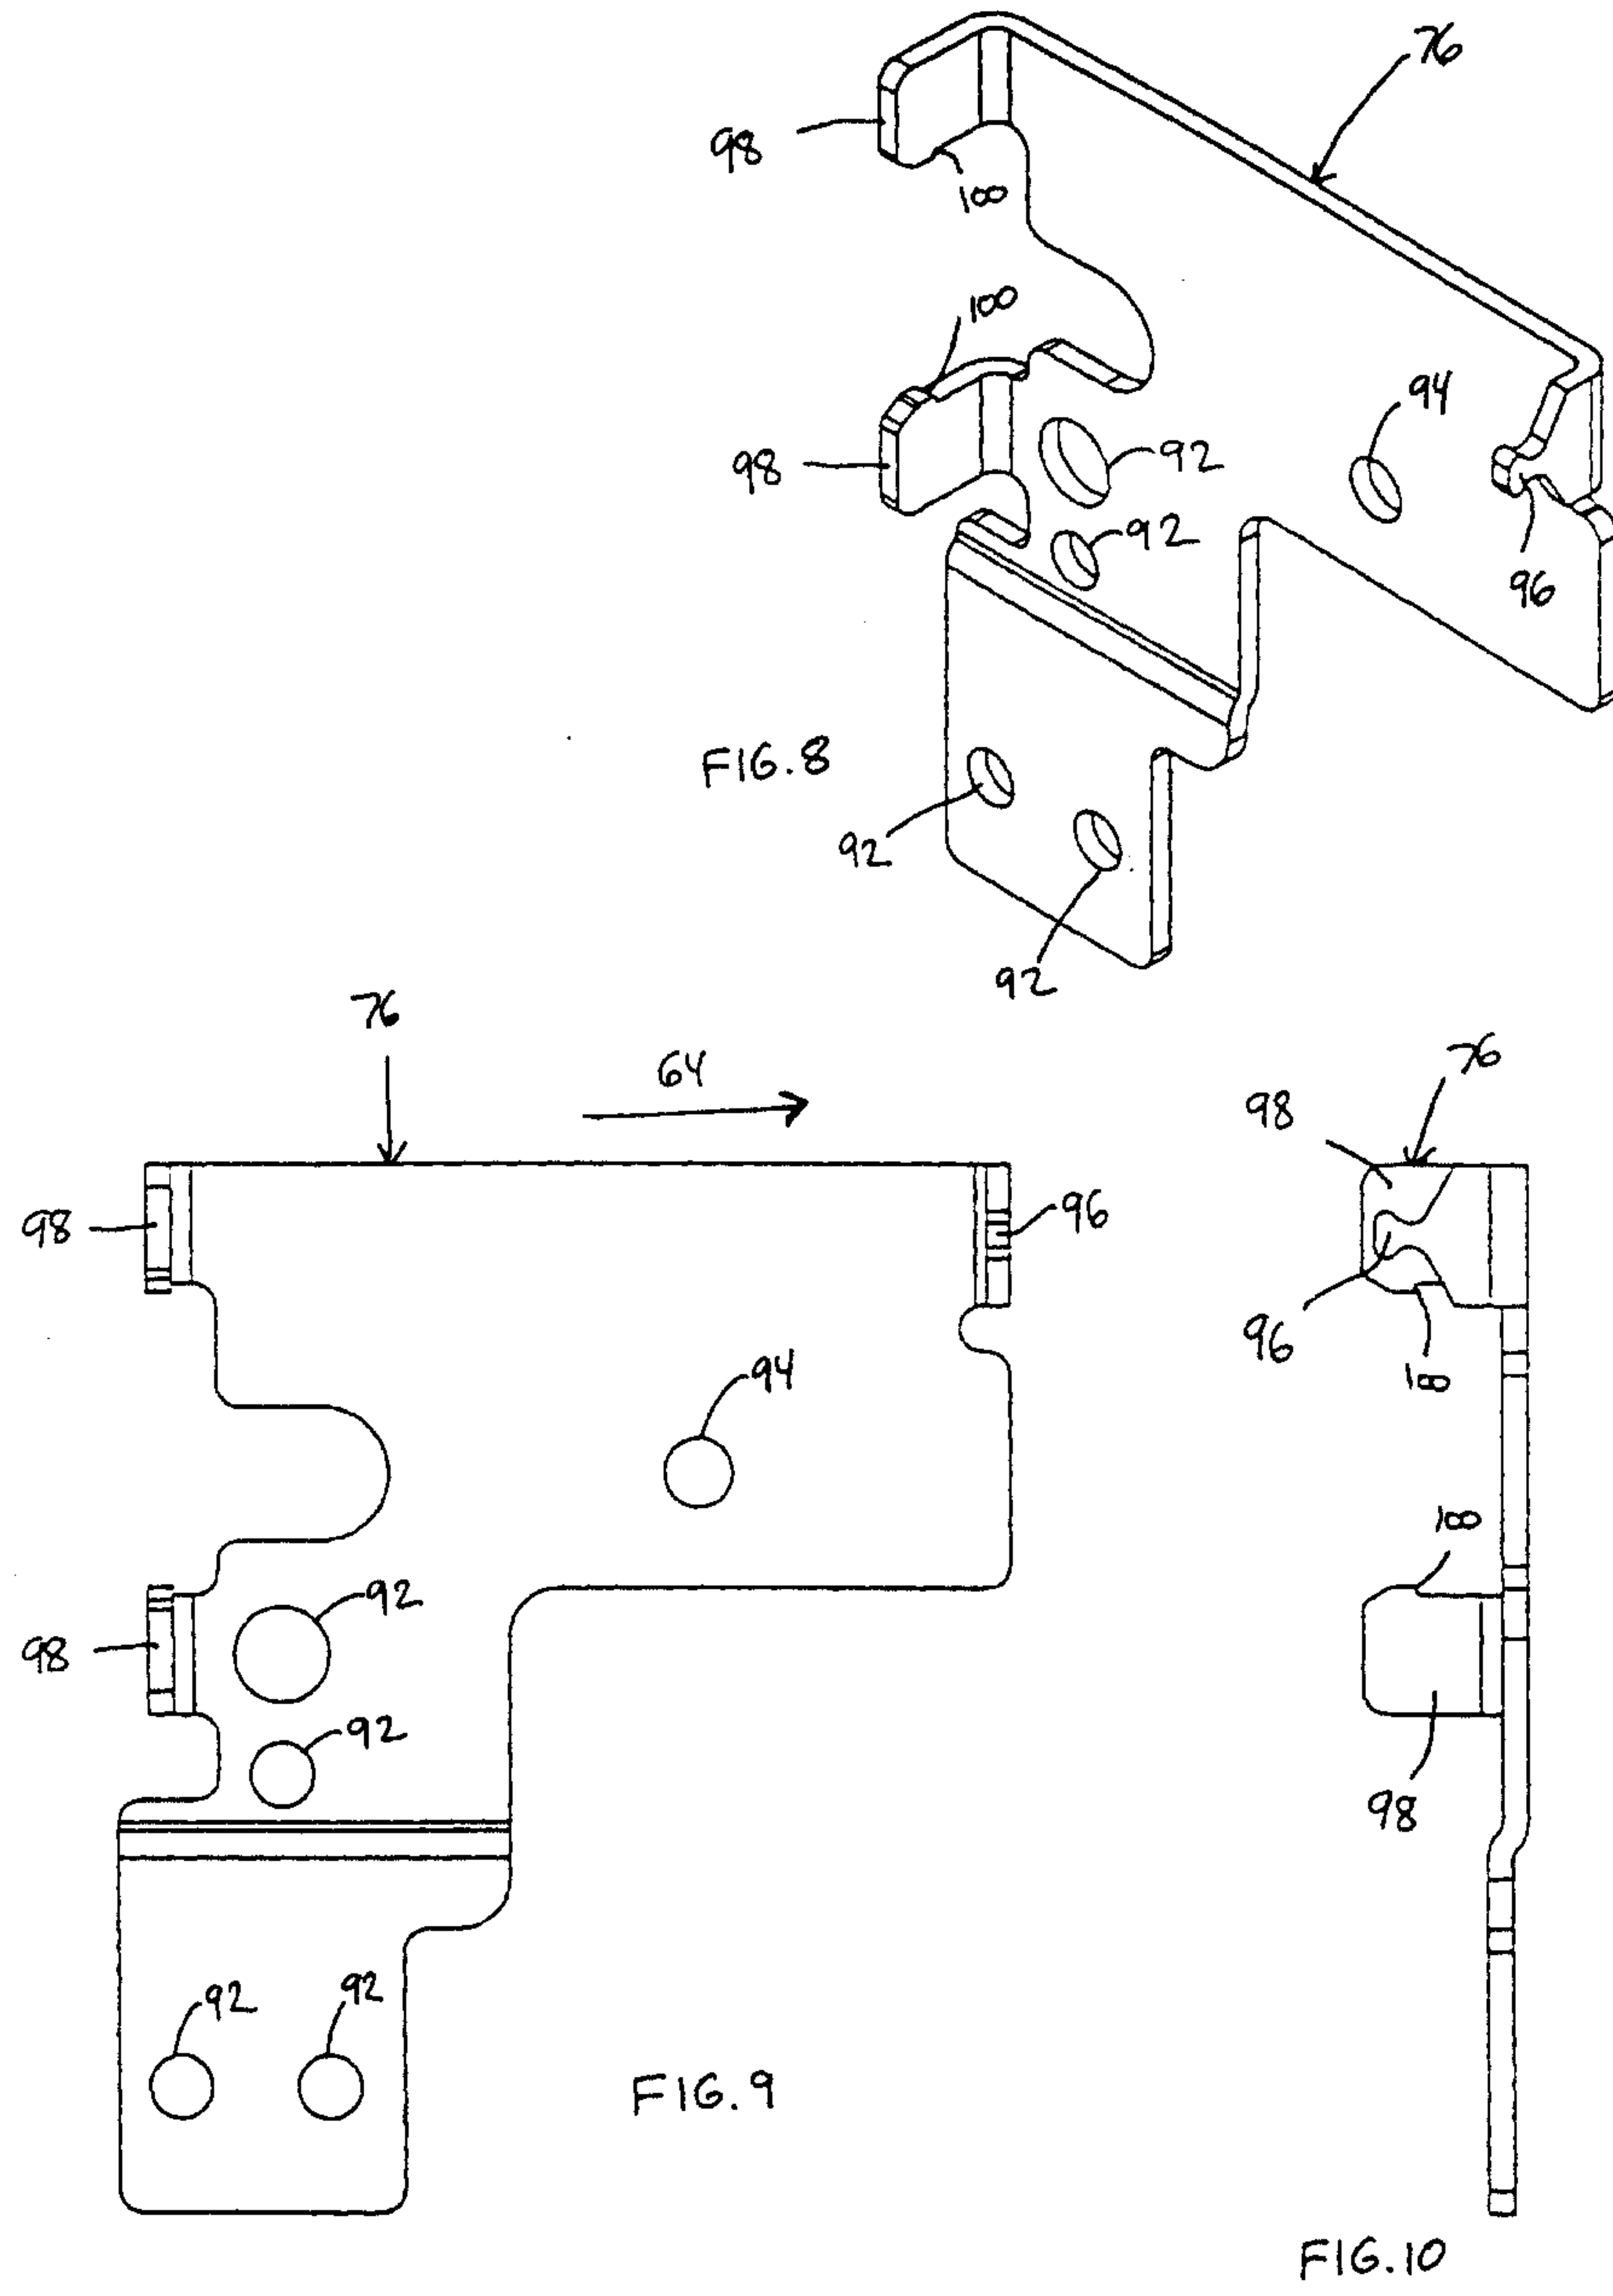
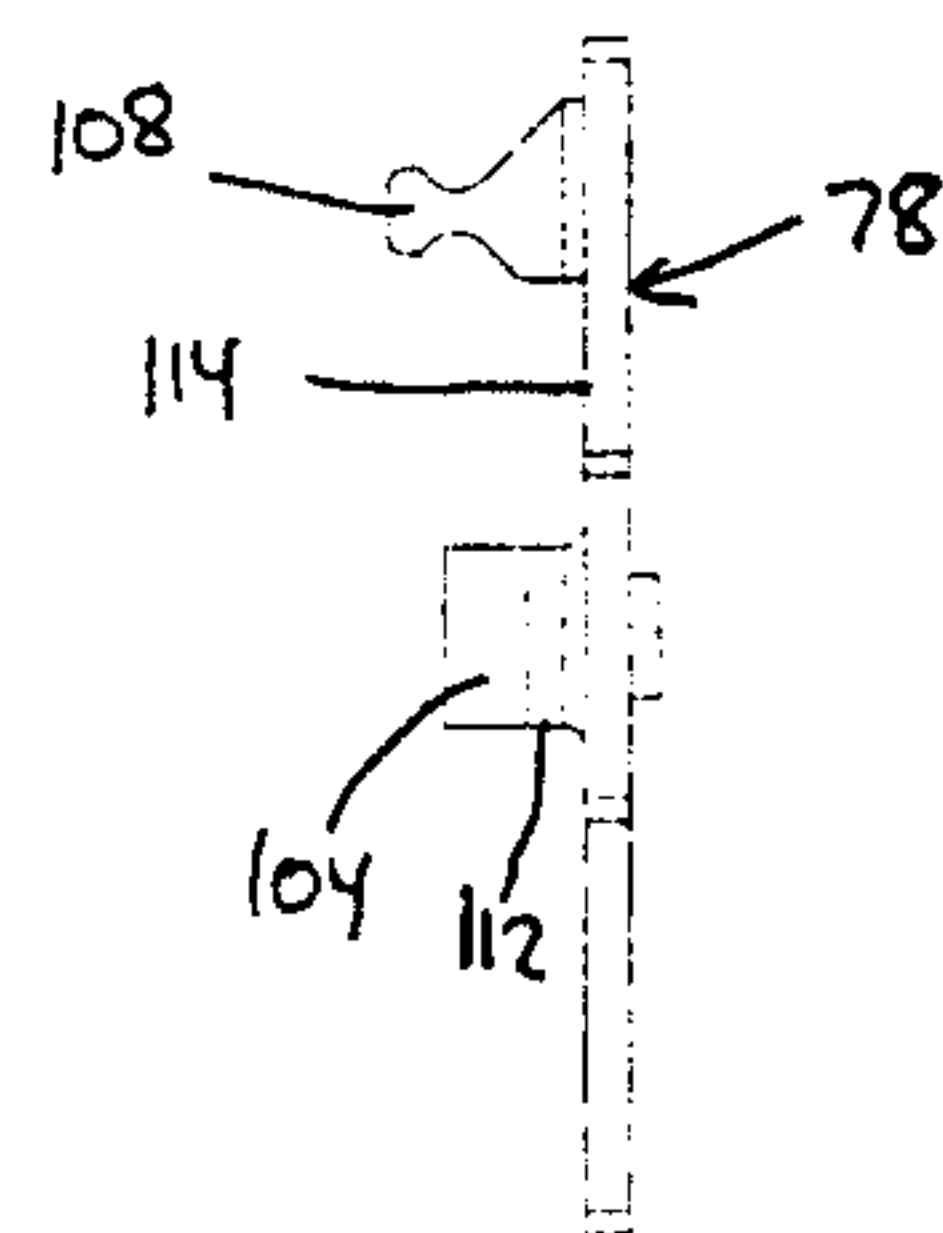
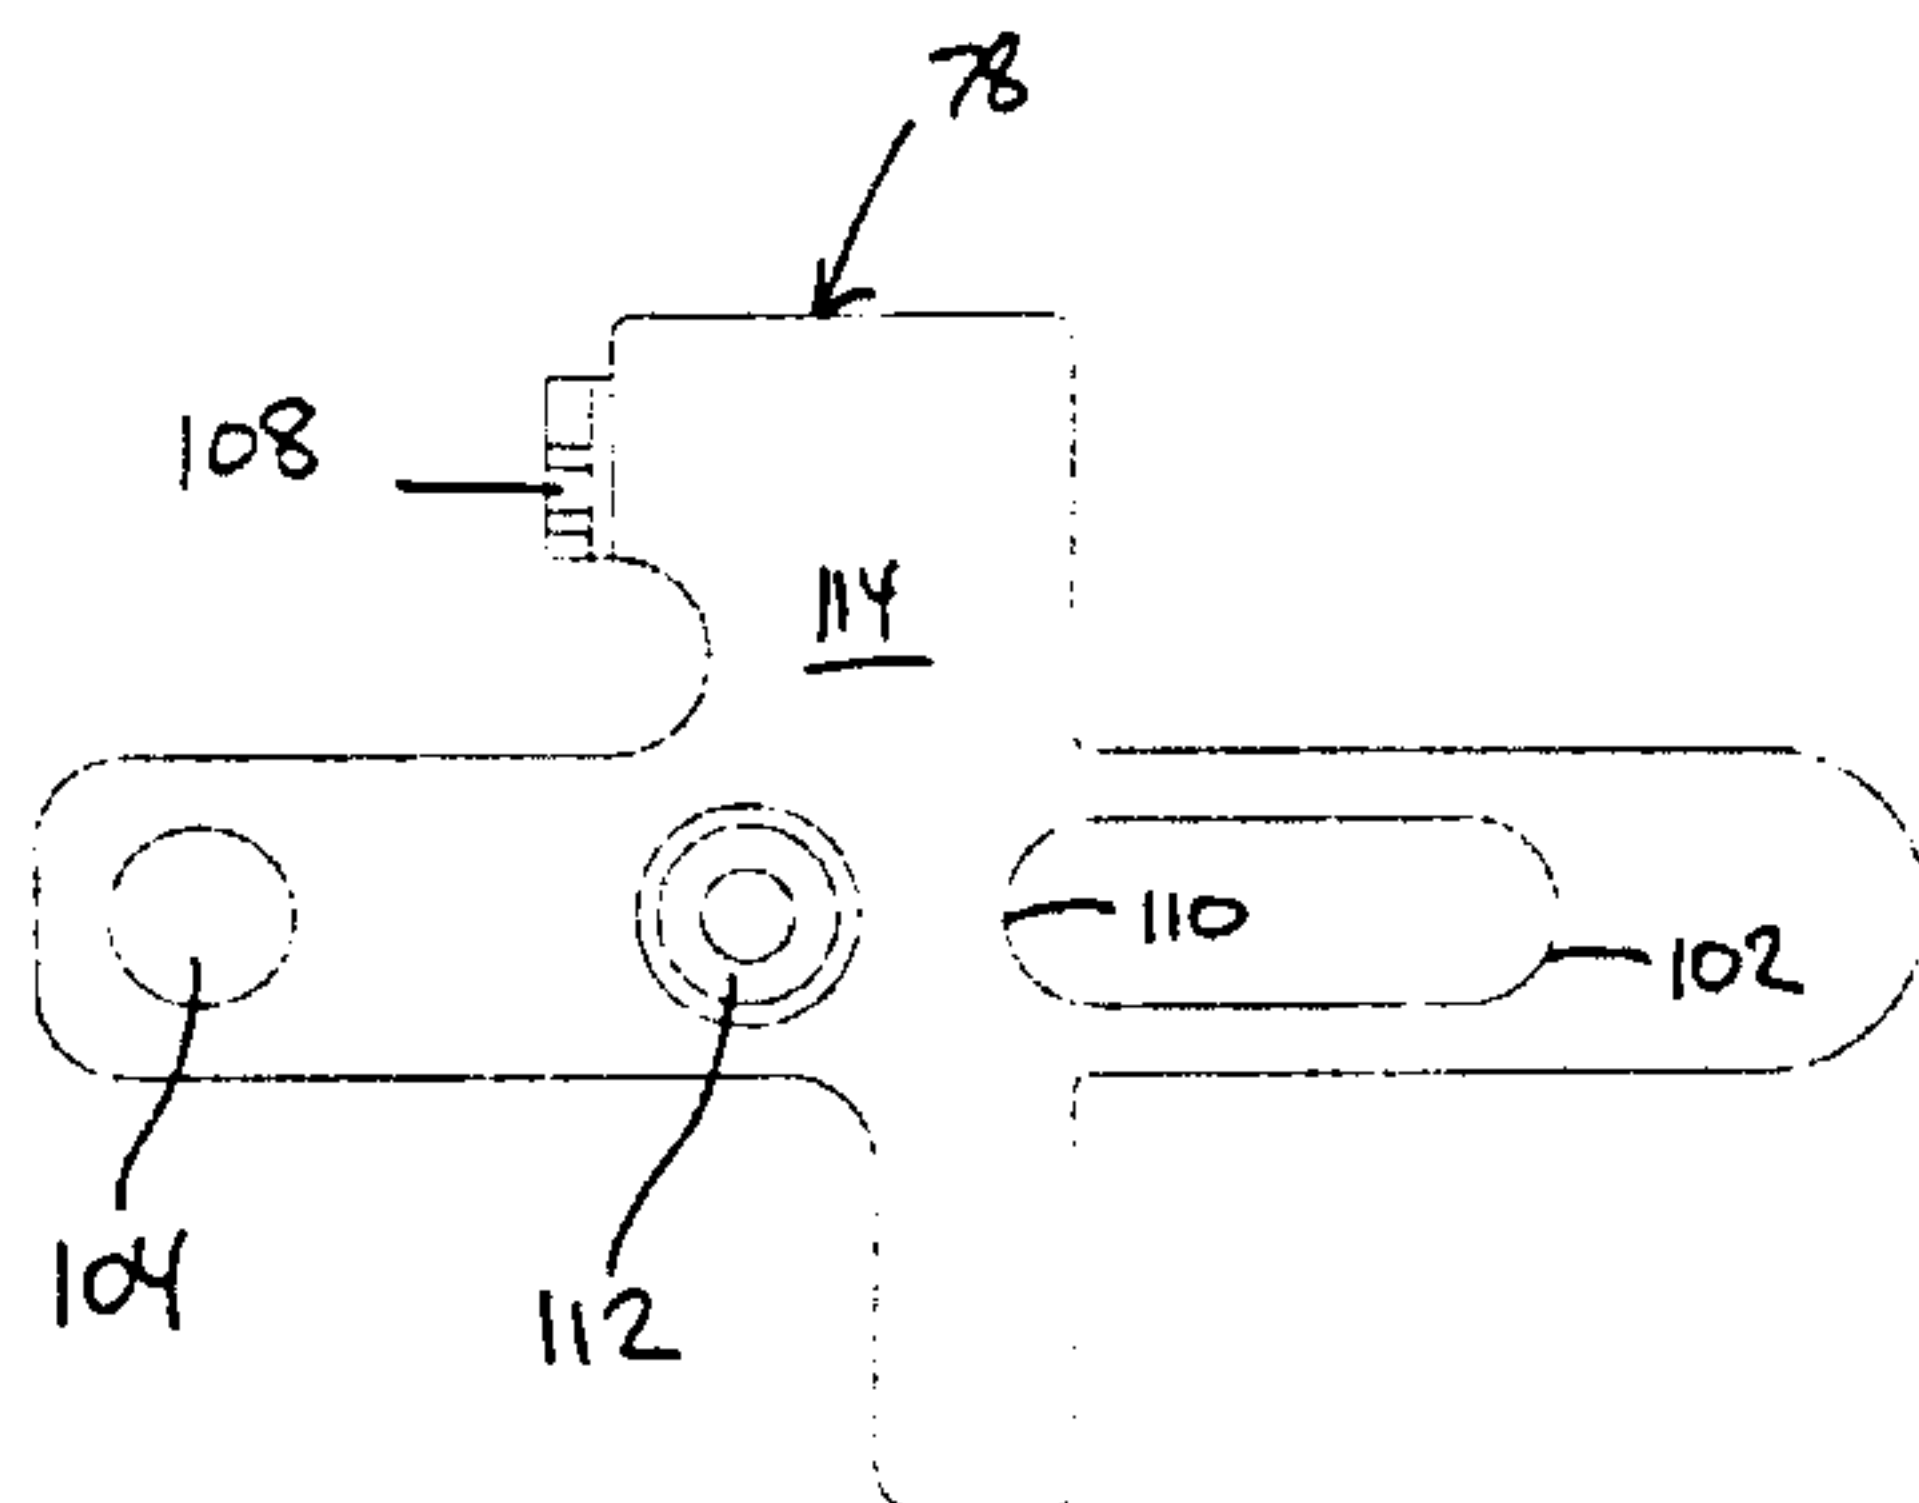
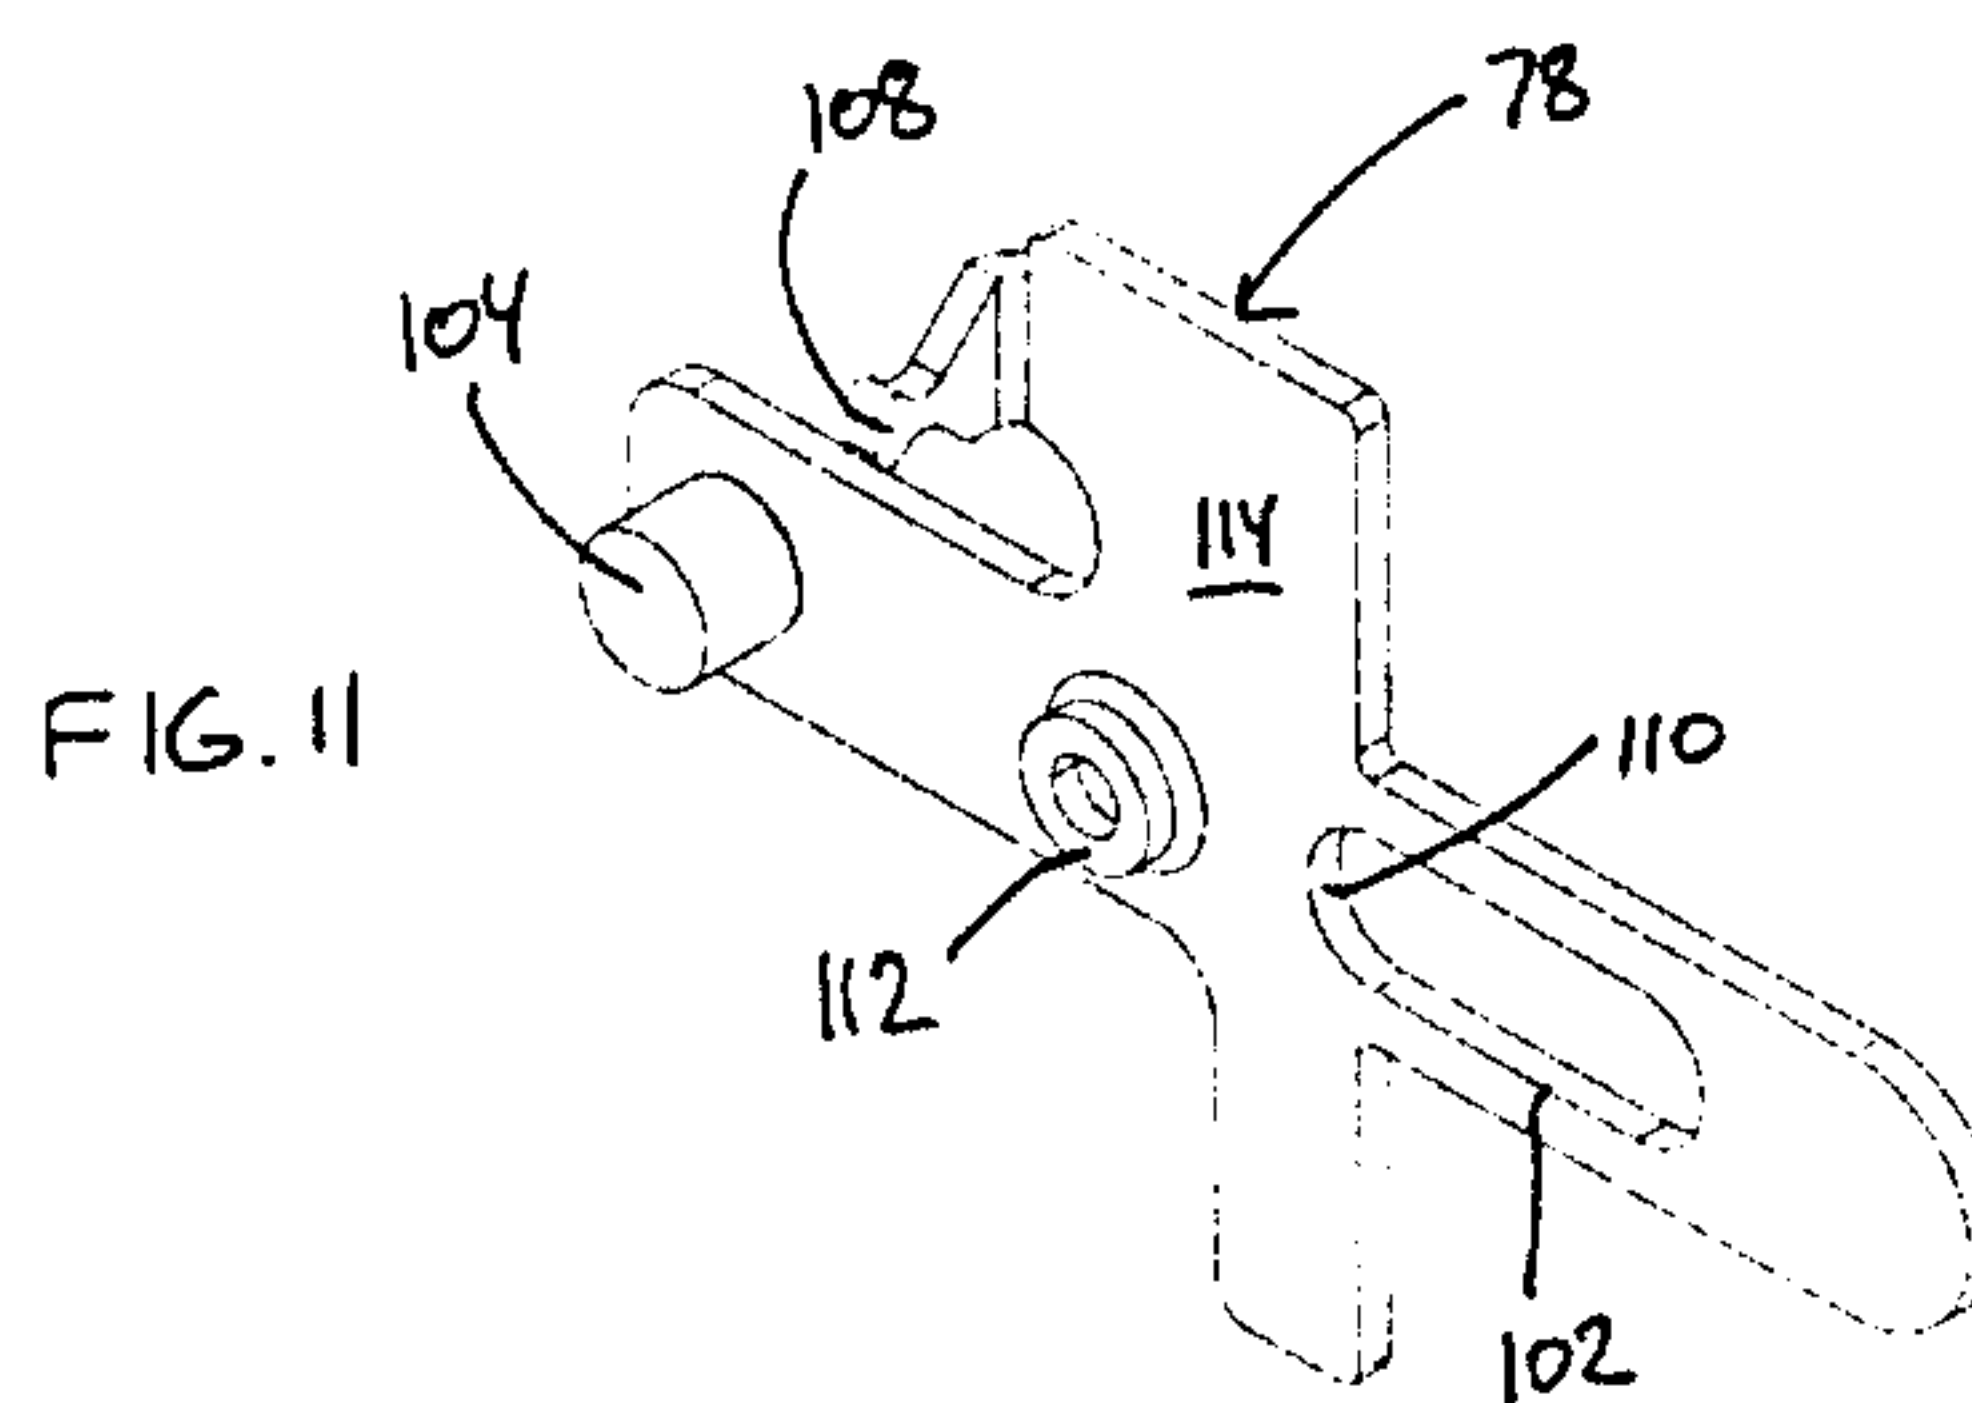
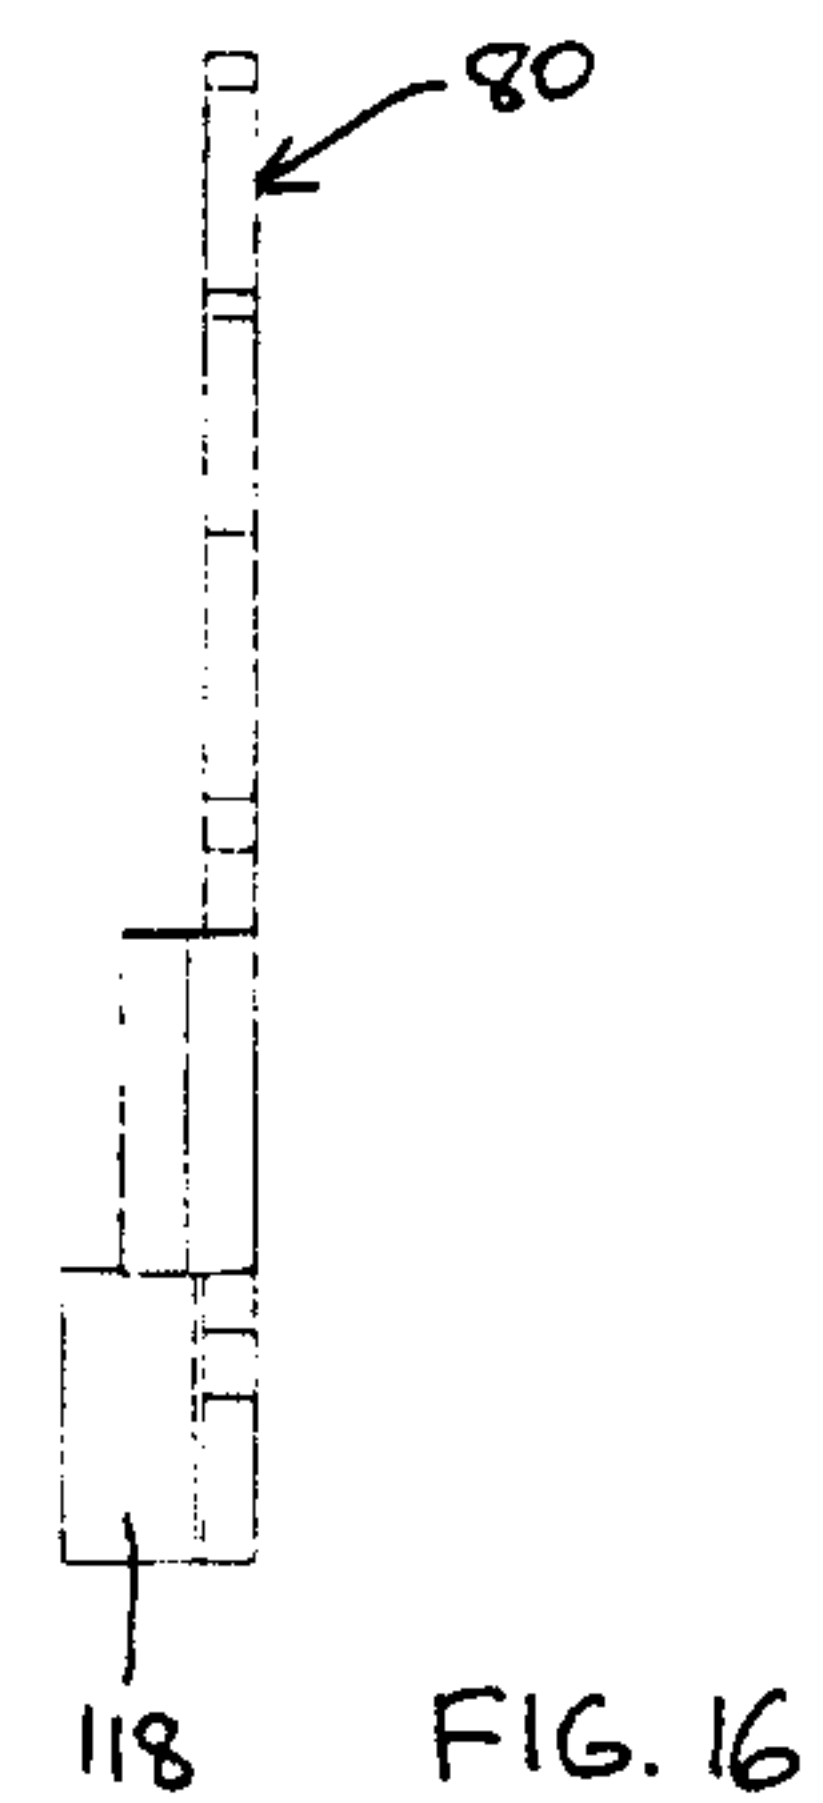
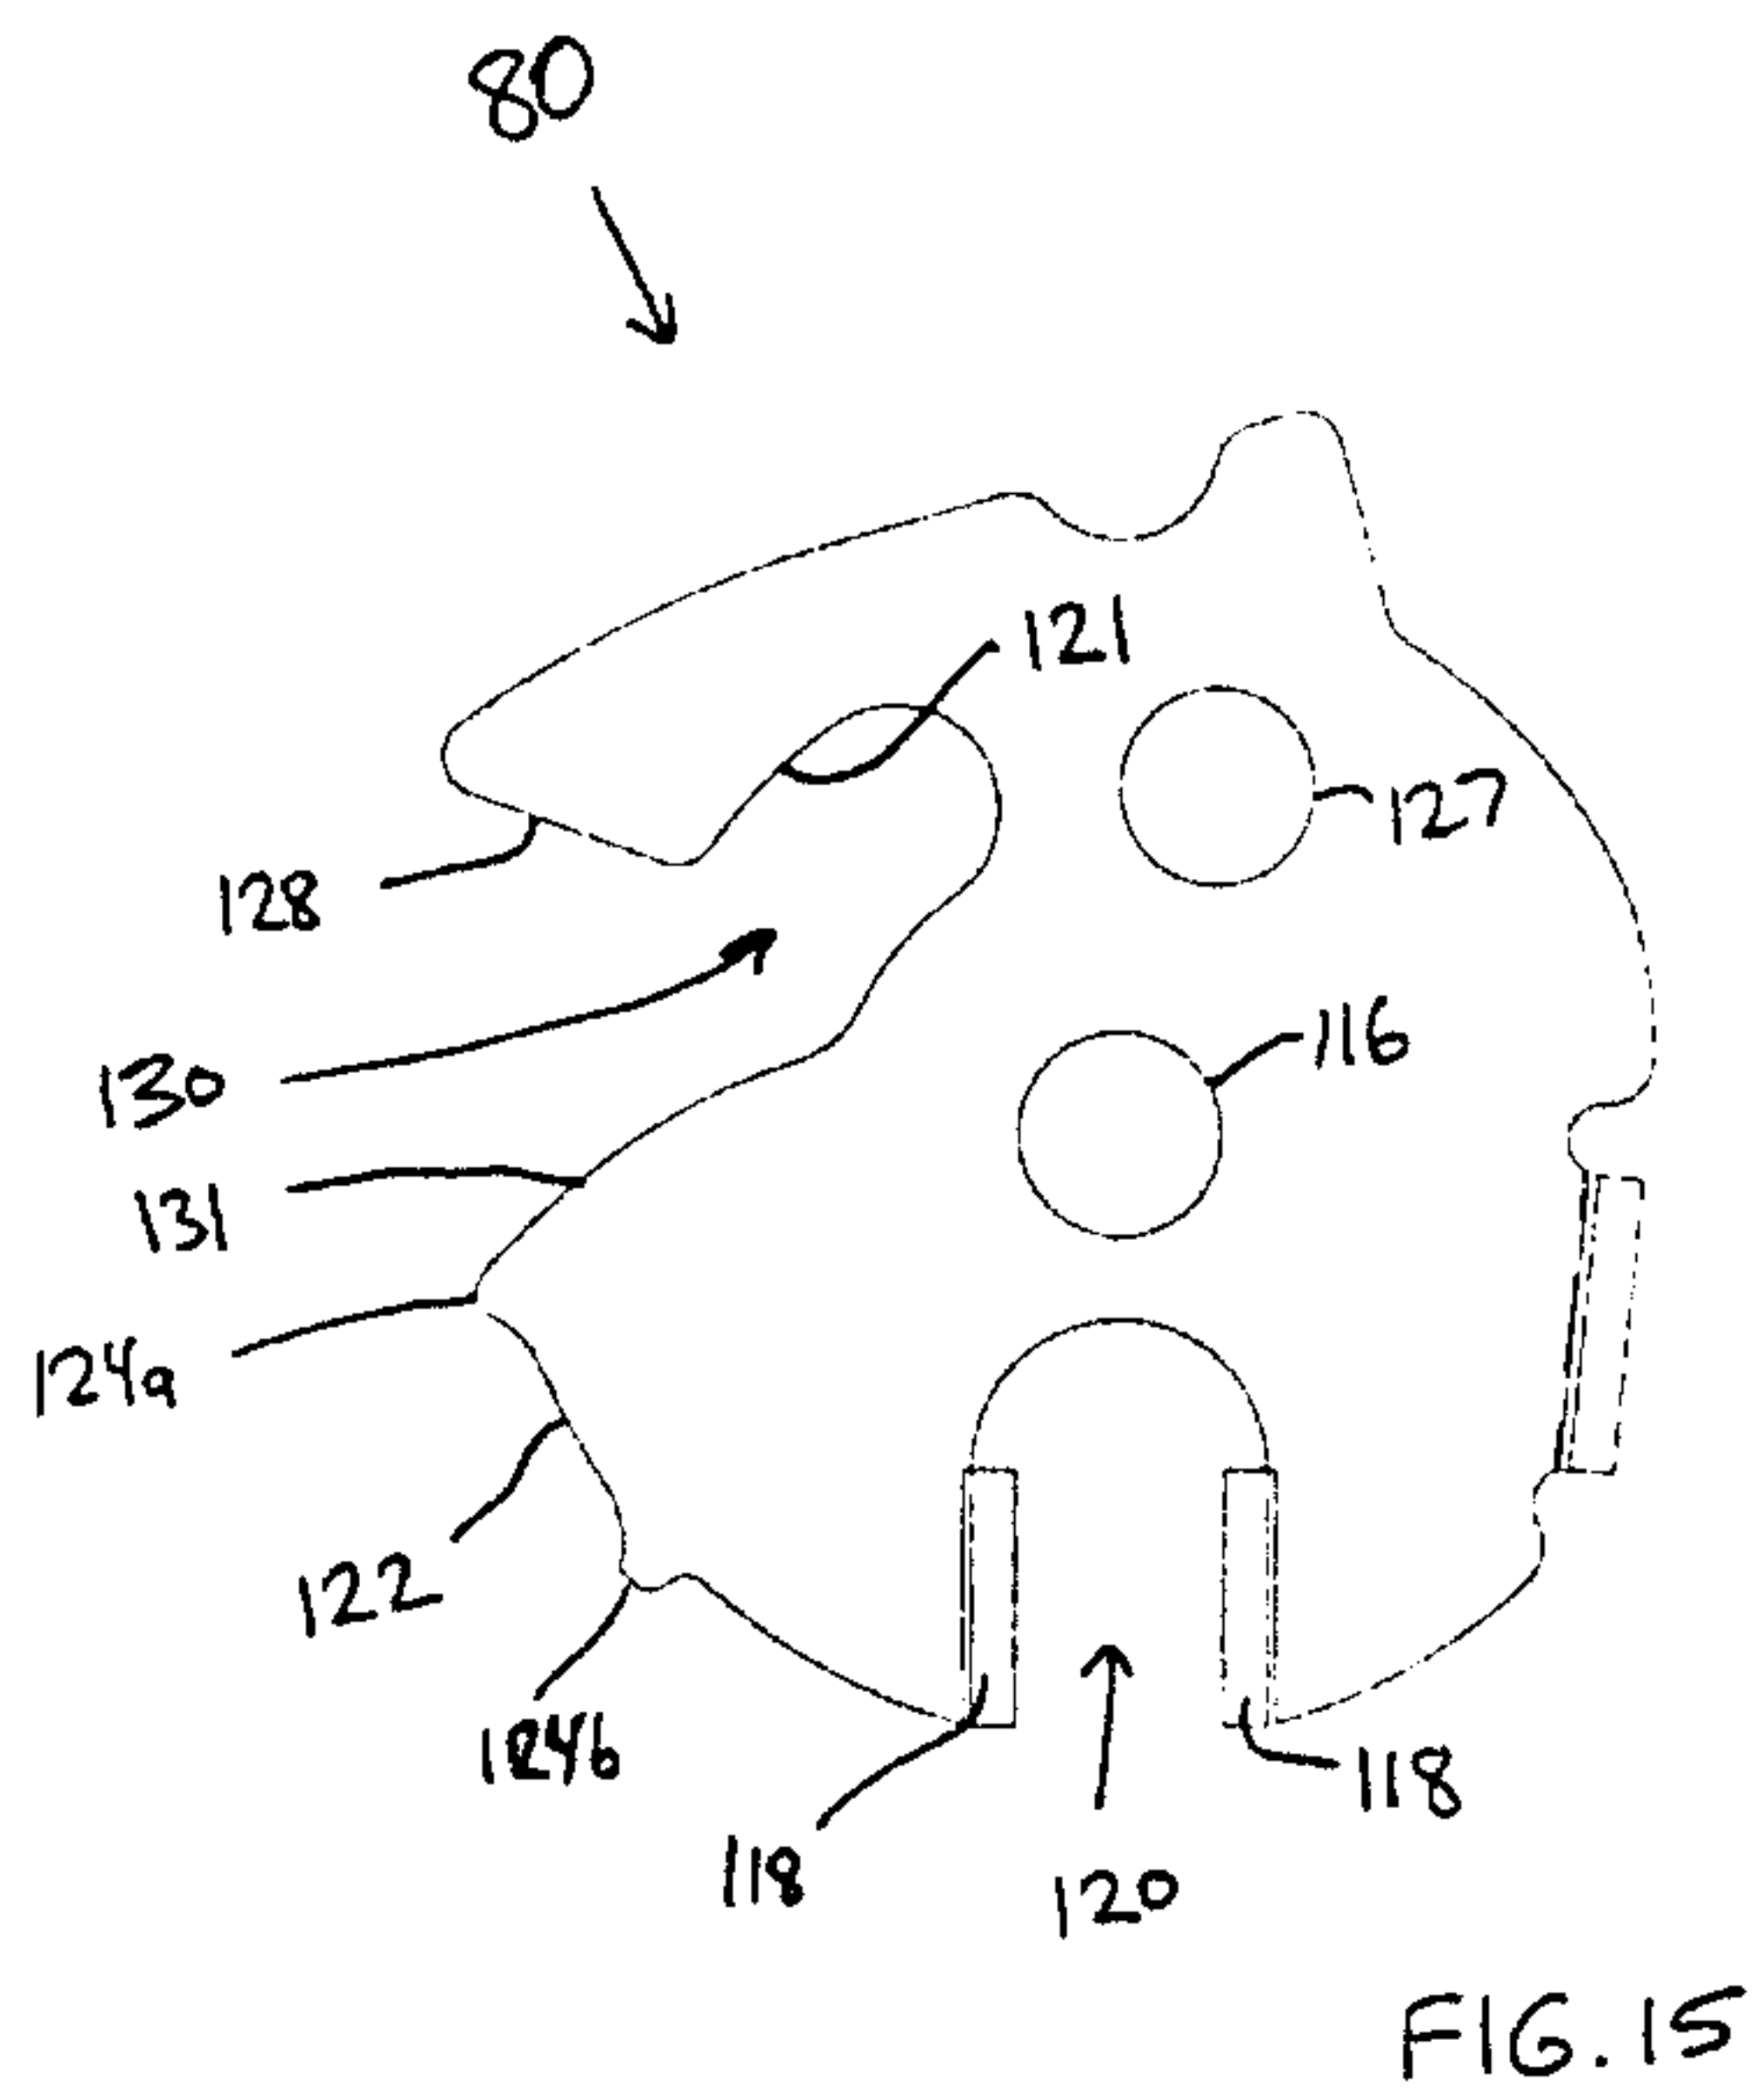
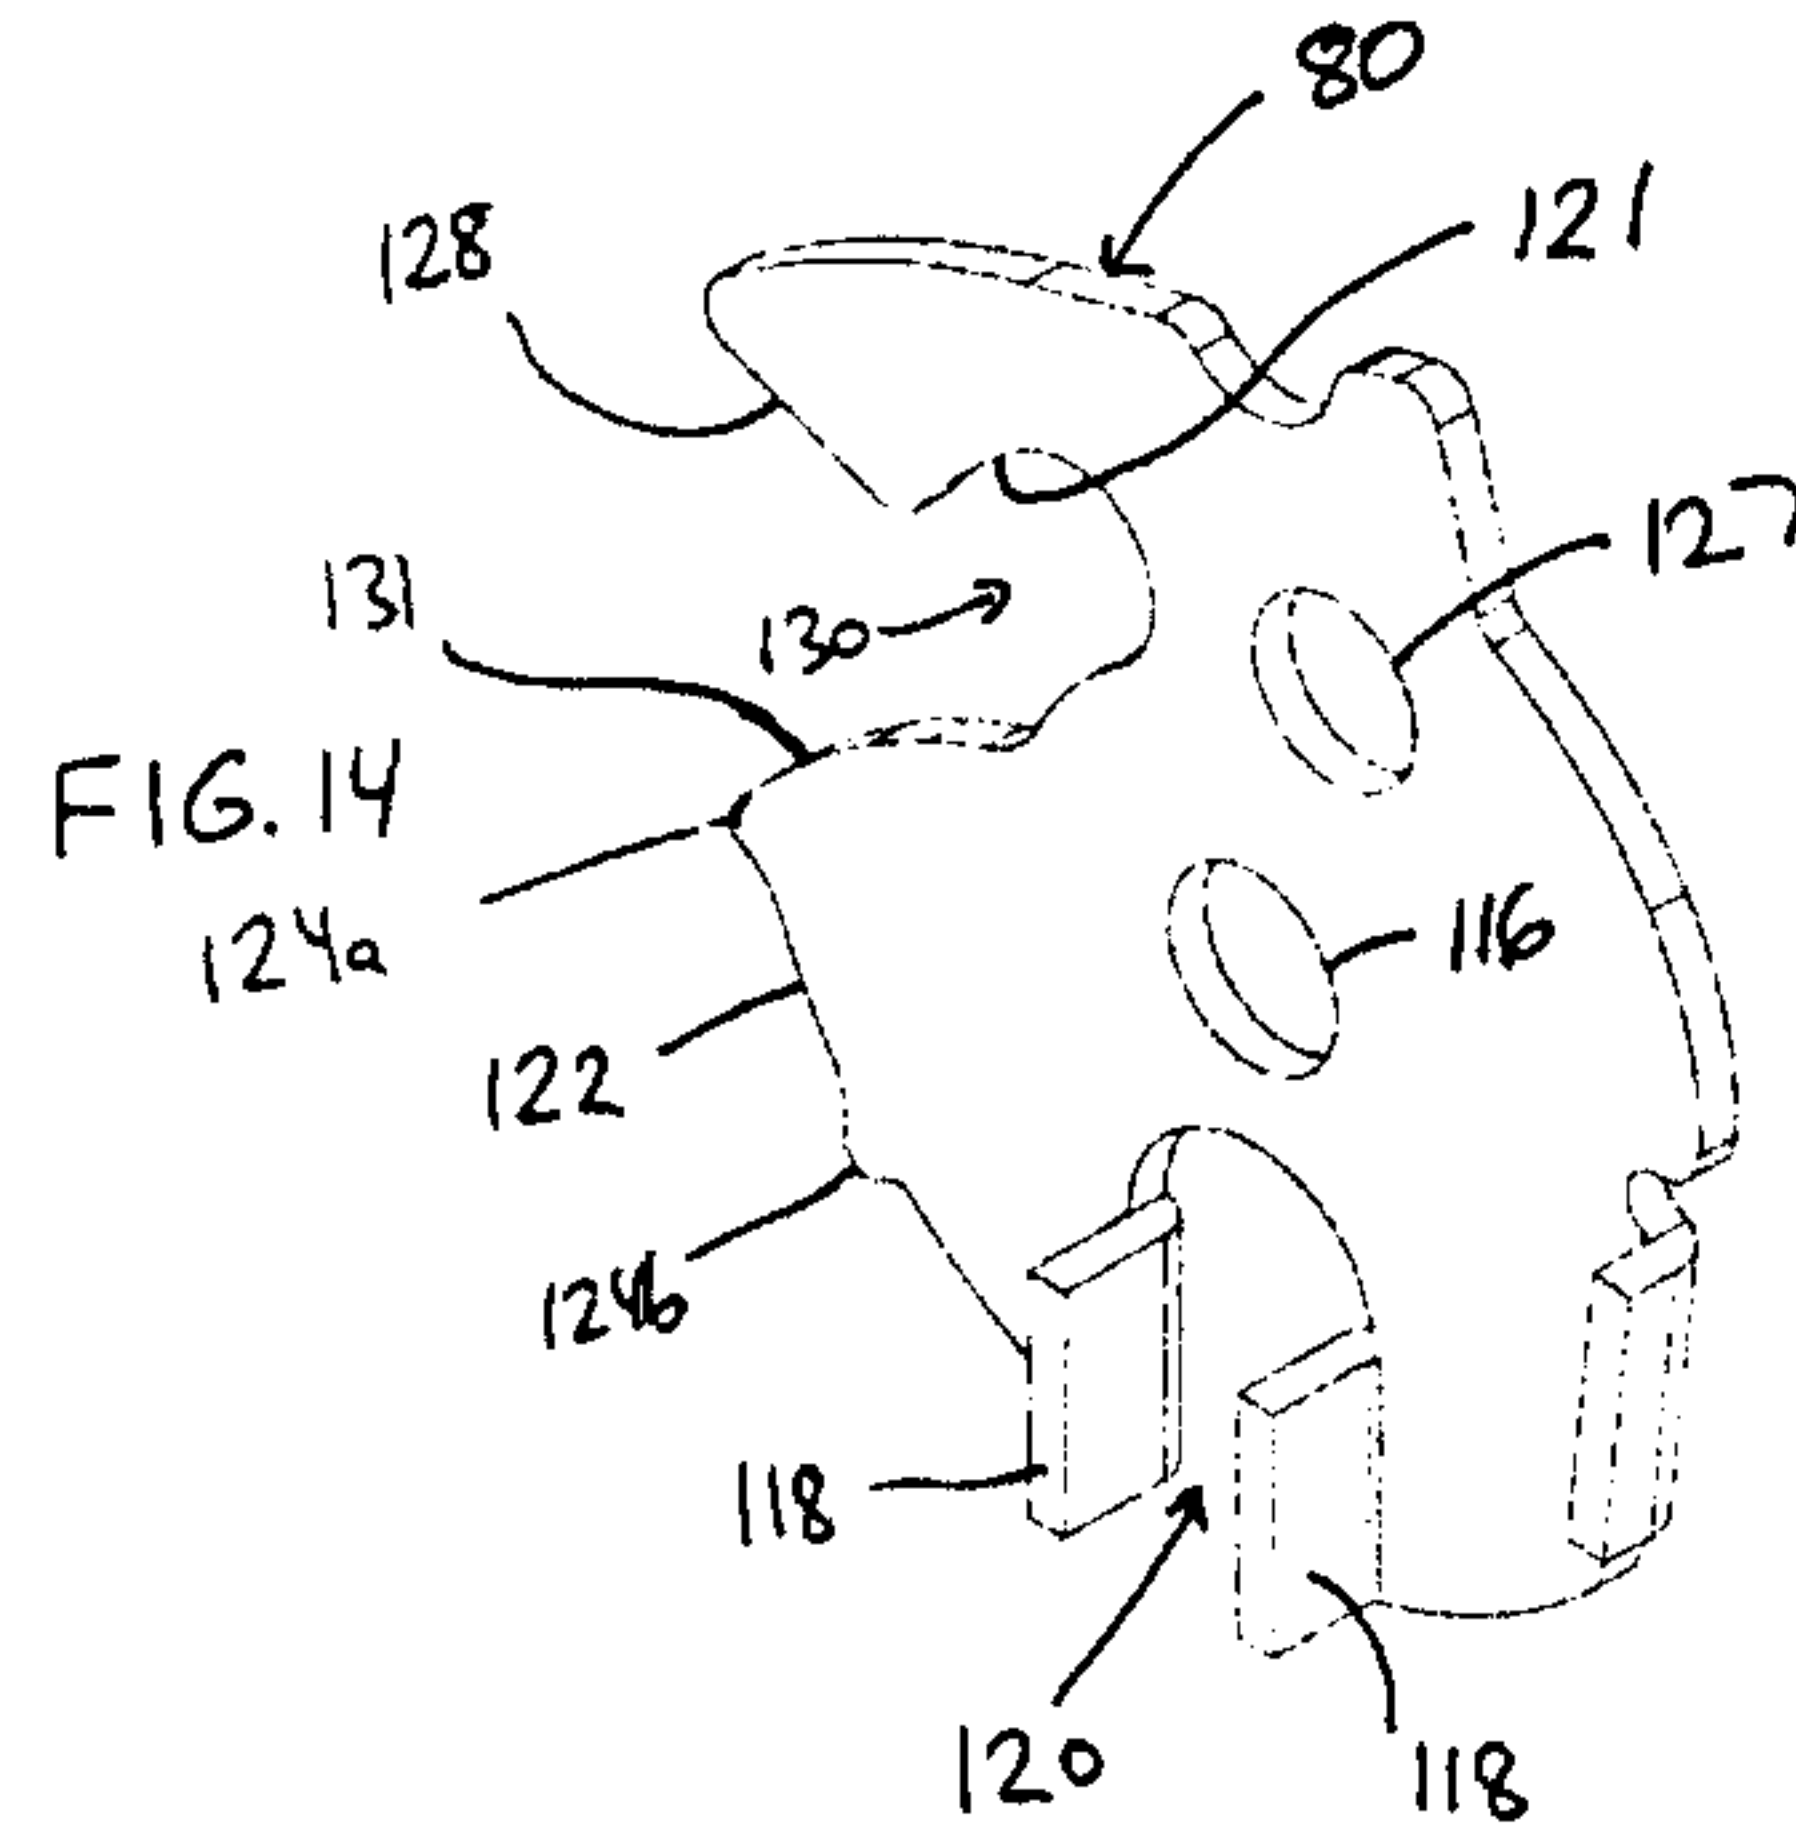


FIG. 7

*Borden Ladner Gervais LLP / s.r.l.*







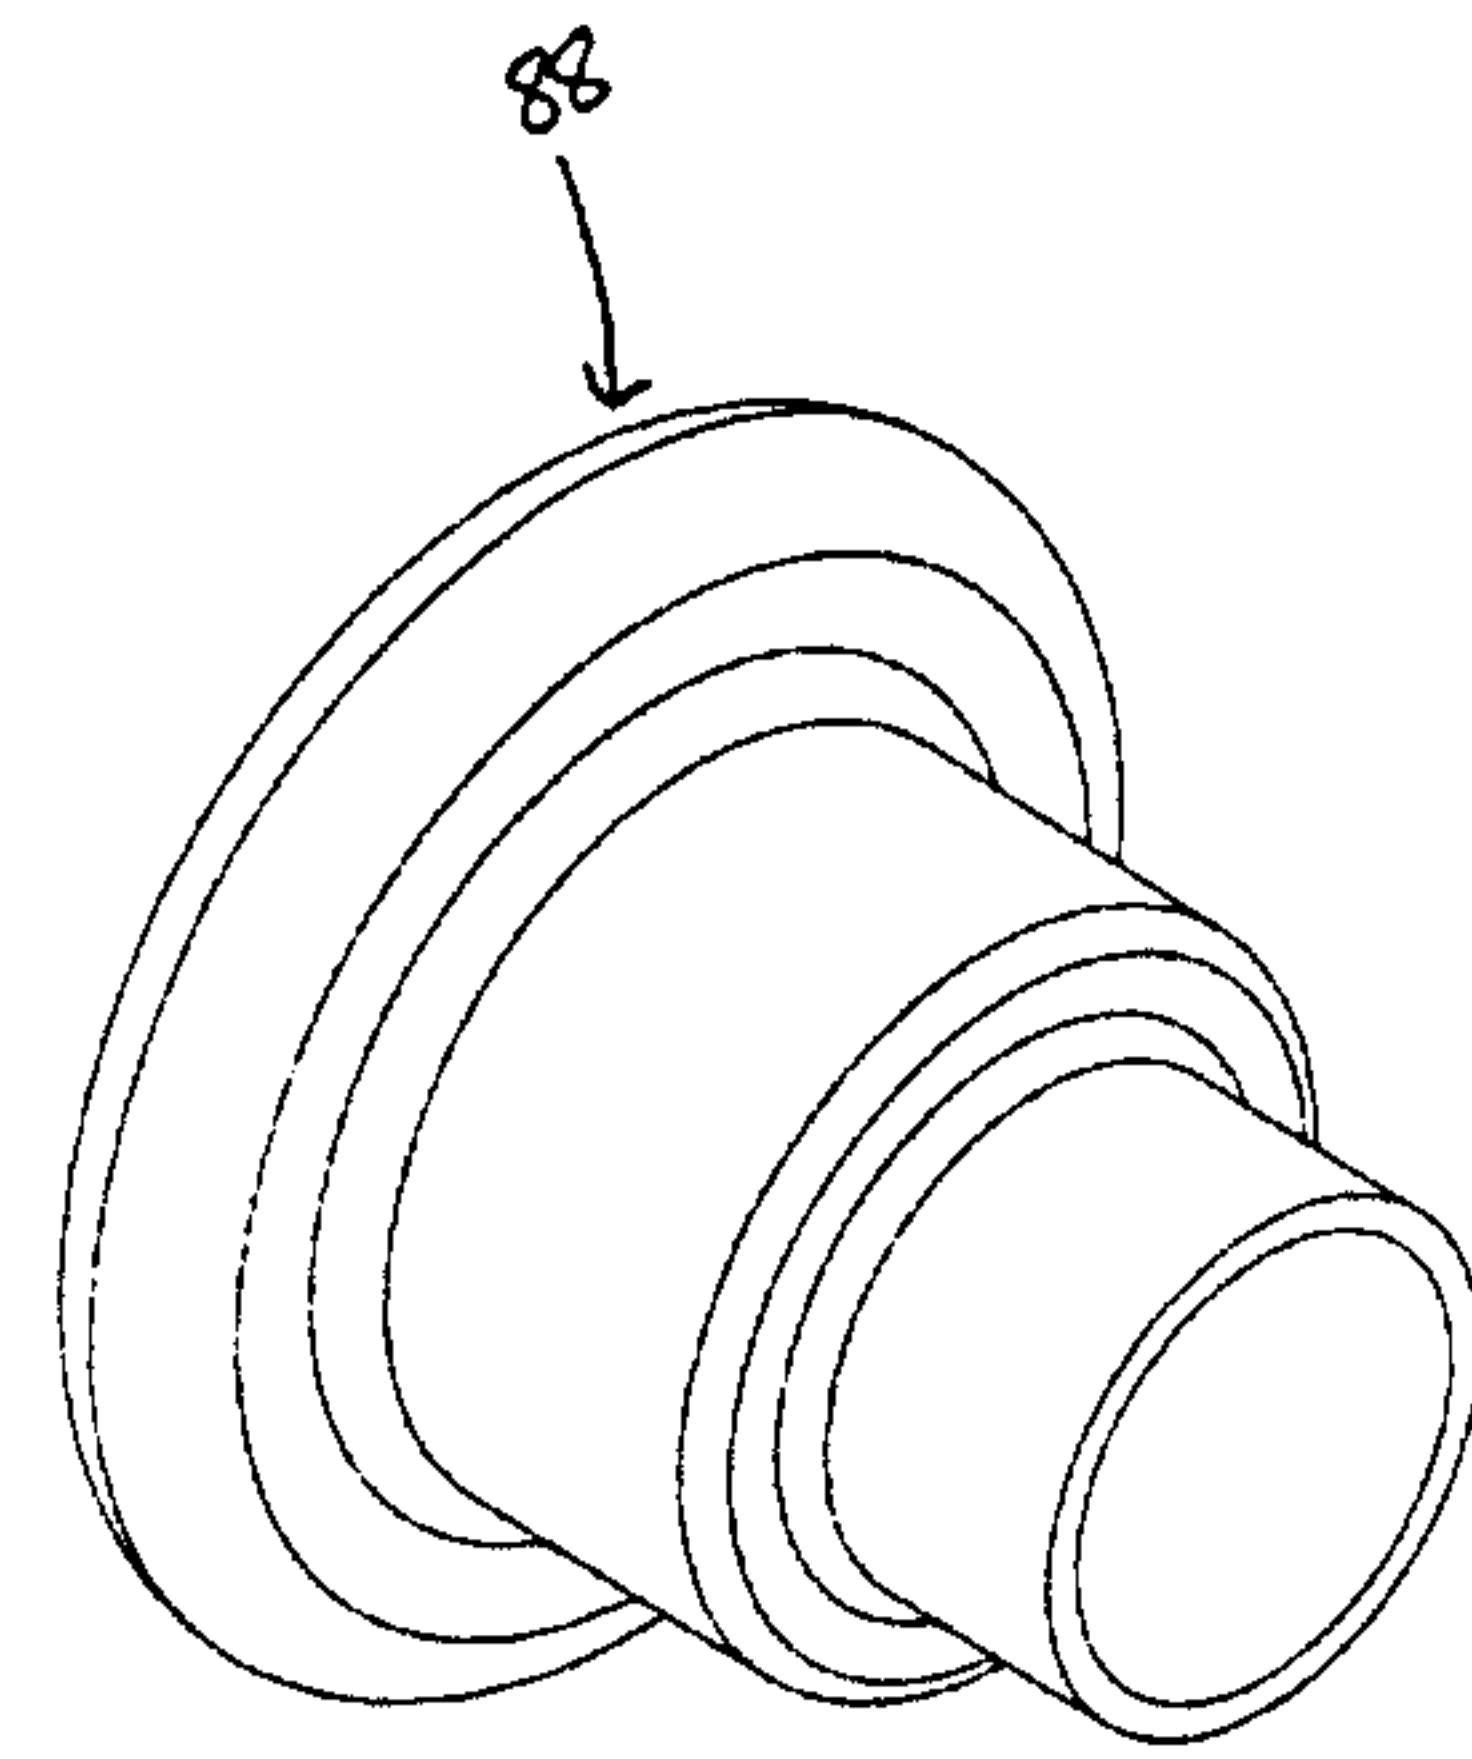
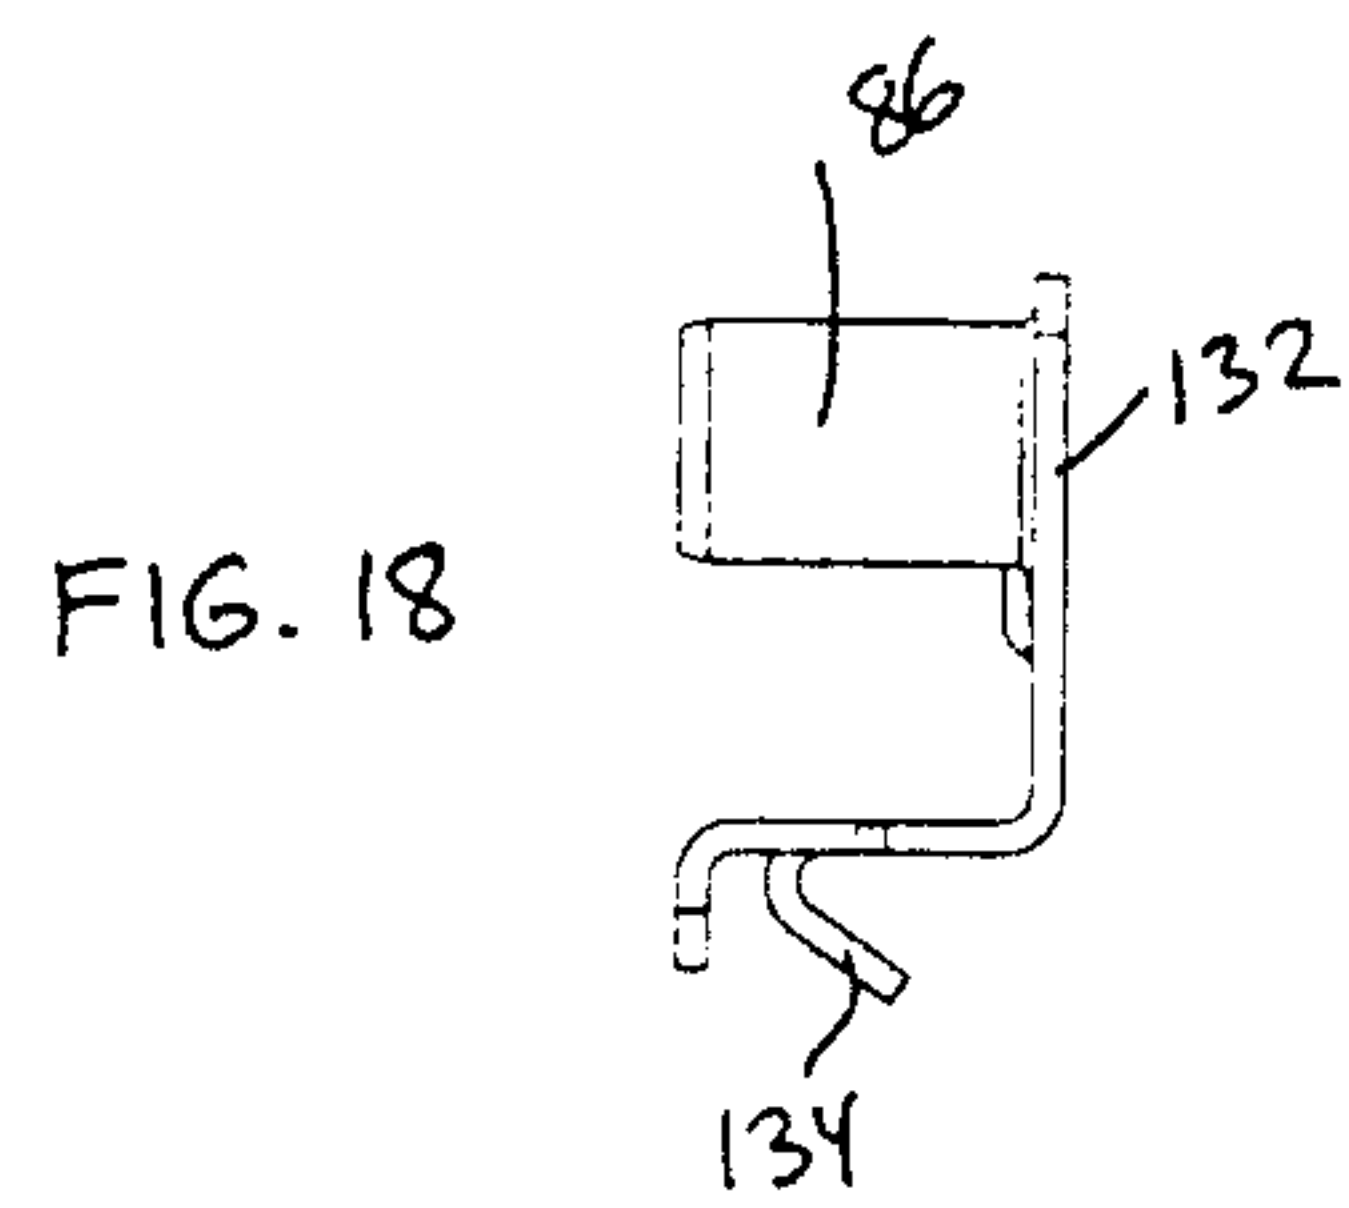
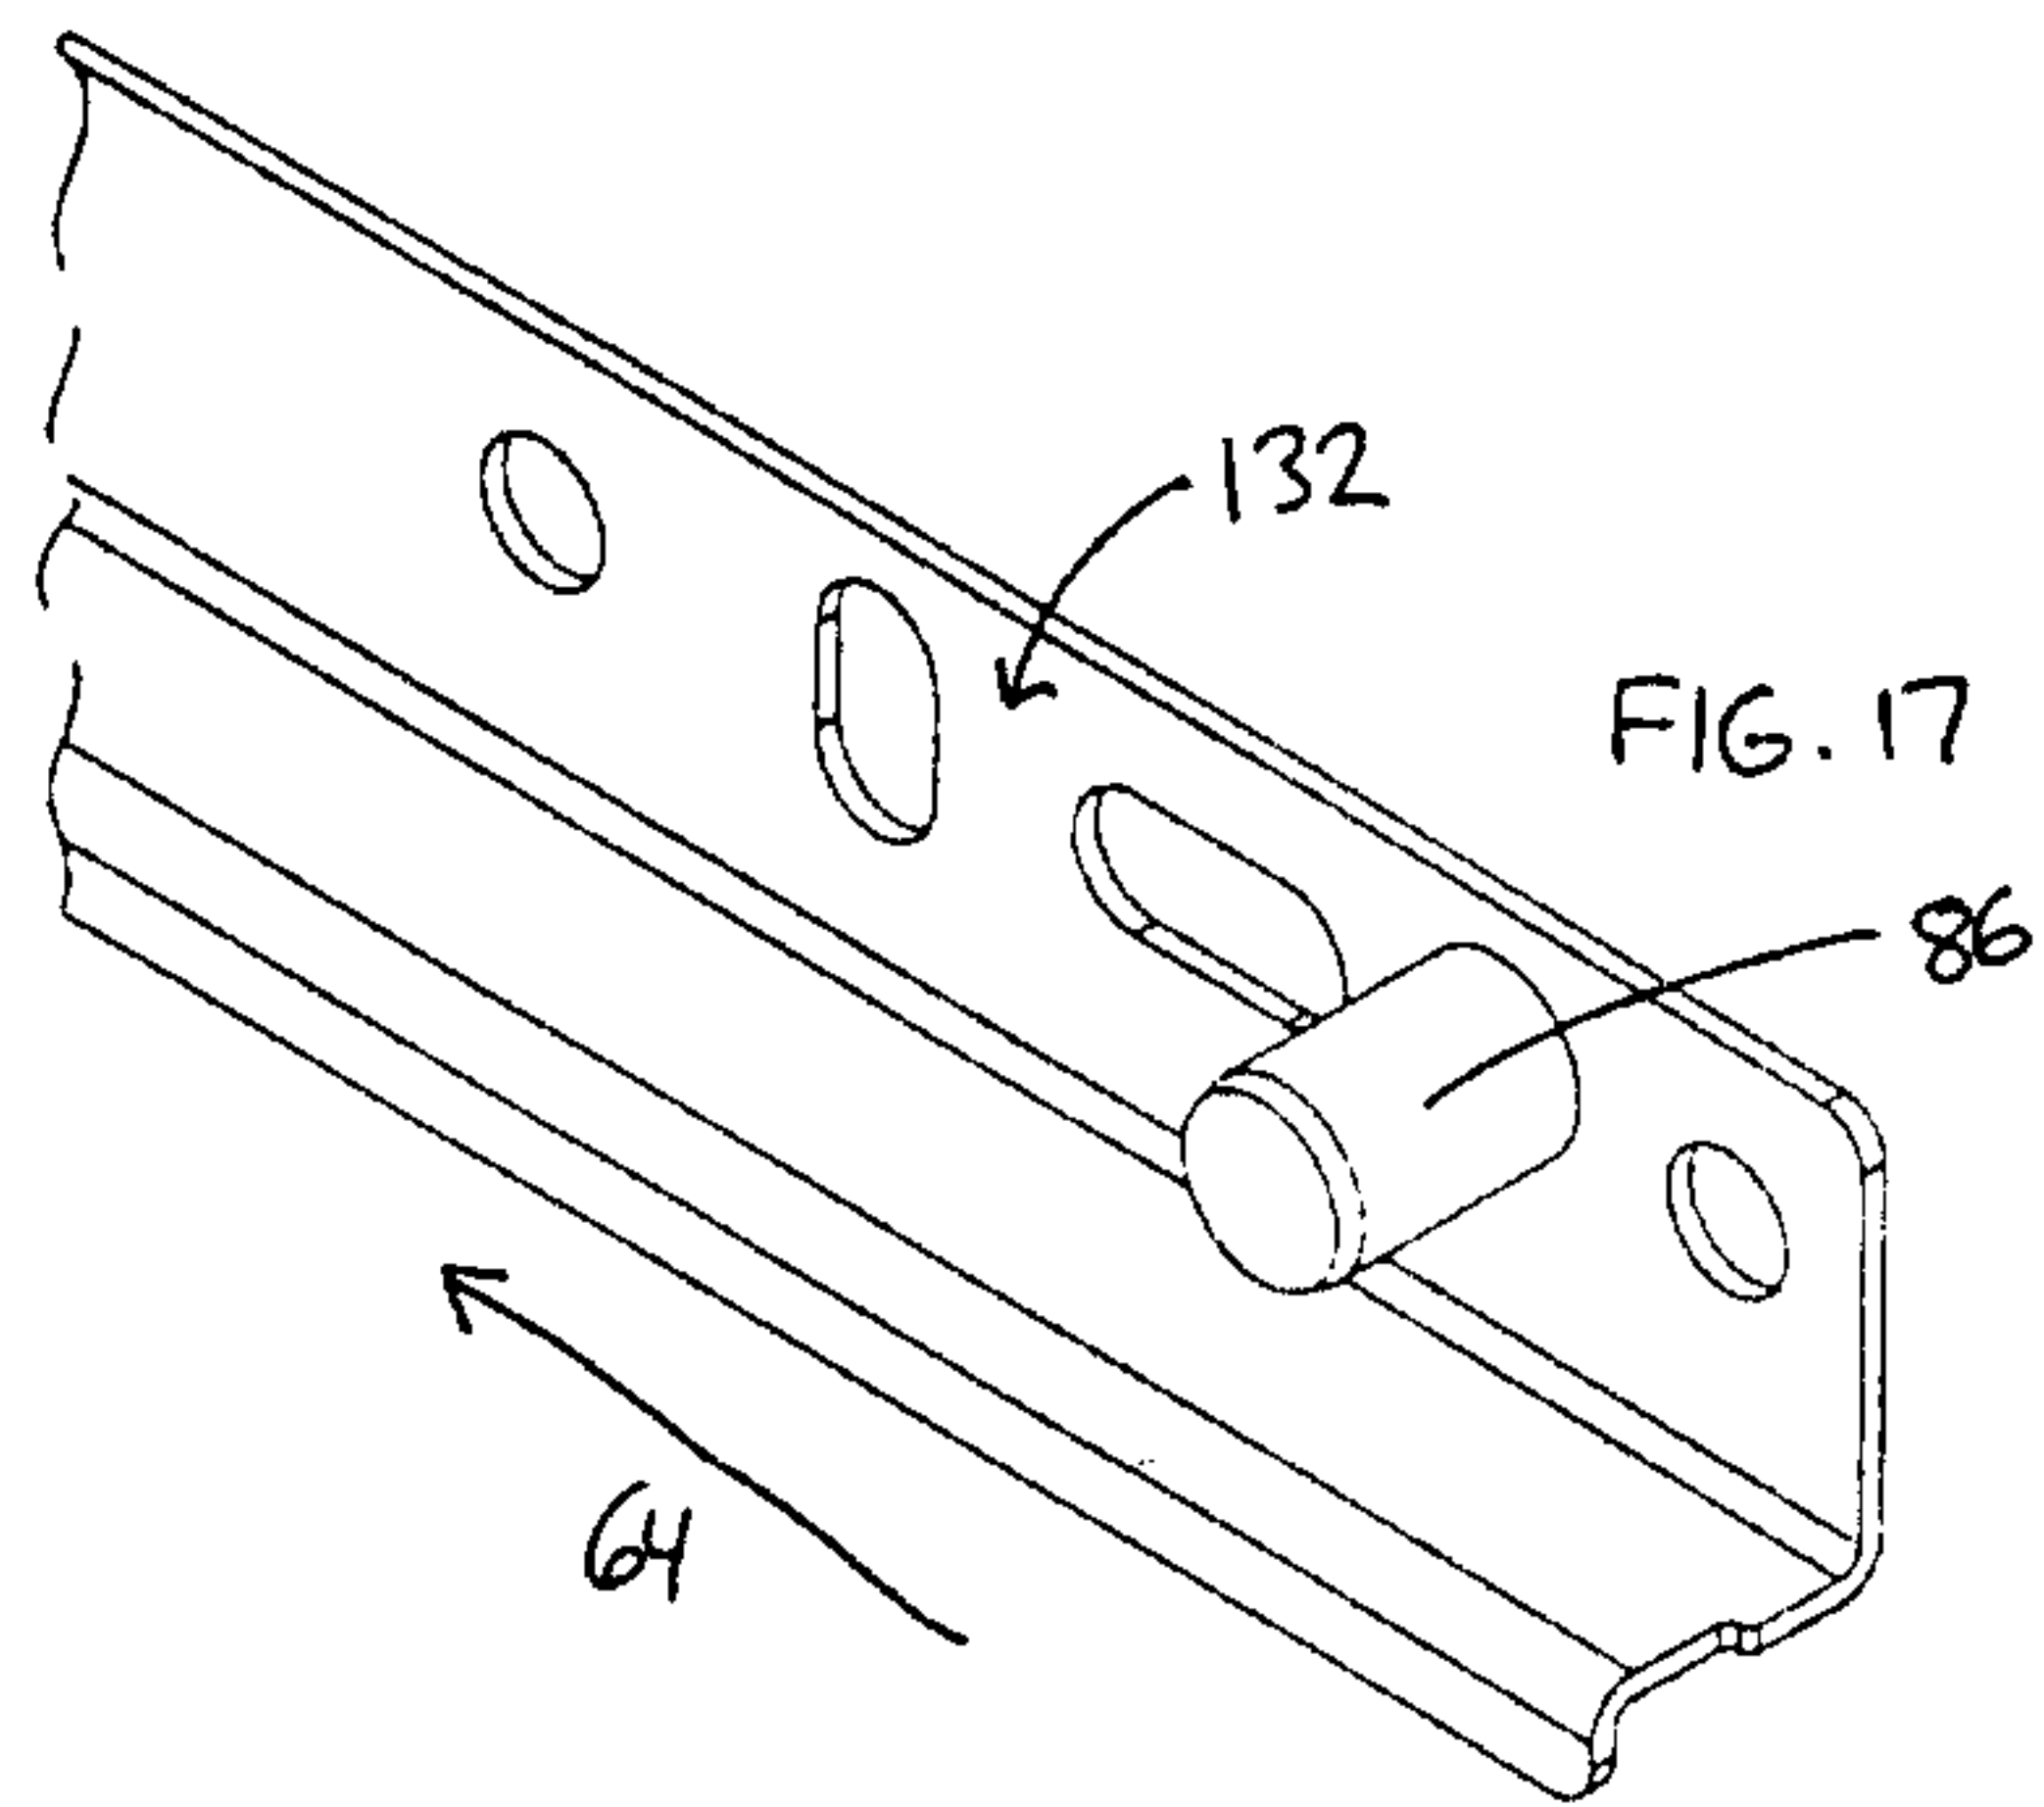


FIG. 19



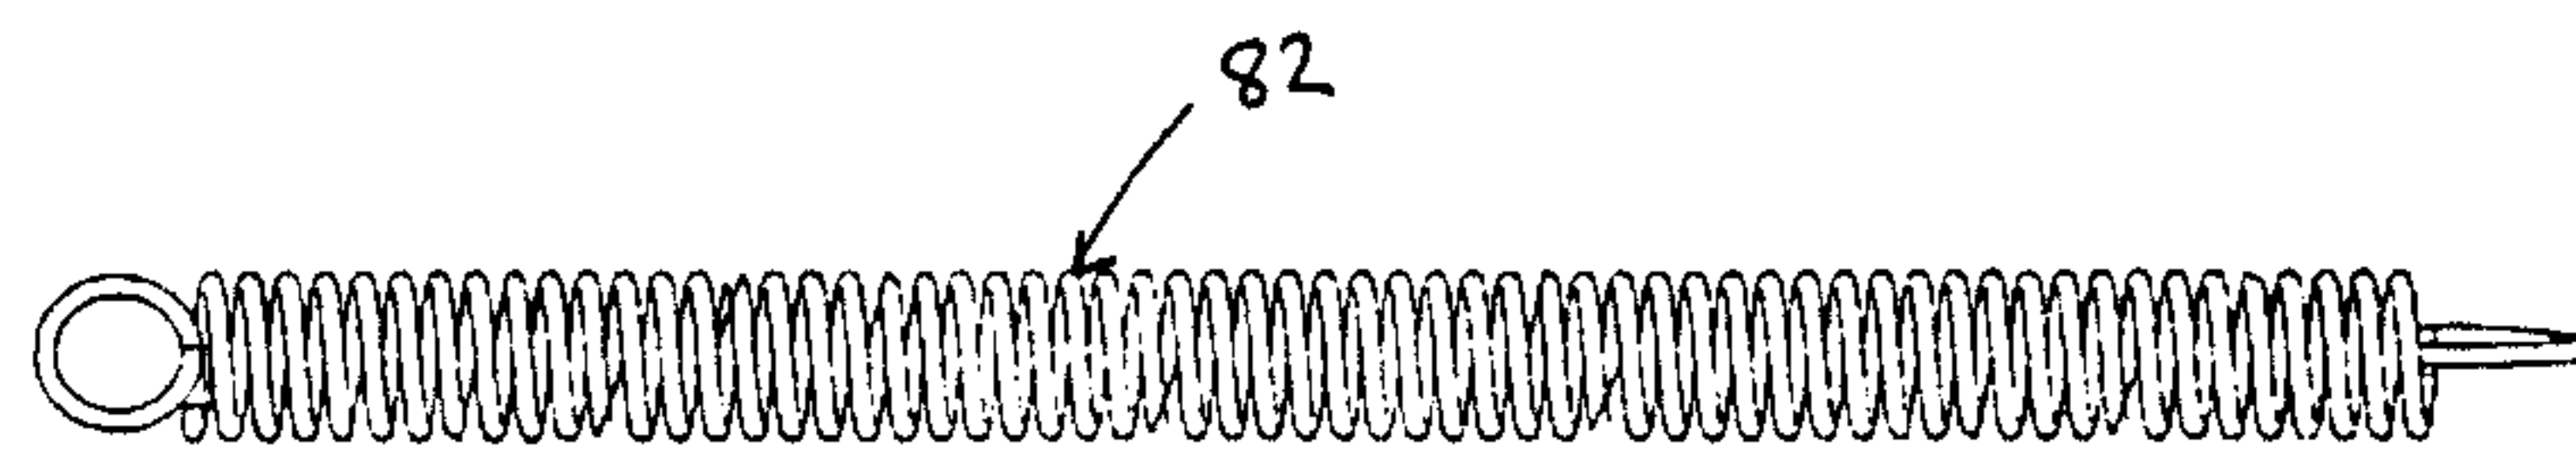


FIG. 20

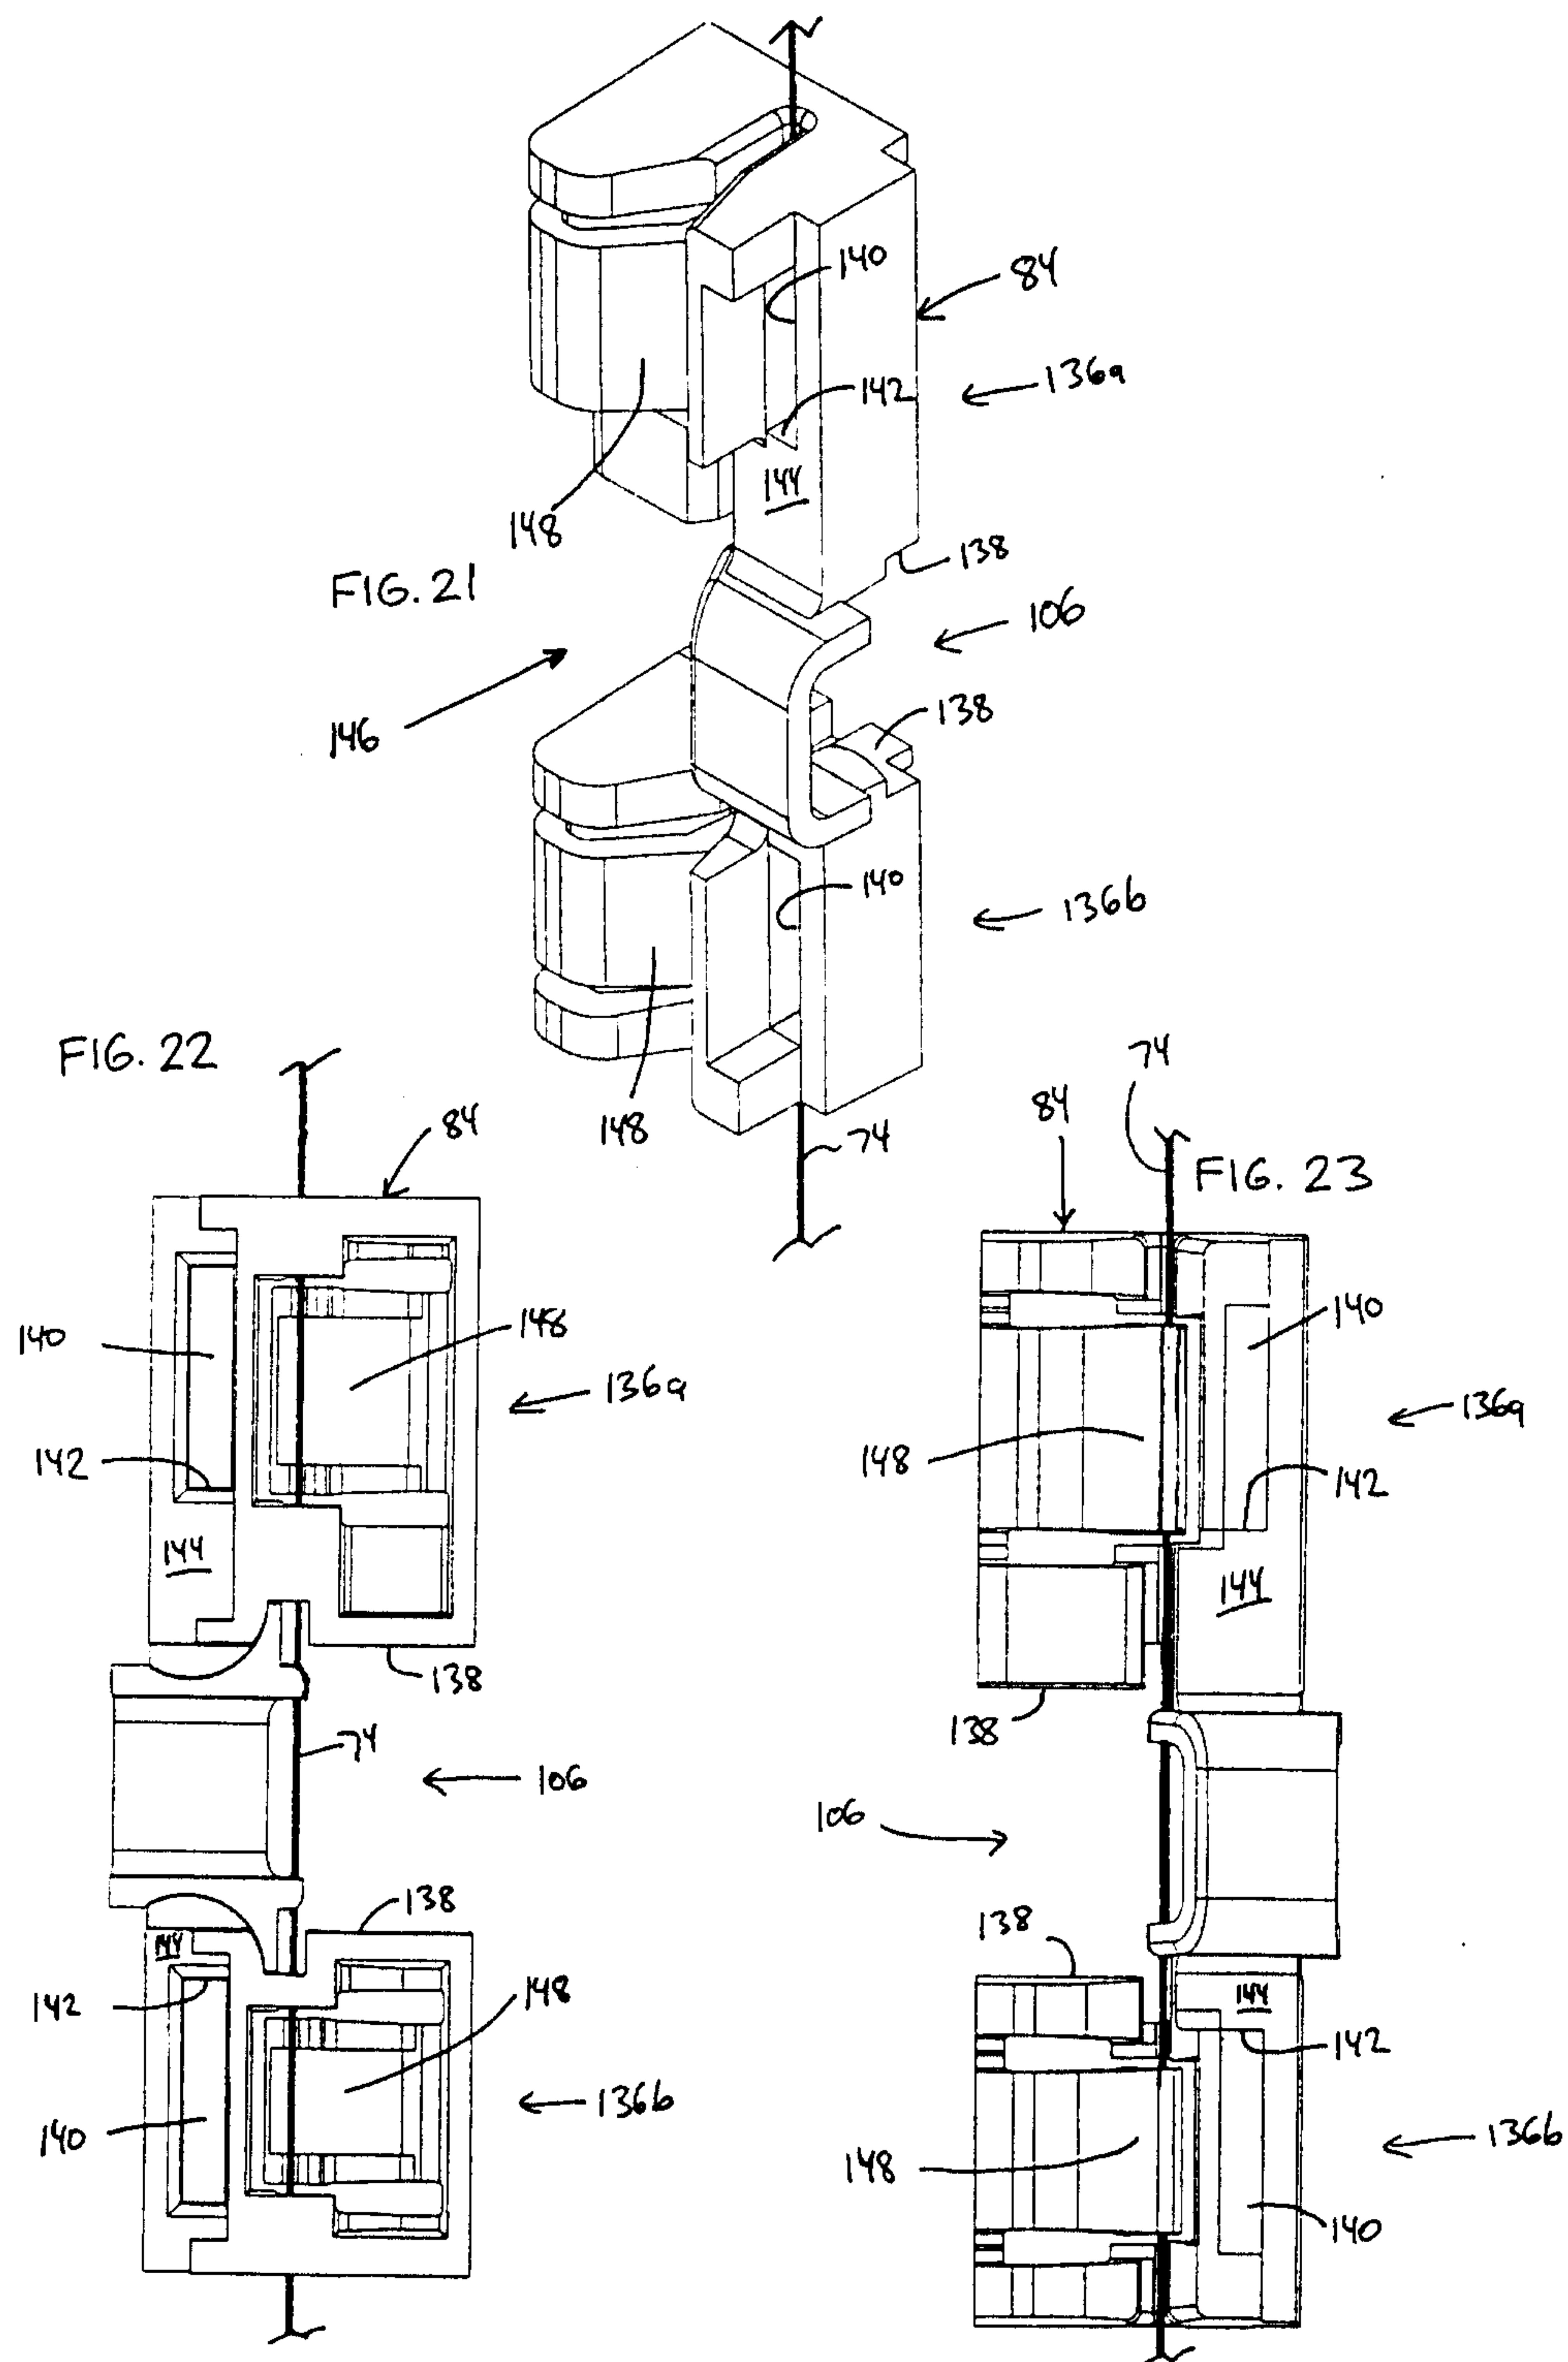

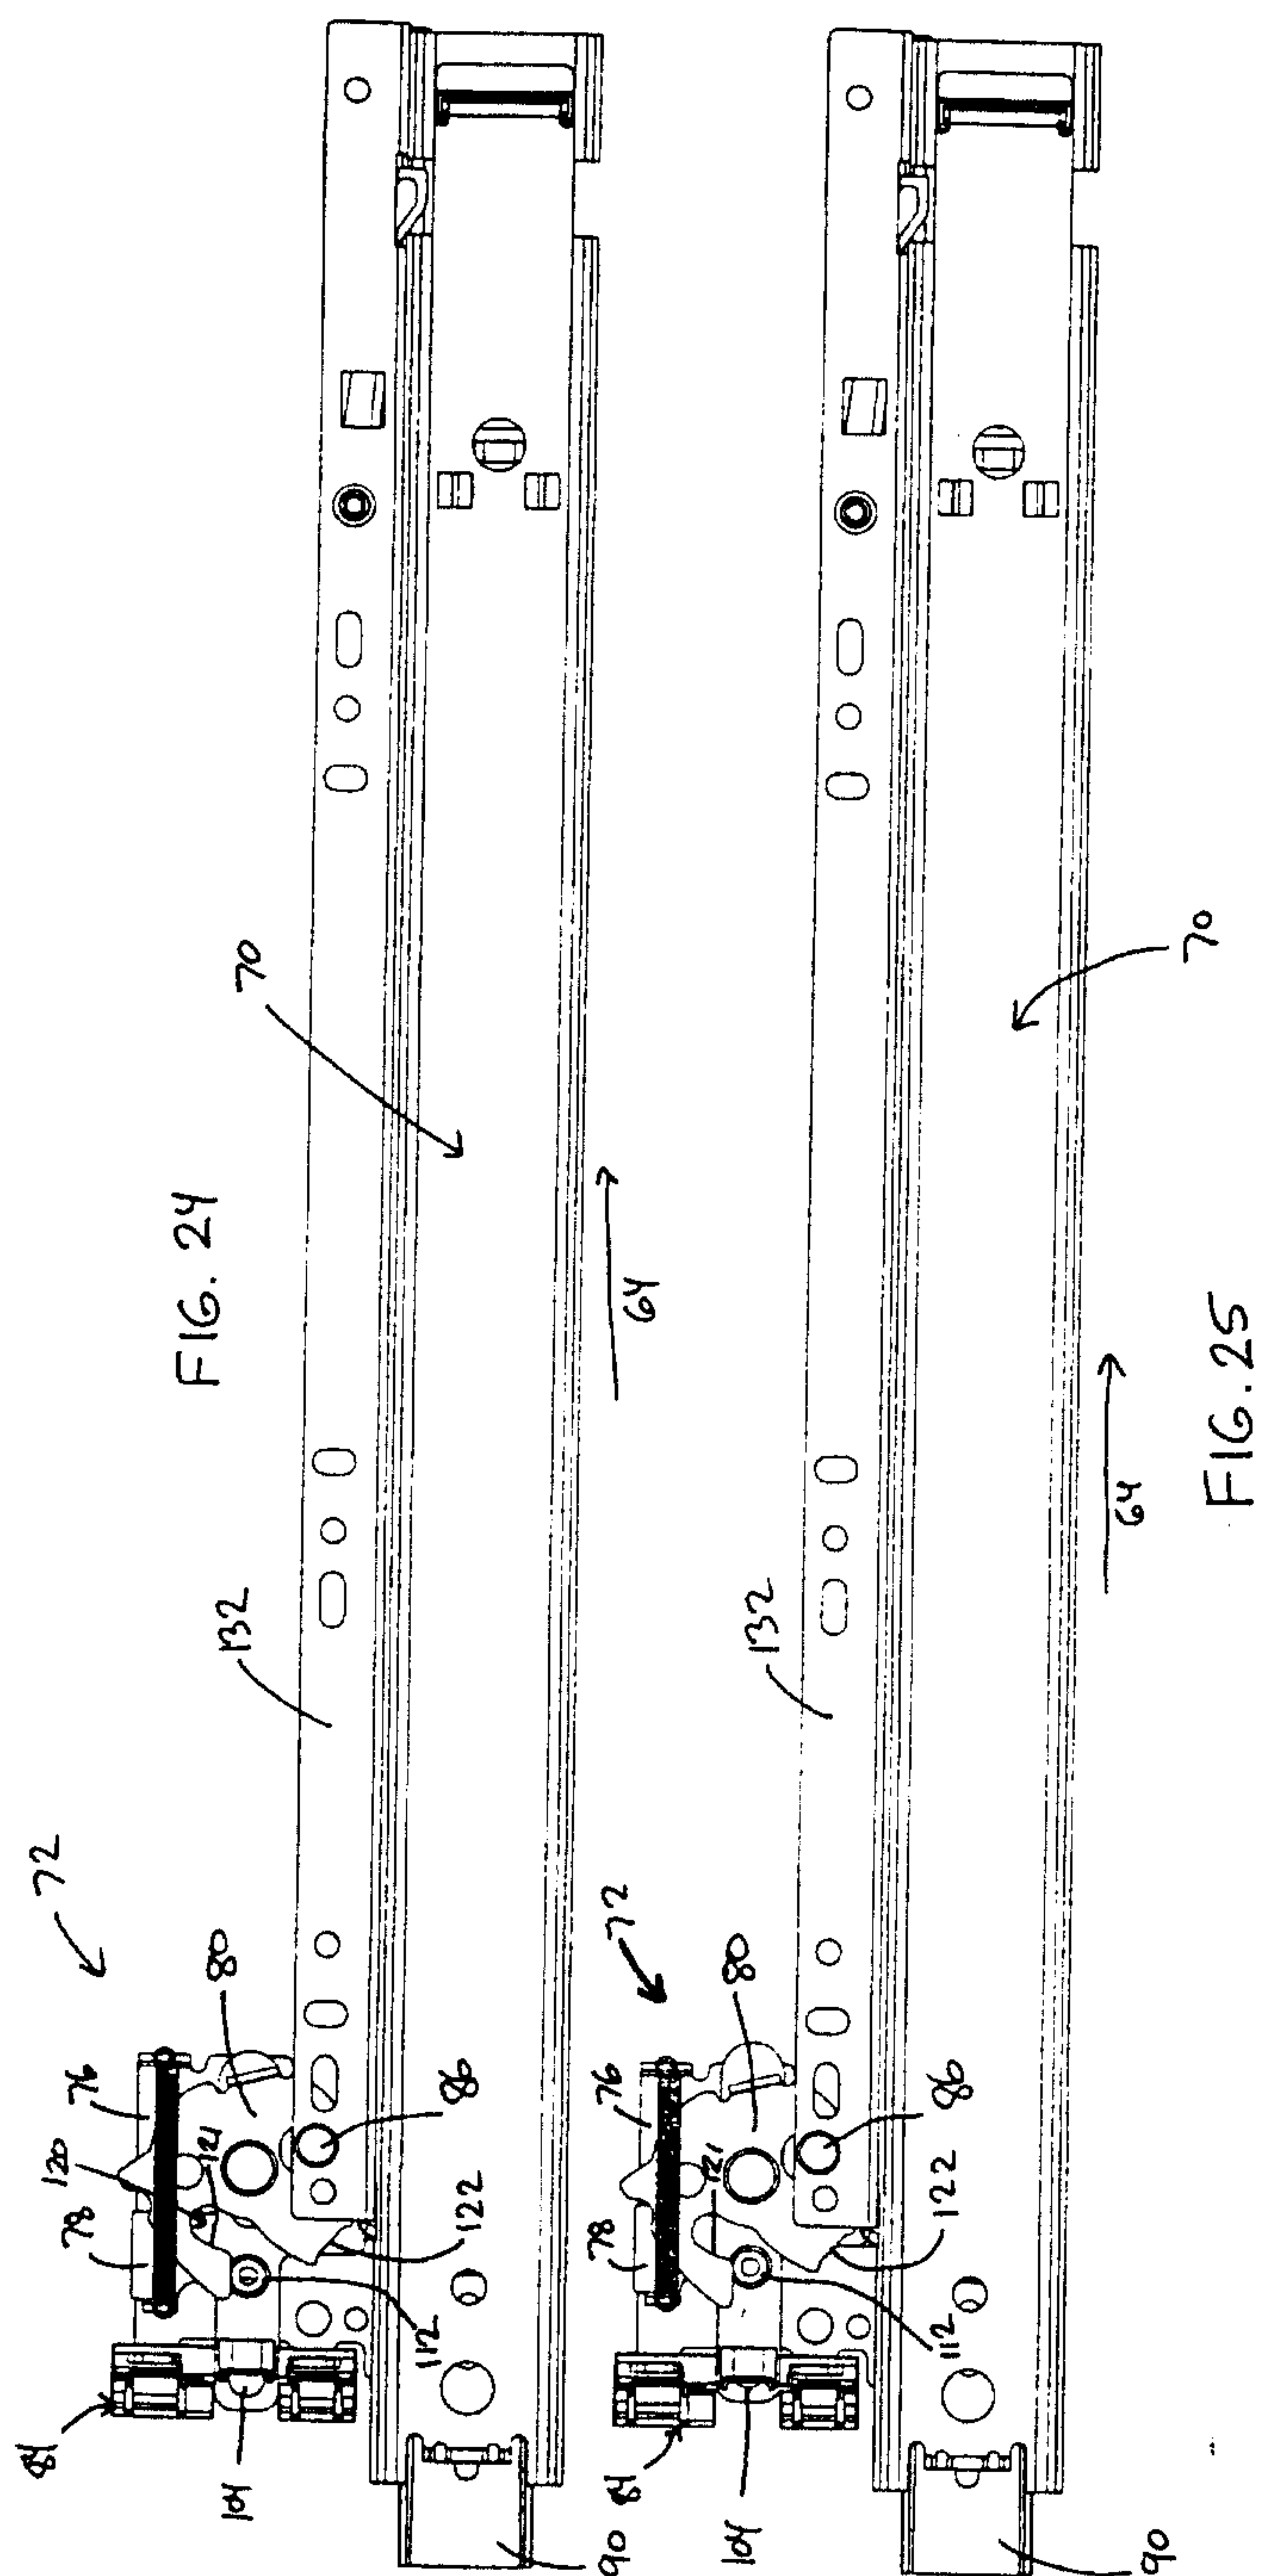

Borden Ladner Gervais LLP / s.r.l.

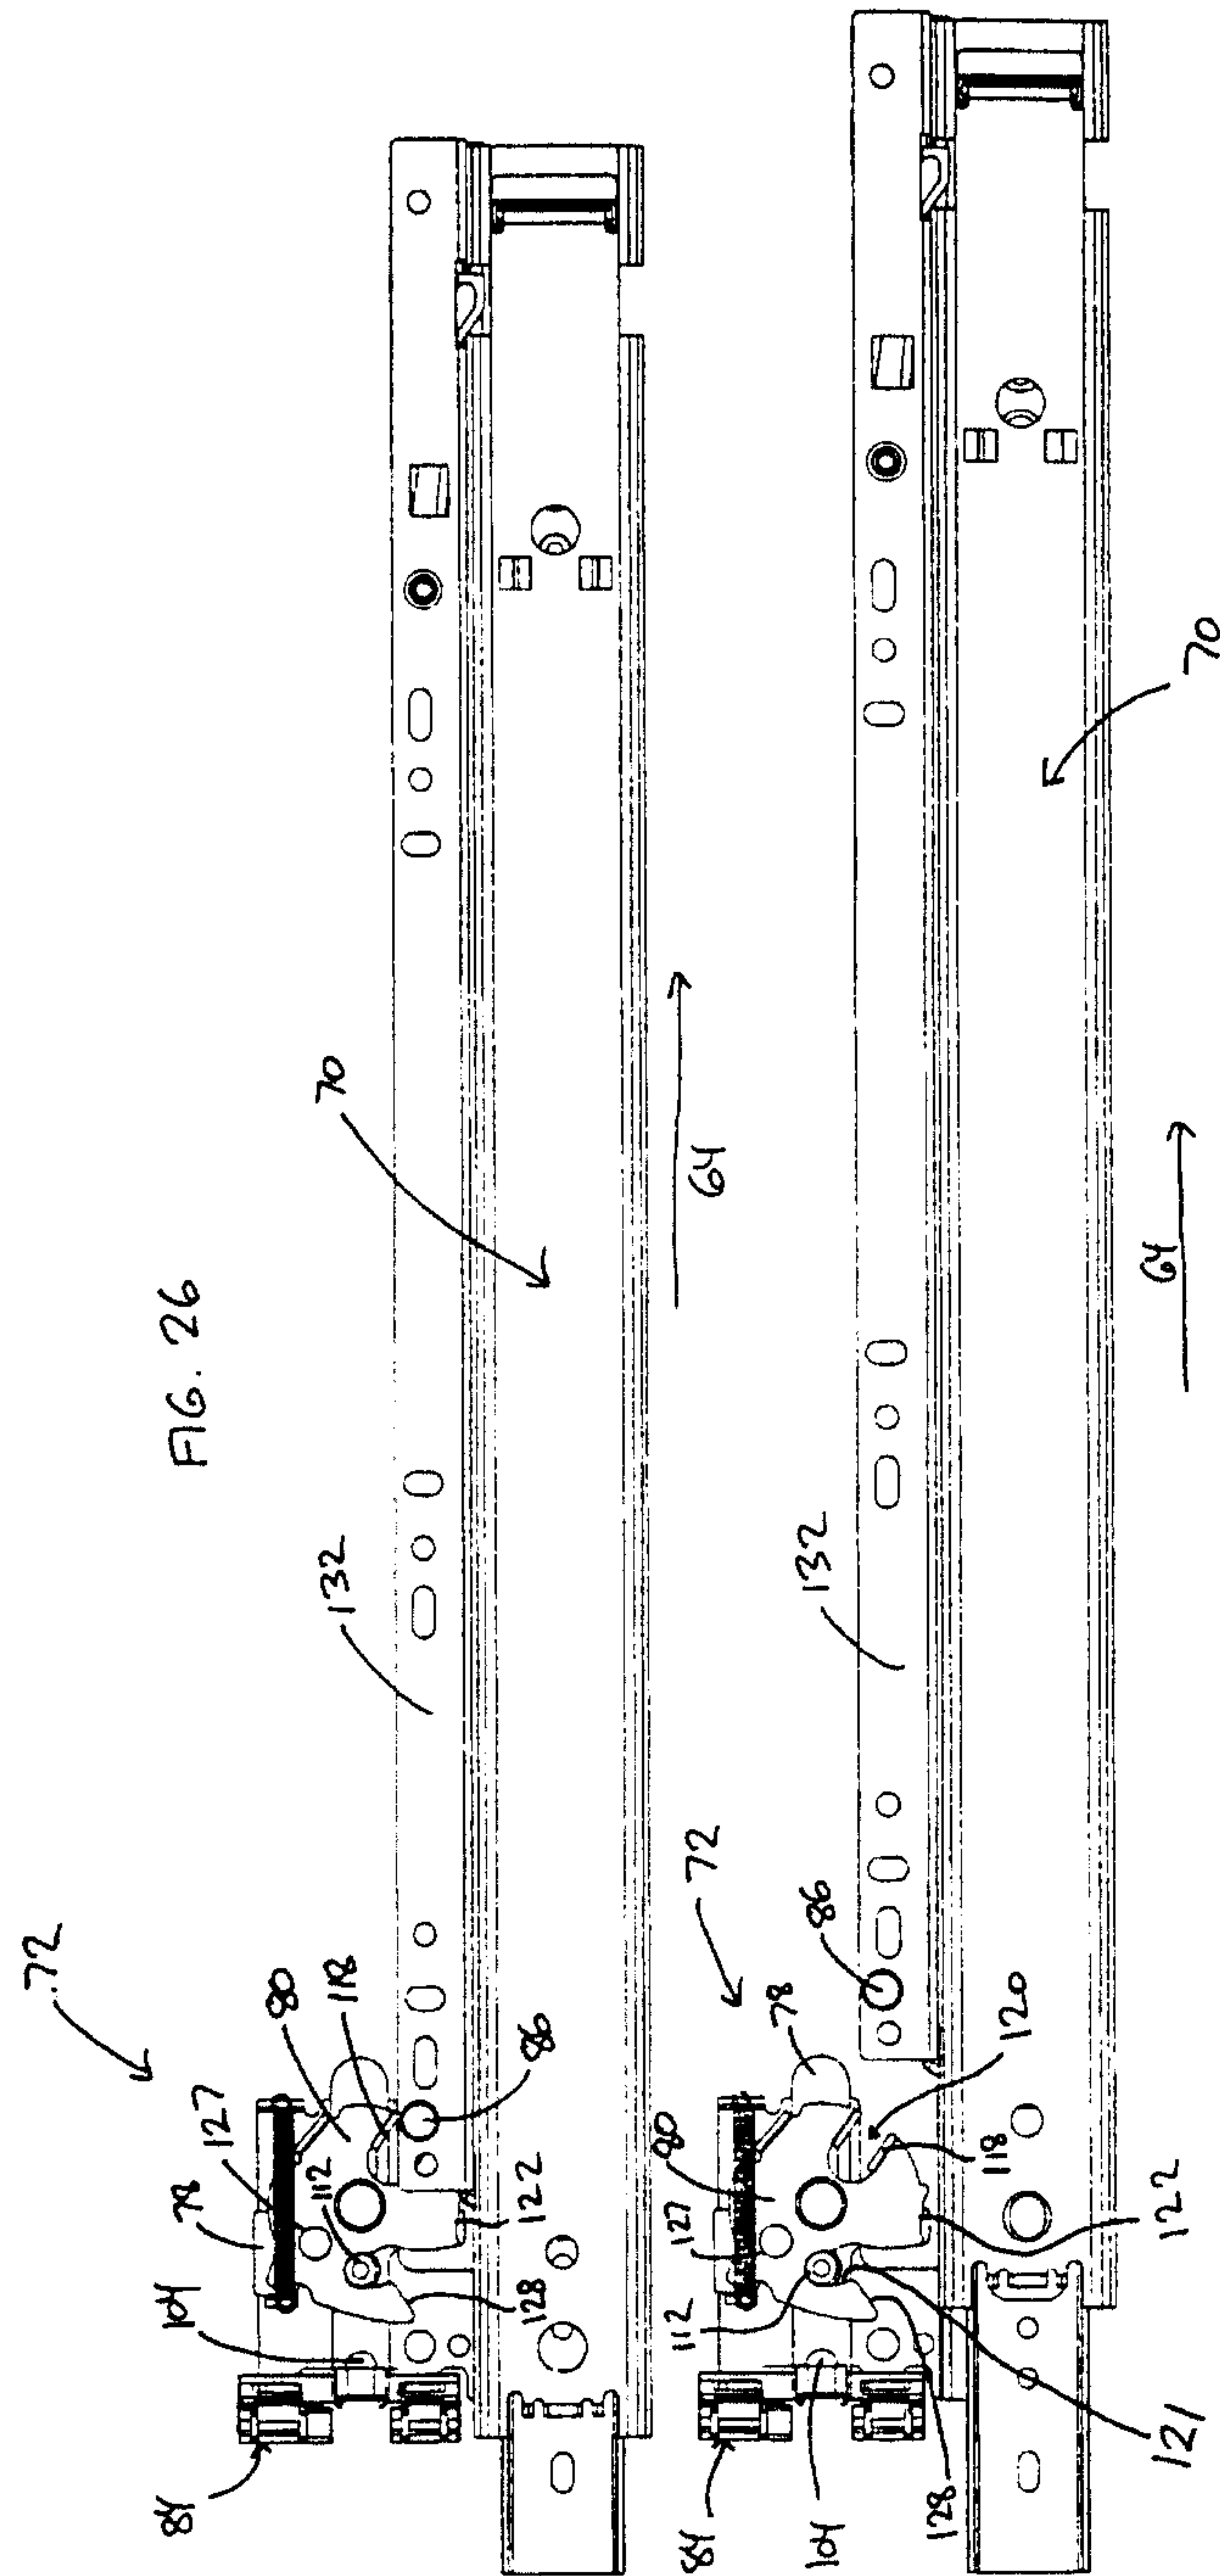
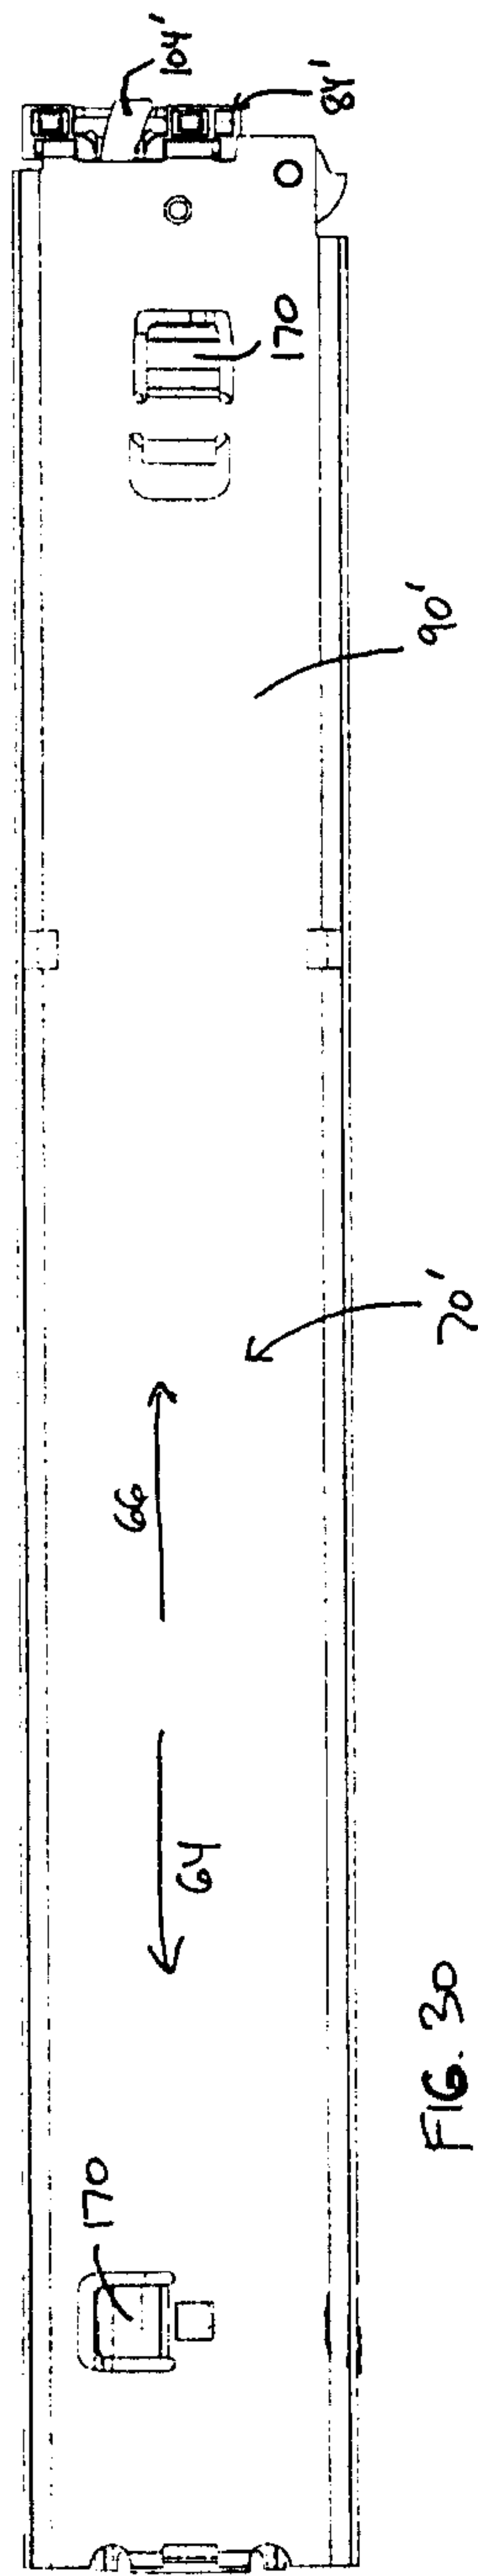
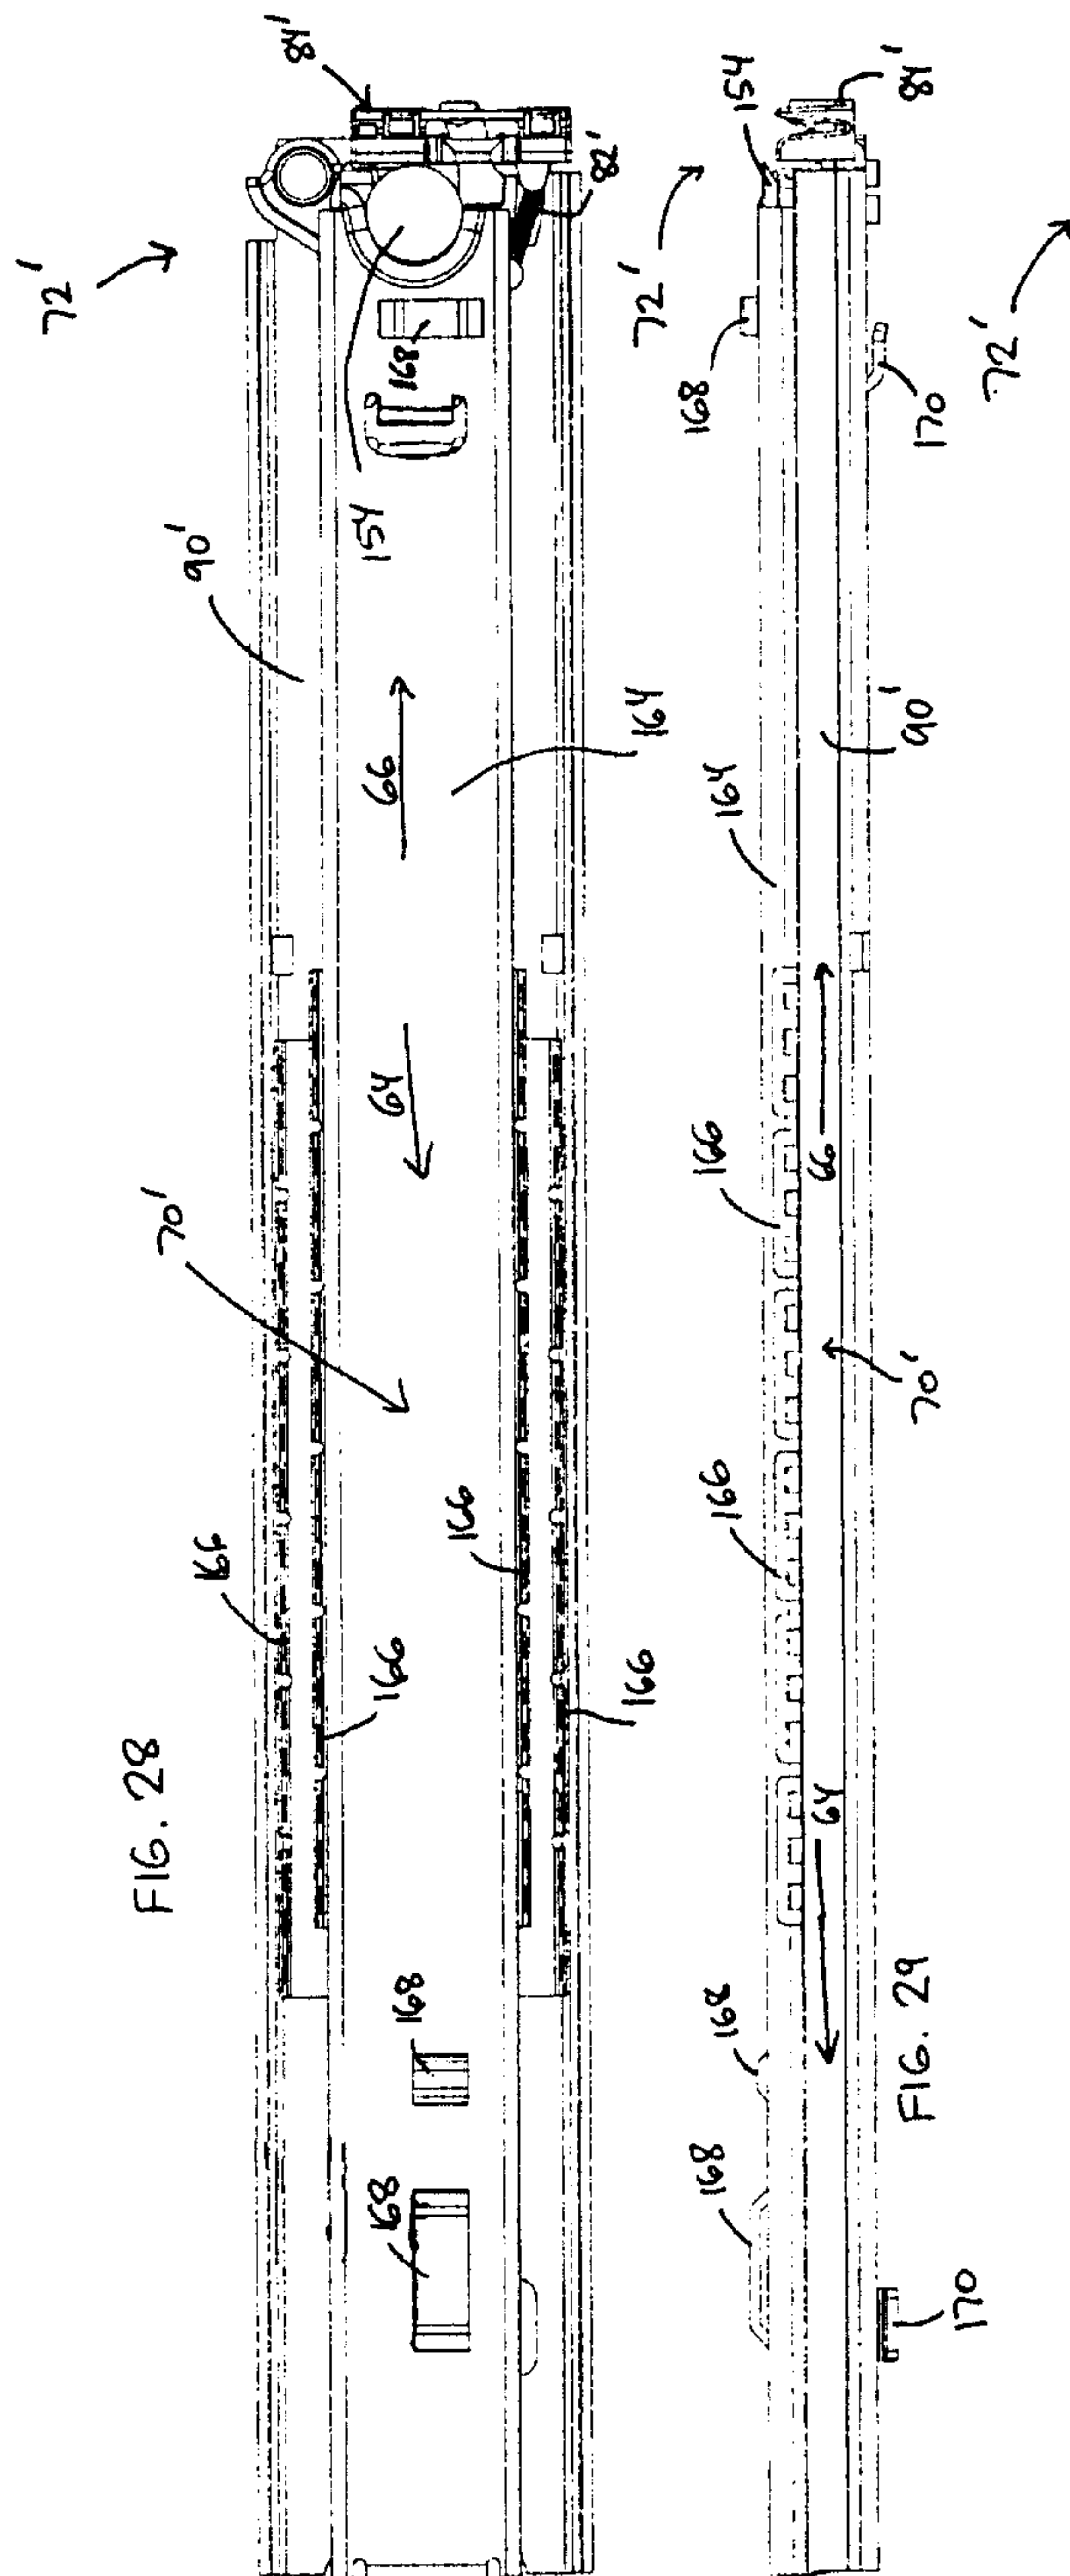


FIG. 26

FIG. 27

Borden Ladner Gornall LLP



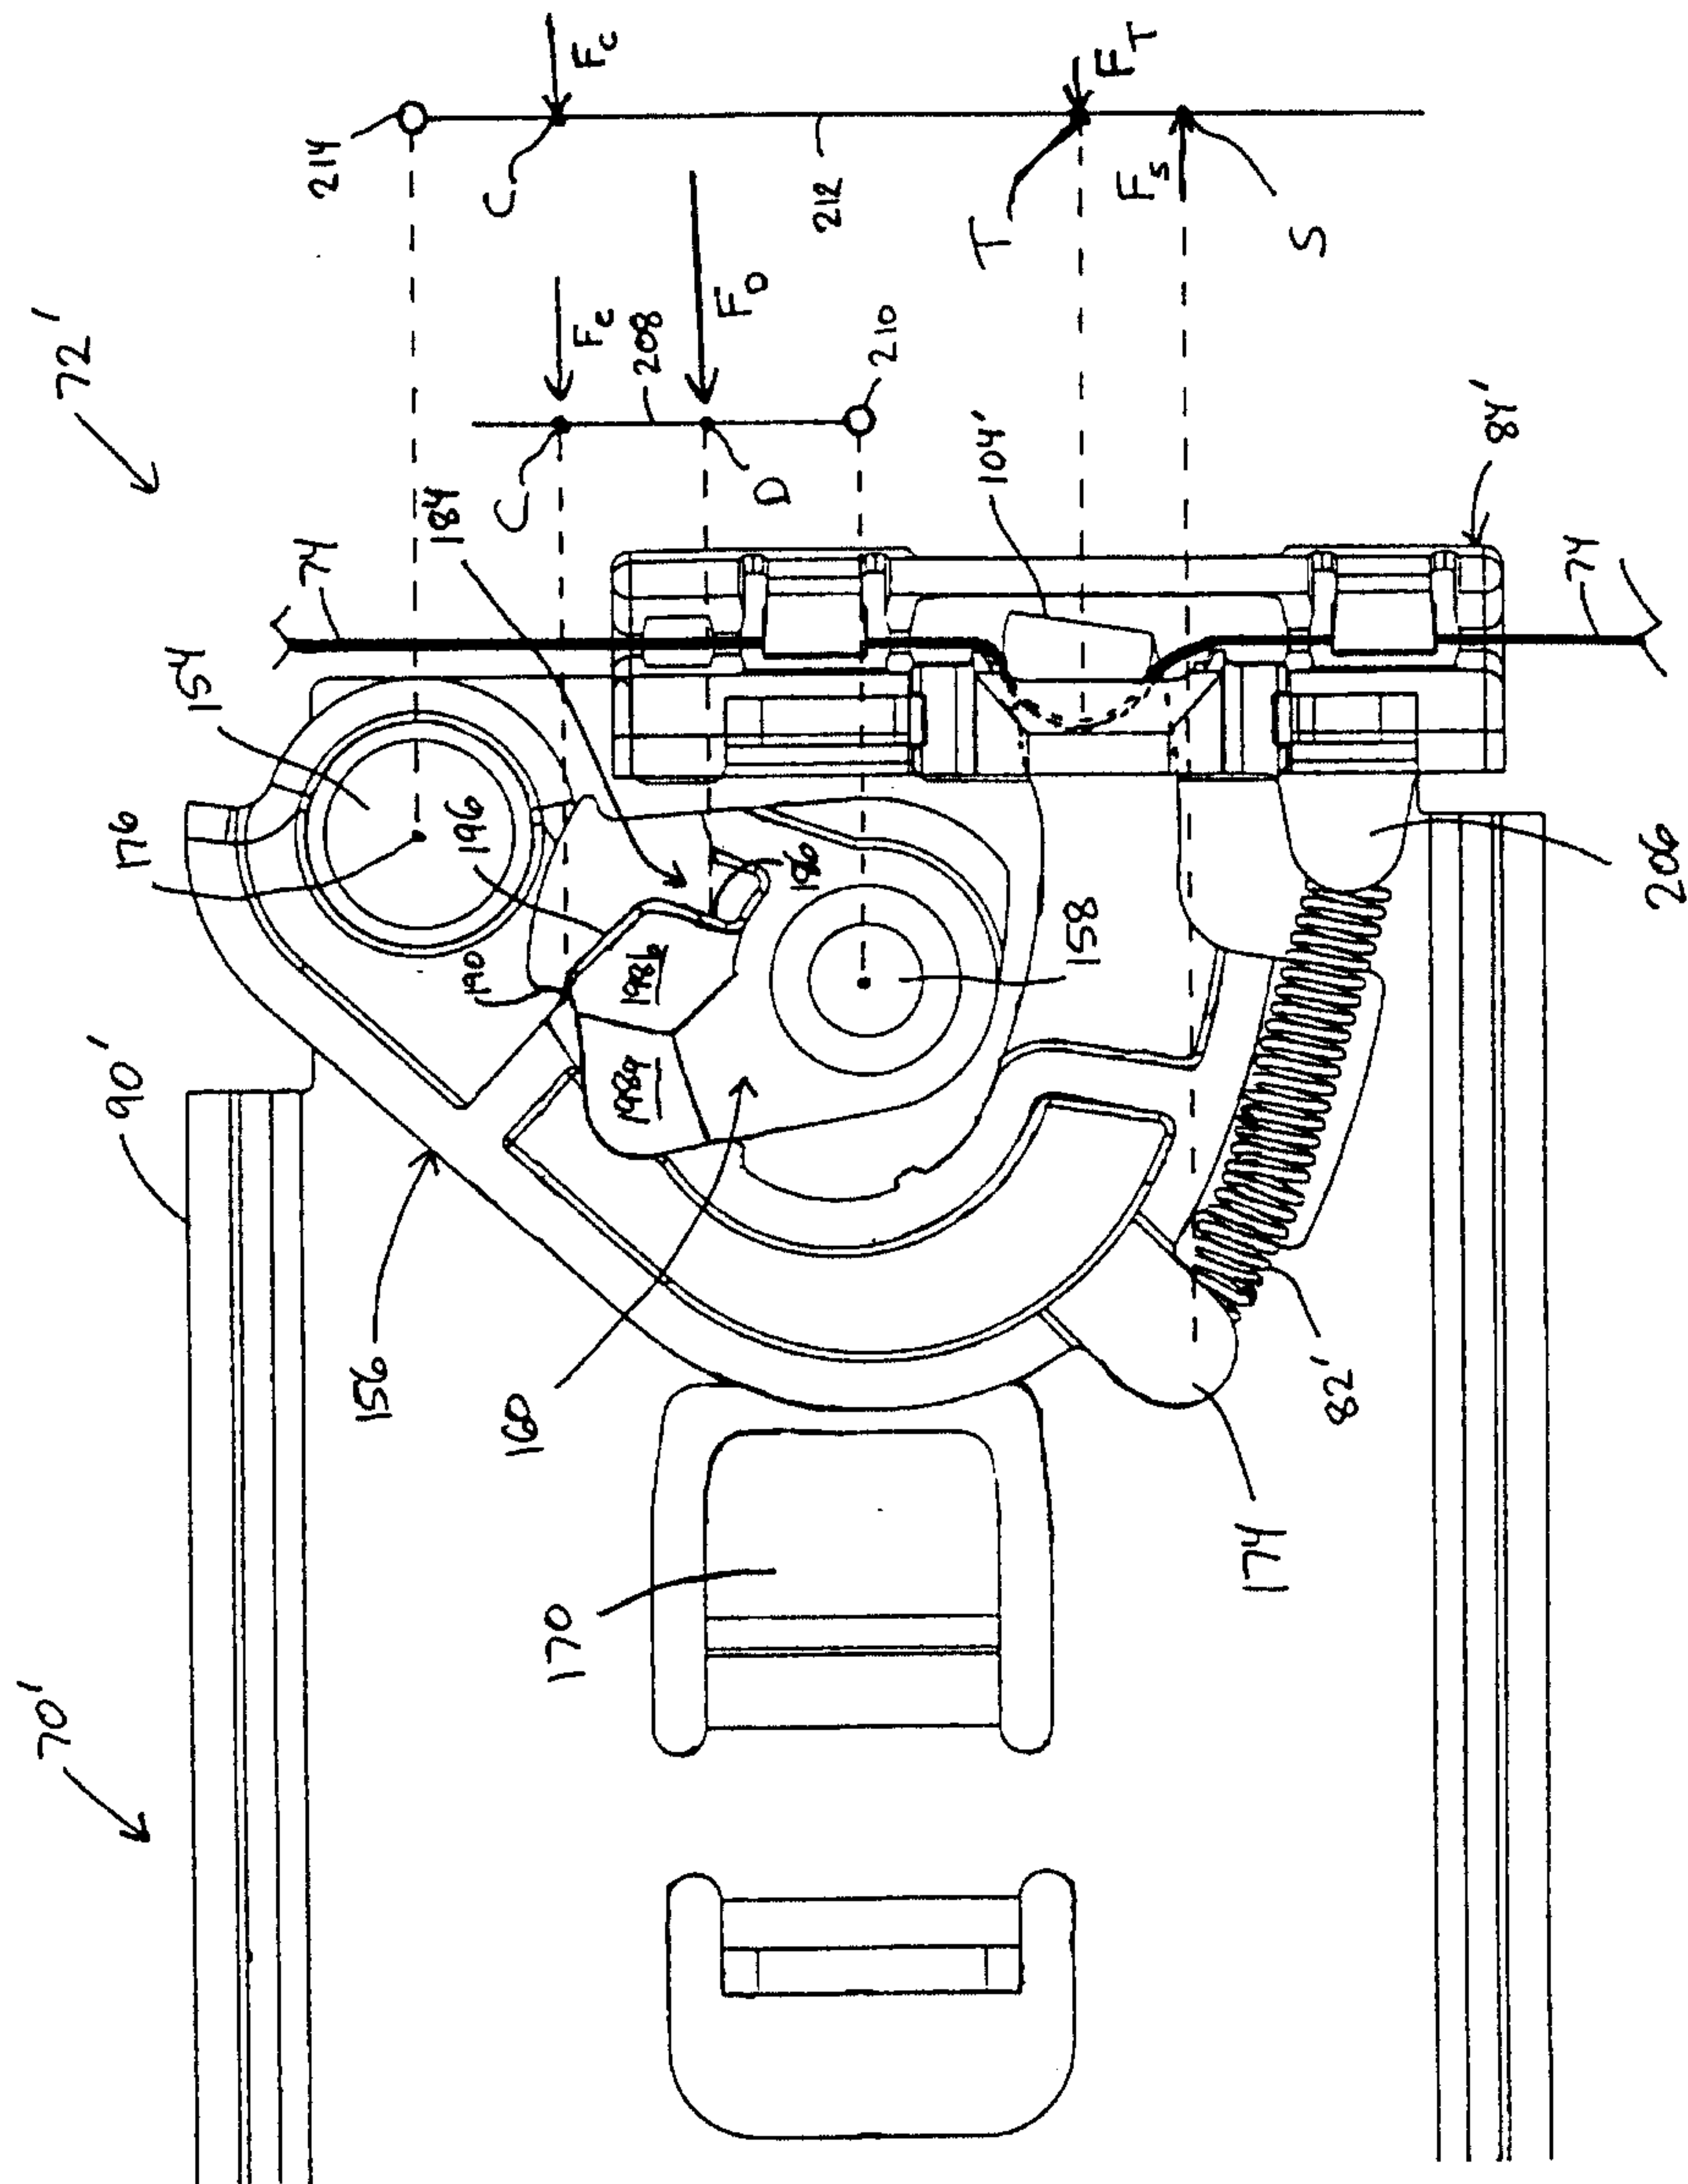


FIG. 31

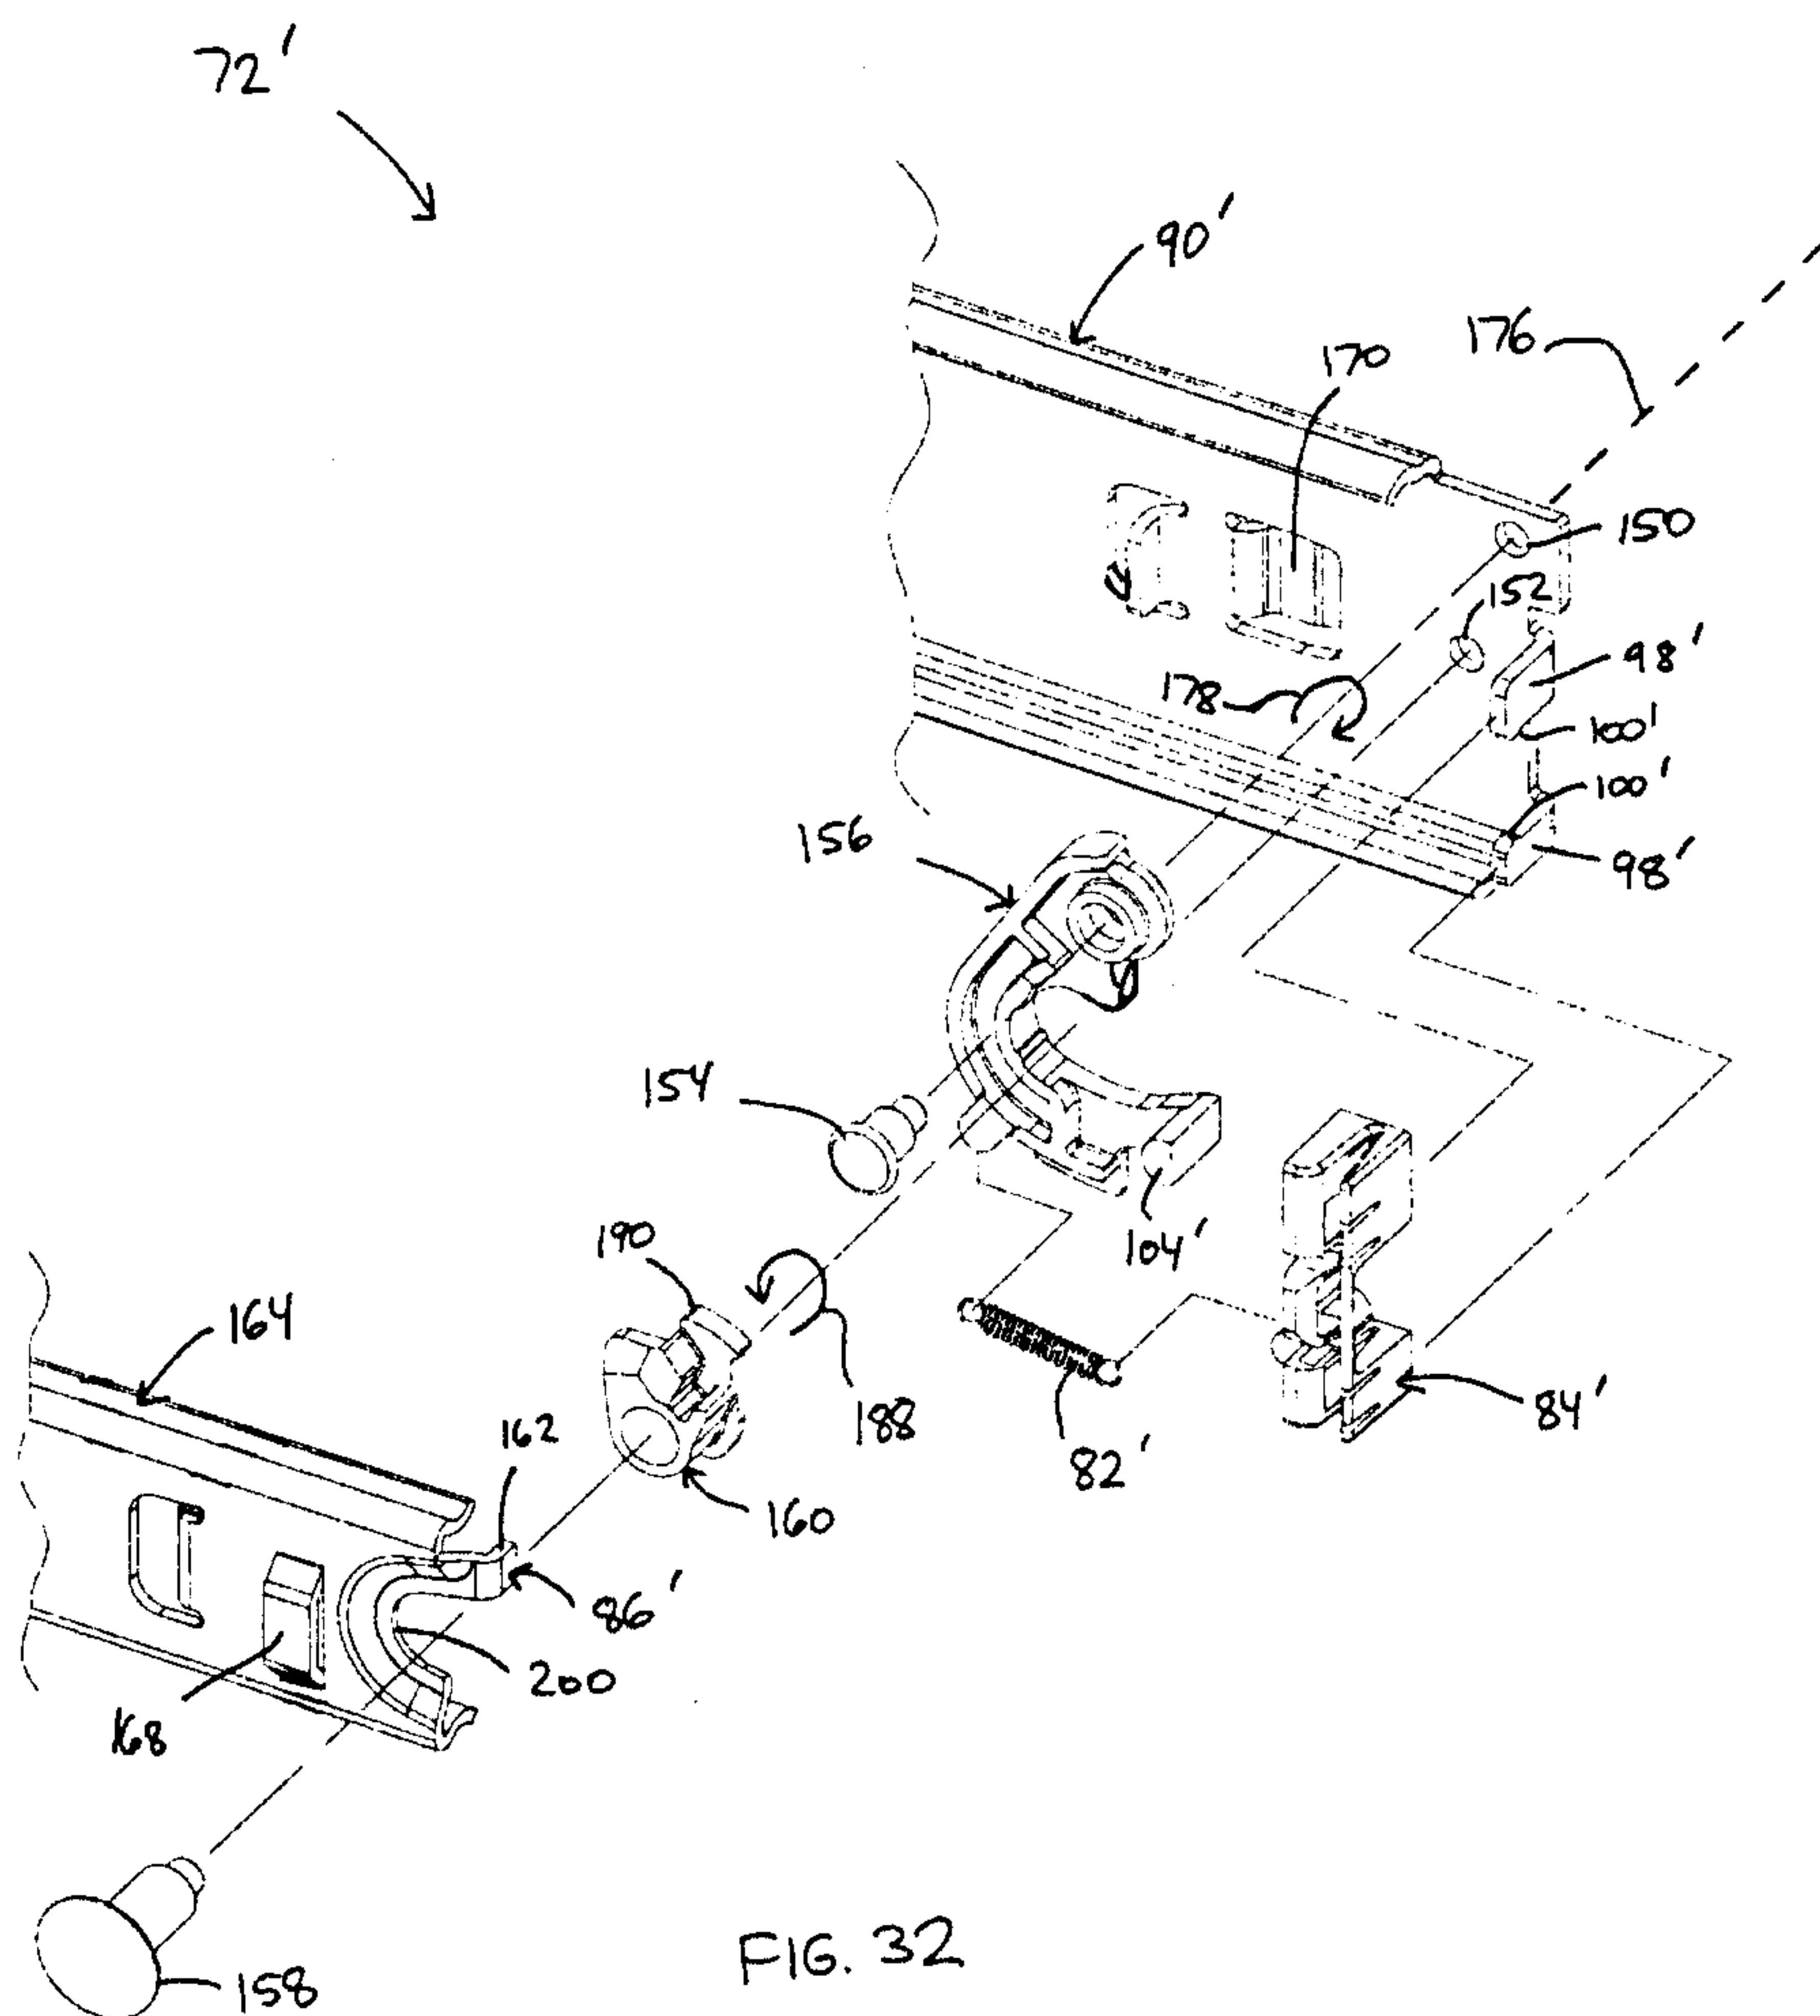
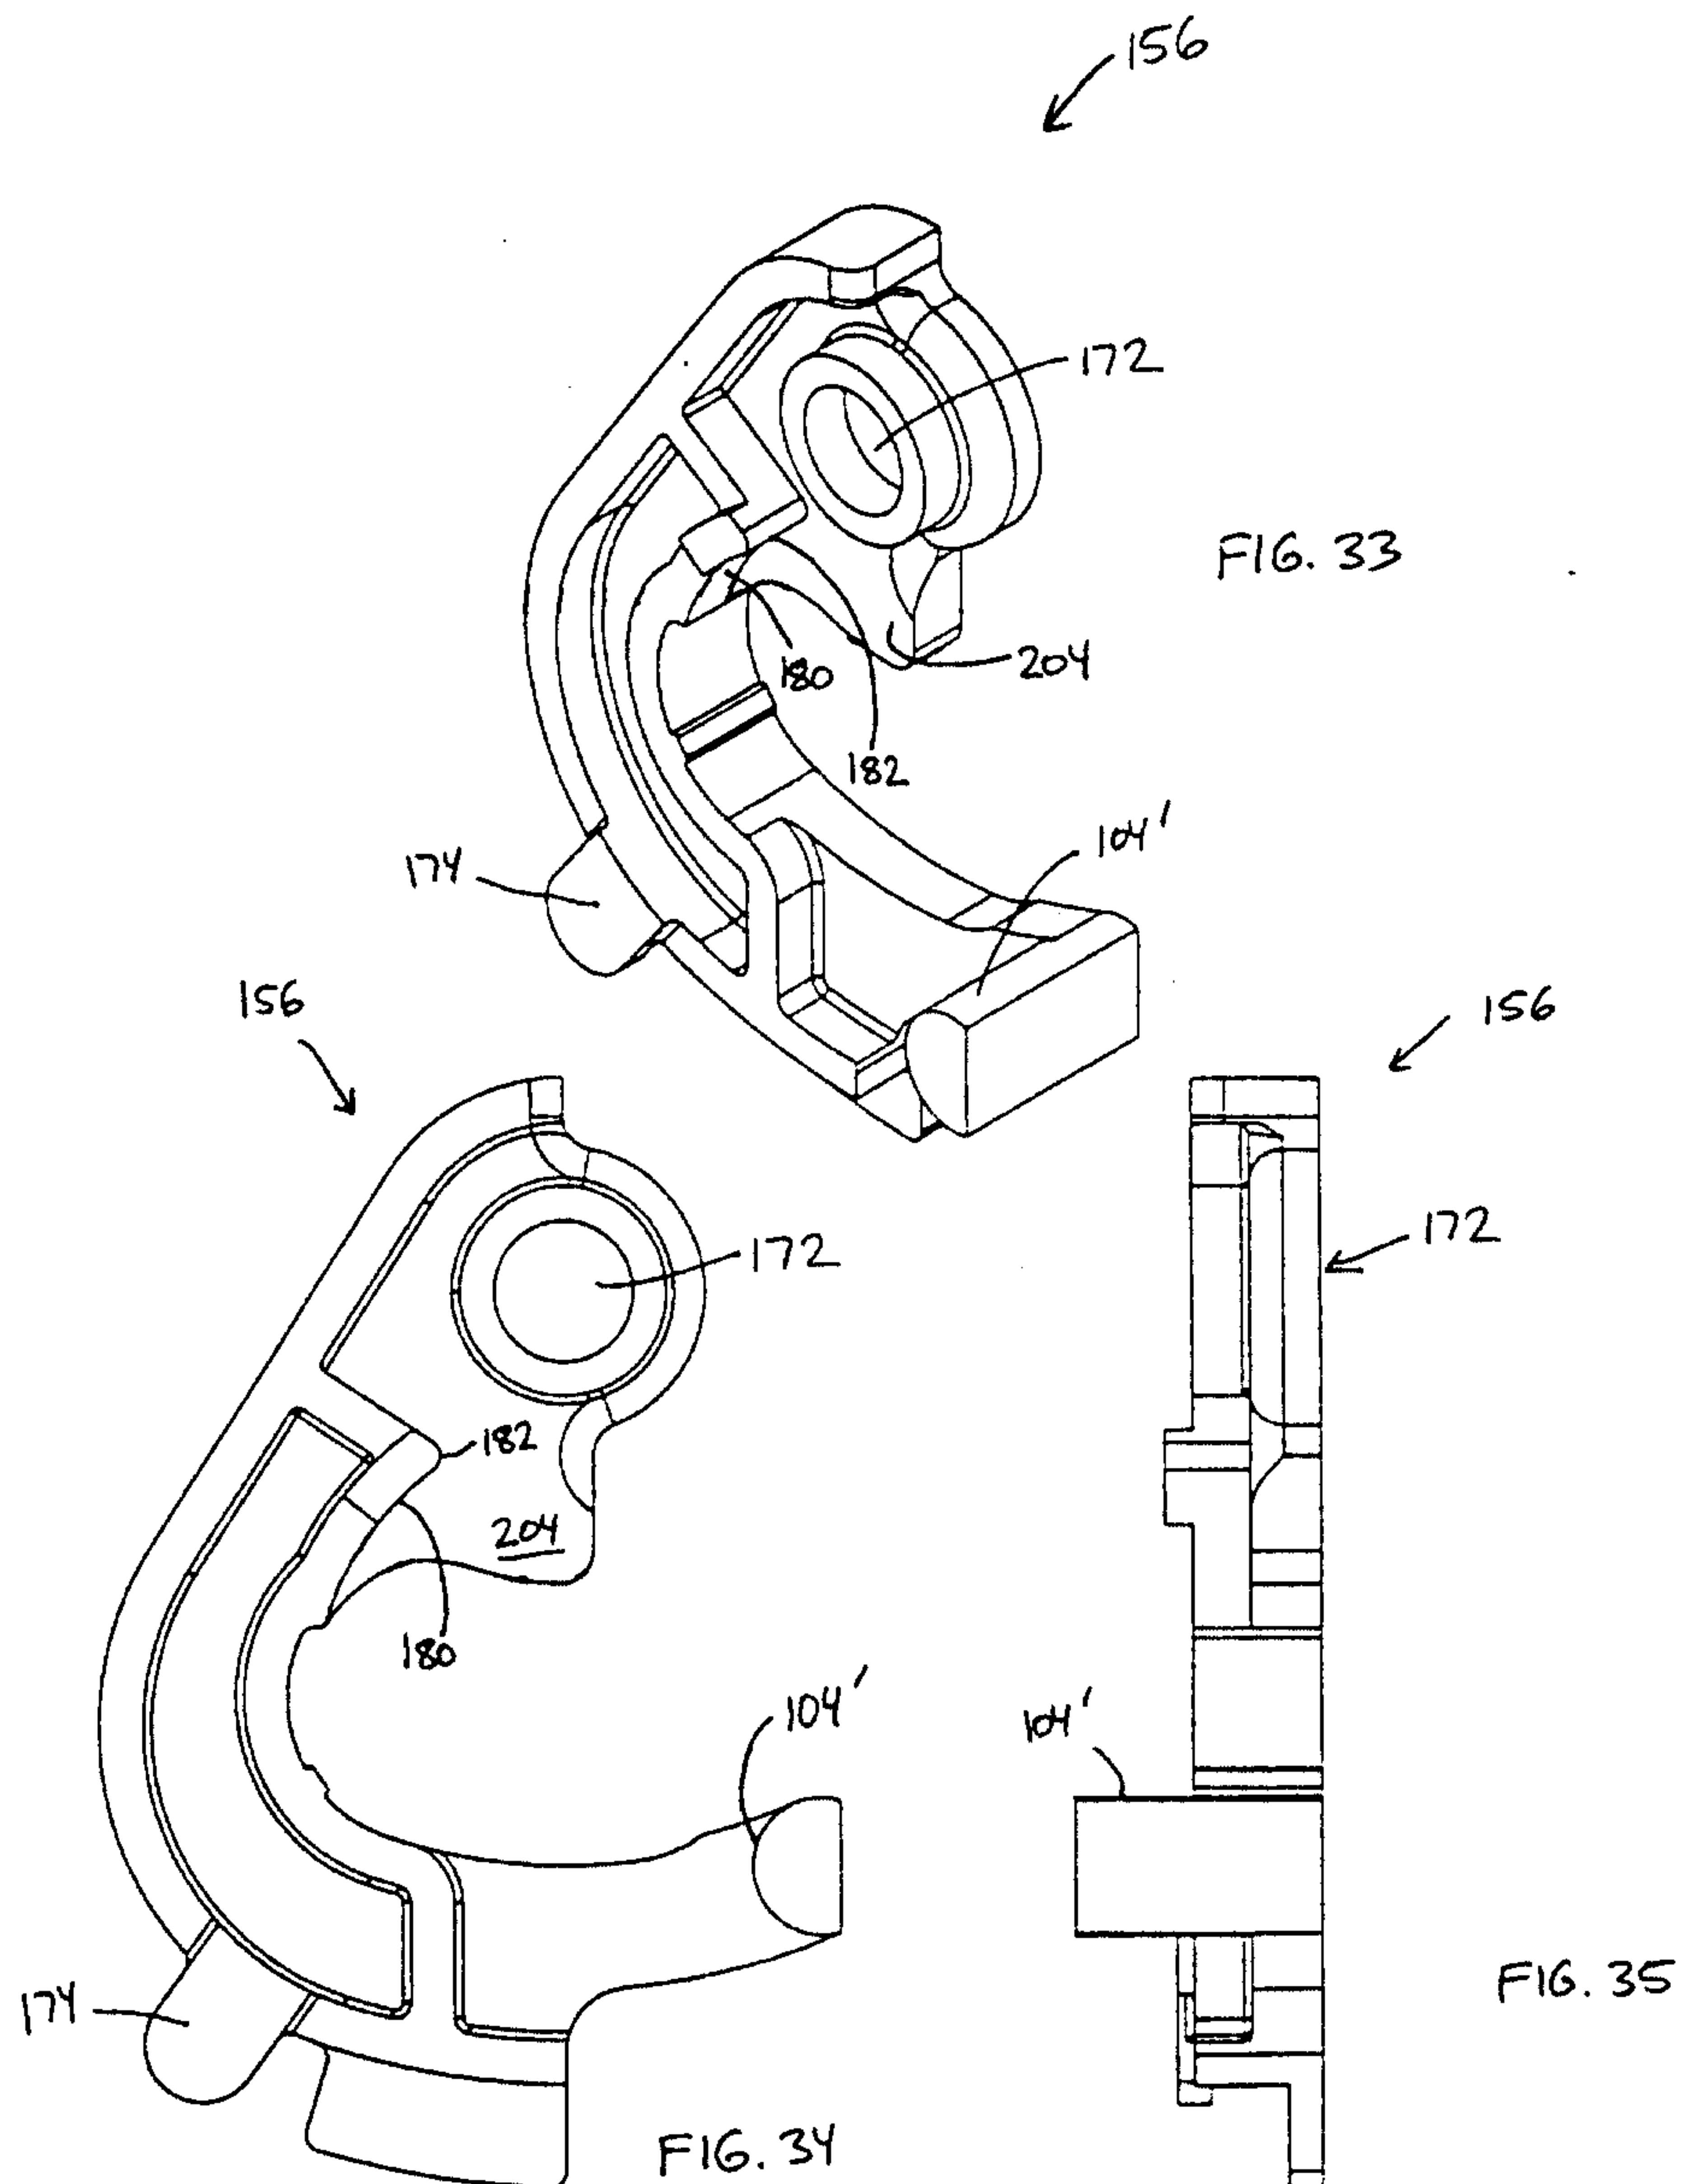
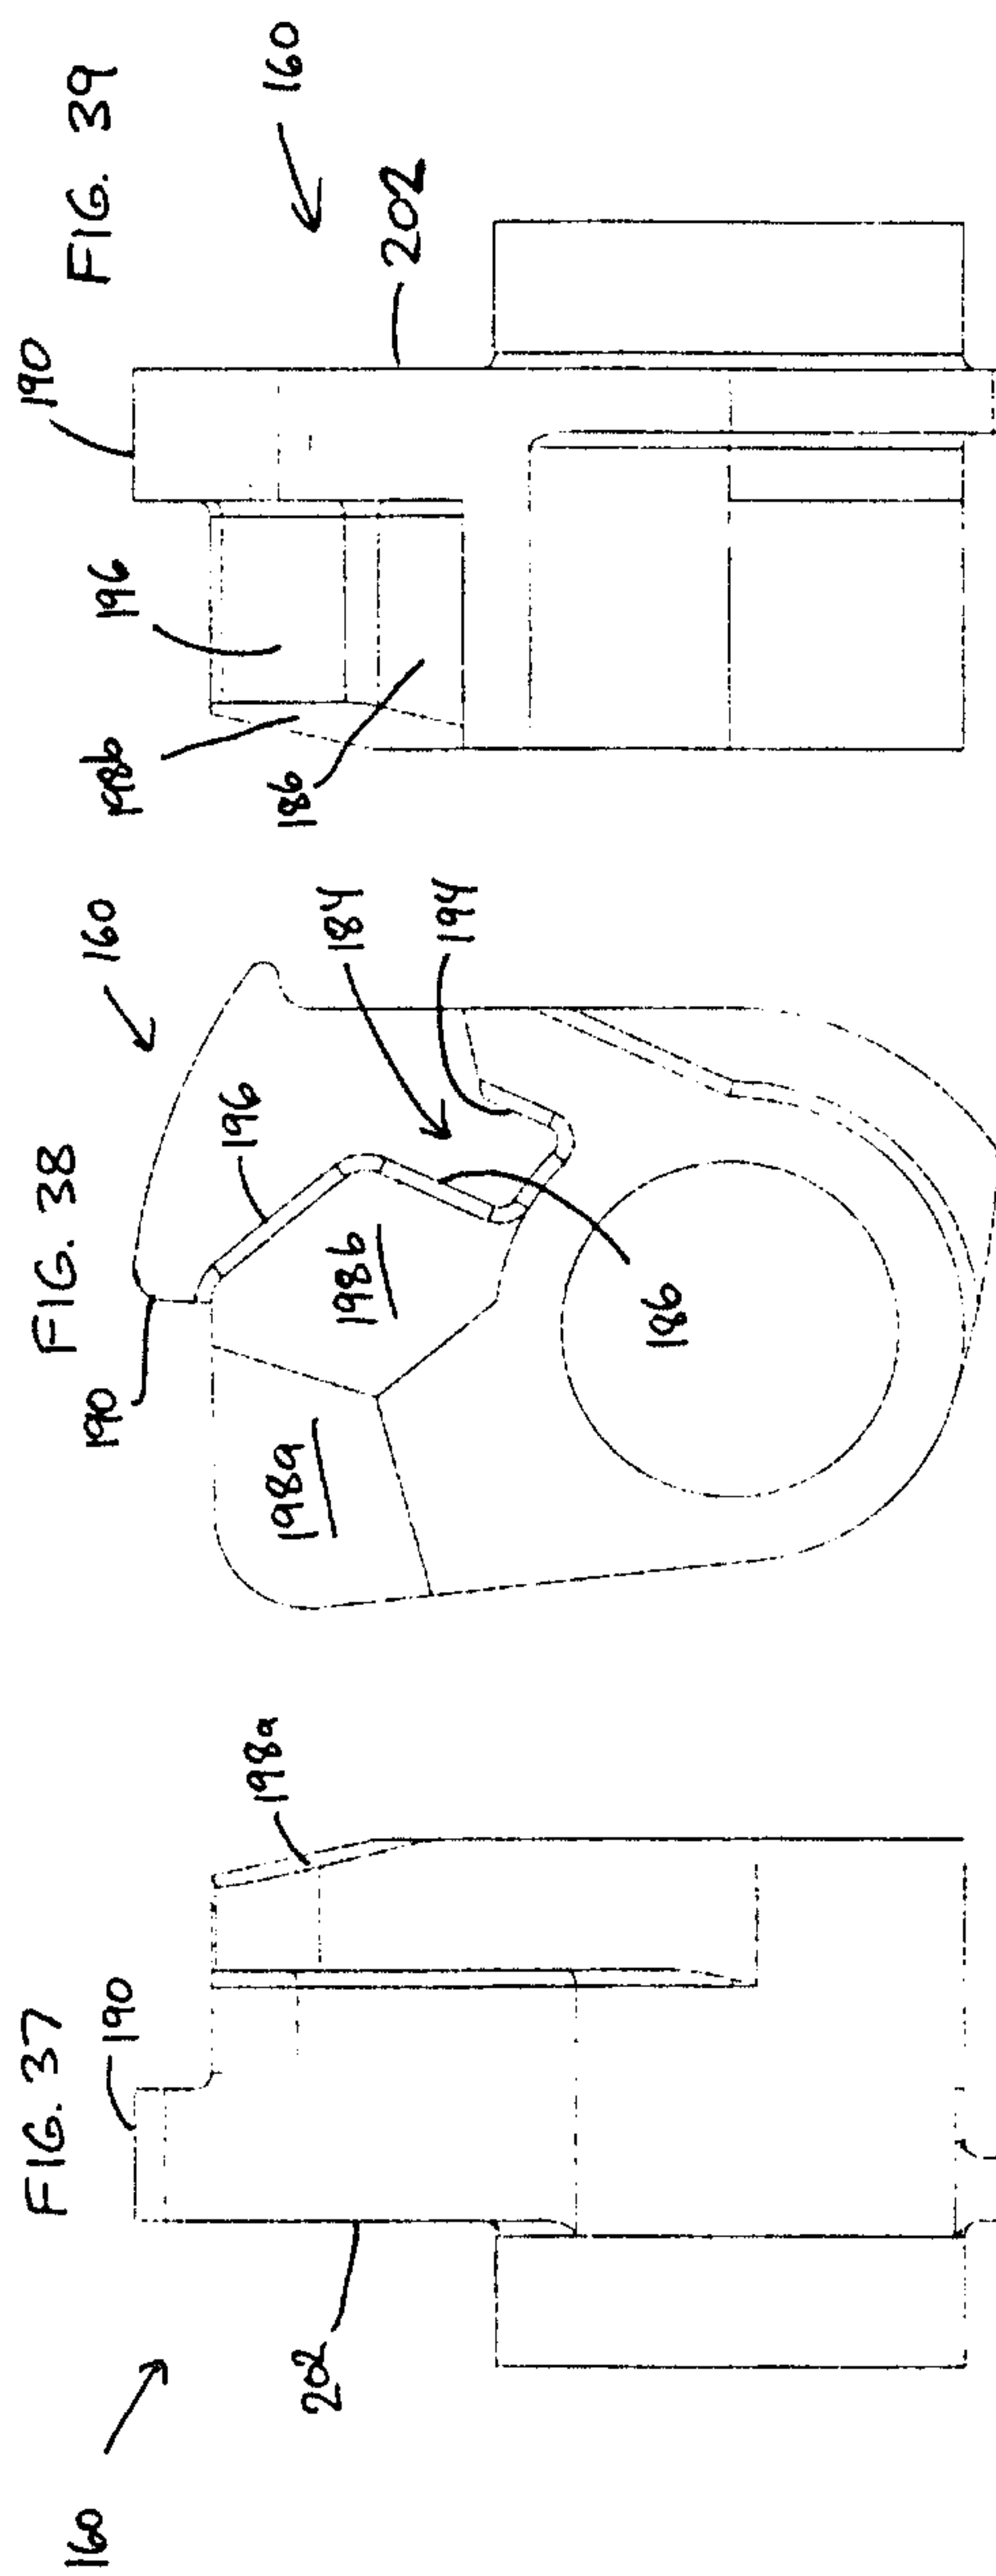
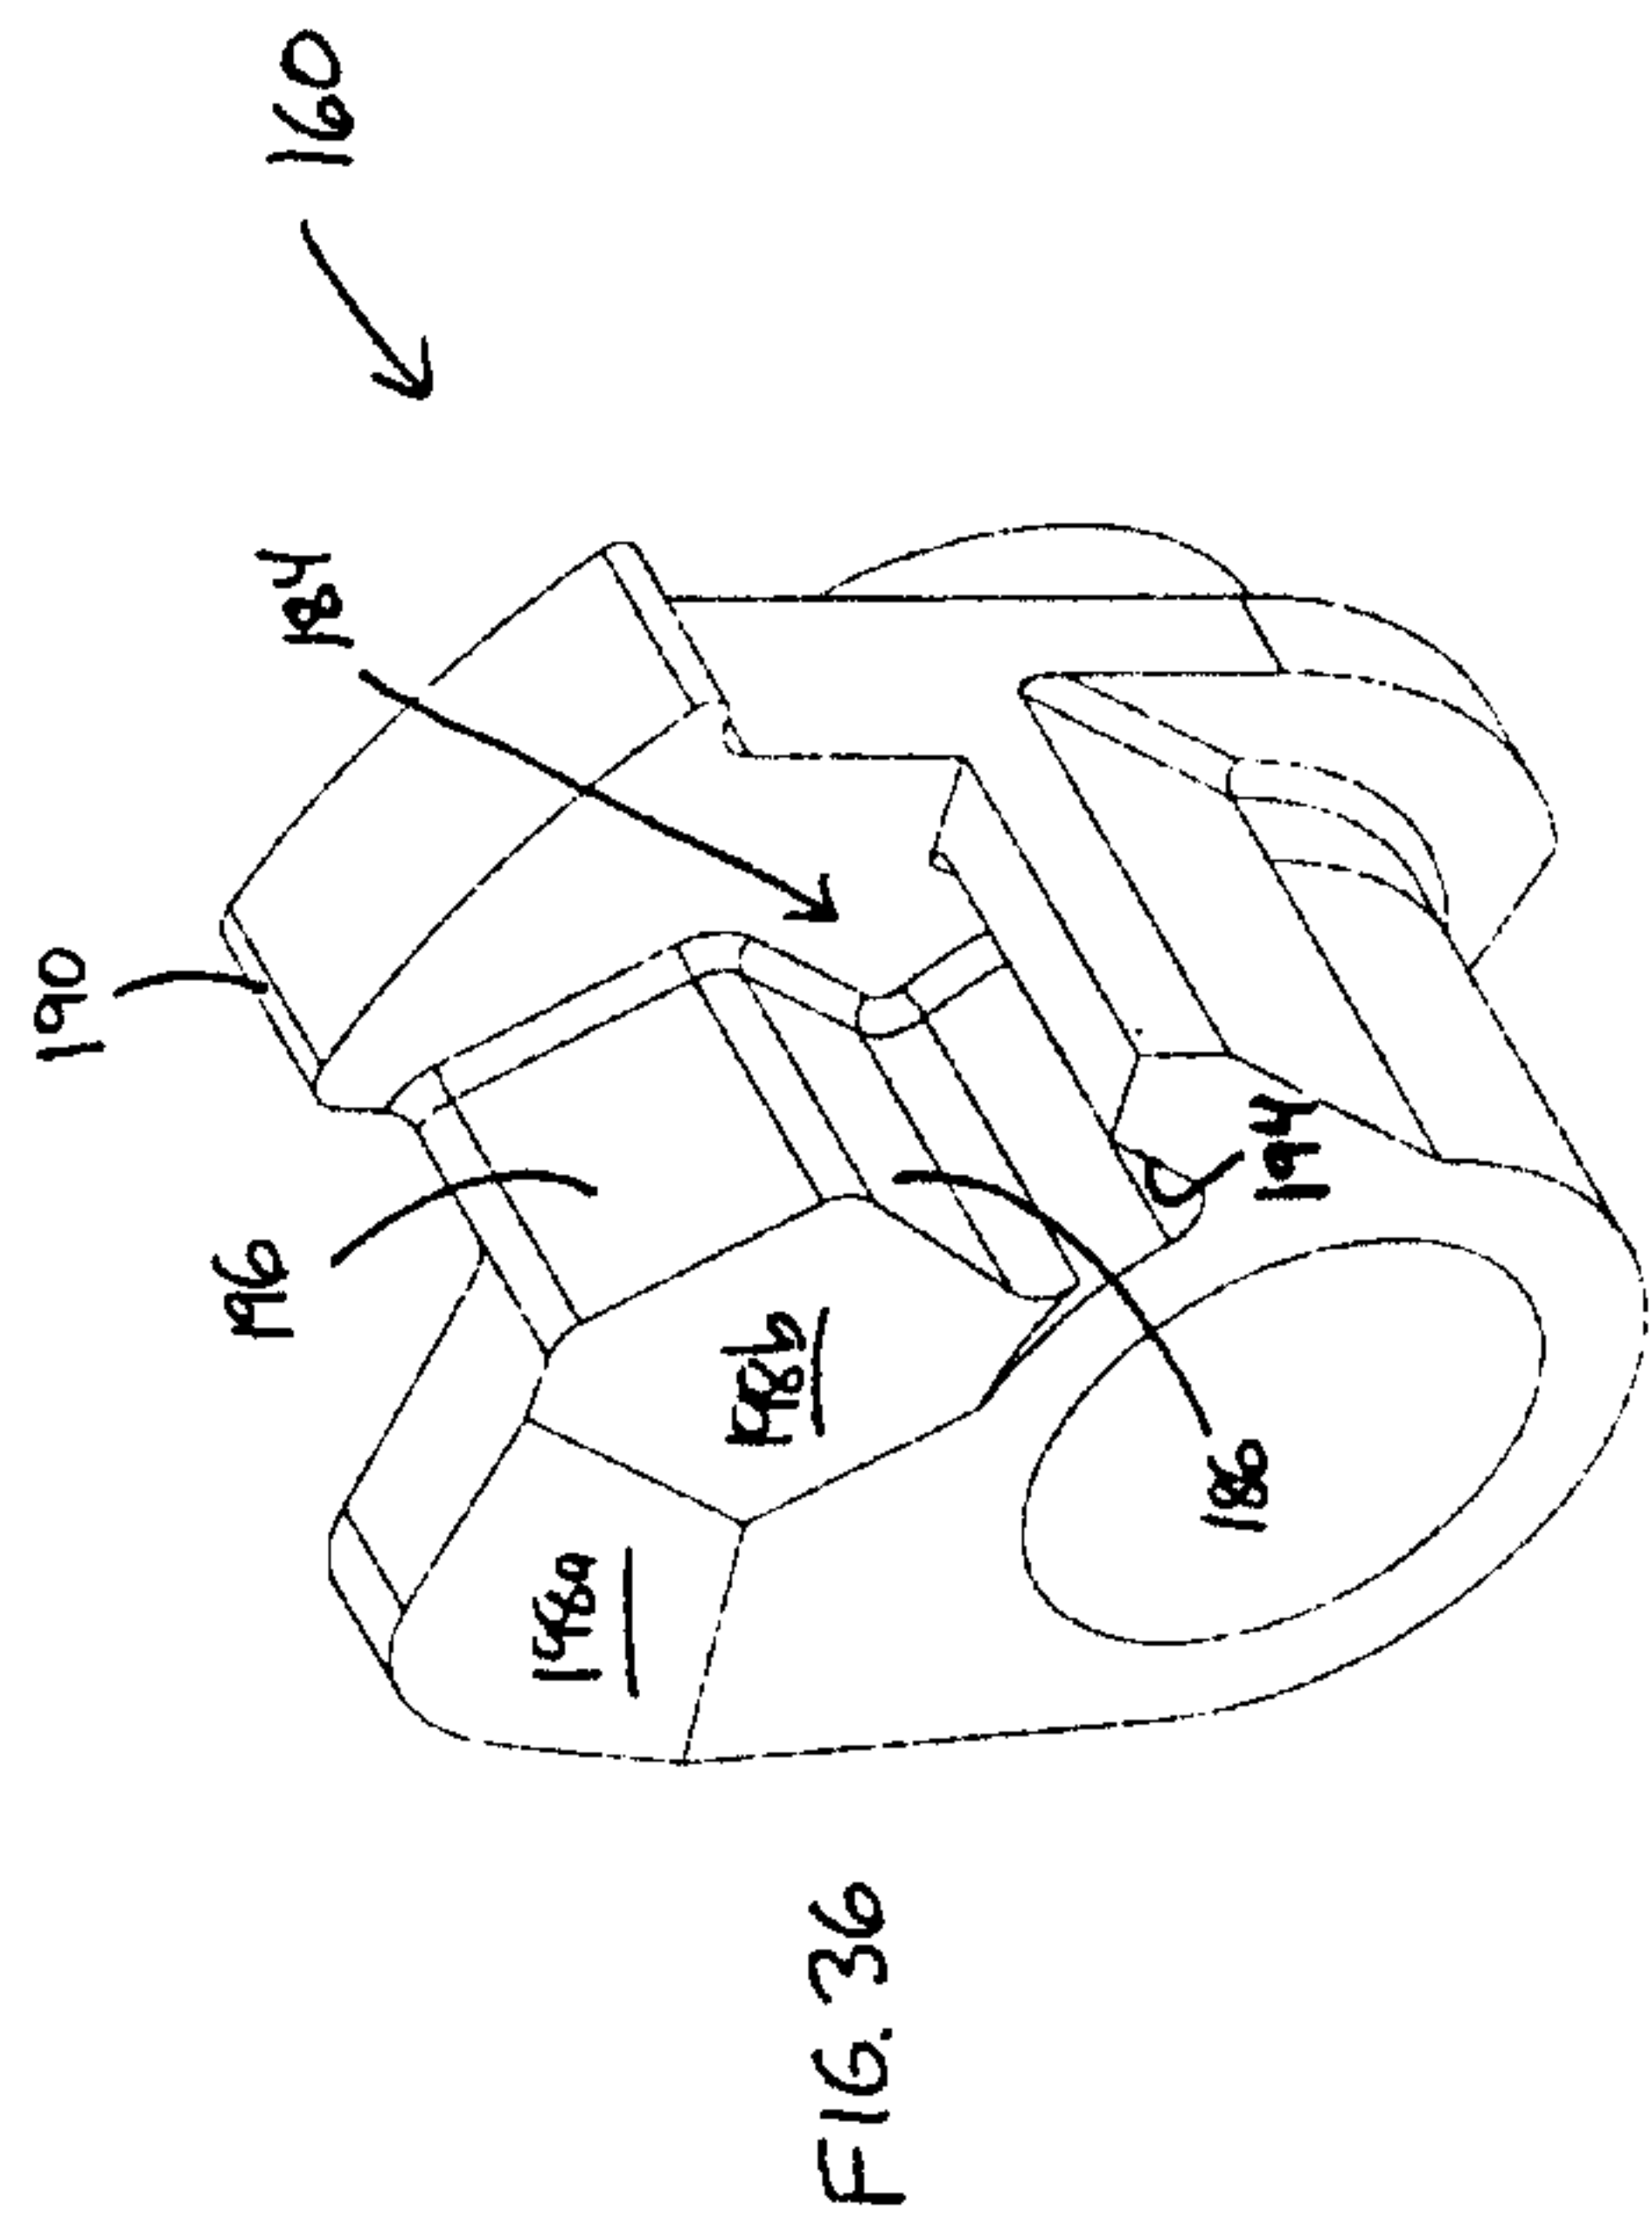
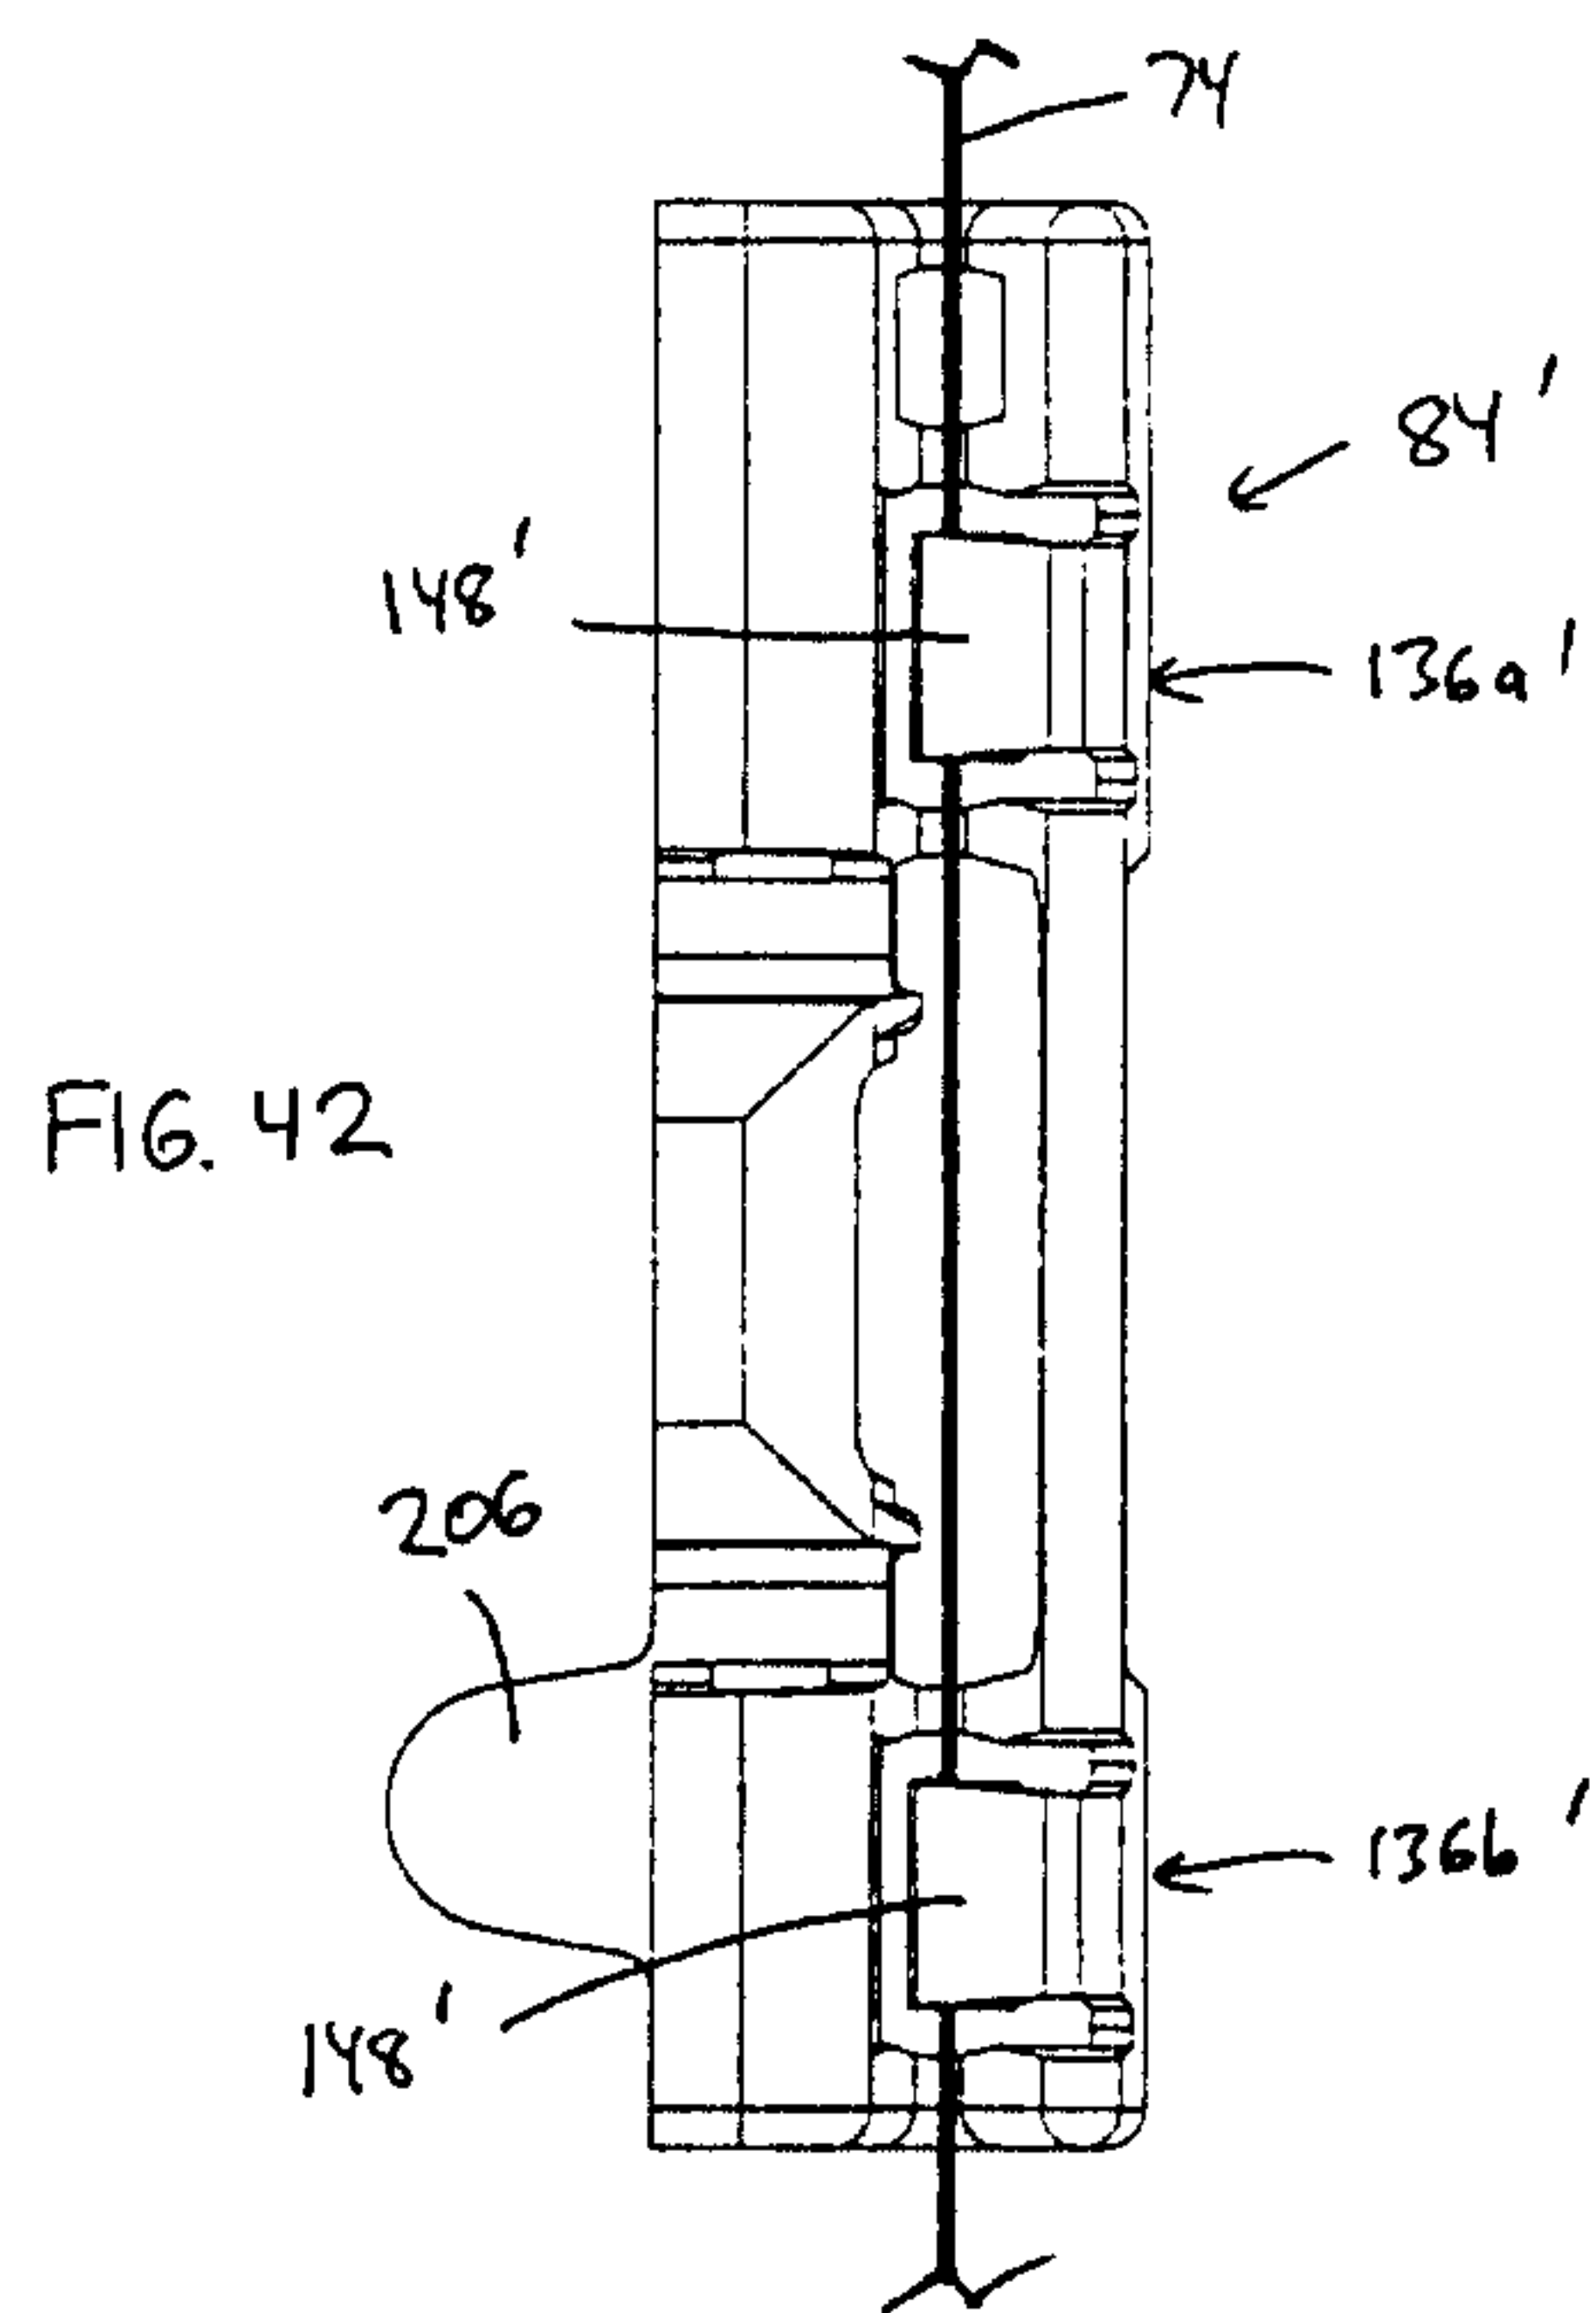
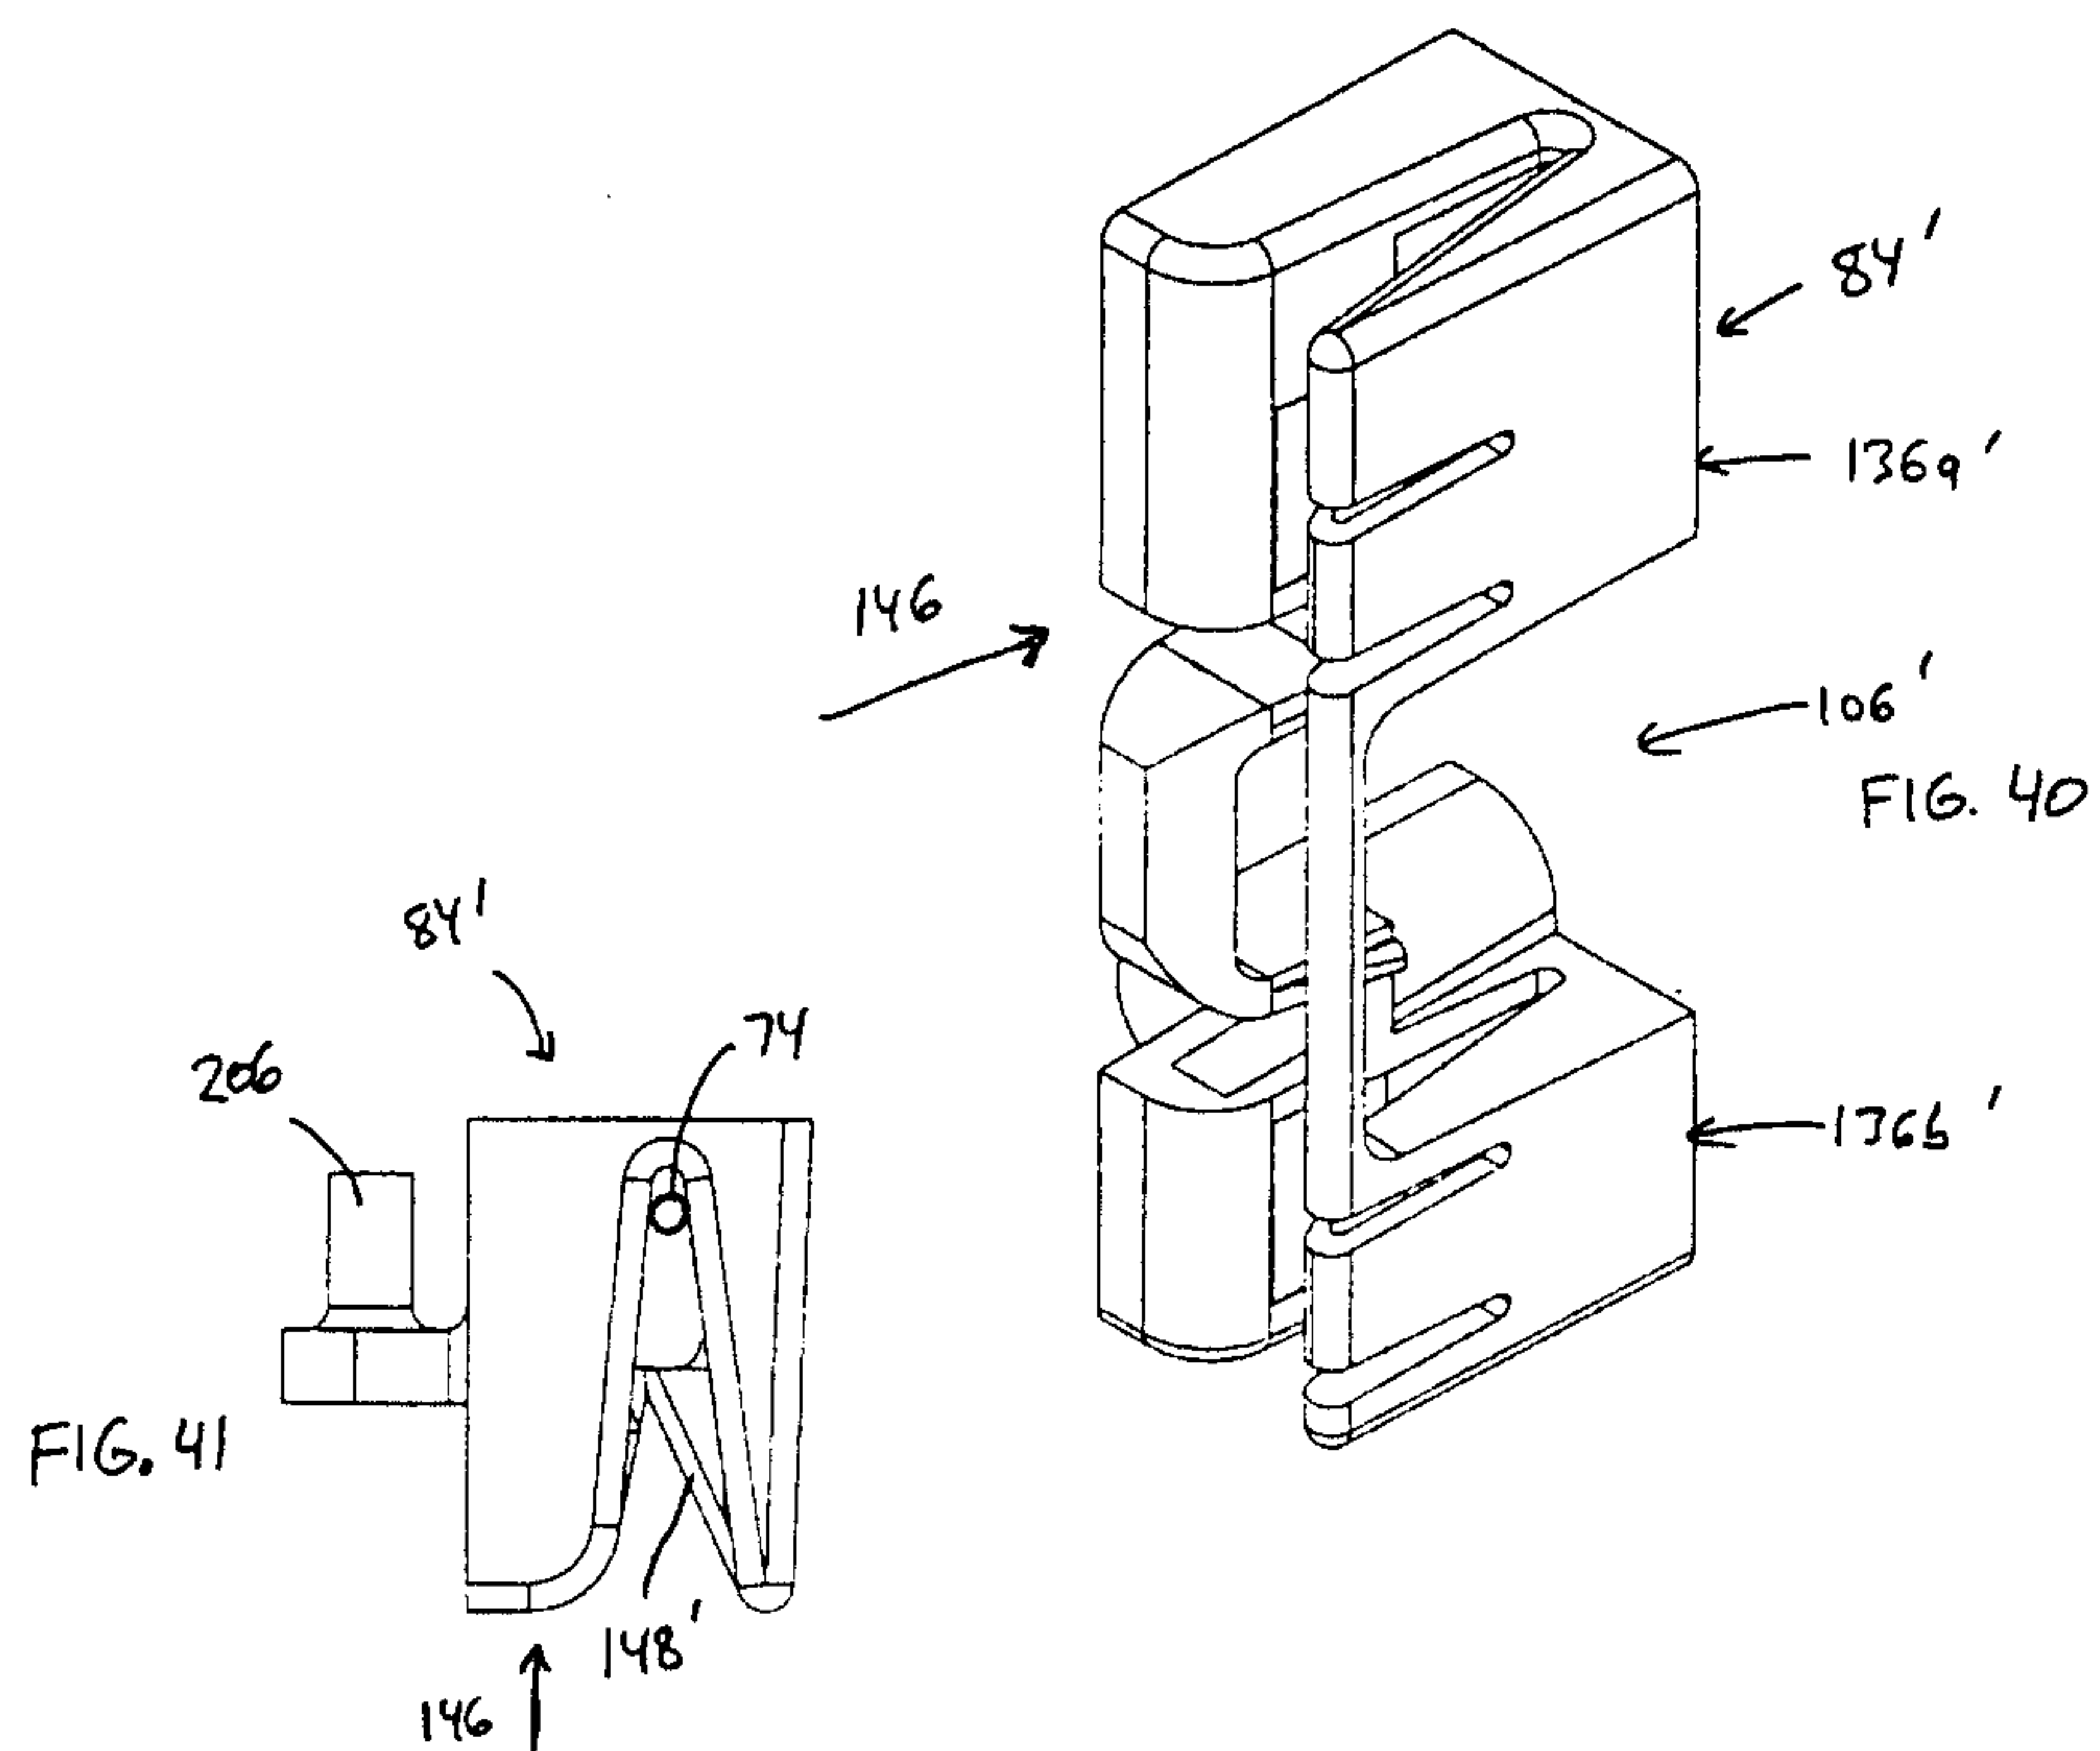


FIG. 32







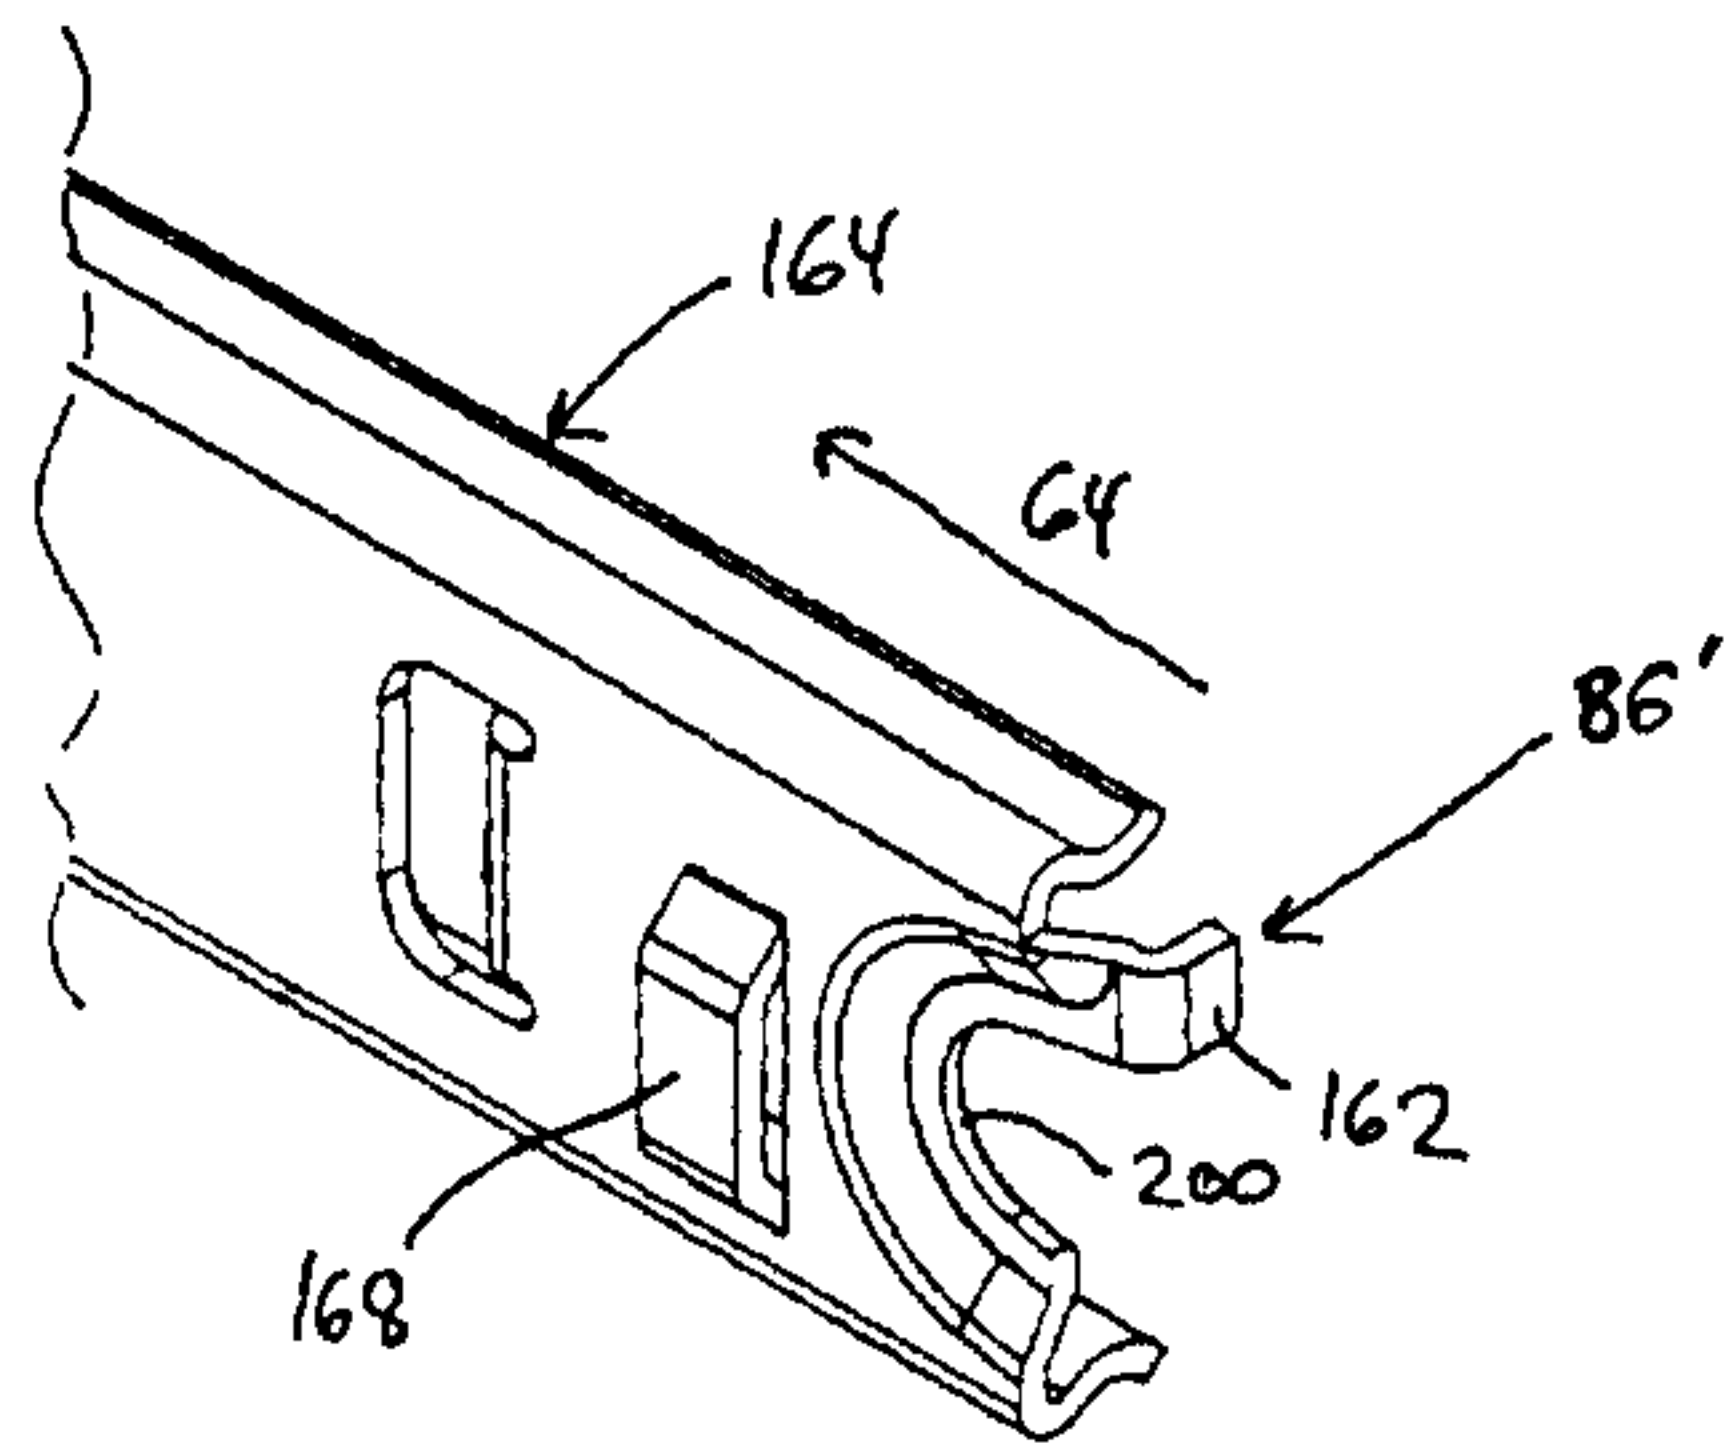


FIG. 43

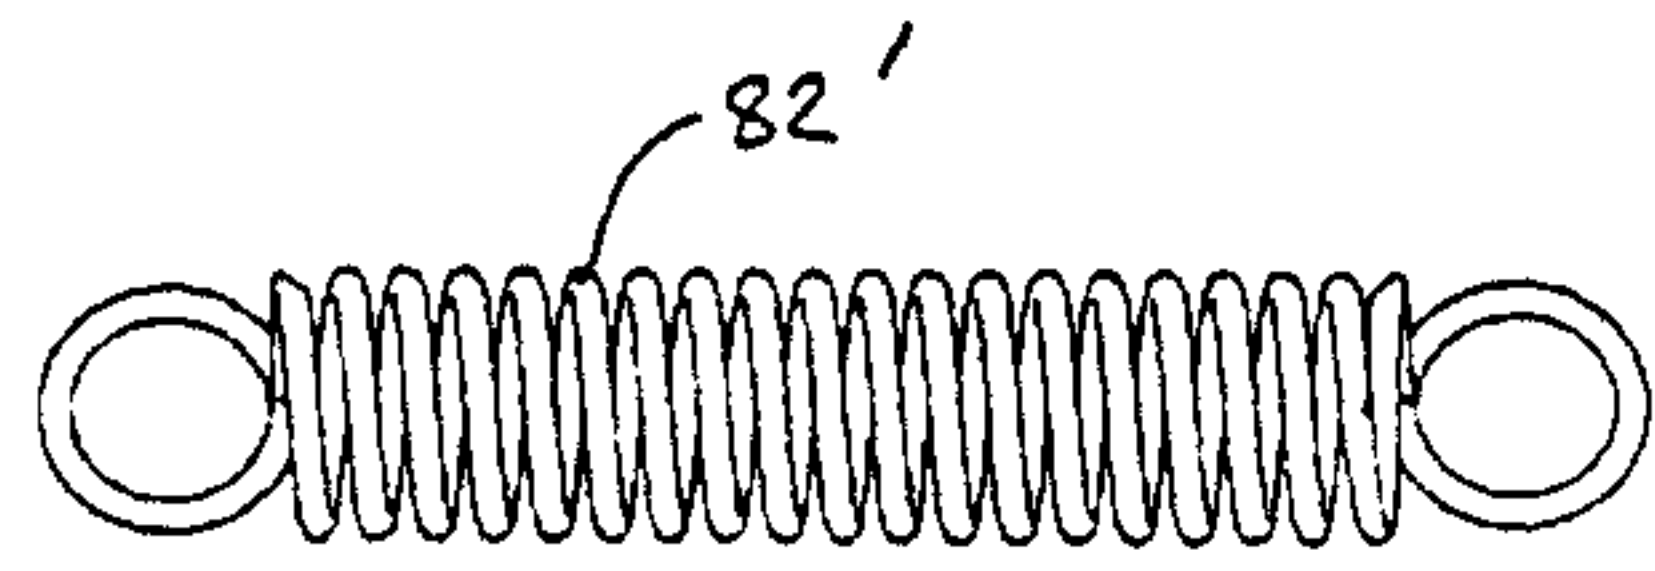


FIG. 44

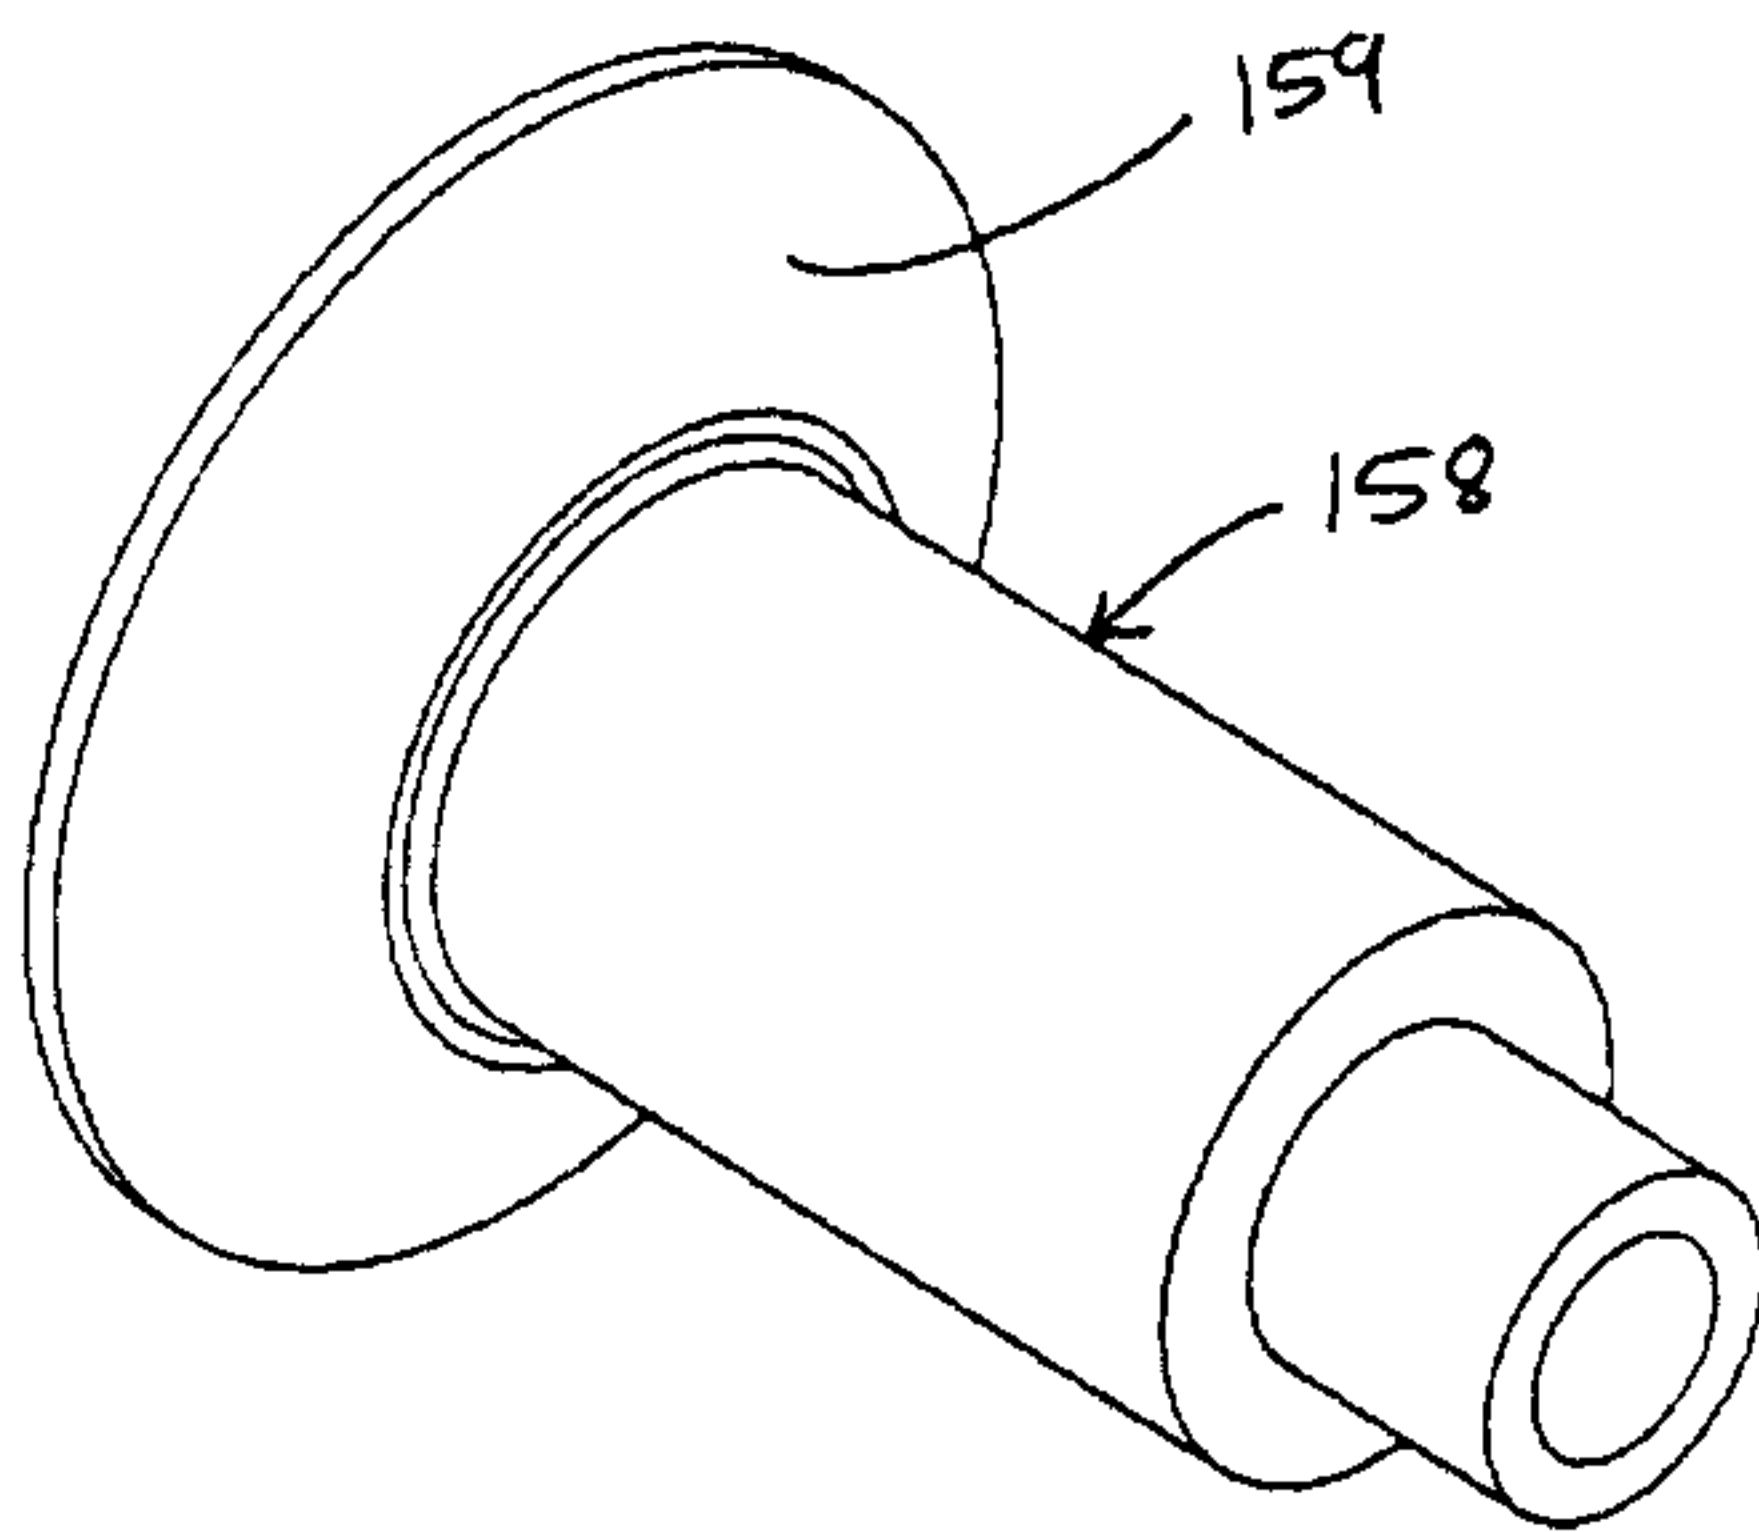


FIG. 45

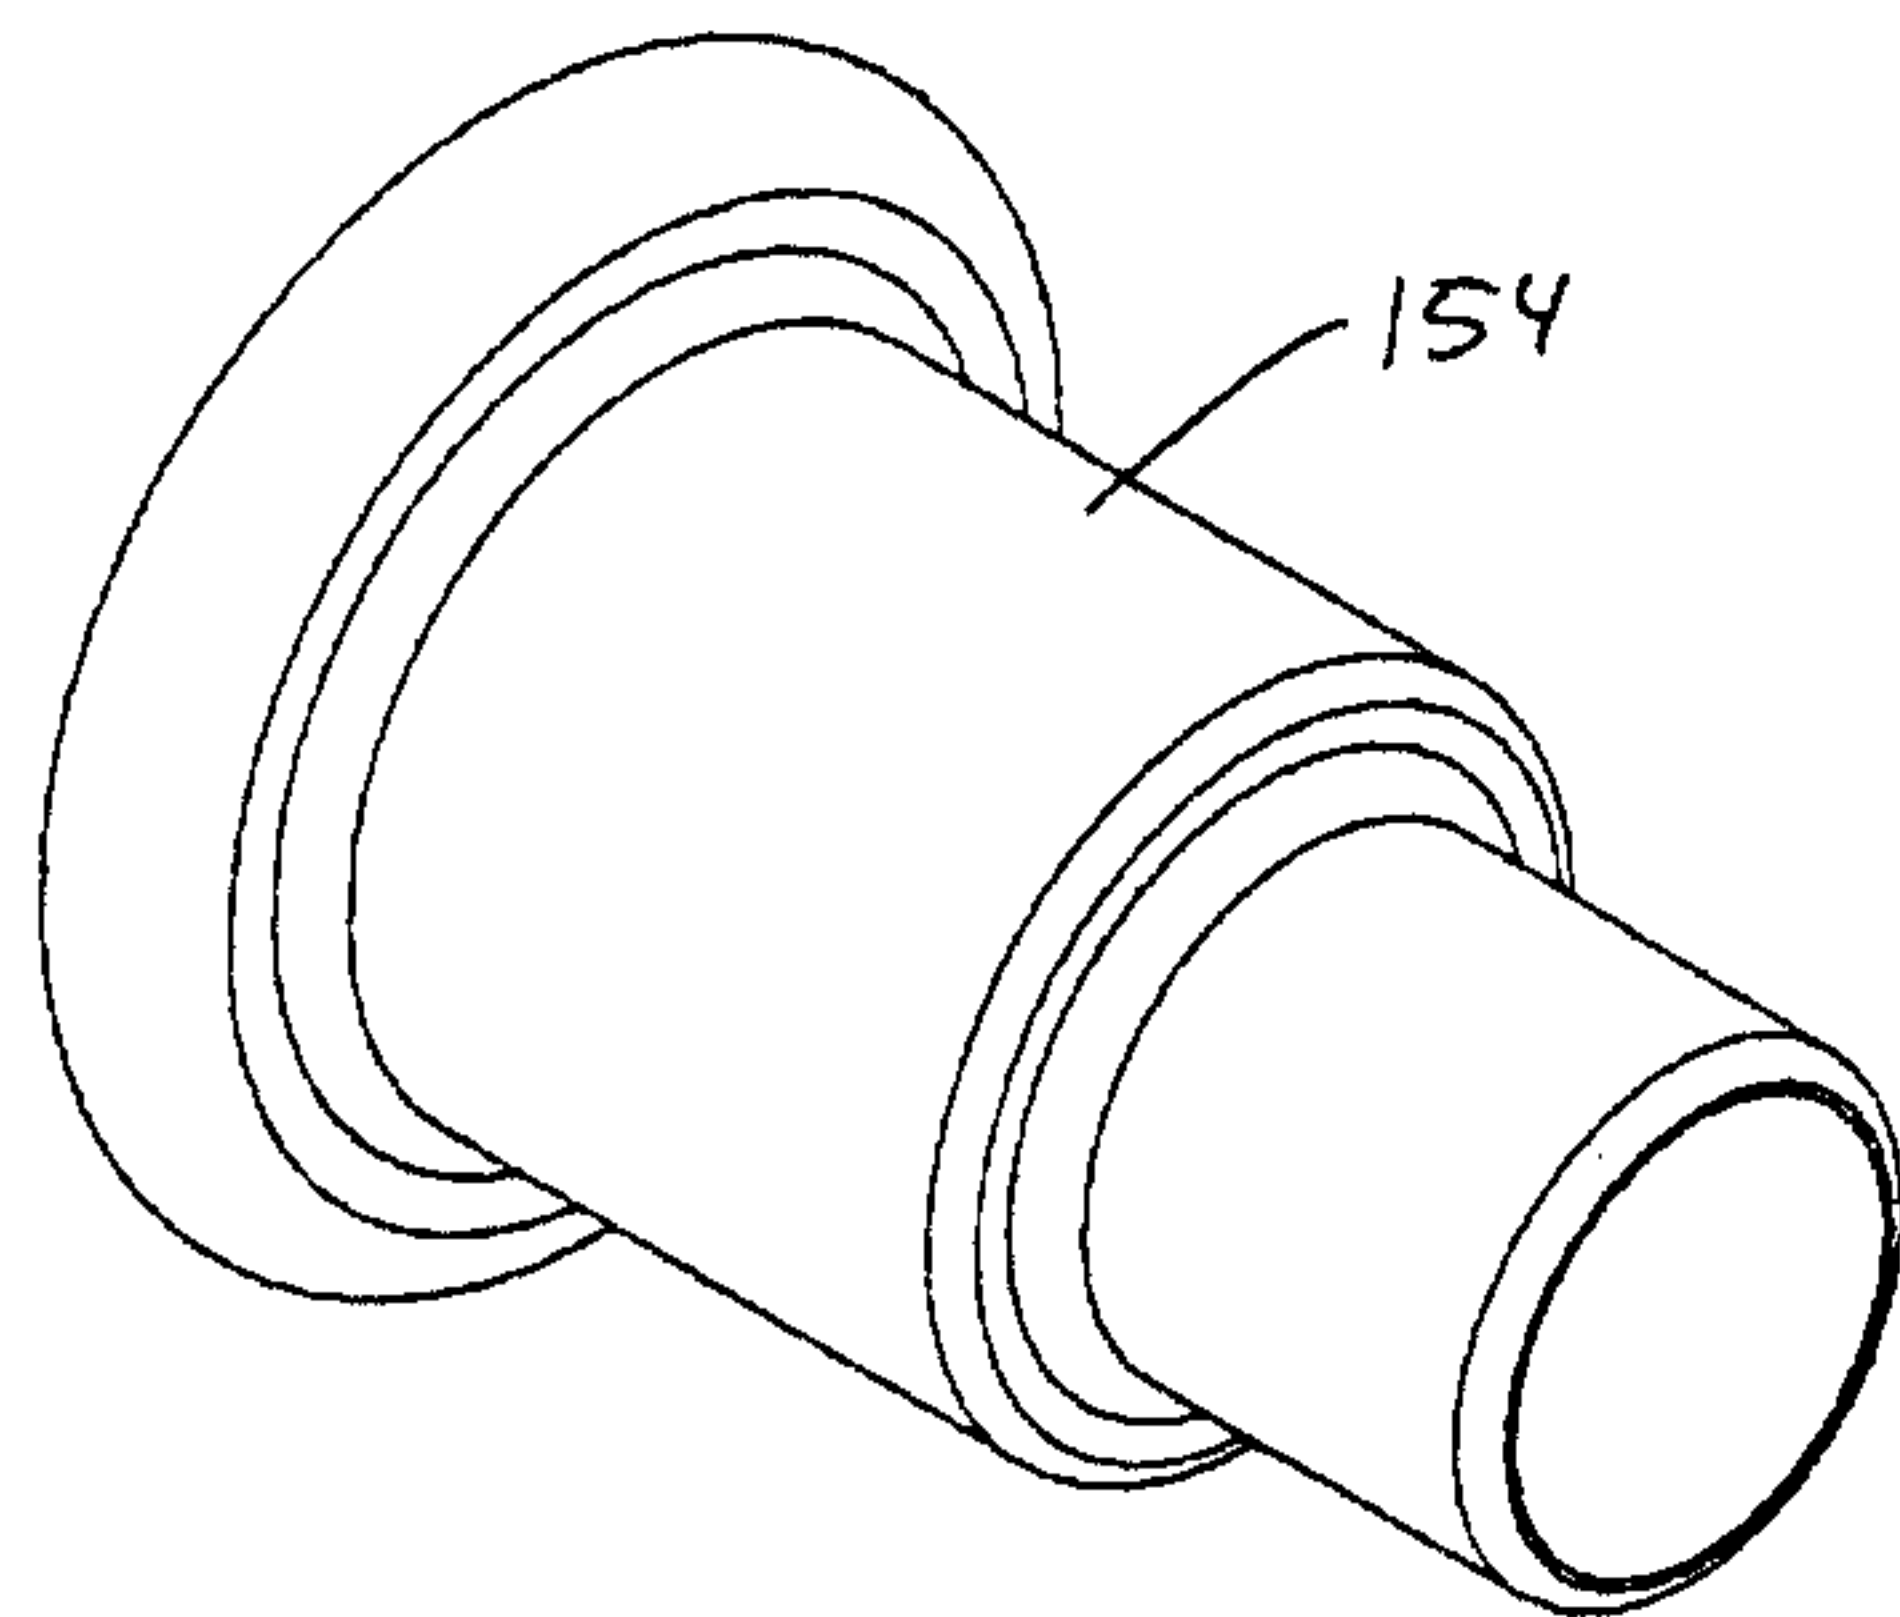


FIG. 46

