

⑩



Europäisches Patentamt

European Patent Office

Office européen des brevets

⑪ Publication number:

**0 095 876
B1**

⑫

EUROPEAN PATENT SPECIFICATION

⑬ Date of publication of patent specification: **23.11.88**

⑭ Int. Cl.⁴: **H 04 R 23/02**

⑮ Application number: **83302913.5**

⑯ Date of filing: **20.05.83**

⑰ **Multi-driver-loudspeaker.**

⑱ Priority: **01.06.82 US 383603**
28.04.83 US 489322

⑲ Date of publication of application:
07.12.83 Bulletin 83/49

⑳ Publication of the grant of the patent:
23.11.88 Bulletin 88/47

㉑ Designated Contracting States:
DE FR GB IT SE

㉒ References cited:
GB-A- 830 351
US-A-2 453 521
US-A-2 593 031
US-A-4 122 315

PATENTS ABSTRACTS OF JAPAN, vol. 5, no.
167 (E-79)839r, 24th October 1981; & JP - A - 56
94900 (DAINI SEIKOSHA K.K.) 31-07-1981

㉓ Proprietor: **HARMAN INTERNATIONAL**
INDUSTRIES, INCORPORATED
8500 Balboa Drive
Northridge California 91329 (US)

㉔ Inventor: **House, William Neal**
1600 N. Willis 227
Bloomington Indiana 47401 (US)

㉕ Representative: **Barlow, Roy James et al**
J.A.KEMP & CO. 14, South Square Gray's Inn
London WC1R 5EU (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

EP 0 095 876 B1

Description

This invention relates generally to loudspeaker systems, and more particularly to systems in which the audio frequency signal is divided into upper and lower ranges for higher fidelity reproduction from transducers particularly designed for that purpose. It is well known that the size, configuration, and even the operating principles of high frequency acoustic transducers may differ substantially from those of low-frequency transducers. Separate and independently operable transducers have been available for a long time, which can faithfully reproduce sound within given frequency bands. Efforts to reproduce high fidelity sound for human ears have targeted questions such as where the frequency division should be made, how a transducer should function within its assigned frequency range, how many frequency divisions and transducers should be used, how the transducers should be physically arranged and associated with one another, and perhaps many other considerations of both broad and narrow scope.

It has been a practice for some time to provide speaker systems wherein the audio signal is divided into upper and lower frequencies and distributed to transducers particularly designed to best reproduce low or high frequency sound. It has also been common, for various reasons, to construct within a single assembly a combination of two or more transducers in which the high frequency transducer is coaxially mounted with respect to the low frequency transducer.

Coaxial loudspeakers have, in the past, employed entirely independent transducers, their interrelationship being almost entirely a matter of mechanical placement with some regard for the acoustical effects which result therefrom. Typically "coaxial" speakers systems employ one or more high frequency drivers mounted above the lower frequency system by a post or bridge-like support, and, as a result, often have irregular frequency response characteristics due to phase cancellation between the drivers and diffraction effects caused by the support apparatus.

Typical of the above features of the prior art, but by no means all-inclusive, are U.S. Patents Nos. 4,146,110 (Maloney); 3,796,839 (Torn); 3,158,697 (Gorike); and 2,259,907 (Olney). These patents all incorporate to varying degrees the features mentioned above.

It is also well known that in acoustic transducers, there are at least two types of drive mechanisms: the permanent-magnet, moving-coil type and the piezoelectric type. U.S. Patent No. 4,246,447 (Vorie) is an example of the piezoelectric mechanism.

The speaker system of the present invention comprises a low frequency dynamic radiator type transducer or woofer and one or more higher frequency transducer(s) or tweeter(s) mounted in a single assembly, but not requiring the elaborate and costly mounting techniques of the prior art devices. The woofer unit typically is of the per-

manent-magnet, moving-coil configuration, its dynamic radiator being a diaphragm. The tweeter is mounted in the space defined by the aforesaid diaphragm, and comprises a smaller diameter second diaphragm having situated at its apex a second driver mechanism comprising a piezoelectric element, or other driving element.

Figure 1 of US—A—2453521, disclose securing both the second diaphragm and the second driver mechanism separately to an intermediate region of the first diaphragm between the apex and perimeter thereof. US—A—2593031 discloses a similar configuration but achieved with the use of a mounting cup carried by the intermediate region of the first diaphragm and supporting both the second diaphragm and the second driver mechanism.

It is an object of the present invention to provide an improved multi-driver loudspeaker construction having improved overall frequency response, dispersion, and time and phase characteristics.

It is also an object of the present invention to provide an improved multi-driver loudspeaker construction which eliminates the need for a separate mounting apparatus for the mid or upper frequency driving units.

Accordingly the present invention uses a piezoelectric transducer as the second driver, and has a second diaphragm with an apex, and is characterised in that the piezoelectric transducer is supported within the interior of the first diaphragm solely by attachment of the piezoelectric transducer to the apex of the second diaphragm and attachment of the second diaphragm to an intermediate region of the first diaphragm between its apex and its interior, so that the piezoelectric transducer moves with the first diaphragm.

In this configuration, the entire mechanism which constitutes the tweeter moves in unison with the low frequency diaphragm in the piston range and forms a part of the total moving mass of the low frequency driver. This configuration eliminates the customarily used mounting post or brackets which support the high frequency unit(s) and also improves the overall frequency response, dispersion, time, and phase characteristics of the loudspeaker system.

The present invention will be more readily understood by those skilled in the art upon reading the following detailed description in conjunction with the accompanying drawing in which:

Fig. 1 is a cross-sectional view of a multi-driver loudspeaker system constructed according to the present invention;

Fig. 2 is a front elevational view of a multi-driver loudspeaker system constructed according to the present invention;

Fig. 3 is a sectional view of the system of Fig. 2, taken generally along section lines 3—3 thereof;

Fig. 4 is a front elevational view of a multi-driver loudspeaker system constructed according to the present invention; and

Figs. 5—7 are frequency response characteristics of a prior art speaker and two speakers constructed according to the present invention.

In the embodiment of the invention illustrated in Fig. 1, the low frequency transducer or woofer is of the permanent-magnet, moving-coil type and comprises a permanent-magnet assembly 10 to which is secured a frame 12 having a generally somewhat conical configuration. The frame 12 defines an aperture 13 which defines generally the frontal shape and area of the transducer. The shape of the aperture 13 formed by the frame can be other than circular, for example, oval. The woofer diaphragm 14 extends or flares generally conically outwardly and has its outer edge secured to the periphery of the frame 12 by means of a compliant suspension 16. The inner portion of the diaphragm 14 is secured to a voice coil form 18 upon the lower portion of which is the voice coil 20 which surrounds the center pole 22 of the permanent-magnet assembly 10 with the voice coil positioned in the magnetic air gap 24 in the customary fashion. Up to this point in the description, the construction of the transducer is entirely conventional.

The high frequency transducer of tweeter comprises the tweeter cone 30, the central axis of which is typically aligned with the central axis of the woofer cone 14. The tweeter cone 30 has a somewhat greater flare rate and is of substantially smaller dimension than the woofer cone 14. At the outer periphery of cone 30, a foam compliance ring 34 may be positioned between the edge of cone 30 and the surface of diaphragm 14. Behind the diaphragm 30 and extending along a portion of the surface thereof, dampening or stiffening material 32 and 36 can be provided to smooth response and isolate the lead wires if desired. The driver element 38 is positioned at the apex of cone 30. This driver element 38 comprises a piezoelectric crystal commonly known in the trade as a bimorph or multimorph. The electrical leads 40 are coupled to the crystal 38, and extend out through the woofer cone 14 in conventional manner to input terminals 44 mounted upon a portion of the frame 12. The leads 40 from the crystal 38 join leads 43 which couple terminals 44 to the voice coil 20. The crystal 38 and voice coil 20 are thus electrically coupled in parallel.

The connection of the single pair of input leads to both drivers 38 and 20 without utilization of a crossover network is made possible because the crystal driver 38 functions as a high-pass filter as well as a tweeter driver, and depending upon the thickness, coupling coefficient and diameter of the crystal 38 and the diameter of cone 30 and its shape, etc., provides an effective crossover frequency in the range anywhere from one to ten kilohertz. An external filter network can be used if desired.

The damping rings 32 and 36, which illustratively can be formed of fibreglass insulating material, are to suppress undesired vibrational modes while the foam compliance ring 34 provides a means to control the mechanical coupling

between the woofer and tweeter cones 14, 30 in the crossover region of response. A desirable acoustic response can thus be achieved by appropriate selection of the material, the dimensions, the symmetry, and the position of the tweeter mechanism as well as variations in the decoupling ring 34 and damping rings 32 and 36. The tweeter cone 30 can be suspended in front of the woofer cone in several ways. The tweeter cone 30 perimeter can be attached to the woofer cone directly, or through a compliant member. The tweeter cone 30 can be mounted to any suitable portion of the woofer cone 14 body, in order to provide wide angle dispersion.

When operating in response to low frequency electrical signals, the transducer assembly appears much as if it were a single piston. The operation in response to high frequency signals above the crossover frequency adds to the translational motion of the high frequency cone 30 essentially as if it were acting alone except that it is, in effect, mounted upon a support which exhibits little or no movement at these high frequencies. The decoupling arrangement disposed between the woofer cone 14 and tweeter cone 30 provides a method to control the degree of motion and phase between the two cones in the midband and upper band response regions, thus providing a means to control the electro-mechanical feedback to the tweeter driving element, as described by the reciprocity principle. This provides a smooth frequency response characteristic in the mid- and upper band response regions. This mounting arrangement between the diaphragms 14, 30 leads to improved frequency response and dispersion for the overall system and to improved time phase coherence throughout the desired frequency range. From a mechanical point of view, the arrangement of the present invention also eliminates the need for the supplemental mounting brackets customarily used in other coaxial systems to support the higher frequency drivers.

In another embodiment of the invention illustrated in Figs. 2 and 3, a permanent-magnet assembly 110 is secured to a frame 112 having a generally elliptical or oval frontal opening, illustratively 6 inches by 9 inches (15.24 cm by 22.86 cm). The woofer diaphragm 114 extends generally conically outwardly. The outer rim of diaphragm 114 is secured to the oval front opening of the frame 112 by means of a compliant suspension 116. The inward portion of the diaphragm 114 is secured to a voice coil form 118 to which is attached a woofer voice coil 120 positioned in the magnetic air gap 124 in the customary fashion.

The tweeter of this embodiment comprises a tweeter cone 130, the central axis of which is about 45° off the axis of the woofer cone 114, as best illustrated in Fig. 3. A junction area 131 is provided at the outer perimeter of cone 130. This junction area 131 is glued or otherwise attached, with or without a compliant member, to the perimetral edge 135 of an opening 133 provided

in the woofer cone 114. A piezoelectric bimorph crystal driver element 138 is positioned at the apex of cone 130. Electrical leads 140 are coupled to the crystal 138 and extend to terminals 145 provided on the outside surface of woofer cone 114. The leads 140 from the crystal 138 are coupled by leads 142 to the input terminals 144 provided on the supporting frame 112. Leads 142 also couple terminals 144 to the woofer voice coil 120. The woofer voice coil 120 and tweeter driver 138 thus are coupled in parallel.

Again, the coupling of the single pair of input leads 142 to both drivers 138 and 120 without a divider or crossover network is made possible because the crystal driver 138 acts as a high pass filter.

In another embodiment of the invention illustrated in Fig. 4, a permanent-magnet assembly (not shown) is secured to a frame 121 having a generally circular frontal opening. The tweeter cones 230 can be molded into the woofer cone body 214, making the surrounding portion of the woofer cone 214 an extension of the tweeter cone body. A woofer diaphragm 214 flares generally conically outwardly. Its outer perimeter is secured to a circular frontal opening provided in the frame 212 by means of compliant suspension 216. The inner portion of the diaphragm 214 is secured to a voice coil form upon which is provided a voice coil which surrounds the center pole of the permanent-magnet assembly with the voice coil positioned in the air gap, all in a manner previously discussed.

Four high frequency transducers or tweeters 229 are mounted in the woofer diaphragm 214 in a manner similar to the tweeter diaphragm mounting illustrated in Fig. 3. Each tweeter 229 comprises a tweeter cone 230, the central axis of which is illustratively 45° off the central axis of the woofer cone 214, as in the embodiment of Figs. 2 and 3. The tweeter cones' axes are also positioned at 90° intervals about the woofer cone 214 axis. As before, the tweeter cones 230 have somewhat greater flares and are of substantially smaller dimension than the woofer cone 214. A piezoelectric driver element (not shown) is positioned at the apex of each cone 230. The electrical terminations (not shown) to the crystals which drive tweeter cones 230 are made as in the preceding embodiments. Again, the crystal drivers function as high-pass filters, and the frequency responses of the drivers are selectable in part by proper selection of the physical parameters of the various drivers and tweeter cones 230.

The advantages of the off-axis placement of the tweeter axes from the woofer axis in the embodiments of Figs. 1—4 can best be appreciated with reference to Figs. 5—7.

Fig. 5 illustrates the frequency response of a prior art 6" by 9" (15.24 cm by 22.86 cm) oval speaker with a coaxial secondary cone called a "whizzer". The three-frequency response curves correspond to the on-axis (0°) frequency response of the speaker, the 30° off-axis frequency

response of the speaker, and the 45° off-axis frequency response of the speaker. It will be appreciated that, even with the whizzer cone, the off-axis (30° and 45° off-axis) response of the speaker is significantly below the on-axis response (1—3 dB) even at such low frequencies as 2 KHz. At about 4 KHz, the off-axis performance has degraded even more seriously (30° off-axis down about 5 dB, 45° off-axis down 14 dB). At 15 KHz, 30° off-axis is down 13 dB, and 45° off-axis is down about the same amount.

Fig. 6 illustrates the frequency responses of a 6" by 9" (15.24 cm by 22.86 cm) elliptical constructed in accordance with Fig. 1. Although the off-axis response at 2 KHz remains down about 1 and 3 dB (at 30° off-axis and 45° off-axis, respectively), at 5 KHz, the 30° off-axis response is down only about 1—1.5 dB, a 3.5—4 dB improvement over Fig. 5, and the 45° off-axis response is only down 8—8.5 dB, a 5.5—6 dB improvement over Fig. 5. At 15 KHz, the improvement is equally as significant, with the 30° off-axis response being down only about 10.5 dB, a 2.5 dB improvement over Fig. 5, and the 45° off-axis only being down 8.5 dB, a 5.5 dB improvement over Fig. 5.

The frequency response characteristics of the Figs. 2 and 3 embodiment of the invention are illustrated in Fig. 7. In the embodiment tested for Fig. 7, the apex of the tweeter cone projected into the plane of the surrounding woofer cone lay half-way from the woofer cone axis to the compliance ring. In other words, the tweeter was mounted half-way out the woofer cone from the axis to the compliance ring. At 2 KHz, the 30° off-axis response was down about 1.5—2 dB and the 45° off-axis response was down 5 dB. At 4 KHz, the 30° off-axis performance was actually 1—1.5 dB above the on-axis performance and the 45° off-axis performance was only about 1.5—2 dB lower than on-axis, both substantial improvements over the embodiment of Fig. 5. At 15 KHz, the 30° off-axis performance and 45° off-axis performance were actually both substantially above the on-axis performance with 30° being about 4—5 dB above and 45° being about 10 dB above the on-axis performance.

Claims

1. A multi-driver loudspeaker combination comprising a first generally cone-shaped diaphragm (14); a first driver (10, 18, 20) including a magnet structure (10) defining an air gap, a voice coil (20) lying within the air gap, and a voice coil former (18) for coupling the apex of the first diaphragm to the first driver, the voice coil being provided on the voice coil former, the first diaphragm and driver being effective to reproduce sound in the lower portion of the audio frequency range; a second driver (38) comprising a piezoelectric transducer; and a second generally cone-shaped diaphragm (30), the second diaphragm and driver being effective to reproduce sound in the upper portion of the audio frequency range; characterised in that the piezoelectric transducer is

supported within the interior of the first diaphragm solely by attachment of the piezoelectric transducer to the apex of the second diaphragm and attachment of the second diaphragm to an intermediate region of the first diaphragm between its apex and its interior, so that the piezoelectric transducer moves with the first diaphragm.

2. The loudspeaker combination of claim 1, characterised in that the first diaphragm defines a first axis about which the first diaphragm is generally symmetrical, the second diaphragm defines a second axis about which the second diaphragm is generally symmetrical, and the angle between the first and second axes is non-zero.

3. The loudspeaker combination of either of claims 1 and 2, characterised in that there is a plurality of said second diaphragms and a plurality of said second drivers.

4. The loudspeaker combination of anyone of claims 1 to 3, characterised in that the second transducer is mounted on the first diaphragm by intermediate mounting means (34) permitting the second transducer to move with the diaphragm in an unrestrained manner.

5. The multi-driver loudspeaker combination of claim 4, characterised in that the intermediate mounting means comprise an annular base terminating at an edge, the second transducer including a diaphragm having an edge joined to the first-mentioned edge to support the second transducer from the annular base.

6. The loudspeaker combination of claim 5, characterised in that the said edge of the base and the diaphragm edge are closed generally planar curves.

7. The loudspeaker combination of any one of claims 4 to 6, characterised in that said intermediate mounting means comprises a compliance ring (34), mounted from the interior of the first diaphragm (14) and means for mounting the second diaphragm from the compliance ring.

8. The loudspeaker combination of any one of claims 1 to 6, characterised in that said second diaphragm (130) is mounted non-concentrically with respect to said first diaphragm (114).

9. The loudspeaker combination of any one of claims 1 to 8, characterised in that said first diaphragm (114) includes said second diaphragm (130) as an integral part thereof, the second transducer being separately driven.

10. The loudspeaker combination according to claim 1, characterised in that the second diaphragm (30) is concentric with respect to the first diaphragm (14).

Patentansprüche

1. Lautsprecher mit mehreren Antrieben, mit einer ersten, im wesentlichen konisch geformten Membran (14, einem ersten Antrieb (10, 18, 20), der einen magnetischen Aufbau (10) mit einem Luftspalt, eine Schwingtauchspule (20), die innerhalb des Luftspaltes liegt und ein Schwingtauch-

spulengebildet (18) zur Verbindung den Spitze der ersten Membran mit dem ersten Antrieb, umfaßt, wobei die Schwingtauchspule auf dem Schwingtauchspulengebilde vorgesehen ist, und die erste Membran und der Antrieb derart wirken, daß sie Töne im unteren Abschnitt des akustischen Frequenzbereiches reproduzieren; mit einem zweiten Antrieb (38), der einen piezoelektrischen Wandler umfaßt und mit einer zweiten, im wesentlichen konisch geformten Membran (30), wobei die zweite Membran und der Antrieb derart wirken, daß sie Töne in dem oberen Abschnitt des akustischen Frequenzbereiches reproduzieren, dadurch gekennzeichnet, daß die piezoelektrische Wandler innerhalb der Innenfläche der ersten Membran einzig durch Befestigung des piezoelektrischen Wandlers an der Spitze der zweiten Membran und Befestigung der zweiten Membran an einem Zwischenabschnitt der ersten Membran zwischen ihrer Spitze und ihrer Innenfläche getragen wird, so daß sich der piezoelektrische Wandler mit der erste Membran bewegt.

2. Lautsprecherkombination nach Anspruch 1, dadurch gekennzeichnet, daß die erste Membran eine erste Achse bestimmt, zu der die erste Membran im wesentlichen symmetrisch ist, daß die zweite Membran eine zweite Achse bestimmt, zu der die zweite Membran im wesentlichen symmetrisch ist und daß der Winkel zwischen den ersten und zweiten Achsen von Null verschieden ist.

3. Lautsprecherkombination nach einem der Ansprüche 1 und 2, dadurch gekennzeichnet, daß eine Mehrzahl zweiter Membranen und eine Mehrzahl zweiter Antriebe vorgesehen ist.

4. Lautsprecherkombination nach einem der Ansprüche 1 bis 3, dadurch gekennzeichnet, daß der zweite Wandler mittels Zwischenbefestigungseinrichtungen (34) auf der ersten Membran befestigt ist, um zu erlauben, daß sich der zweite Wandler mit der Membran ungehindert bewegen kann.

5. Lautsprecherkombination nach Anspruch 4, dadurch gekennzeichnet, daß die Zwischenbefestigungseinrichtung einen ringförmigen Träger umfaßt, der an einer Kante endet, wobei der zweite Wandler einen Membran mit einer Kante hat, die mit der zuerst genannten Kante verbunden ist, um den Wandler durch den ringförmigen Träger zu tragen.

6. Lautsprecherkombination nach Anspruch 5, dadurch gekennzeichnet, daß die Kante des Trägers und die Kante der Membran im wesentlichen geschlossene, ebene Kurvenform aufweisen.

7. Lautsprecherkombination nach einem der Ansprüche 4 bis 6, dadurch gekennzeichnet, daß die Zwischenbefestigungseinrichtungen einen Federring aufweisen, der auf der Innenfläche der ersten Membran (14) befestigt ist und Einrichtungen zur Befestigung der zweiten Membran auf dem Federring.

8. Lautsprecherkombination nach einem der Ansprüche 1 bis 6, dadurch gekennzeichnet, daß die zweite Membran (130) exzentrisch zur ersten Membran (114) montiert ist.

9. Lautsprecherkombination nach einem der Ansprüche 1 bis 8, dadurch gekennzeichnet, daß die erste Membran (114) als integralen Teil der zweiten Membran (130) umfaßt, wobei der zweite Wandler separat angetrieben wird.

10. Lautsprecherkombination nach Anspruch 1, dadurch gekennzeichnet, daß die zweite Membran (30) konzentrisch zur ersten Membran (14) ist.

Revendications

1. Haut-parleur combiné à plusieurs moteurs, comprenant une première membrane (14) ayant une forme générale de cône, un premier moteur (10, 18, 20) comprenant une structure à aimant (10) délimitant un entrefer, une bobine mobile (20) disposée dans l'entrefer, et une armature (18) de bobine mobile destinée à coupler le sommet de la première membrane au premier moteur, la bobine mobile étant disposée sur l'armature, la première membrane et le moteur restituant efficacement un son dans la partie inférieure de la gamme des audiofréquences, un second moteur (38) comprenant un transducteur piézoélectrique, et une seconde membrane (30) de forme générale conique, la seconde membrane et le second moteur restituant efficacement le son dans la partie supérieure de la gamme des audiofréquences, caractérisé en ce que le transducteur piézoélectrique est supporté à l'intérieur de la membrane uniquement par fixation du transducteur piézoélectrique au sommet de la seconde membrane et par fixation de la seconde membrane à une région intermédiaire de la première membrane entre son sommet et sa partie interne, si bien que le transducteur piézoélectrique se déplace avec la première membrane.

2. Haut-parleur combiné selon la revendication 1, caractérisé en ce que la première membrane délimite un premier axe autour duquel la première membrane est symétrique de façon générale, la seconde membrane délimite un second axe autour duquel la seconde membrane est symétrique de façon générale, et l'an-

gle formé par le premier et le second axe n'est pas nul.

3. Haut-parleur combiné selon l'une des revendications 1 et 2, caractérisé en ce qu'il comporte plusieurs secondes membranes et plusieurs seconds moteurs.

4. Haut-parleur combiné selon l'une quelconque des revendications 1 à 3, caractérisé en ce que le second transducteur est monté sur la première membrane par un dispositif intermédiaire de montage (34) permettant le déplacement du second transducteur avec la membrane sans qu'il soit retenu.

5. Haut-parleur combiné à plusieurs moteurs selon la revendication 4, caractérisé en ce que le dispositif intermédiaire de montage comporte une base annulaire aboutissant à un bord, le second transducteur comprenant une membrane ayant un bord raccordé au premier bord cité afin que le second transducteur soit supporté sur la base annulaire.

6. Haut-parleur combiné selon la revendication 5, caractérisé en ce que le bord de la base et le bord de la membrane sont des courbes planes de façon générale et fermées.

7. Haut-parleur combiné selon l'une quelconque des revendications 4 à 6, caractérisé en ce que le dispositif intermédiaire de montage comporte une bague (34) d'élasticité montée à partir de l'intérieur de la première membrane (14) et un dispositif de montage de la seconde membrane à partir de la bague d'élasticité.

8. Haut-parleur combiné selon l'une quelconque des revendications 1 à 6, caractérisé en ce que la seconde membrane (130) est montée de manière non concentrique par rapport à la première membrane (114).

9. Haut-parleur combiné selon l'une quelconque des revendications 1 à 8, caractérisé en ce que la première membrane (114) contient la seconde membrane (130) qui en est solidaire, le second transducteur étant excité séparément.

10. Haut-parleur combiné selon la revendication 1, caractérisé en ce que la seconde membrane (30) est concentrique à la première membrane (14).


50

55

60

65

6

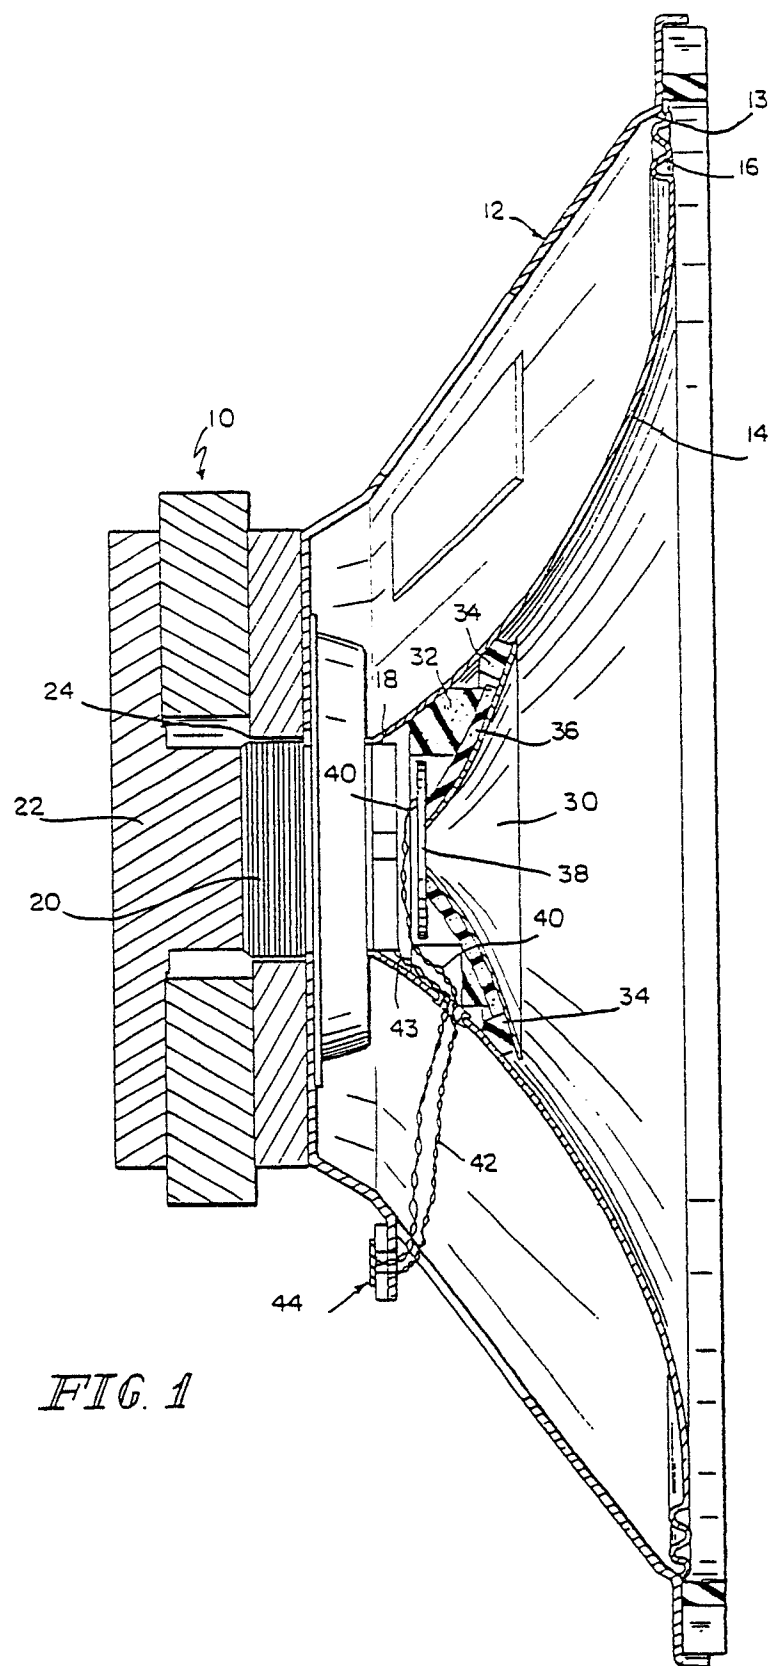

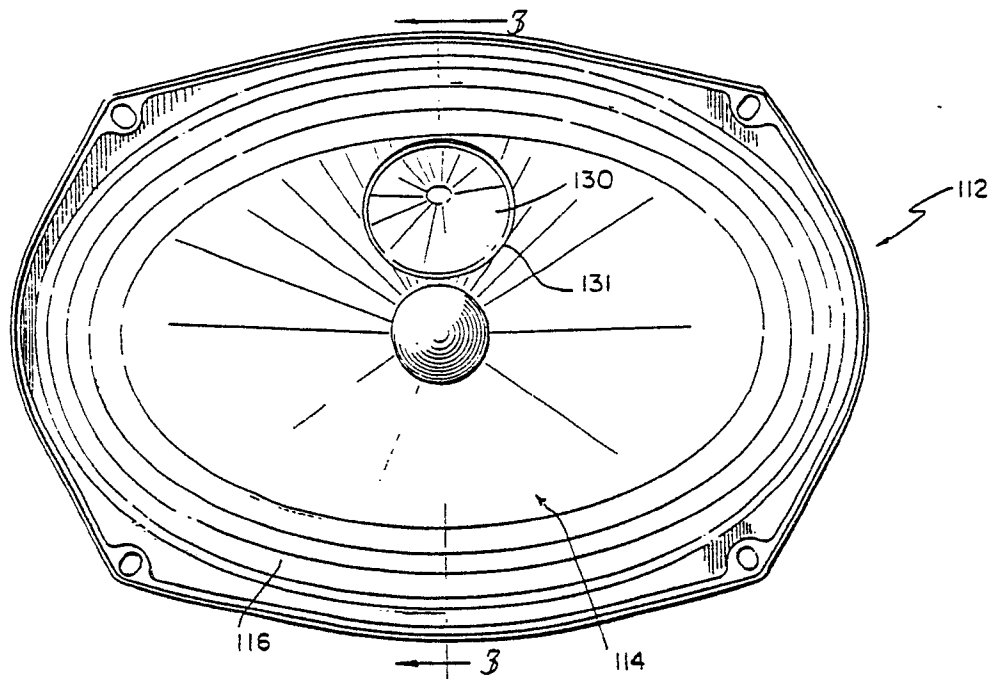


FIG. 2

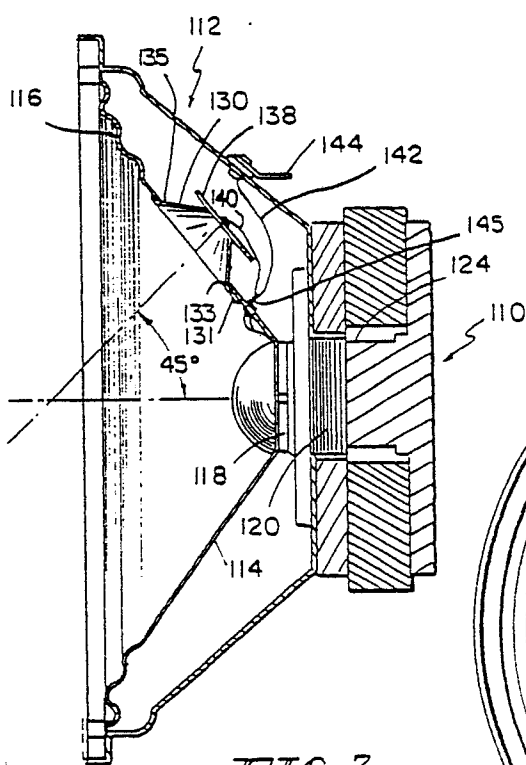


FIG. 3

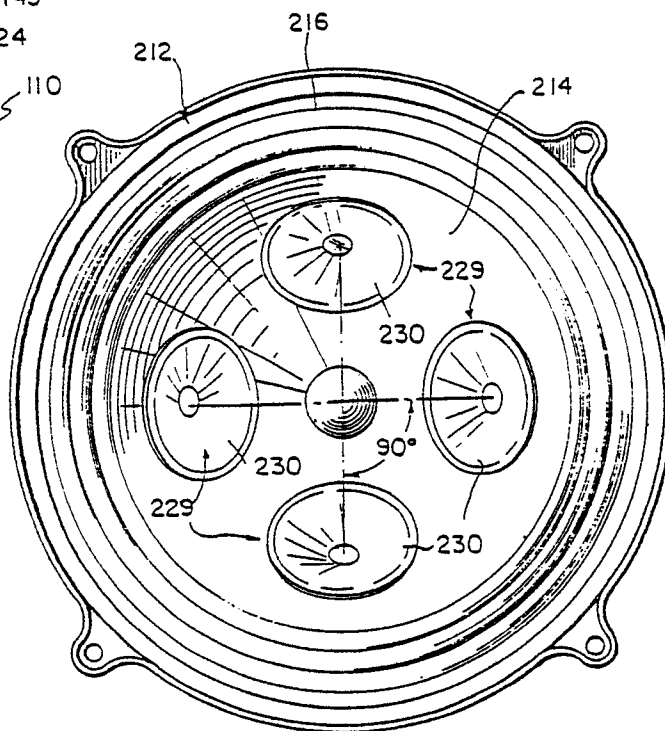


FIG. 4

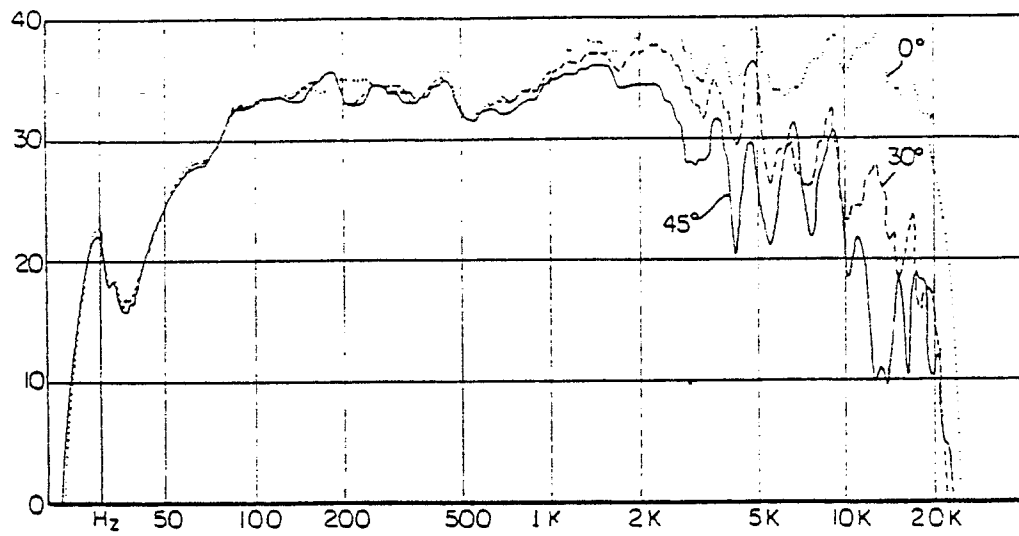


FIG 5

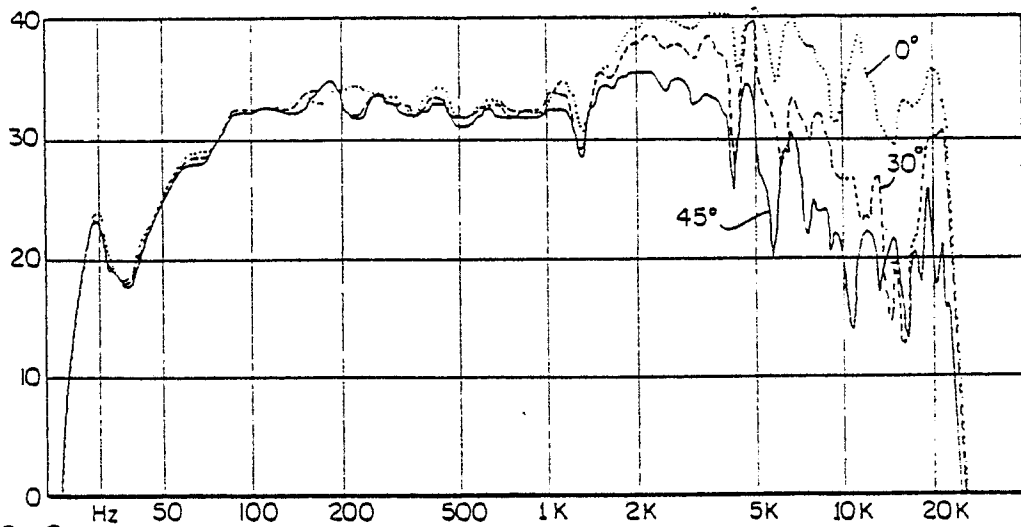


FIG 6

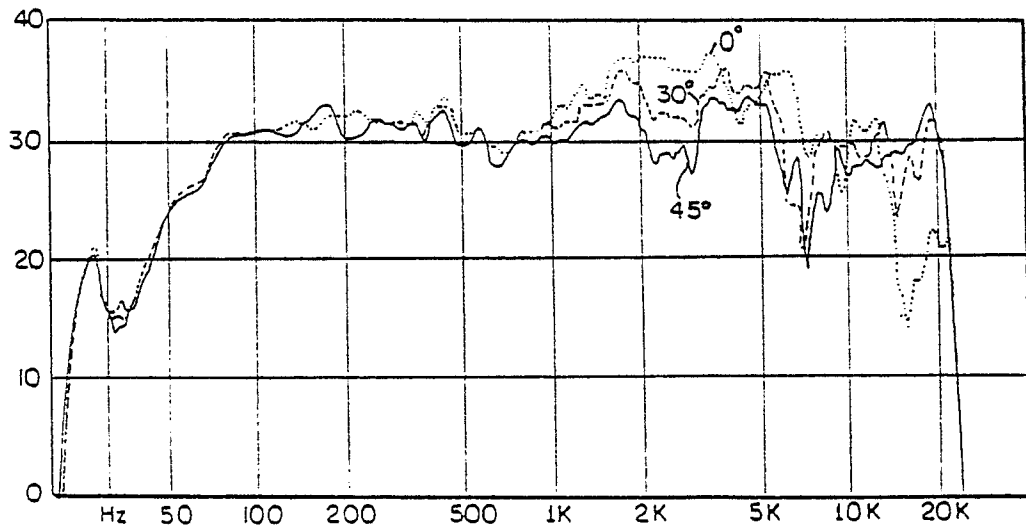


FIG 7