



(51) International Patent Classification:

H01J 37/305 (2006.01) *H01J 37/304* (2006.01)

(21) International Application Number:

PCT/US2017/046207

(22) International Filing Date:

10 August 2017 (10.08.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/262,471 12 September 2016 (12.09.2016) US

(71) Applicant: **VARIAN SEMICONDUCTOR EQUIPMENT ASSOCIATES, INC.** [US/US]; 35 Dory Road, Gloucester, Massachusetts 01930 (US).(72) Inventors: **GILCHRIST, Glen FR**; 3 Burnham Lane, Danvers, Massachusetts 01923 (US). **LIANG, Shurong**; 22 Partridge Lane, Lynnfield, Massachusetts 01940 (US).(74) Agent: **FRAME, Robert C.** et al.; Nields, Lemack & Frame, LLC, 176 E. Main Street, Suite 5, Westboro, Massachusetts 01581 (US).(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ANGLE CONTROL FOR RADICALS AND REACTIVE NEUTRAL ION BEAMS

(57) Abstract: A workpiece processing apparatus allowing independent control of the extraction angles of charged ions and reactive neutrals is disclosed. The apparatus includes an extraction plate having an extraction aperture through which charged ions pass. Plasma sheath modulation and electric fields may be used to determine the extraction angle of the charged ions. The extraction plate also includes one or more neutral species channels, separate from the extraction aperture, through which reactive neutrals are passed at a selected extraction angle. The geometric configuration of the neutral species channels determines the extraction angle of the reactive neutrals. The neutral species channel may also comprise a suppressor, to reduce the number of charged ions that pass through the neutral species channel. The apparatus may be used for various applications, such as directed reactive ion etching.

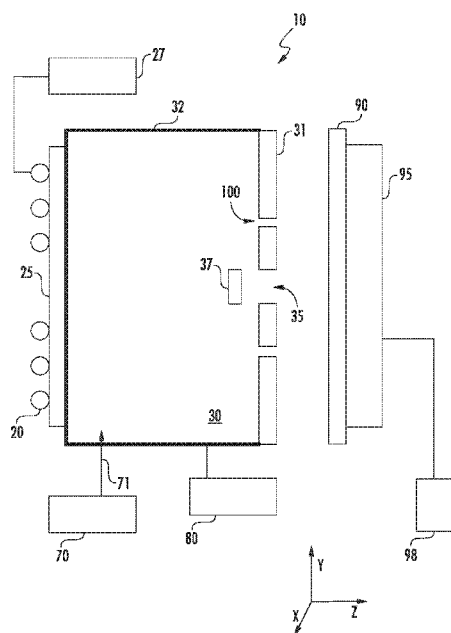


FIG. 1



ANGLE CONTROL FOR RADICALS AND REACTIVE NEUTRAL ION BEAMSFIELD

5 Embodiments of the present disclosure relate to angle control for neutral ion beams, and more particularly, an apparatus for creating charged ion beams and neutral beams for use in directed reactive ion etch processes.

10 BACKGROUND

Fabrication of advanced three dimensional semiconductor structures with complex surface topology and high packing density presents many technical challenges. As the critical dimension of devices and the pitch decreases, the aspect ratio of features increases. For example, this trend results in deep, but very narrow trenches on the surface of the workpiece. These trenches may be created using a technique known as reactive ion etch, or RIE. Trimming and forming the various trench liner materials may be performed using a technique known as directed reactive ion etching, DRIE. Precise angle control is used to selectively etch a specified portion of the walls of these trenches. Angular control of an ion beam may be obtained through the manipulation of electrical fields, which serve to focus the ions in a particular direction.

The etch rates of reactive ion etching may be enhanced by supplementing the charged ion beam with reactive neutrals. However, reactive neutrals are not controllable using electrical fields. Therefore, while the angle of the charged ion beam may be precisely controlled, the same is not true for reactive

neutrals. As the angles used for DRIE decrease (i.e. become closer to perpendicular to the workpiece), the lack of angular control of the reactive neutrals becomes more pronounced. Reactive neutrals are defined as those radicals/atoms which are highly reactive with some of the materials on the workpiece, but not others. For example, under the correct process conditions, chlorine has a high reaction rate with TiN, but a very low reaction rate with SiO₂. These reactive neutrals serve to etch portions of the workpiece, without affecting other parts. The inability to control the angle at which the reactive neutrals are directed toward the workpiece may compromise the speed of the etching process. In certain embodiments, the inability to control the angle at which the reactive neutrals are directed toward the workpiece may make it difficult to achieve the specified feature on the workpiece.

Thus, it would be beneficial if there was an apparatus which could control the angle at which reactive neutrals are directed toward a workpiece. Further, it would be beneficial if the apparatus also controls the angle at which charged ions are directed toward the workpiece. Such an apparatus may be beneficial in certain applications, such as directed reactive ion etching.

SUMMARY

A workpiece processing apparatus allowing independent control of the extraction angles of charged ions and reactive neutrals is disclosed. The apparatus includes an extraction plate having an extraction aperture through which charged ions pass. Plasma sheath modulation and electric fields may be used

to determine the extraction angle of the charged ions. In certain embodiments, the extraction plate also includes one or more neutral species channels, separate from the extraction aperture, through which reactive neutrals are passed at a selected extraction angle. The geometric configuration of the neutral species channels determines the extraction angle of the reactive neutrals. The neutral species channel may also comprise a suppressor, to reduce the number of charged ions that pass through the neutral species channel. The apparatus may be used for various applications, such as directed reactive ion etching.

According to one embodiment, a workpiece processing apparatus is disclosed. The workpiece processing apparatus comprises a plasma generator; a plasma chamber; and an extraction plate having a first aperture and a second aperture; wherein charged ions are extracted through the first aperture at a first selected extraction angle, and reactive neutrals are passed through the second aperture at a second selected extraction angle, where the second aperture is different than the first aperture. In certain embodiments, the second aperture comprises a suppressor to minimize charged ions passing through the second aperture. The suppressor may be an electrically biased grid, an electrically biased cup, or a sieve. In certain embodiments, the second selected extraction angle is determined by a tilt of the second aperture relative to a plane orthogonal to the extraction plate. In certain embodiments, the angular distribution of reactive neutrals about the second selected extraction angle is determined by an aspect ratio of the second aperture, defined as a length of the second aperture through the extraction plate divided by a height of the second aperture. In certain embodiments, a blocker is disposed in the plasma

chamber. In certain embodiments, the reactive neutrals are created in a remote neutral species generator, different from the plasma chamber, and are transported to the second aperture.

5 According to another embodiment, a workpiece processing apparatus is disclosed. The workpiece processing apparatus comprises a plasma generator; a plasma chamber; and an extraction plate, through which charged ions and reactive neutrals are extracted, wherein the workpiece processing
10 apparatus uses a first mechanism to extract charged ions from the plasma chamber through an extraction aperture disposed in the extraction plate at a first selected extraction angle and uses a second mechanism to extract reactive neutrals from the plasma chamber at a second selected extraction angle. In certain
15 embodiments, the first mechanism comprises plasma sheath modulation or electric fields proximate the extraction aperture. In certain embodiments, the second mechanism comprises geometric configuration of a neutral species channel. In certain embodiments, the neutral species channel is disposed in the
20 extraction plate. In certain embodiments, the neutral species channel is disposed in a blocker disposed within the plasma chamber proximate the extraction aperture.

 According to another embodiment, a workpiece processing
25 apparatus is disclosed. The workpiece processing apparatus comprises a plasma generator; a plasma chamber; and an extraction plate comprising an extraction aperture; wherein the workpiece processing apparatus uses plasma sheath modulation or electric fields to extract charged ions through the extraction
30 aperture as an ion beam at a first selected extraction angle; and wherein reactive neutrals are passed through a neutral

species channel at a second selected extraction angle. The neutral species channel may be disposed in the extraction plate, or may be disposed in a blocker disposed within the plasma chamber proximate the extraction aperture. In certain
5 embodiments, the neutral species channel is the extraction aperture.

BRIEF DESCRIPTION OF THE FIGURES

10 For a better understanding of the present disclosure, reference is made to the accompanying drawings, which are incorporated herein by reference and in which:

FIG. 1 is a workpiece processing apparatus in accordance with one embodiment;

15 FIG. 2 is an expanded view of the extraction plate of the working processing apparatus of FIG. 1;

FIGs. 3A-3C shows three embodiments of a neutral species channel having a suppressor;

20 FIGs. 4A-4C shows embodiments of a neutral species channel having collimating channels;

FIGs. 5A-5C shows various embodiments of the neutral species channels as viewed from the workpiece;

FIGs. 6A-6B show an embodiment with adjustable neutral species channels;

25 FIGs. 7A-7B shows representative workpieces that may be processed using the apparatus of FIG. 1;

FIGs. 8A-8I show various configurations of a blocker and an extraction aperture and the resulting extraction angles;

30 FIG. 9 is an expanded view of the extraction plate and blocker of the workpiece processing apparatus according to another embodiment; and

FIG. 10 is an expanded view of the extraction plate of the workpiece processing apparatus according to another embodiment.

DETAILED DESCRIPTION

5

FIG. 1 shows a first embodiment of workpiece processing apparatus 10 for controlling the angle at which charged ions and reactive neutrals are directed toward a workpiece 90. The workpiece processing apparatus 10 comprises a plasma chamber 30, which is defined by a plurality of chamber walls 32.

An antenna 20 is disposed external to a plasma chamber 30, proximate a dielectric window 25. The dielectric window 25 may also form one of the walls that define the plasma chamber 30. The antenna 20 is electrically connected to a RF power supply 27, which supplies an alternating voltage to the antenna 20. The voltage may be at a frequency of, for example, 2MHz or more. While the dielectric window 25 and antenna 20 are shown on one side of the plasma chamber 30, other embodiments are also possible. For example, the antenna 20 may surround the chamber walls 32 or be disposed on the top of the plasma chamber 30. The chamber walls 32 of the plasma chamber 30 may be made of a conductive material, such as graphite. These chamber walls 32 may be biased at an extraction voltage, such as by extraction power supply 80. The extraction voltage may be, for example, 1kV, although other voltages are within the scope of the disclosure.

The workpiece processing apparatus 10 includes an extraction plate 31 having an extraction aperture 35. The extraction plate 31 may form another wall that defines plasma

chamber 30. The extraction aperture 35 may be about 320 mm in the x-direction and 30 mm in the y-direction, although other dimensions are possible. The extraction plate 31 may have a thickness in the z-direction of between 5 and 10 mm, although
5 other dimensions are also possible. This extraction plate 31 may be disposed on the side of the plasma chamber 30 opposite the dielectric window 25, although other configurations are also possible. In certain embodiments, the extraction plate 31 may be constructed from an insulating material. For example, the
10 extraction plate 31 may comprise quartz, sapphire, alumina or a similar insulating material. The use of an insulating material may allow modulation of the plasma sheath, which affects the angle at which charged ions exit the extraction aperture 35. In other embodiments, the extraction plate 31 may be constructed of
15 a conducting material.

A blocker 37 may be disposed proximate the extraction aperture 35 on the interior of the plasma chamber 30. In certain embodiments, the blocker 37 is constructed from an insulating
20 material. The blocker 37 may be about 3-5 mm in the z-direction, and the same dimension as the extraction aperture 35 in the x-direction. The length of the blocker 37 in the y-dimension may be varied to achieve the target extraction angles.

25 The position and size of the blocker 37 along with the size and shape of the edges of the extraction aperture 35 may define the boundary of the plasma sheath within the plasma chamber 30. The boundary of the plasma sheath, in turn, determines the angle at which charged ions cross the plasma sheath and exit through
30 the extraction aperture 35. In certain embodiments, the blocker 37 may include a conductive material. In these embodiments, the

conductive material on the blocker 37 may be biased so as to create an electric field proximate the extraction aperture 35. The electric field may also serve to control the angle at which the charged ions exit through the extraction aperture 35. A
5 blocker 37 positioned between the interior of the plasma chamber 30 and the extraction aperture 35, such as is shown in FIG. 1, may create a bimodal extraction angle profile. In other words, charged ions may exit the extraction aperture 35 at either $+\theta^\circ$ or $-\theta^\circ$, where θ is determined by the size and position of the
10 blocker 37, the width of extraction aperture 35 and the electric fields proximate the extraction aperture.

While FIG. 1 shows a blocker 37, in other embodiments, a blocker 37 is not employed.

15 A workpiece 90 is disposed proximate and outside the extraction plate 31 of the plasma chamber 30. In some embodiments, the workpiece 90 may be within about 1 cm of the extraction plate 31 in the z-direction, although other distances
20 are also possible. In operation, the antenna 20 is powered using a RF signal from the RF power supply 27 so as to inductively couple energy into the plasma chamber 30. This inductively coupled energy excites the feed gas introduced from a gas storage container 70 via gas inlet 71, thus generating a plasma.
25 While FIG. 1 shows an antenna, other plasma generators may also be used with the present disclosure. For example, a capacitively coupled plasma generator may be used.

The plasma within the plasma chamber 30 may be biased at
30 the voltage being applied to the chamber walls 32 by the extraction power supply 80. The workpiece 90, which may be

disposed on a platen 95, is disposed proximate the extraction plate 31. The platen 95 may be electrically biased by a bias power supply 98. The difference in potential between the plasma and the workpiece 90 causes charged ions in the plasma to be accelerated through the extraction aperture 35 in the form of one or more ribbon ion beams and toward the workpiece 90. In other words, positive ions are attracted toward the workpiece 90 when the voltage applied by the extraction power supply 80 is more positive than the bias voltage applied by the bias power supply 98. Thus, to extract positive ions, the chamber walls 32 may be biased at a positive voltage, while the workpiece 90 is biased at a less positive voltage, ground or a negative voltage. In other embodiments, the chamber walls 32 may be grounded, while the workpiece 90 is biased at a negative voltage. In yet other embodiments, the chamber walls 32 may be biased at a negative voltage, while the workpiece 90 is biased at a more negative voltage.

The ribbon ion beams 60 (see FIG. 2) may be at least as wide as the workpiece 90 in one direction, such as the x-direction, and may be much narrower than the workpiece 90 in the orthogonal direction (or y-direction). In one embodiment, the extracted ribbon ion beam 60 may be about 1 mm in the y-direction and 320 mm in the x-direction.

Further, the platen 95 and workpiece 90 may be translated relative to the extraction aperture 35 such that different portions of the workpiece 90 are exposed to the ribbon ion beam 60. The process wherein the workpiece 90 is translated so that the workpiece 90 is exposed to the ribbon ion beam 60 is referred to as "a pass". A pass may be performed by translating

the platen 95 and workpiece 90 while maintaining the position of the plasma chamber 30. The speed at which the workpiece 90 is translated relative to the extraction aperture 35 may be referred to as workpiece scan velocity. In certain embodiments, the workpiece scan velocity may be about 100 mm/sec, although other speeds may be used. In another embodiment, the plasma chamber 30 may be translated while the workpiece 90 remains stationary. In other embodiments, both the plasma chamber 30 and the workpiece 90 may be translated. In some embodiments, the workpiece 90 moves at a constant workpiece scan velocity relative to the extraction aperture 35 in the y-direction, so that the entirety of the workpiece 90 is exposed to the ribbon ion beam 60 for the same amount of time.

As described above, the extraction aperture 35 is used to direct the charged ions toward the workpiece 90 at a predetermined angle. As described above, plasma sheath modulation and electric fields are used to control the angle at which the charged ions exit the extraction aperture 35. However, reactive neutrals are not affected by either of these mechanisms and therefore leave the extraction aperture in a random manner. The reactive neutrals travel in straight lines until they collide with other particles or structures. For example, the reactive neutrals may collide with the blocker 37, the extraction plate 31, or with other ions or reactive neutrals. Collisions between reactive neutrals including radicals and atoms may result in recombination to form molecules which are typically much less reactive and of no practical use in the DRIE process. As a result, most reactive neutrals exit the extraction aperture at high extraction angles. Throughout this disclosure, extraction angles are referenced to the plane perpendicular to

the workpiece 90. Thus, an extraction angle of 0° refers to a path that is perpendicular to the surface of the workpiece 90, while an extraction angle of 90° is a path parallel to the surface of the workpiece 90.

5

The extraction angle of the reactive neutrals may be somewhat controlled by the placement and size of the blocker 37, however, the range and precision of this angular control is limited.

10

Thus, to better control the extraction angle of the reactive neutrals, one or more neutral species channels 100 may be disposed in the extraction plate 31.

15

The neutral species channels 100 may be disposed in the extraction plate 31, on opposite sides of the extraction aperture 35. In this way, there are at least two neutral species channels 100 which may be disposed to direct the reactive neutrals toward the workpiece 90 at two angles, which may correspond to the bimodal distribution of the charged ions exiting the extraction aperture 35. Of course, in other embodiments, only one neutral species channel 100 may be disposed on the extraction plate 31.

20

25

FIG. 2 shows an expanded view of the extraction plate 31, the blocker 37 and the workpiece 90 according to one embodiment. When a blocker 37 is employed, charged ions exit the extraction aperture 35 as two ribbon ion beams 60. The neutral species channels 100 facilitate the exit of reactive neutrals from the plasma chamber 30 as neutral beams 101. The reactive neutrals exiting the neutral species channels 100 have a range of

30

extraction angles, defined by a central extraction angle and an angular distribution. A narrow distribution implies that most of the reactive neutrals are travelling in a path close to the central extraction angle.

5

The central extraction angle of the reactive neutrals is controlled by the direction of the neutral species channels 100. For example, FIG. 2 shows each of the neutral species channels 100 tilted slightly toward the extraction aperture 35. A horizontal neutral species channel may have a central extraction angle of 0°. The central extraction angle increases as the neutral species channel 100 is tilted away from the plane orthogonal to the extraction plate 31. The distribution of extraction angles of the reactive neutrals may be defined by the geometric configuration of the neutral species channels 100. The ratio of the dimension of the neutral species channel 100 in the z-direction to the dimension of the neutral species channel 100 in the y-direction may be referred to as the aspect ratio of the neutral species channel 100. A neutral species channel 100 with a high aspect ratio will have a narrower distribution of extraction angles than a neutral species channel with a lower aspect ratio. In certain embodiments, an aspect ratio of at least 5 may be desirable. In other embodiments, the aspect ratio may be greater than 10.

25

In certain embodiments, the neutral species channels 100 may be about 10 mm from the extraction aperture 35 in the y-direction. The neutral species channels 100 may have a dimension in the x-direction which is substantially equal to the dimension of the extraction aperture 35 in the x-direction.

30

In certain embodiments, it may be beneficial to allow only reactive neutrals to pass through the neutral species channels 100. This may be achieved by introducing a suppressor to the neutral species channel 100.

5

FIGS. 3A-3C shows different embodiments of a neutral species channel 100 that include a suppressor. The suppressor serves to suppress the passage of charged ions through the neutral species channel 100. In certain embodiments, this is achieved by repelling the charged ions away from the neutral species channel 100. In other embodiments, this is achieved by neutralizing any charged ions that enter the neutral species channel 100.

FIG. 3A shows an embodiment of the neutral species channel 100 which includes an electrically biased grid 200 disposed within an insulator 210. The insulator 210 may isolate the electrically biased grid 200 from the extraction plate 31. If the extraction plate 31 is made of an insulating material, the insulator 210 may not be employed. The electrically biased grid 200 may be constructed of a conductive material, such as a metal such as tungsten. The positive voltage may be applied by a grid power supply 220. The voltage may be selected to repel positive ions back toward an interior of the plasma chamber 30. The electrically biased grid 200 may be disposed anywhere in the neutral species channel 100. In certain embodiments, the electrically biased grid 200 may be disposed in the neutral species channel 100 near the interior of the plasma chamber 30 to minimize collisions within the neutral species channel 100. Other embodiments include baffles operated at a sufficient bias to repel charged ions back into the plasma chamber 30.

FIG. 3B shows an embodiment of the neutral species channel 100 which includes an electrically biased cup 250 disposed within an insulator 260. The insulator 260 may isolate the electrically biased cup 250 from the extraction plate 31. If the extraction plate 31 is made of an insulating material, the insulator 260 may not be employed. The electrically biased cup 250 may be constructed of a conductive material, such as a metal such as tungsten. The positive voltage may be applied by a cup power supply 270. The voltage may be selected to repel positive ions back toward an interior of the plasma chamber 30.

FIG. 3C shows an embodiment of the neutral species channel 100 that includes a sieve 240. In this embodiment, the sieve 240 admits charged ions and reactive neutrals from the plasma chamber 30 but causes ions to be neutralized by surface collisions before exiting the neutral species channel 100 toward the workpiece. Materials for the sieve 240 are selected such that reactive neutrals including radicals are not recombined on the walls of the sieve 240. The side of the sieve facing the plasma chamber 30 may be solid and the aspect ratio of the channel may be large enough such that ions do not have a line of sight path to the workpiece and collide with the top of the sieve or side walls of the neutral species channel 100 where they are neutralized.

The embodiments shown in FIGs. 3A-3C may be used with the extraction plate 31 shown in FIGs. 1 and 2. In other words, the extraction plate 31 may comprise an extraction aperture 35, through which charged ions are directed at a first selected extraction angle toward the workpiece 90. The extraction plate

31 may also include one or more neutral species channels 100, through which reactive neutrals are directed at a second selected extraction angle toward the workpiece 90. As described above, the first selected extraction angle may be determined by
5 modulating the plasma sheath or through the use of electric fields. The second selected extraction angle may be determined by the geometric configuration of the neutral species channel 100. While the first selected extraction angle may be the same as the second selected extraction angle, it is noted that other
10 embodiments exist. For example, the first and second selected angles may differ due to the forces of attraction on the charged ions that the reactive neutrals do not experience. By using different mechanisms to determine the first and second selected extraction angles, these extractions angle may be independently
15 controlled.

It is noted that some reactive neutrals may also exit the plasma chamber 30 through the extraction aperture 35. However, the angle at which these reactive neutrals exit may not be
20 controlled to the same level as the reactive neutrals exiting the neutral species channels 100. For example, the reactive neutrals that exit the extraction aperture 35 may have a wide distribution and may also have an extraction angle greater than the second selected extraction angle.

25 Thus, the present disclosure describes a workpiece processing apparatus that includes a plasma generator, a plasma chamber and an extraction plate, through which charged ions and reactive neutrals are extracted. The workpiece processing
30 apparatus uses a first mechanism to extract charged ions from the plasma chamber at a first selected extraction angle and uses

a second mechanism to extract reactive neutrals from the plasma chamber at a second selected extraction angle. As stated above, the first mechanism may be plasma sheath modulation or electric fields proximate the extraction aperture. The second mechanism
5 may be the geometric configuration of the neutral species channels. Specifically, the orientation or tilt of the neutral species channels 100 may determine the central extraction angle, while the aspect ratio of the neutral species channel 100 may determine the distribution of the extraction angles.

10

Additionally, the present disclosure describes a workpiece processing apparatus that includes a plasma generator, a plasma chamber and an extraction plate, where charged ions are extracted through a first aperture at a first selected
15 extraction angle, and reactive neutrals are passed through a second aperture at a second selected extraction angle, where the second aperture is different than the first aperture. As described above, the number of charged ions exiting through the neutral species channel may be reduced by the use of a
20 suppressor in conjunction with the neutral species channel.

In certain embodiments, it may be beneficial to create a narrower distribution of reactive neutrals. This may be achieved through collimation. FIGs. 4A-4C show embodiments of a neutral species channel having a plurality of collimating columns. FIG.
25 4A shows a first embodiment of a neutral species channel 300 that includes a plurality of collimating columns 310. As before, the neutral species channel 300 may be surrounded by an insulating material 330 to insulate it from the extraction plate
30 31. These collimating columns 310 may be created by forming the neutral species channel 300 as an array or raster of many

smaller channels. Each of these smaller channels has a higher aspect ratio, since the thickness of each smaller channel in the z-direction is unchanged, while the height in the y-direction is reduced. In one embodiment, these collimating columns 310 may be
5 created by having the electrically biased grid 320 extend through the thickness of the neutral species channel 300. This electrically biased grid 320 may be biased using grid power supply 340. In certain embodiments, the collimating columns 310 are created such that only the y-direction of the neutral
10 species channels 300 is affected. In other embodiments, the collimating columns 310 are created such that both the x-direction and the y-direction of the neutral species channels 300 are affected.

15 FIG. 4B shows a second embodiment of a neutral species channel 350 having a plurality of collimating columns 360. As before, the neutral species channel 350 may be surrounded by an insulating material 380 to insulate it from the extraction plate 31. In this embodiment, the collimating columns 360 are created
20 by inserting a plurality of thin slats 370 in the neutral species channel 300. These thin slats 370 may be conductive material or insulating material. A conductive cup 385 may be disposed against the inner wall of the insulating material 380, and may be in communication with a cup power supply 390. In
25 certain embodiments, the collimating columns 360 are created such that only the y-direction of the neutral species channels 350 is affected. In other embodiments, the collimating columns 360 are created such that both the x-direction and the y-direction of the neutral species channels 350 are affected.

30

Further, although FIGs. 4A-B shows the neutral species channels and collimating columns as being orthogonal to the plane of the extraction plate 31, the disclosure is not limited to this embodiment. The neutral species channel and collimating
5 channels may be tilted relative to the plane orthogonal to the extraction plate 31 if desired. For example, Fig. 4C shows the neutral species channel 350 of FIG. 4B tilted slightly upward. The cup power supply 390 is not shown for clarity, however may be used to bias the conductive cup 385. Further, the neutral
10 species channel 350 of FIG. 4B may also be tilted downward if desired. The angle of the tilt is not limited by this disclosure.

FIGs. 5A-5C shows various embodiments of the extraction
15 plate as seen from the workpiece 90. FIG. 5A shows the extraction plate 31 with an extraction aperture 35 and two neutral species channels 100. One neutral species channel 100 is disposed on each side of the extraction aperture 35. The neutral species channels 100 are each rectangular in shape. The neutral
20 species channels 100 may be the same dimension as the extraction aperture 35 in the x-direction. In certain embodiments, the neutral species channels 100 may be smaller than the extraction aperture 35 in the y-direction. The neutral species channels 100 may be about 10mm away from the extraction aperture 35 in the y-
25 direction in certain embodiments.

FIG. 5B shows a second embodiment of the extraction plate 31 as seen from the workpiece 90. In this embodiment, the neutral species channels 103 are staggered and are disposed on
30 either side of the extraction aperture 35. This configuration allows more mechanical strength to remain in the extraction

plate 31 but still delivers a sufficient flux of reactive neutrals to the workpiece and accommodates all of the directional and collimating features discussed above.

5 FIG. 5C shows a third embodiment of the extraction plate 31 as seen from the workpiece 90. In this embodiment, the neutral species channels 102 are circular so as to form collimating columns, as described with respect to FIGs. 4A-4C. The neutral species channels 102 are disposed on either side of the
10 extraction aperture 35. This configuration allows more mechanical strength to remain in the extraction plate but still delivers a sufficient flux of reactive neutrals to the workpiece and accommodates all of the directional and collimating features discussed above.

15 In certain embodiments, the neutral species channels in FIGs. 5A-5C may each be tilted toward the extraction aperture 35. In other words, the reactive neutrals are directed toward the extraction aperture 35, as shown in FIG. 2. Thus, reactive
20 neutrals are extracted through some neutral species channels at an angle of $+\theta_2$ and extracted through other neutral species channels at an angle of $-\theta_2$, where θ_2 is the second selected extraction angle.

25 In certain embodiments, it may be desirable to be able to vary the selected extraction angles. The first selected extraction angle may be modified, for example, by varying the electrical fields within the plasma chamber 40 or moving the blocker 37 relative to the extraction aperture 35.

FIGs. 6A-6B shows one embodiment that may be used to modify the second selected extraction angle. In this embodiment, the neutral species channels 600 are housed within a rotatable member 610. The rotatable member 610 may be disposed in the extraction plate 631. The rotatable member 610 may be a suitable material, such as SiO_2 , SiC , SiN , Al_2O_3 , and others. A suppressor, which may be an electrically biased grid, a sieve or an electric cup, may also be disposed within the rotatable member 610. FIG. 6A shows the rotatable member 610 positioned so that the neutral species channels 600 are perpendicular to the plane of the extraction plate 631. FIG. 6B shows the rotatable member 610 rotated upward relative to the position in FIG. 6A.

While the disclosure describes the use of a separate neutral species channel, other embodiments are also possible. For example, the blocker and extraction aperture may be designed to achieve the desired extraction angle for the reactive neutrals. FIGs. 8A-8I show a plurality of configurations. In these configurations, the width of the extraction aperture 835 in the extraction plate 831 and the distance between the blocker 837 and the extraction aperture 835 is varied. In these configurations, the width of the extraction aperture 835 and the width of the blocker 837 are related. As the width of the extraction aperture 835 becomes narrower, the width of the blocker 837 is also reduced. The configurations are presented such that the distance between the blocker 837 and the extraction aperture 835 increases moving to the right. The width of the extraction aperture 835 decreases moving downward.

In FIG. 8A, the average extraction angle for a fixed point in the plasma source was found to be 50.8° , with a distribution

of extraction angles from 43.3° to 58.2° . Thus, the spread is about 14.9° .

5 Moving to FIG. 8B, the distance between the blocker 837 and the extraction aperture is increased. This reduces the average extraction angle to 49° , with a distribution of extraction angles from 35.7° to 62.2° . Thus, the spread is about 26.5° .

10 In FIG. 8C, the distance between the blocker 837 and the extraction aperture is again increased. This reduces the average extraction angle to 41.2° , with a distribution of extraction angles from 24.9° to 57.5° . Thus, the spread is about 32.6° .

15 Thus, in general, as the distance between the blocker 837 and the extraction aperture 835 is increased, the average extraction angle decreases, but the angular spread increases.

20 In the configuration shown in FIG. 8D, the distance between the blocker 837 and the extraction aperture 835 is the same as in FIG. 8A, however, the width of the extraction aperture 835 and the blocker 837 is reduced. This results in an average extraction angle to 45.3° , with a distribution of extraction angles from 35.5° to 55.1° . Thus, the spread is about 19.6° .

25 Moving down to FIG. 8G, the width of the extraction aperture 835 and the blocker 837 is again reduced relative to FIG. 8D. This results in an average extraction angle to 32.7° , with a distribution of extraction angles from 30.1° to 35.3° . Thus, the spread is about 5.2° .

30

Thus, in general, as the width of the extraction aperture 835 is decreased, the average extraction angle decreases, and the angular spread decreases.

5 Thus, manipulation of the width of the extraction aperture 835 and the distance between the blocker 837 and the extraction aperture 835 offers another mechanism to control the extraction angle of reactive neutrals. As with the separate neutral species channels, this embodiment relies on the physical configuration
10 of the aperture, since the extraction angle of reactive neutrals is largely dictated by line-of-sight optics. In another words, reactive neutrals typically travel along paths in which there is a clear path from the plasma chamber to the exterior of the extraction plate 831. Thus, by manipulating the width of the
15 extraction aperture 835 and the distance between the blocker 837 and the extraction aperture 835, the extraction angle of reactive neutrals can be controlled.

Further, modifying the width of the blocker 837
20 independently from the width of the extraction aperture 835 may offer another mechanism to control the extraction angles of reactive neutrals.

In FIGs. 8A-8I, as was described above, the extraction
25 angle of charged ions is determined by the shape of the plasma sheath and electric fields in proximity to the extraction aperture 835. Thus, the extraction angle of the charged ions and the extraction angle of reactive neutrals are controlled using two different mechanisms.

30

In another embodiment, the blocker 837 and extraction aperture 835, shown in Figures 8A-8I may be used for the extraction of neutral species only. In this embodiment, the blocker 837 may be biased with a positive electrical potential in order to repel positive ions generated in the plasma. Further, in this embodiment, the extraction aperture 835 may be similar to the neutral species channels shown in FIG. 2. Thus, the extraction aperture 835 serves as the pathway for neutral species to exit in a second selected extraction angle. In this embodiment, the blocker 37 and extraction aperture 35 shown in FIG. 1 may also be employed. In other words, two blockers may be disposed within the plasma chamber 30. The blocker 37 serves to manipulate the plasma sheath to facilitate the extraction of charged ions through the extraction aperture 35 at a first selected extraction angle. The blocker 837 serves to provide a pathway for reactive neutrals through extraction aperture 835 so that these neutrals are extracted at a second selected extraction angle. Further, since the blocker 837 and extraction aperture 835 allow a bimodal extraction of reactive neutrals, in some embodiments, only one neutral species channel is used.

FIGs. 1, 2 and 5A-C illustrate the use of neutral species channels 100 disposed in the extraction plate 31. These neutral species channels 100 serve to guide the reactive neutrals in a desired path. However, the neutral species channels may also be disposed in other locations. FIG. 9 shows an extraction plate 931 and a blocker 937. As was shown in FIG. 2, charged ions exit as a ribbon ion beam 60 through the extraction aperture 935. However, in this embodiment, the neutral species channels 900 are disposed in the blocker 937. Like the previous embodiments, the geometric configuration of the neutral species channels 900

serves to determine the extraction angle of reactive neutrals 901 from the extraction aperture 935. Further, as was described above, the neutral species channels 900 in the blocker 937 may also include a suppressor, such as any of those shown in FIGs. 3A-3C. In addition, the neutral species channels 900 disposed in the blocker 937 may also be collimated, as shown in the embodiments of FIGs. 4A-4C.

The above disclosure and figures describe embodiments in which the reactive neutrals are extracted from the same plasma chamber which produces the charged ions. However, other embodiments are also possible. For example, FIG. 10 shows another embodiment. In this embodiment, the neutral species channels 100 are in communication with neutral species pathways 1010. These neutral species pathways 1010 may be in communication with one or more remote neutral species generators 1000. In certain embodiments, the remote neutral species generator 1000 may be a plasma generator or other suitable device. The reactive neutrals are then transported along the neutral species pathways 1010 to the neutral species channels 100, where they are directed toward the workpiece 90. In other words, the neutral species channels in FIG. 10 are separated from the plasma chamber 30. This embodiment may be beneficial in embodiments where long-lived or metastable reactive neutral species are used. For example, fluorine atoms may be delivered to the neutral species channels 100 using this mechanism. Further, although FIG. 10 is shown as a modification of FIG. 2, it is understood that the remote neutral species generator 1000 may be employed with any of the configurations shown in the other figures.

The disclosed apparatus has many possible applications. In one particular application, the apparatus is used to perform directed reactive ion etching (DRIE). In this application, both charged ions and reactive neutrals are delivered toward the workpiece at selected extraction angles. These selected extraction angles allow for the etching of material, particularly material disposed in a trench. FIG. 7A shows a workpiece 700 to be etched. The workpiece 700 has a plurality of trenches 710, each trench having sidewalls 711 and a bottom 712. The workpiece may be any suitable material, including, but not limited to, crystalline silicon, amorphous silicon, polysilicon and silicon dioxide. The sidewalls 711 of each trench 710 may be coated with one or more films which may be a dielectric 713, such as silicon dioxide, silicon nitride, hafnium dioxide and others. The surface of the workpiece 700 is also conformally covered by a liner 714, such as, for example, cobalt, tungsten, aluminum, copper or titanium nitride. In certain embodiments, it may be beneficial to remove the liner 714 on the top surface and to a specific depth on the sidewalls 711.

In some embodiments, the removal of the liner 714 is achieved by striking the workpiece 700 with both charged ions and reactive neutrals. In certain embodiments, the charged ions and reactive neutrals may be created using a halogen-based feedgas, such as, for example, Cl_2 , CF_4 , CHF_3 , CH_3F , C_2F_6 , Br_2 , BBr_3 , HBr or I_2 . In other embodiments, the charged ions and reactive neutrals may be created using a feedgas that comprises O_2 , H_2 , or NH_3 . In operation, a feedgas, which may be one or more of the species recited above, is introduced into the plasma chamber 30. RF power is applied to the antenna 20 by the RF

power supply 27. A plasma is created, that includes charged ions, such as Cl^+ , as well as reactive neutrals, such as Cl .

In one non-limiting example, each trench 710 may be 100 nm
5 deep and only the top 20 nm of the liner 714 is to be removed. Additionally, the liner 714 is to be removed from the top surface 715. To remove a portion of the liner 714 from the sidewalls 711, the charged ions and reactive neutrals strike the workpiece 700 at an angle ϕ_1 , as shown in FIG. 7A. If the angle
10 at which these ions and reactive neutrals strike the workpiece is greater than ϕ_1 , the liner 714 on the sidewalls 711 will not be etched to the proper level. A greater angle (i.e. more horizontal) will etch less of the sidewalls 711 as the top surface 715 of an adjacent trench will block the ions and
15 reactive neutrals from striking the sidewall 711.

FIGs. 7A-7B show the workpiece 700 during processing. In these figures, the workpiece 700 is moving to the left relative to the workpiece processing apparatus 10. Consequently, trenches
20 710 on the left side of the figures have been etched, while trenches 710 on the right side are still covered by the liner 714.

FIG. 7A shows an angle, ϕ_1 , that is used to etch the proper
25 amount of liner 714 from the sidewalls 711. This angle is a function of the pitch (i.e. the distance between adjacent trenches), the aspect ratio of the trenches, and the amount of liner 714 to be removed. The angle, ϕ_1 , used in FIG. 7A is relatively large. FIG. 7B shows a workpiece 700 having trenches
30 710 which are positioned much closer together than those in FIG. 7A. Consequently, the angle, ϕ_2 , that is used to etch the proper

amount of liner 714 from the sidewalls 711 is much smaller than ϕ_1 . The apparatus disclosed herein is able to create this desired angle for reactive neutrals through the use of the neutral species channels.

5

The embodiments described above in the present application may have many advantages. First, directed reactive ion etching may be more effective and efficient when both charged ions and reactive neutrals contact the surface to the charged. The
10 extraction angle of reactive neutrals may be precisely controlled through the use of neutral species channels in a manner that may not be possible using conventional techniques. This precise extraction angle control allows etching of densely packed features. In fact, in certain embodiments, the time to
15 etch the sidewall of a trench may be reduced by an order of magnitude or more by being able to precisely direct the reactive neutrals to the desired locations.

The present disclosure is not to be limited in scope by the
20 specific embodiments described herein. Indeed, other various embodiments of and modifications to the present disclosure, in addition to those described herein, will be apparent to those of ordinary skill in the art from the foregoing description and accompanying drawings. Thus, such other embodiments and
25 modifications are intended to fall within the scope of the present disclosure. Furthermore, although the present disclosure has been described herein in the context of a particular implementation in a particular environment for a particular purpose, those of ordinary skill in the art will
30 recognize that its usefulness is not limited thereto and that the present disclosure may be beneficially implemented in any

number of environments for any number of purposes. Accordingly, the claims set forth below should be construed in view of the full breadth and spirit of the present disclosure as described herein.

What is claimed is:

1. A workpiece processing apparatus, comprising:

5 a plasma generator;
 a plasma chamber; and
 an extraction plate having a first aperture and a second
aperture;

10 wherein charged ions are extracted through the first
aperture at a first selected extraction angle, and reactive
neutrals are passed through the second aperture at a second
selected extraction angle, where the second aperture is
different than the first aperture.

15 2. The workpiece processing apparatus of claim 1, wherein the
second aperture comprises a suppressor to minimize charged ions
passing through the second aperture.

20 3. The workpiece processing apparatus of claim 2, wherein the
suppressor comprises an electrically biased conductive grid
disposed in the second aperture.

25 4. The workpiece processing apparatus of claim 2, wherein the
suppressor comprises an electrically biased cup disposed around
second aperture.

5. The workpiece processing apparatus of claim 2, wherein the
suppressor comprises a sieve to neutralize charged ions entering
the second aperture.

30

6. The workpiece processing apparatus of claim 1, wherein the second selected extraction angle is determined by a tilt of the second aperture relative to a plane orthogonal to the extraction plate and wherein an angular distribution of reactive neutrals about the second selected extraction angle is determined by an aspect ratio of the second aperture, defined as a length of the second aperture through the extraction plate divided by a height of the second aperture.

7. The workpiece processing apparatus of claim 1, wherein a blocker is disposed in the plasma chamber and wherein the second selected extraction angle and an angular distribution of reactive neutrals about the second selected extraction angle is determined by a width of the second aperture, a width of the blocker and a distance between the blocker and the second aperture.

8. The workpiece processing apparatus of claim 1, wherein the reactive neutrals are created in a remote neutral species generator, different from the plasma chamber, and are transported to the second aperture.

9. A workpiece processing apparatus, comprising:

a plasma generator;

a plasma chamber; and

an extraction plate, through which charged ions and reactive neutrals are extracted,

wherein the workpiece processing apparatus uses a first mechanism to extract charged ions from the plasma chamber through an extraction aperture disposed in the extraction plate at a first selected extraction angle and uses a second mechanism

to extract reactive neutrals from the plasma chamber at a second selected extraction angle.

10. The workpiece processing apparatus of claim 9, wherein the
5 first mechanism comprises plasma sheath modulation or electric fields proximate the extraction aperture and wherein the second mechanism comprises geometric configuration of a neutral species channel.

10 11. The workpiece processing apparatus of claim 10, wherein the neutral species channel is disposed in the extraction plate.

12. The workpiece processing apparatus of claim 10, wherein the
neutral species channel is disposed in a blocker disposed within
15 the plasma chamber proximate the extraction aperture.

13. A workpiece processing apparatus, comprising:
a plasma generator;
a plasma chamber; and
20 an extraction plate comprising an extraction aperture;
wherein the workpiece processing apparatus uses plasma sheath modulation or electric fields to extract charged ions through the extraction aperture as an ion beam at a first selected extraction angle; and
25 wherein reactive neutrals are passed through a neutral species channel at a second selected extraction angle.

14. The workpiece processing apparatus of claim 13, wherein the
neutral species channel is disposed in the extraction plate.

30

15. The workpiece processing apparatus of claim 13, wherein the neutral species channel is disposed in a blocker disposed within the plasma chamber proximate the extraction aperture.

1/10

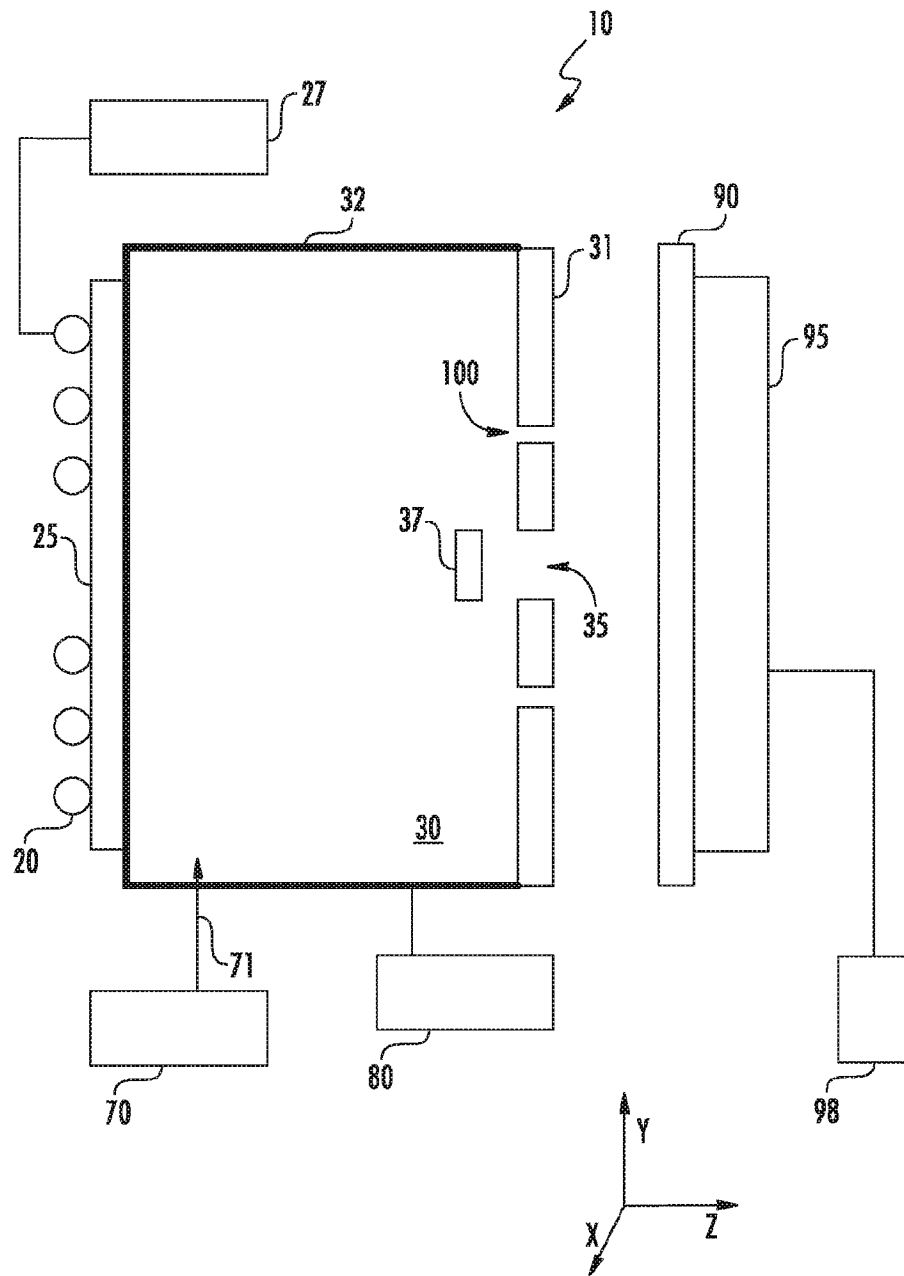


FIG. 1

2/10

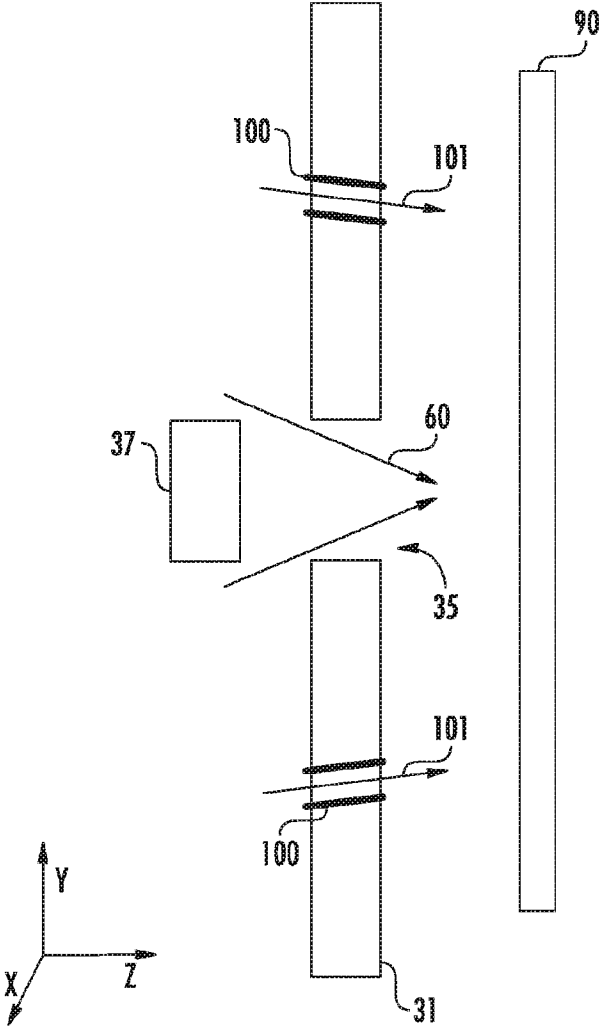


FIG. 2

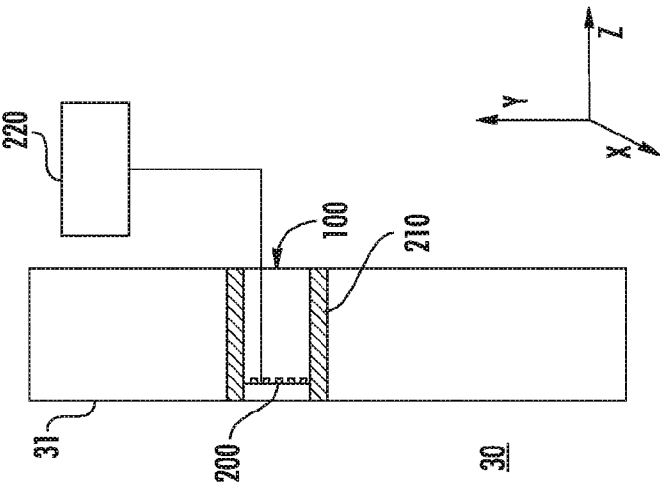


FIG. 3A

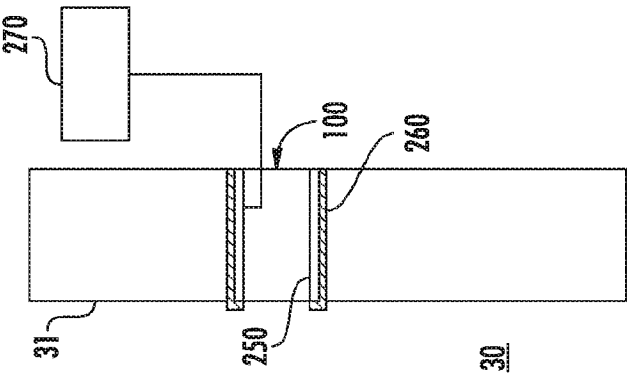


FIG. 3B

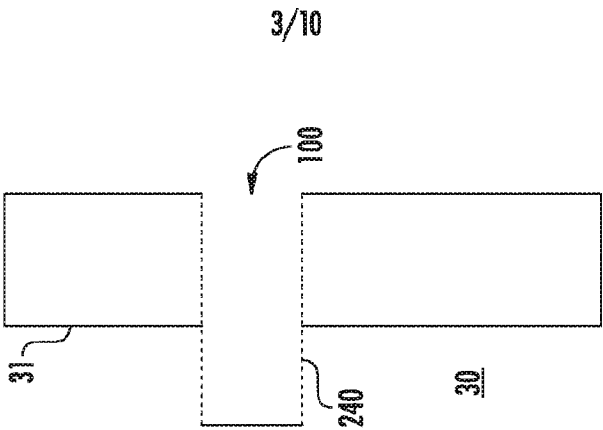


FIG. 3C

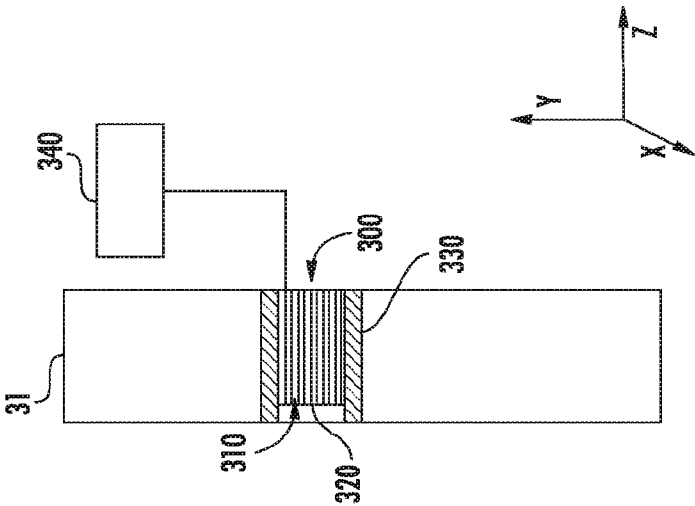


FIG. 4A

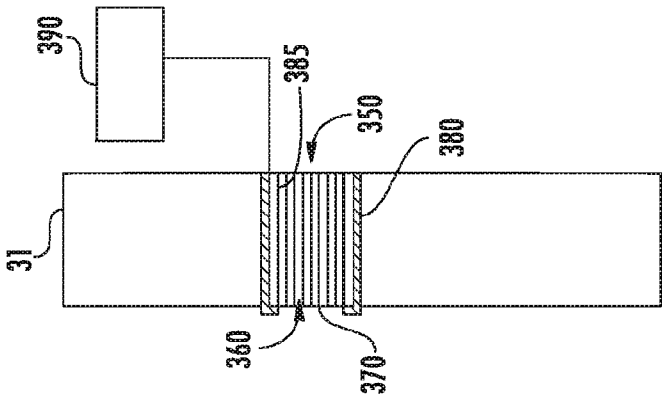


FIG. 4B

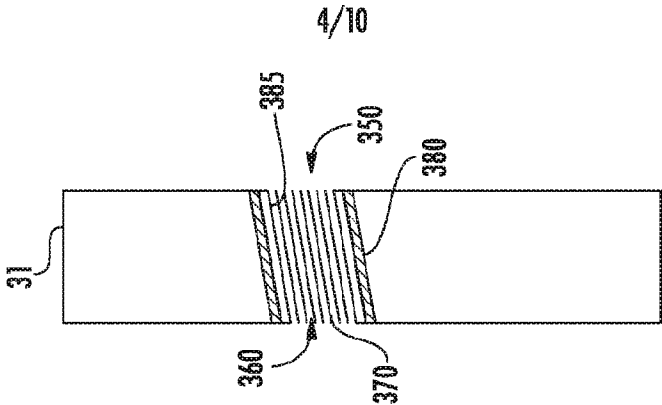


FIG. 4C

5/10

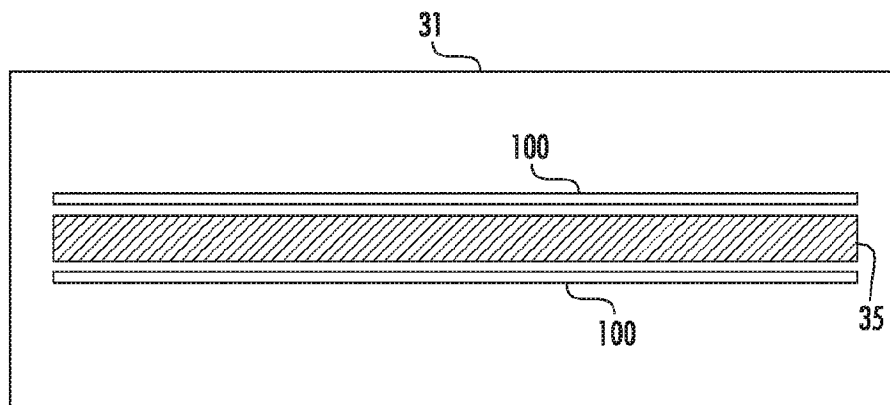


FIG. 5A

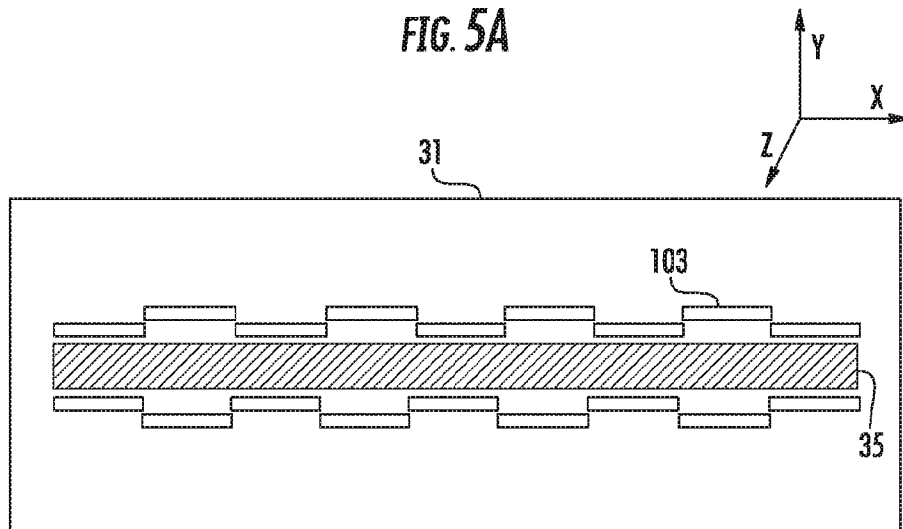


FIG. 5B

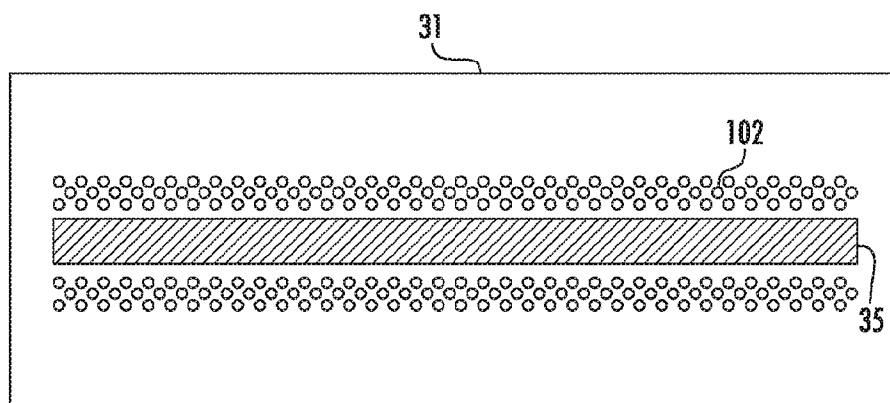


FIG. 5C

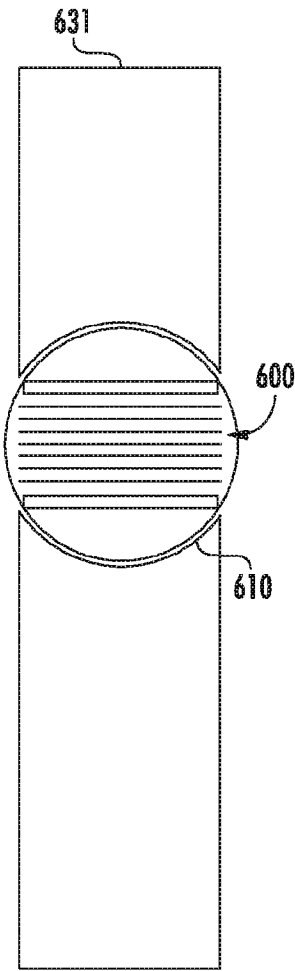


FIG. 6A

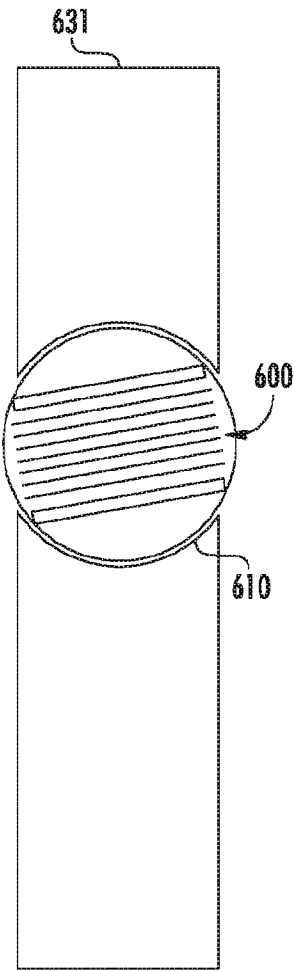


FIG. 6B

7/10

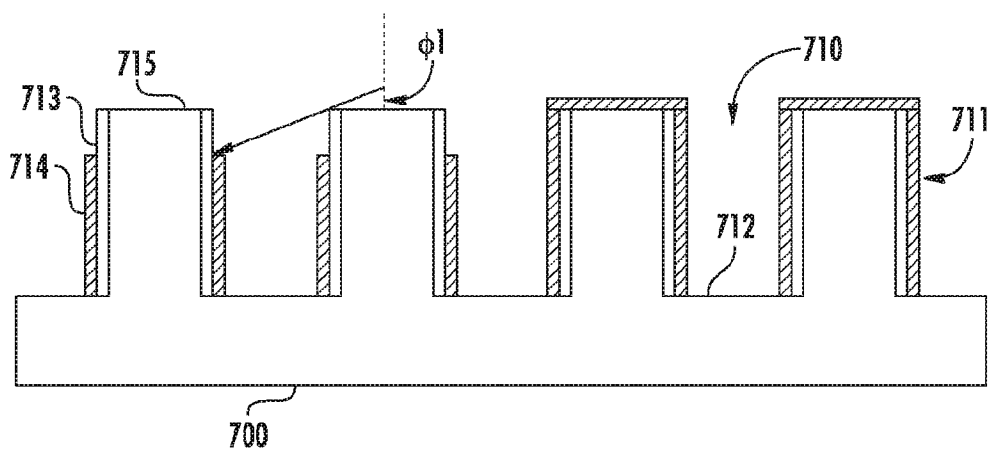


FIG. 7A

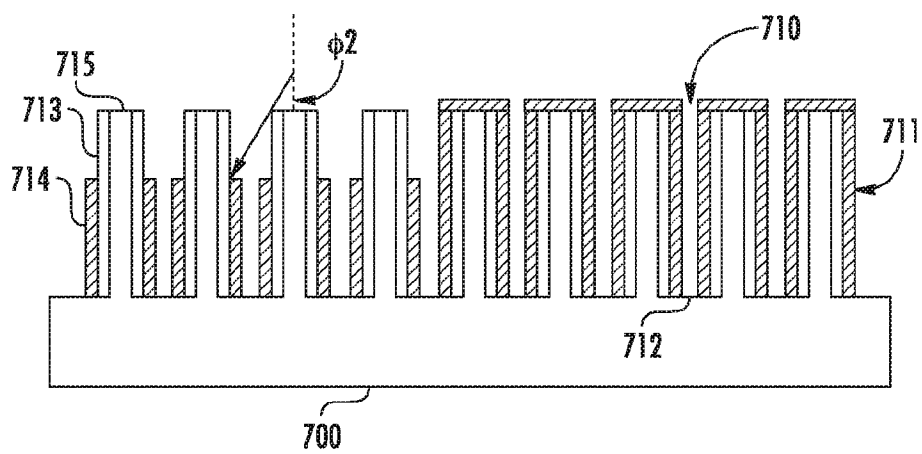


FIG. 7B

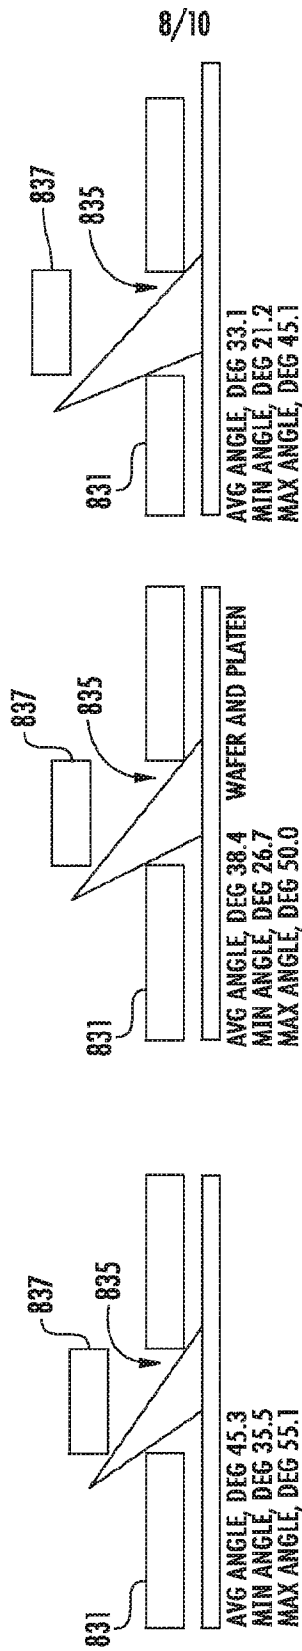
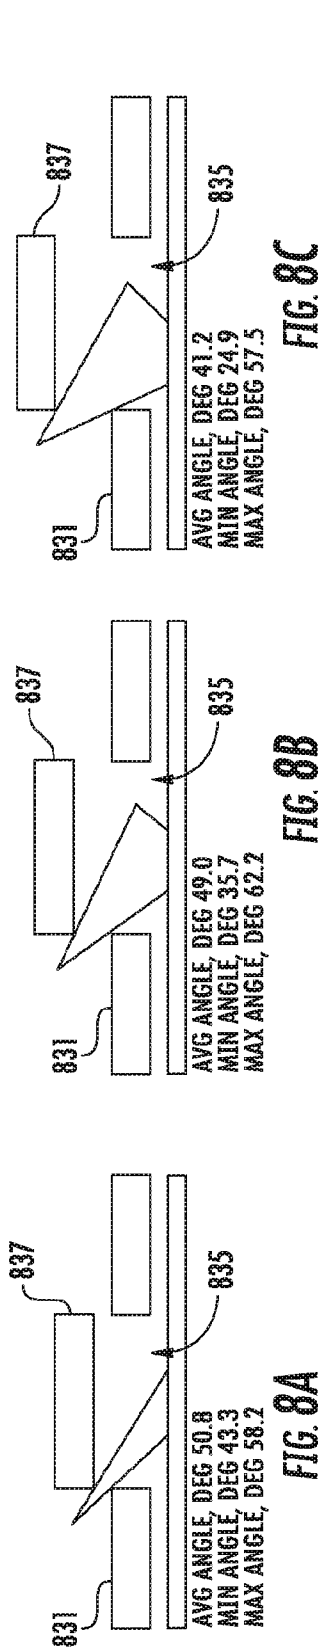


FIG. 8C

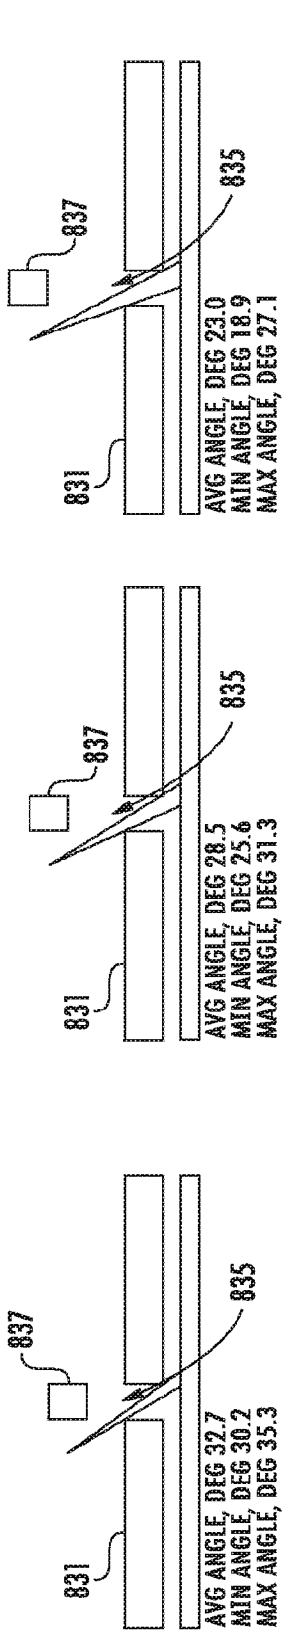


FIG. 8E

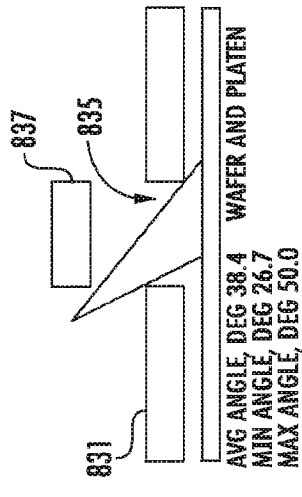
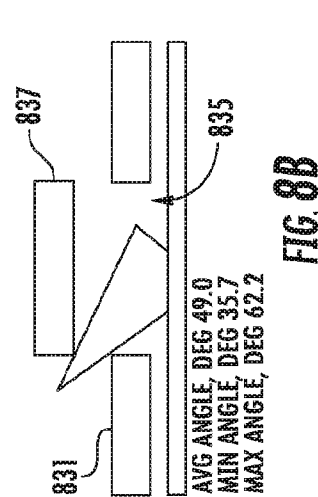


FIG. 8I

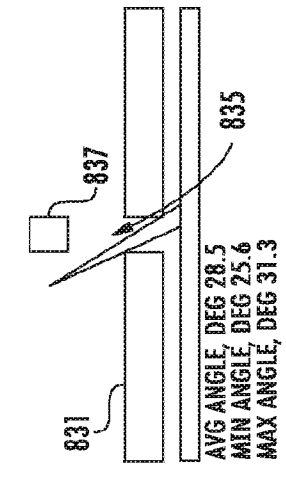


FIG. 8K



9/10

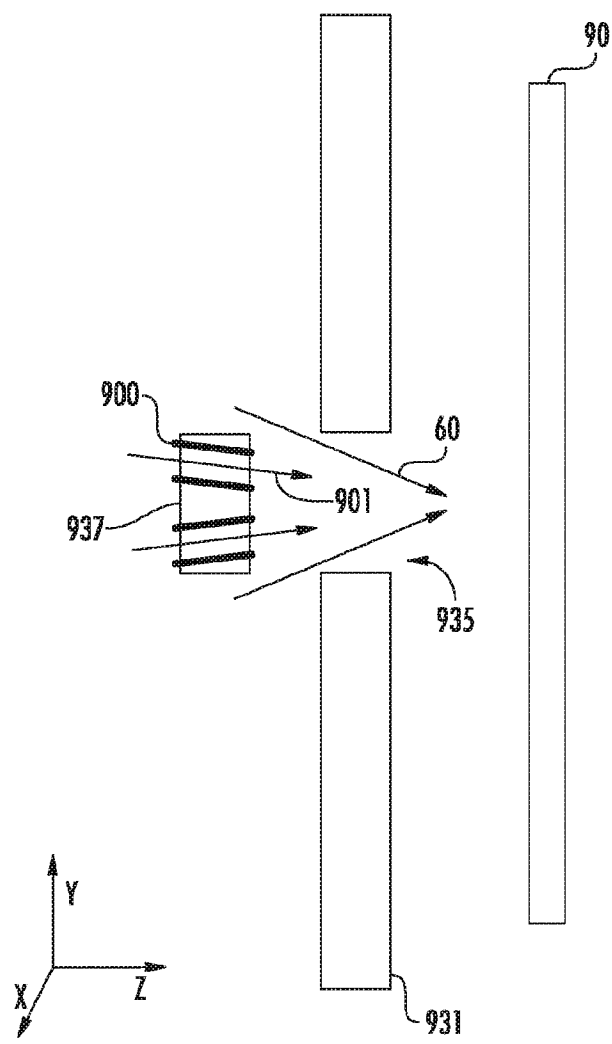


FIG. 9

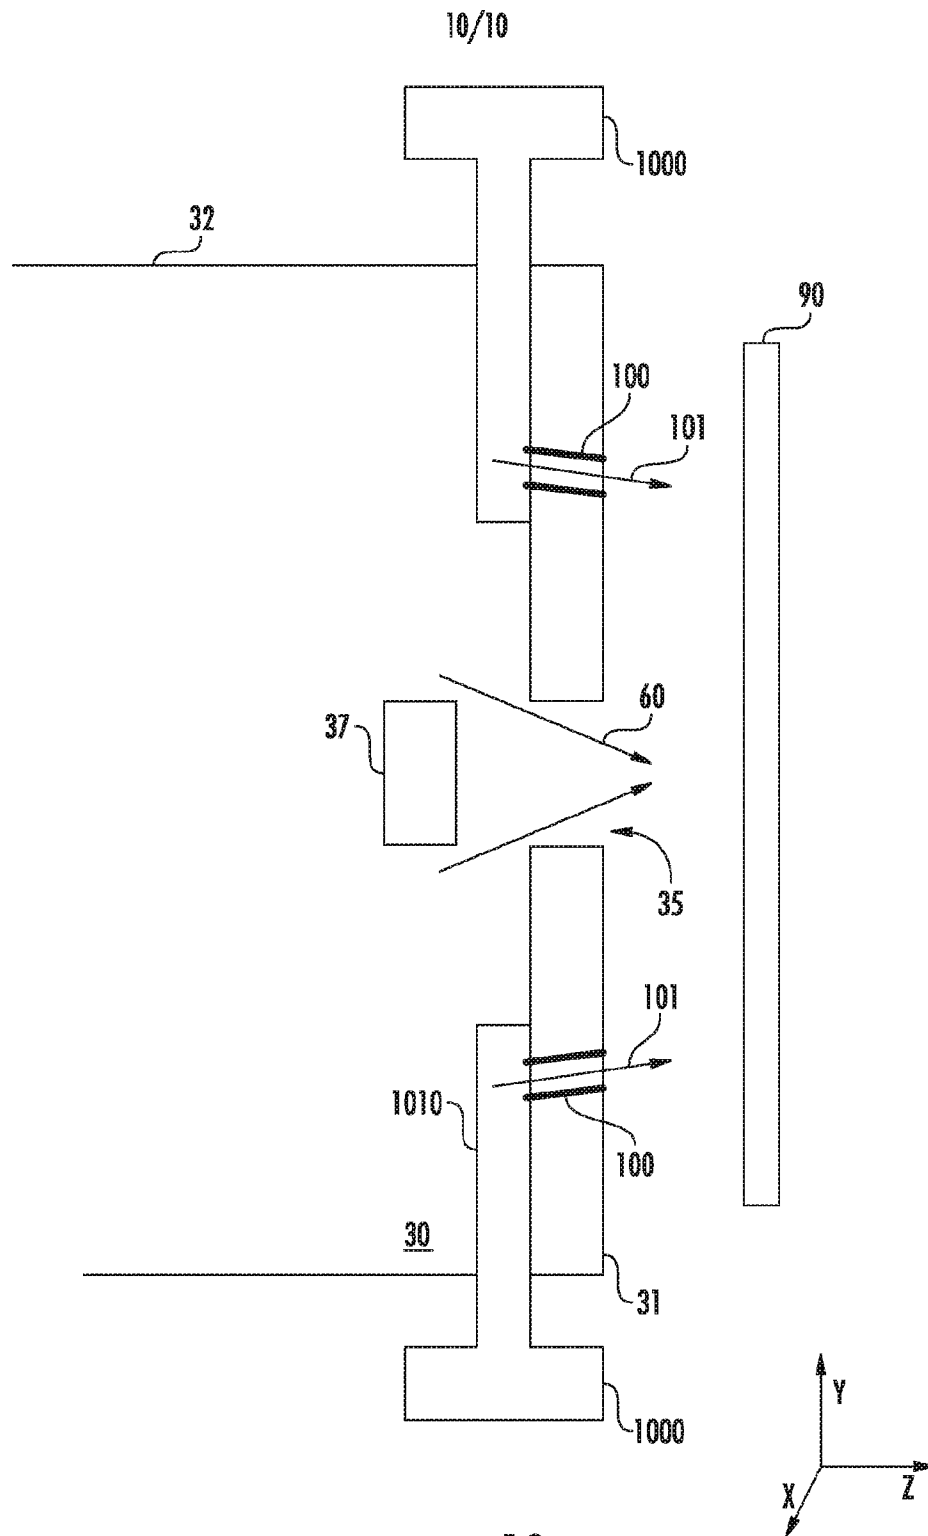


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2017/046207**A. CLASSIFICATION OF SUBJECT MATTER****H01J 37/305(2006.01)i, H01J 37/304(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01J 37/305; H01L 21/311; H01L 21/3213; G21K 1/14; H05H 3/06; C23C 16/50; G21K 1/00; B44C 1/22; C23C 16/458; H01J 37/304

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: ion, neutral, plasma, chamber, angle

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2014-0034611 A1 (VARIAN SEMICONDUCTOR EQUIPMENT ASSOCIATES, INC.) 06 February 2014 See paragraphs [0055], [0061]–[0075], [0094], [0109], [0132]; and figures 2, 3, 8–10, 22, 28A.	1–15
Y	US 2015-0197853 A1 (TOKYO ELECTRON LIMITED et al.) 16 July 2015 See paragraphs [0033], [0042], [0049], [0050]; claims 1, 3; and figures 1, 2, 7.	1–15
Y	US 2016-0240389 A1 (APPLIED MATERIALS, INC.) 18 August 2016 See paragraphs [0049], [0050]; and figure 7.	2–5
A	US 2014-0272179 A1 (VARIAN SEMICONDUCTOR EQUIPMENT ASSOCIATES, INC.) 18 September 2014 See paragraphs [0038]–[0048]; claims 1–11; and figures 3–6.	1–15
A	US 2008-0164819 A1 (SUNG-WOOK HWANG et al.) 10 July 2008 See paragraphs [0028]–[0053]; claims 1–14; and figures 1–5.	1–15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 November 2017 (22.11.2017)

Date of mailing of the international search report

22 November 2017 (22.11.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea




Facsimile No. +82-42-481-8578

Authorized officer

KIM, Sung Gon

Telephone No. +82-42-481-8746



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/046207

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014-0034611 A1	06/02/2014	CN 102422389 A	18/04/2012
		CN 102422389 B	22/10/2014
		CN 102422722 A	18/04/2012
		CN 102422722 B	08/10/2014
		CN 102428762 A	25/04/2012
		CN 102428762 B	08/10/2014
		CN 102439683 A	02/05/2012
		CN 102439683 B	30/09/2015
		JP 2012-523120 A	27/09/2012
		JP 2012-523122 A	27/09/2012
		JP 2012-523123 A	27/09/2012
		JP 2013-525939 A	20/06/2013
		JP 5594547 B2	24/09/2014
		JP 5643820 B2	17/12/2014
		JP 5704577 B2	22/04/2015
		KR 10-1585519 B1	14/01/2016
		KR 10-1668822 B1	24/10/2016
		KR 10-1707563 B1	16/02/2017
		KR 10-2011-0134493 A	14/12/2011
		KR 10-2012-0085654 A	01/08/2012
		KR 10-2017-0019483 A	21/02/2017
		TW 201044921 A	16/12/2010
		US 2010-0252531 A1	07/10/2010
		US 2010-0255665 A1	07/10/2010
		US 2010-0255683 A1	07/10/2010
		US 2012-0111834 A1	10/05/2012
		US 7767977 B1	03/08/2010
		US 8101510 B2	24/01/2012
		US 8603591 B2	10/12/2013
		US 8623171 B2	07/01/2014
		US 8664098 B2	04/03/2014
		US 8858816 B2	14/10/2014
		WO 2010-114961 A2	07/10/2010
		WO 2010-114961 A3	10/02/2011
		WO 2010-115110 A2	07/10/2010
		WO 2010-115110 A3	13/01/2011
		WO 2010-115114 A2	07/10/2010
		WO 2010-115114 A3	13/01/2011
		WO 2011-155917 A1	15/12/2011
US 2015-0197853 A1	16/07/2015	JP 2015-134943 A	27/07/2015
		JP 5908001 B2	26/04/2016
		KR 10-1658304 B1	22/09/2016
		KR 10-2015-0085793 A	24/07/2015
		US 2017-0253972 A1	07/09/2017
US 2016-0240389 A1	18/08/2016	CN 102918635 A	06/02/2013
		JP 2013-529391 A	18/07/2013
		KR 10-2013-0066636 A	20/06/2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/046207

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		SG 185514 A1	28/12/2012
		TW 201207934 A	16/02/2012
		US 2011-0294300 A1	01/12/2011
		US 9324576 B2	26/04/2016
		US 9754800 B2	05/09/2017
		WO 2011-149638 A2	01/12/2011
		WO 2011-149638 A3	15/03/2012
US 2014-0272179 A1	18/09/2014	US 9288889 B2	15/03/2016
US 2008-0164819 A1	10/07/2008	CN 101365290 A	11/02/2009
		DE 102008003943 A1	10/07/2008
		JP 2008-171819 A	24/07/2008
		KR 10-0836765 B1	10/06/2008