

(19) **DANMARK**



Patent- og  
Varemærkestyrelsen

(10) **DK/EP 3975792 T3**

(12) **Oversættelse af  
europæisk patentskrift**

- 
- (51) Int.Cl.: **A 45 C 7/00 (2006.01)**                      **A 45 C 1/02 (2006.01)**                      **A 45 C 11/00 (2006.01)**  
**A 45 C 13/00 (2006.01)**                      **A 45 C 13/10 (2006.01)**                      **B 65 D 33/16 (2006.01)**  
**B 65 D 33/24 (2006.01)**                      **B 65 D 33/25 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2025-01-13**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2024-10-09**
- (86) Europæisk ansøgning nr.: **20834136.2**
- (86) Europæisk indleveringsdag: **2020-04-02**
- (87) Den europæiske ansøgnings publiceringsdag: **2022-04-06**
- (86) International ansøgning nr.: **US2020026284**
- (87) Internationalt publikationsnr.: **WO2021002906**
- (30) Prioritet:    **2019-07-04 US 201916503519**                      **2020-03-18 US 202016822245**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Poketins LLC, 121 N Post Oak Lane, 1902, Houston, TX 77024, USA**  
**Kuri, Isabel, 121 N Post Oak Lane, 1902, Houston, TX 77024, USA**
- (72) Opfinder: **KURI, Isabel, 121 N Post Oak Lane, 1902, Houston, TX 77024, USA**
- (74) Fuldmægtig i Danmark: **Budde Schou A/S, Dronningens Tværgade 30, 1302 København K, Danmark**
- (54) Benævnelse: **SYSTEMER OG FREMGANGSMÅDER TIL EN KOMPRIMERBAR POSE**
- (56) Fremdragne publikationer:  
**EP-B1- 1 921 941**  
**JP-A- 2010 070 227**  
**US-A1- 2003 000 784**  
**US-A1- 2007 074 941**  
**US-A1- 2007 194 090**  
**US-A1- 2007 267 262**  
**US-A1- 2011 048 882**  
**US-A1- 2011 272 231**  
**US-A1- 2019 142 123**



# DESCRIPTION

Description

## CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims a benefit of priority as a continuation in part under 35 U.S.C. §119 to both US 16/822,245 filed on March 18, 2020 that is a continuation of US 16/503519 filed on July 4, 2019.

## BACKGROUND INFORMATION

### Field of the Disclosure

[0002] Examples of the present disclosure are related to systems and methods associated with a compressible pouch. More particularly, embodiments relate to a compressible pouch with a flap, rear shell, front shell, and a compressible layer positioned between the rear shell and the front shell, wherein a zipper is configured to apply pressure to towards the front shell to squeeze a compartment within the front shell.

### Background

[0003] Bags are universal in most cultures due to everyone needing to carry objects, protect items, or carry several things together. As such, a wide variety of bags, as the one disclosed in the document EP 1 921 941, have evolved to meet given standards. When deciding what type of bag to use, most users will be required to use larger bags that can be cumbersome to carry around, but can hold more objects. Unfortunately, many bags take up a considerable amount of space, even if folded. Furthermore, when utilizing a larger bag to store objects within the bag, the objects may move around. This may damage the objects. Accordingly, needs exist for more effective and efficient methods and systems for a compression pouch with an rear shell and a front shell that are coupled together with a compressible layer, wherein the compressible layer is configured to open and close via a zipper.

## SUMMARY

**[0004]** Embodiments are directed towards a compression pouch with a flap, rear shell, compressible layer, and front shell. The compression pouch may be a small refillable pouch, case, storage container, etc. that is configured to store various objects, such as feminine pads, diapers, liners, cosmetics, wallet and keys, other essentials, etc. The compression pouch may allow for easy access of objects without removing the compressive forces applied against the rear shell and front shell. This may allow for a compartment within the front shell.

**[0005]** The flap has a first end that is configured to be permanently coupled to a proximal surface of the rear shell, and a second end that is configured to be selectively coupled to a distal surface of the front shell. Responsive to decoupling the second end of the flap to the distal surface of the front shell, a compartment within the front shell may be accessed. Further, the compressive zipper may be opened and closed when the second end of the flap is decoupled from the front shell. Responsive to coupling the second end of the flap to the distal surface of the front shell, the compartment may be sealed.

**[0006]** The rear shell may be a piece of fabric that is configured to be a rear sidewall of the compressible pouch. An outer surface of the rear shell may be coupled with the first end of the flap, and an inner surface of the rear shell may be coupled with, and positioned adjacent to, the compression layer.

**[0007]** The compression layer is positioned between the rear shell and the front shell. The compression layer may be formed of, and filled with, compressible material, which is a different material, or the same material with thinner sidewalls, than the rear shell or front shell. The compression layer is configured to apply compressive forces against the front shell to shrink a volume of a compartment within the front shell. The compression layer includes a zipper that is configured to be accessed responsive to decoupling the second end of the flap and the distal surface of the front shell. Responsive to opening the flap, the zipper may be exposed. When the zipper is exposed, the compressive forces may be released by opening the zipper or retained.

**[0008]** The front shell may be positioned adjacent to, and in front of, the compression layer. The front shell may include a coupling mechanism and a compartment. The coupling mechanism may be configured to be coupled with the flap to allow objects to be inserted into and removed from the compartment. Responsive to decoupling the flap from the coupling mechanism the compartment may be exposed. The compartment may be positioned on the outer surface of the front shell, and have an opening on the outer surface and top surface of the outer shell. The compartment may be configured to allow users to remove objects from the compressible pouch without removing the compressive forces against the front shell.

**[0009]** In embodiments, the upper and lower edges of the front shell, compression layer, and/or the rear shell may be compressed of or coated with stronger and/or thicker material that shields components of the compression pouch from the elements.

**[0010]** These, and other, aspects of the invention will be better appreciated and understood

when considered in conjunction with the following description and the accompanying drawings. The following description, while indicating various embodiments of the invention and numerous specific details thereof, is given by way of illustration and not of limitation. Many substitutions, modifications, additions or rearrangements may be made within the scope of the invention, and the invention includes all such substitutions, modifications, additions or rearrangements as long as they fall within the scope of the claims.

**BRIEF DESCRIPTION OF THE DRAWINGS**

**[0011]** Non-limiting and non-exhaustive embodiments of the present invention are described with reference to the following figures, wherein like reference numerals refer to like parts throughout the various views unless otherwise specified.

FIGURE 1 depicts a front view of a compression pouch, according to an embodiment.

FIGURE 2 depicts a rear view of a compression pouch, according to an embodiment.

FIGURE 3 depicts a front view of an alternative compression pouch, according to an embodiment.

FIGURE 4 depicts a rear view of an alternative compression pouch, according to an embodiment.

FIGURE 5 depicts a method of using a compression pouch to store objects, according to an embodiment.

**[0012]** Corresponding reference characters indicate corresponding components throughout the several views of the drawings. Skilled artisans will appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help to improve understanding of various embodiments of the present disclosure. Also, common but well-understood elements that are useful or necessary in a commercially feasible embodiment are often not depicted in order to facilitate a less obstructed view of these various embodiments of the present disclosure.

**DETAILED DESCRIPTION**

**[0013]** In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present embodiments. It will be apparent, however, to one having ordinary skill in the art that the specific detail need not be employed to practice the present embodiments. In other instances, well-known materials or methods have not been

described in detail in order to avoid obscuring the present embodiments.

**[0014]** FIGURE 1 depicts one embodiment of a compression pouch 100, according to an embodiment. Compression pouch 100 includes a flap 110, rear shell 120, compressible layer 130, and front shell 140.

**[0015]** Flap 110 has a first end that is configured to be permanently coupled to a proximal surface of rear shell 120, and a first coupling mechanism 112 that is configured to be selectively coupled to a second coupling mechanism 144 positioned on front shell 140. First coupling mechanism 112 may be any type of coupling mechanism that can selectively couple with second coupling mechanisms 144, such as buttons, hoop and loops, buckles, etc. Responsive to decoupling first coupling mechanism 112 and second coupling mechanism 144, a compartment 142 positioned on front shell 140. Responsive to coupling first coupling mechanism 112 and second coupling mechanism 144, compartment 142 may be sealed. In embodiments, flap 110 may have a body that is substantially rectangular in shape with a triangular shape end or be rectangular in shape.

**[0016]** Rear shell 120 may be a piece of fabric that is configured to be a rear sidewall of compressible pouch 100. An outer surface of rear shell 120 may be coupled with the first end of flap 110, and an inner surface of rear shell 120 may be coupled with a positioned adjacent with compressible layer 130.

**[0017]** Compressible layer 130 is positioned between rear shell 120 and front shell 140.

**[0018]** Compressible layer 130 may be comprised of a compressible material, such as compressible foam, nylon, rubber, etc. In embodiments, compressible layer 130 may be formed of a different material than rear shell 120 or front shell 140. Compressible layer 130 is configured to apply forces against front shell 140 to increase or reduce the volume associated with compartment 142. Compressible layer 130 may be formed of a first layer and second layer, which are coupled together in part via a zipper on a zipper track 132. The first layer of compressible layer 130 may be positioned adjacent to rear shell 120, and the second layer positioned adjacent to front shell 140. The zipper may be configured to move on zipper track 132 to increase or decrease the compression forces created by compressible layer 130 against compartment 142. In embodiments, responsive to fully closing zipper on zipper track 132 the maximum compression forces may be applied against compartment 142, which may reduce the volume of compartment 142. Responsive to fully opening zipper on zipper track 132 minimal compression forces may be applied against compartment 142, which may not reduce the volume of compartment 142. In embodiments, the zipper track 132 may be configured to have a first end point 134 on an upper surface of compressible layer 130, rotate three hundred sixty degrees and have a second end point 136 on a sidewall of compressible layer 130. In embodiments, second end point 136 may be vertically positioned below a lower edge of compartment 142. By having the zipper track 132 fully circumnavigate the boundary of compressible layer 130, the compression forces generated by compressible layer 130 may be maximized and retained. Due to the positioning of zipper track 132 behind compartment 142

and in front of rear shell 120, compartment 142 may be accessed without modifying the zipper placement along track 132. In implementations, first end point 134 may be a starting position of the zipper on track 132 when the compression layer 130 is fully closed, and the zipper moves towards second end point 136 to open the compression layer 130. Second end point 136 may be a starting position of the zipper on track 132 when the compression layer 130 is fully opened, and the zipper moves towards first end point 136 to close the compression layer. This may enable flap 110 to cover the zipper when compression layer 130 is closed.

**[0019]** Also, by having the second end point 136 of zipper track 132 on a sidewall of compression layer 130 that is not covered by flap 110, the placement of the zipper and relative compression forces may be adjusted even while flap 110 is positioned over compartment 142 and the start point 132 of the zipper. Additionally, by positioning second end point 136 of zipper track 132 on a lower portion of the sidewall of compressible layer 130, the compression forces may be angled towards the opening of compartment 142, assisting users remove objects from compartment 142.

**[0020]** Front shell 140 may be positioned adjacent to, and in front of compression layer 130. Front shell 140 may include compartment 142 and second coupling mechanism 144. Compartment 142 may have an opening along an upper edge of front shell 140 and on an outer face of front shell 140. Compartment 142 may be configured to allow users to remove objects from compressible pouch 100 without removing the compressive forces against front shell 140. This may enable other objects positioned within compartment 142 to be secured in place. Second coupling mechanism 144 may be positioned between lower edges of compartment 142 and front shell 140, and may be configured to be coupled with first coupling mechanism 112. By positioning second coupling mechanism 144 below the lower edge of compartment 142, objects may be secured in place while first coupling mechanism 144 is secured to first coupling mechanism 112.

**[0021]** FIGURE 2 depicts a rear view of compression pouch 100, according to an embodiment. As depicted in FIGURE 2, compression pouch 100 may include a hem line 210, which extends across an outer surface of rear shell 120.

**[0022]** Further, a second zipper 220 may be positioned across the outer surface of rear shell 120. Second zipper 220 may be configured to open and close a second compartment embedded within rear shell 120. The second compartment may be independent from the compartment on the front shell.

**[0023]** FIGURE 3 depicts a front view of compression pouch 300 and FIGURE 4 depicts a rear view of compression pouch 300, according to an embodiment. Elements depicted in FIGURES 3 and 4 may be described above, and for the sake of brevity these elements may be omitted. As depicted in FIGURES 3 and 4, each face of compression pouch 300 may include an independent rear shell, compression layer, and front shell.

**[0024]** As further depicted in FIGURES 3 and 4, a flap layer 305 may be configured to be

sandwiched between inner surfaces of rear shells 120A and 120B, and extend away from the bodies of rear shells 120A and 120B. A first flap 310 may be configured to be positioned on a first end of flap layer 305, and a second flap 320 may be positioned on a second end of flap layer 305. First flap 310 may have a coupling mechanism 315 that is configured to be selectively coupled with a coupling mechanism 319 positioned on front shell 140A. Second flap 320 may have a second coupling mechanism 325 that is configured to be selectively coupled with a coupling mechanism 239 positioned on front shell 140B. As such, each face of compression pouch 300 may have an independent compartment 142A, 142B that is selectively coupled by an independent flap 310, 320, respectively. Further, each side has its own compression layer 130A, 130B that can independently control the compression forces applied to a respective compartment 142A, 142B. FIGURE 5 illustrates a method 500 for utilizing a compression pouch, according to an embodiment. The operations of method 500 presented below are intended to be illustrative. In some embodiments, method 500 may be accomplished with one or more additional operations not described, and/or without one or more of the operations discussed. Additionally, the order in which the operations of method 500 are illustrated in FIGURE 5 and described below is not intended to be limiting.

**[0025]** At operation 510, objects may be inserted into a compartment, wherein the compartment is positioned on a front shell of a compression pouch.

**[0026]** At operation 520, a zipper that circumnavigates a boundary of a compression layer may be closed. Responsive to closing the zipper, the compression layer may apply compression forces against the compartment to minimize a volume of the compartment.

**[0027]** At operation 530, a flap may be closed over top edges of a rear shell, the compression layer, and the front shell. This may secure the objects within the container.

**[0028]** At operation 540, the flap may be opened, exposing the top edges of the rear shell, the compression layer, and the front shell.

**[0029]** At operation 550, objects within the compartment may be removed without opening the zipper. Although the present technology has been described in detail for the purpose of illustration based on what is currently considered to be the most practical and preferred implementations, it is to be understood that such detail is solely for that purpose and that the technology is not limited to the disclosed implementations, but, on the contrary, is intended to cover modifications and equivalent arrangements that are within the scope of the appended claims. For example, it is to be understood that the present technology contemplates that, to the extent possible, one or more features of any implementation can be combined with one or more features of any other implementation.

**[0030]** Reference throughout this specification to "one embodiment", "an embodiment", "one example" or "an example" means that a particular feature, structure or characteristic described in connection with the embodiment or example is included in at least one embodiment of the present invention. Thus, appearances of the phrases "in one embodiment", "in an

embodiment", "one example" or "an example" in various places throughout this specification are not necessarily all referring to the same embodiment or example. Furthermore, the particular features, structures or characteristics may be combined in any suitable combinations and/or sub-combinations in one or more embodiments or examples. In addition, it is appreciated that the figures provided herewith are for explanation purposes to persons ordinarily skilled in the art and that the drawings are not necessarily drawn to scale.

**[0031]** The flowcharts and block diagrams in the flow diagrams illustrate the architecture, functionality, and operation of possible implementations of systems and methods according to various embodiments of the present invention. In this regard, each block in the flowcharts or block diagrams may represent a segment, which comprises one or more steps.

## **REFERENCES CITED IN THE DESCRIPTION**

### Cited references

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

### **Patent documents cited in the description**

- [US16822245B \[0001\]](#)
- [US16503519B \[0001\]](#)
- [EP1921941A \[0003\]](#)

**Patentkrav**

**1.** Kompressionspose (100) omfattende:

en bagerste skal (120);

en forreste skal (140) med et rum (142);

et kompressionslag (130) placeret mellem den forreste skal og den bagerste skal, hvor kompressionslaget er konfigureret til at påføre trykkræfter mod den forreste skal for at reducere rummets rumfang;

en lynlås konfigureret til at dreje tre hundrede og tres grader inden for et kompressionslag;

en klap (110) med en første ende, der er permanent koblet til den bagerste skal, og en anden ende der er konfigureret til selektivt at blive koblet til den forreste skal.

**2.** Kompressionspose ifølge krav 1, og som endvidere omfatter:

en første koblingsmekanisme (112) anbragt på klappen (110);

en anden koblingsmekanisme (144) anbragt på den forreste skal (140).

**3.** Kompressionspose ifølge krav 1, kendetegnet ved, at rummet er konfigureret til at blive blotlagt ved afkobling af klappen med den forreste skal.

**4.** Kompressionsposen ifølge krav 3, kendetegnet ved, at trykkræfterne mod den forreste skal fastholdes, når klappen kobles af den forreste skal.

**5.** Kompressionspose ifølge krav 4, hvor en lynlåsbanes (132) start er anbragt på en øvre kant af kompressionslaget, og en lynlåsbaneende (136) er anbragt på en sidevæg af kompressionslaget i en position under en nederste kant af rummet.

**6.** Kompressionspose ifølge krav 5, hvor rummet har en blotlagt flade og øvre kant.

**7.** Kompressionspose ifølge krav 6, hvor klappen er konfigureret til at dække

lynlåsbanens start og den øvre kant af rummet, når den første koblingsmekanisme er koblet til den anden koblingsmekanisme.

**8.** Kompressionspose ifølge krav 1, omfattende en flerhed af klapper koblet til et klaplegeme.

**9.** Kompressionspose ifølge krav 8, hvor flerheden af klapper er konfigureret til at blive koblet til modsatte flader af kompressionslegemet.

**10.** Kompressionspose ifølge krav 8, kendetegnet ved, at klaplegemet er anbragt mellem to bageste skaller, hvor de to bagerste skaller indbefatter den bageste skal.

**11.** Fremgangsmåde forbundet med en kompressionspose (100) omfattende: placering af et kompressionslag (130) mellem en forreste skal (140) og en bagerste skal (120),

lukning af kompressionslaget for at påføre trykkræfter mod frontkappen for at reducere et rumfang (142), hvor lukning af kompressionslaget omfatter flytning af en lynlås tre hundrede og tres grader inden for kompressionlaget; permanent sammenkobling af en klap (110) med den bagerste klaps første ende; og selektivt at koble en anden ende til den forreste skal.

**12.** Fremgangsmåde ifølge krav 11, og som endvidere omfatter: placering af en første koblingsmekanisme (112) på klappen; placering af en anden koblingsmekanisme (144) på den forreste skal.

**13.** Fremgangsmåde ifølge krav 11, og som endvidere omfatter: blotlæggelse af rummet ved at afkoble klappen med den forreste skal.

**14.** Fremgangsmåde ifølge krav 13, og som endvidere omfatter; fastholdelse af trykkræfterne mod den forreste skal, når klappen kobles af den forreste skal.

**15.** Fremgangsmåde ifølge krav 14, og som endvidere omfatter:

positionering af en lynlåsbanes start (132) på en øvre kant af komprimeringslaget og

positionering af en lynlåsbaneende (136) på en sidevæg af kompressionslaget ved en position under en nedre kant af rummet.

**16.** Fremgangsmåde ifølge krav 15, kendetegnet ved, at rummet har en blotlagt flade og øvre kant.

**17.** Fremgangsmåde ifølge krav 16, endvidere omfattende:

at dække, via klappen, lynlåsbanens start og den øvre kant af rummet, når den første koblingsmekanisme er koblet til den anden koblingsmekanisme.

**18.** Fremgangsmåde ifølge krav 11, omfattende en flerhed af klapper koblet til et klaplegeme.

**19.** Fremgangsmåde ifølge krav 11, hvor flerheden af klapper er konfigureret til at være koblet til modsatte flader af kompressionsposens legeme.

**20.** Fremgangsmåde ifølge krav 11, endvidere omfattende:

placering af klaplegemet mellem to bageste skaller, de to bageste skaller, herunder den bageste skal.

# DRAWINGS

Drawing

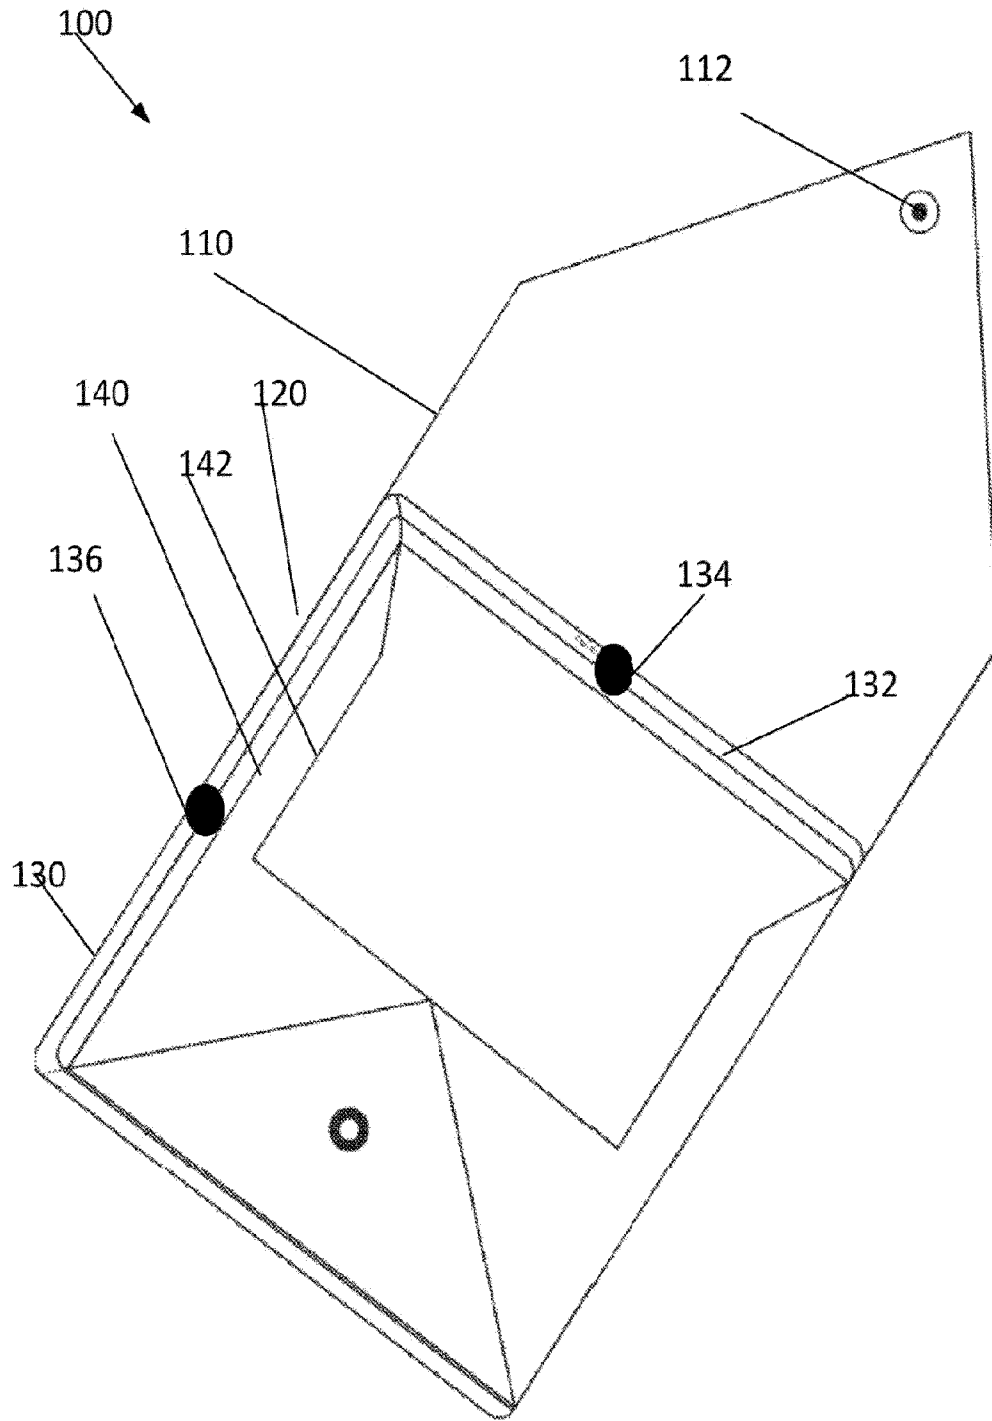


FIGURE 1



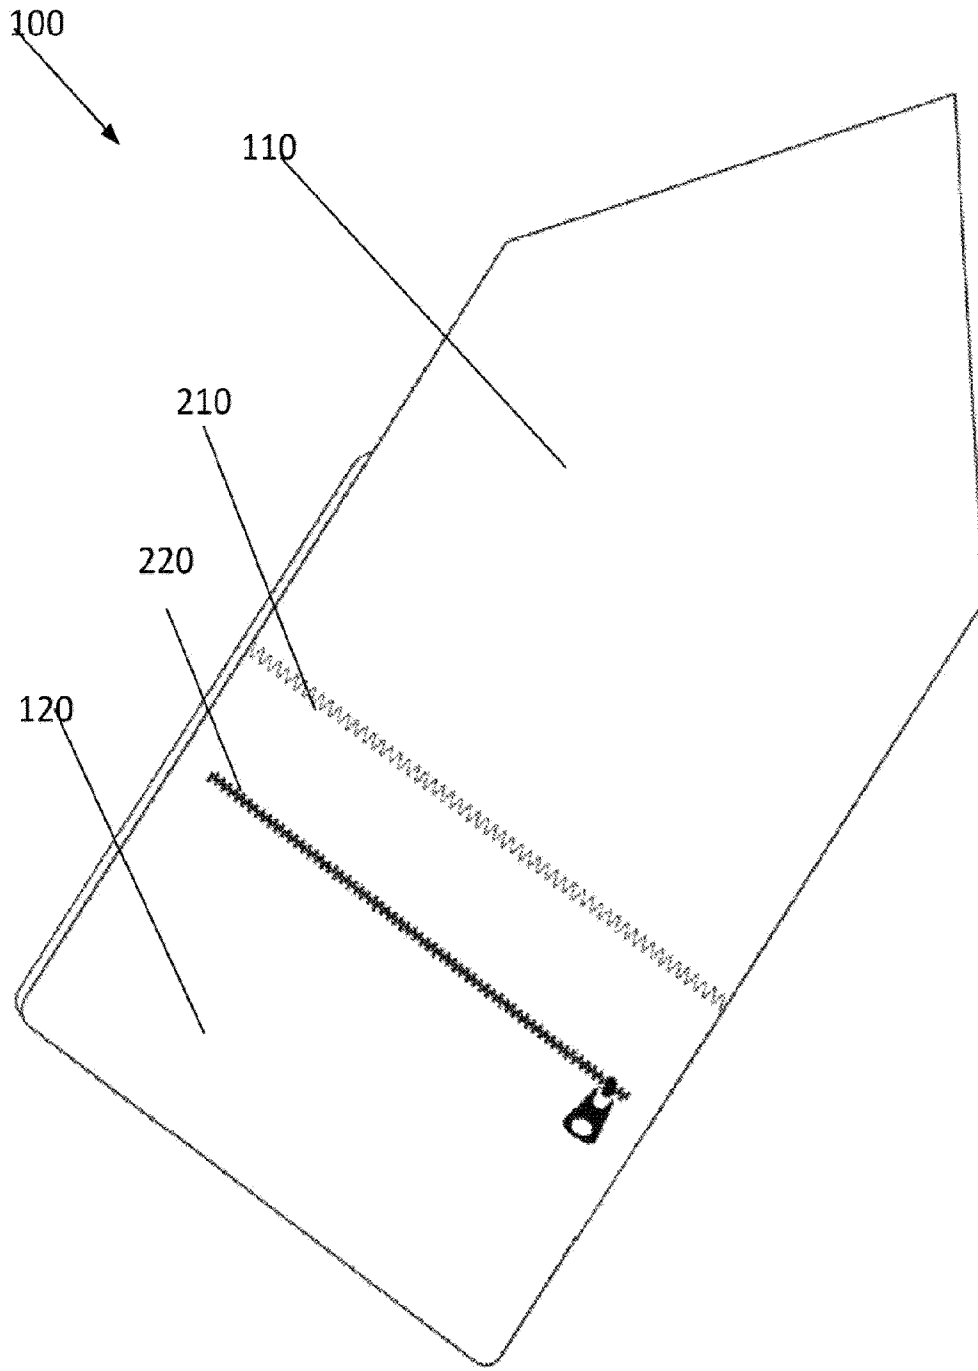


FIGURE 2

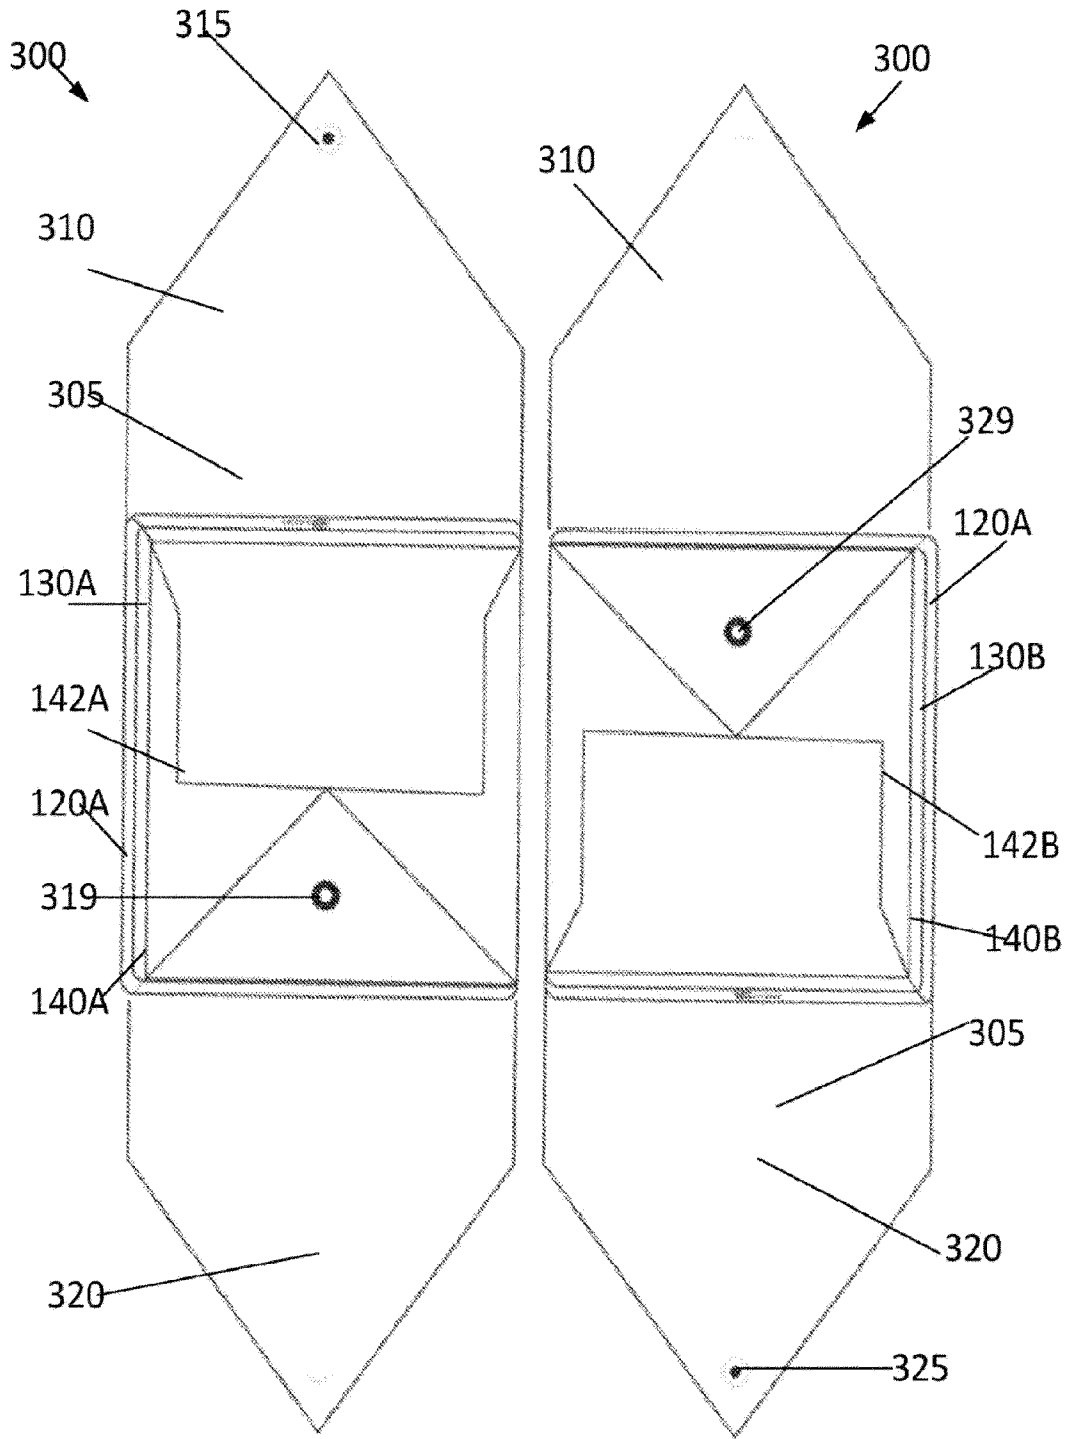


FIGURE 3

FIGURE 4

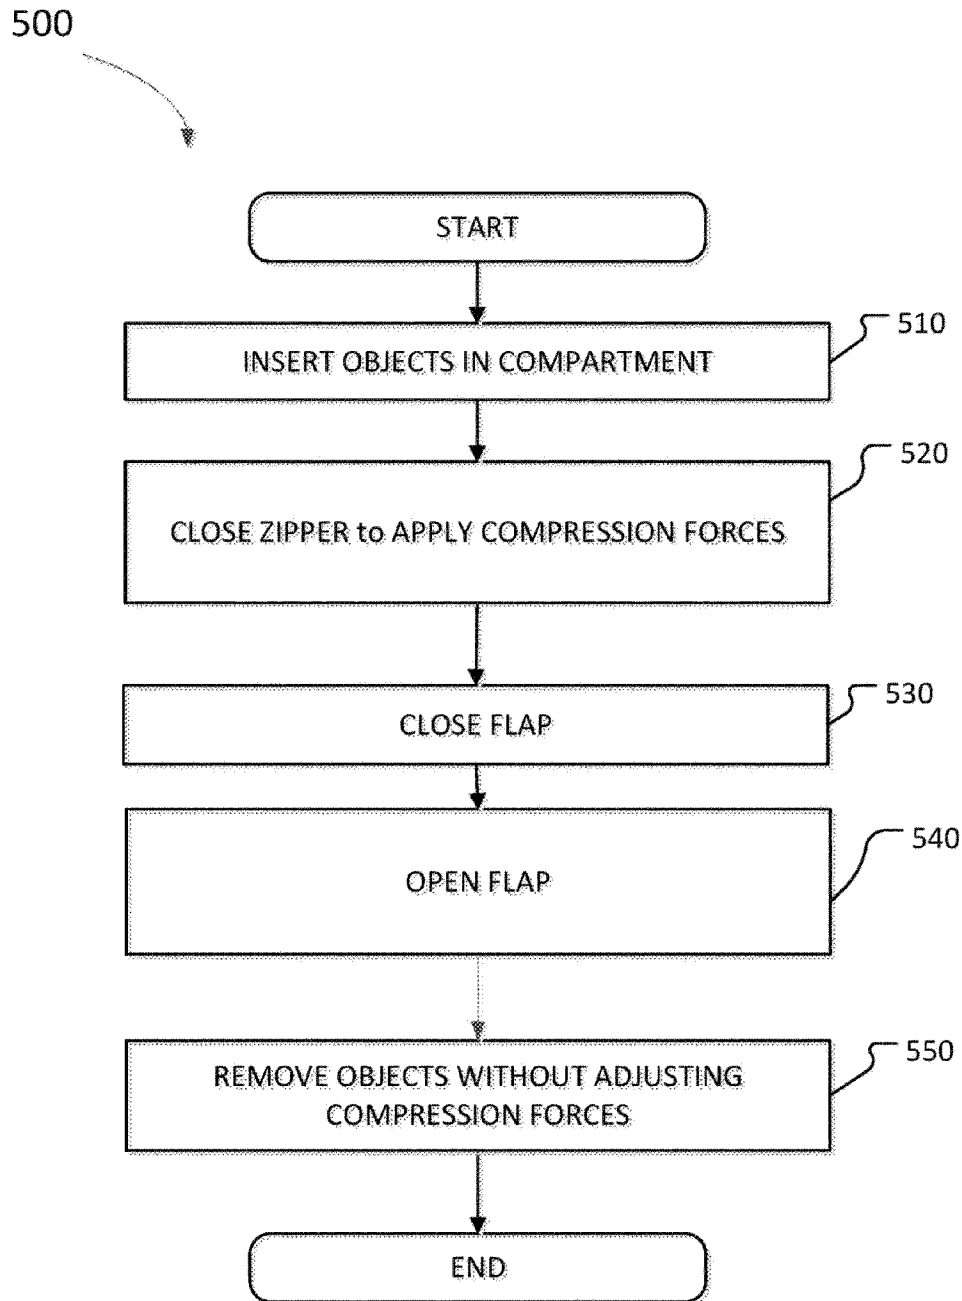


FIGURE 5