G. T. SHOLLEY.

NECKTIE HOLDER.

APPLICATION FILED JULY 30, 1917.

1,266,333. Patented May 14, 1918.

Fig. 1.

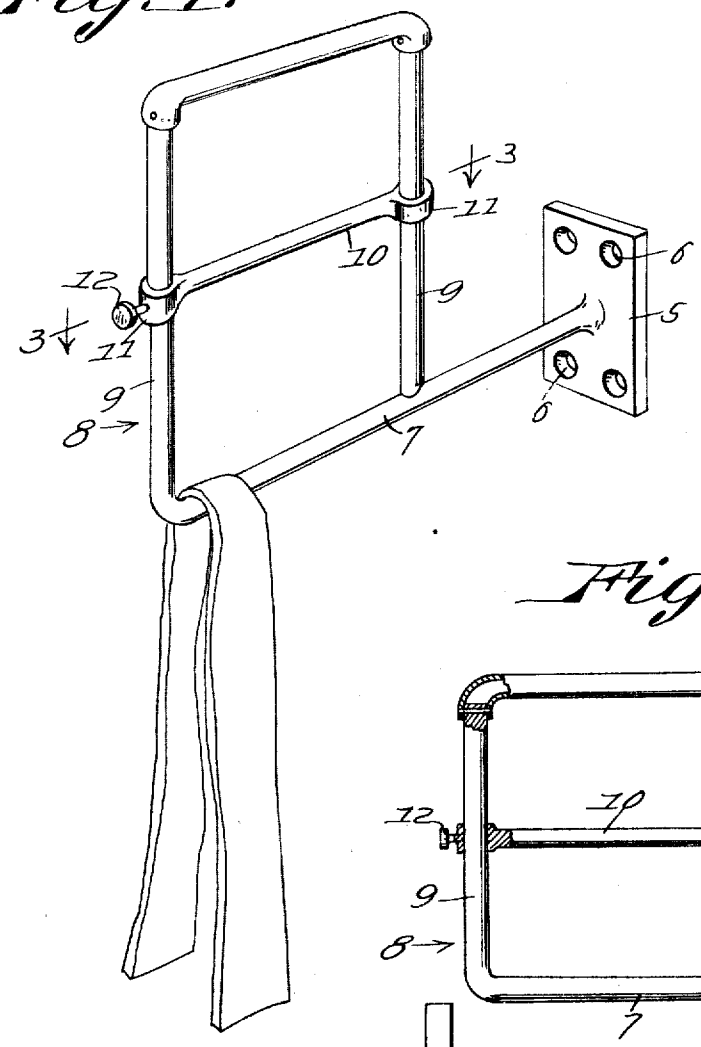


Fig. 2.

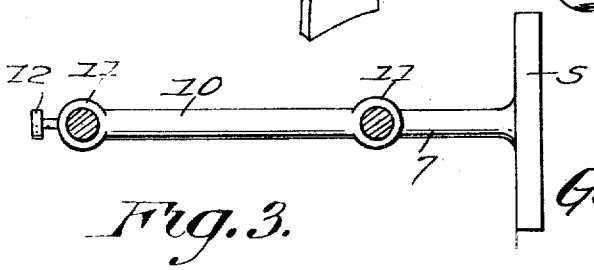


Fig. 3.

Inventor

George T. Sholley

By Talbert & Parker

Attorneys

UNITED STATES PATENT OFFICE.

GEORGE T. SHOLLEY, OF LEBANON, PENNSYLVANIA.

NECKTIE-HOLDER.

1,266,333. Specification of Letters Patent. Patented May 14, 1918.

Application filed July 30, 1917. Serial No. 183,561.

To all whom it may concern:

Be it known that I, GEORGE T. SHOLLEY, a citizen of the United States, residing at Lebanon, in the county of Lebanon and State of Pennsylvania, have invented certain useful Improvements in Necktie-Holders, of which the following is a specification, reference being had therein to the accompanying drawing.

The invention relates to a holder and more particularly to the class of necktie holders.

The primary object of the invention is the provision of a holder of this character wherein neckties can be placed and held in order, without the possibility of the accidental falling of the ties therefrom.

Another object of the invention is the provision of a holder of this character wherein a retaining rod or bar is slidably supported upon a frame on which are adapted to be placed neckties and this bar or rod retains the ties to avoid the falling of the same from the holder, said holder being of novel construction to render the same handy for use and neat and attractive in appearance.

A further object of the invention is the provision of a holder of this character which is extremely simple in construction, thoroughly reliable and efficient in its purpose, strong, durable and inexpensive in manufacture.

With these and other objects in view the invention consists in the features of construction, combination and arrangement of parts as will be hereinafter fully described, illustrated in the accompanying drawing and pointed out in the claim hereunto appended.

In the accompanying drawing:

Figure 1 is a perspective view of the holder constructed in accordance with the invention showing a tie held thereby;

Fig. 2 is a vertical longitudinal sectional view;

Fig. 3 is a transverse sectional view on the line 3—3 of Fig. 1.

Similar reference characters indicate corresponding parts throughout the several views in the drawing.

Referring to the drawing in detail, the tie holder comprises a base 5 preferably made from metal and in this instance is of a substantially rectangular shape having holes 6 for the reception of fasteners to permit the base to be secured to a wall or other support and integrally formed with this base and extending outwardly therefrom is an arm 7 from which rises an open frame 8, the side members 9 of the frame being integrally formed with the arm 7 although said frame can be separate from the arm and made fast thereto in any suitable manner.

Disposed transversely of the opening in the frame 8 is a retaining rod or bar 10 which is provided with sleeve or collar like ends 11, the latter loosely embracing the side limbs 9 of said frame 8 so that the bar or rod 10 is free for sliding movement longitudinally of said frame and in the use of the holder the neckties are placed within the frame to straddle or lie crosswise of the arm 7 and this bar 10 by reason of its weight moves downwardly into contact with the grouped ties to retain the same upon the arm 7 when placed within the frame and thereby avoid the possibility of the accidental falling of the ties from the frame when supported by the holder.

Formed on one of the sleeves or collars of the retaining rod or bar 10 is a hand knob 12 which permits the manual raising of the rod or bar 10 when it is desired to remove a necktie or neckties from the holder the bar or rod 10 being slightly raised out of contact with the neckties so that any one or several of the same can be withdrawn from the frame as will be apparent.

It is of course to be understood that changes, variations and modifications may be made in the invention such as come properly within the scope of the appended claim without departing from the spirit of the invention or sacrificing any of its advantages.

From the foregoing it is thought that the construction and manner of operation of the device will be clearly understood and therefore a more extended explanation has been omitted.

What is claimed is:

A necktie holder comprising a base for attachment to a wall, an arm formed integral with and extending outwardly from

the base, an open frame rising upwardly from the arm and formed integral therewith, the frame having upstanding side limbs, and a retaining bar provided with collar like ends, the latter loosely embracing the said side limbs of the frame so that the bar may be raised vertically to permit the removal of ties held in the bottom of the frame, the retaining bar being further provided with a handle secured to one of its collar like ends outside the frame to permit the manual raising of the retaining bar.

In testimony whereof I affix my signature.

GEORGE T. SHOLLEY.