



(43) International Publication Date
15 September 2016 (15.09.2016)

- (51) **International Patent Classification:**
E21B 34/06 (2006.01) *E21B 43/12* (2006.01)
E21B 21/08 (2006.01)
- (21) **International Application Number:**
PCT/US2015/019337
- (22) **International Filing Date:**
7 March 2015 (07.03.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 3000 N. Sam Houston Parkway East, Houston, TX 77032-3219 (US).
- (72) **Inventors:** LEAST, Brandon, T.; 2601 Beltline Road, Carrollton, TX 75006 (US). GRECI, Stephen, M.; 2601 Beltline Road, Carrollton, TX 75006 (US).
- (74) **Agent:** HILTON, Robert, C.; McGuire Woods LLP, Attn: Docketing Department, 1750 Tysons Blvd., Suite 1800, Tysons Corner, VA 22102 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

(54) **Title:** INFLOW CONTROL DEVICE THAT CONTROLS FLUID FLOW THROUGH A TUBING WALL

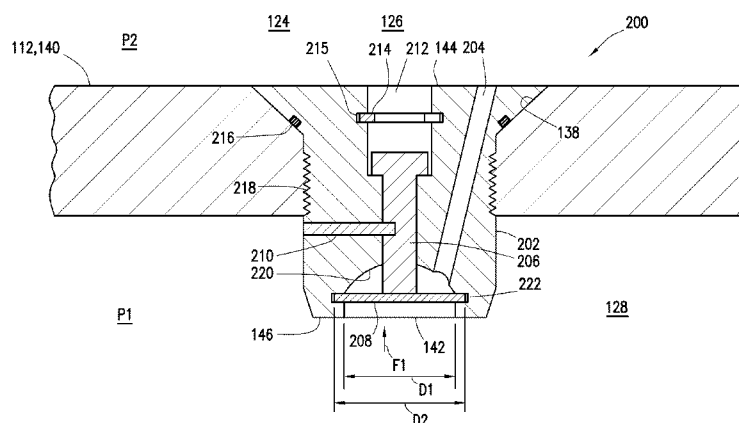


FIG. 4

(57) **Abstract:** An inflow control device (ICD) that may include a piston located in a flow passage, a barrier that prevents fluid flow through the ICD, and a shear device that prevents movement of the piston. A method of actuating one or more ICDs may include preventing actuation of the devices by maintaining a pressure in an interior of a well tool (or tubing string) below an actuation pressure of the devices, where each device may include a piston located within a flow passage, a barrier that prevents fluid flow through the ICD, and a shear device that initially prevents movement of the piston. The method may include increasing the pressure in the well tool (or tubing string) to be greater than or equal to the actuation pressure, thereby shearing the shear device and moving the piston.



**INFLOW CONTROL DEVICE THAT CONTROLS FLUID FLOW
THROUGH A TUBING WALL**

Technical Field

[0001] A pressure-actuated inflow control device for controlling fluid flow between an interior and an exterior of a tubing string. The inflow control device can include a piston, a shear device, a barrier, and a flow passage, where the barrier provides pressure isolation between the interior and the exterior of the tubing string until sufficient pressure is applied to the interior of the tubing string. The increased pressure can deform the barrier, which maintains the pressure isolation until the pressure is reduced. The reduced pressure can at least partially remove the barrier and permit fluid flow through the inflow control device. According to certain embodiments, the inflow control device is used in an oil or gas well operation.

Brief Description of the Figures

[0002] The features and advantages of certain embodiments will be more readily appreciated when considered in conjunction with the accompanying figures. The figures are not to be construed as limiting any of the preferred embodiments.

[0003] **Fig. 1** depicts a schematic diagram of a well system with multiple inflow control devices (ICDs) according to certain embodiments.

[0004] **Figs. 2A, 2B, and 3** depict a partial cross-sectional view of an ICD according to certain embodiments with an outer housing.

[0005] Figs. 4 - 5 depict a partial cross-sectional view of a plug that can be used as the ICD or as a component of the ICD.

[0006] Figs. 6 - 8 depict a partial cross-sectional view of another plug that can be used as the ICD or as a component of the ICD.

Detailed Description

[0007] Oil and gas hydrocarbons are naturally occurring in some subterranean formations. In the oil and gas industry, a subterranean formation containing oil or gas is referred to as a reservoir. A reservoir may be located under land or offshore. Reservoirs are typically located in the range of a few hundred feet (shallow reservoirs) to tens of thousands of feet (ultra-deep reservoirs). In order to produce oil or gas, a wellbore is drilled into a reservoir or adjacent to a reservoir. The oil, gas, or water produced from a reservoir is called a reservoir fluid. As used herein, a "fluid" is a substance having a continuous phase that tends to flow and to conform to the outline of its container when the substance is tested at a temperature of 71 °F (22 °C) and a pressure of one atmosphere (atm) (0.1 megapascals (MPa)). A fluid can be a liquid or gas.

[0008] A well can include, without limitation, an oil, gas, or water production well or an injection well. As used herein, a "well" includes at least one wellbore. A wellbore can include vertical, inclined, and horizontal portions, and it can be straight, curved, or branched. As used herein, the term "wellbore" includes any cased, and any uncased, open-hole portion of the wellbore. The well can also include multiple wellbores, such as a main wellbore and lateral wellbores. As used herein, the term "wellbore" also includes a main wellbore

as well as lateral wellbores that branch off from the main wellbore or from other lateral wellbores. A near-wellbore region is the subterranean material and rock of the subterranean formation surrounding the wellbore. As used herein, a "well" also includes the near-wellbore region. The near-wellbore region is generally considered to be the region within approximately 100 feet radially of the wellbore. As used herein, "into a well" means and includes into any portion of the well, including into the wellbore or into the near-wellbore region via the wellbore.

[0009] In an open-hole wellbore portion, a tubing string may be placed into the wellbore. The tubing string allows fluids to be introduced into or flowed from a remote portion of the wellbore. In a cased-hole wellbore portion, a casing is placed into the wellbore that can also contain a tubing string. A wellbore can contain an annulus. Examples of an annulus include, but are not limited to: the space between the wellbore and the outside of a tubing string in an open-hole wellbore; the space between the wellbore and the outside of a casing in a cased-hole wellbore; and the space between the inside of a casing and the outside of a tubing string in a cased-hole wellbore.

[0010] It is not uncommon for a wellbore to extend several hundreds of feet or several thousands of feet into a subterranean formation. The subterranean formation can have different zones. A zone is an interval of rock differentiated from surrounding rocks on the basis of its fossil content or other features, such as faults or fractures. For example, one zone can have a higher permeability compared to another zone. Each zone of the formation can be isolated within the wellbore via the use of packers or other similar devices. At least one wellbore interval corresponds to each zone.

[0011] It is often desirable to produce a reservoir fluid from multiple zones of a formation or inject treatment fluids into the zones. This can be done by installing one or more inflow control devices (ICDs) in the wellbore at each of the zones. These ICDs can be hydraulically, pneumatically, electrically, optically, magnetically, and/or mechanically operated to selectively permit and prevent fluid flow into or out of the tubing string. However, individual control of multiple ICDs can require several control lines to each ICD, additional trips in the wellbore to operate individual ICDs (e.g., sliding sleeve valves, rotary actuated valves, etc.), and the ICDs can require more complex valves than simpler valves, such as rupture disks and check valves. These simpler valves may be used to reduce the complexity of the well system, but they can also have drawbacks. For example, check valves can be used to allow production flow from the formation into the tubing string, or injection flow from the tubing string into the formation, but not both.

[0012] Rupture disks can be used to prevent fluid communication between an internal flow passage in the tubing string and an annulus until it is desired to enable fluid communication between them. When a pressure differential across the rupture disks exceeds the preset rupture disk pressure rating, then at least some of the rupture disks will rupture, thereby enabling two-way fluid communication through at least some of the ICDs. However, when one or more of the rupture disks rupture, it becomes more difficult to maintain a required pressure differential across any of the non-ruptured disks, which can prevent some of these disks from rupturing. Verifying which disks ruptured and which disks did not rupture can also be a problem. Additional wellbore operations and/or trips in the

wellbore may be needed to ensure that all of the disks have been ruptured for the desired zones of interest.

[0013] Rupture disks can include a barrier that isolates a pressure from one side of the rupture disk from an opposite side until the barrier ruptures. Rupture disks can allow multiple pressure cycles in the internal flow passage of the tubing string (e.g., setting packers, setting slips, operating a bottom hole assembly (BHA), etc.) without permitting fluid communication through the rupture disk until the preset pressure rating of the rupture disk is applied (e.g., by increasing pressure in the tubing string). However, it has been determined that rupture disks can deform during pressure cycles, even though the pressure remains below the preset pressure rating of the rupture disks. The deformation can weaken the disks which can cause them to rupture prematurely. Therefore, there is a need to provide a system with multiple inflow control devices that utilize simpler valves and provide a means to ensure that all the valves have been actuated when it is desired to enable fluid flow through the ICDs. As used herein, "premature rupture" means that the barrier of the rupture disk ruptures at a pressure differential that is outside of a factory set pressure differential range, where the factory set pressure differential is the pressure differential at which the barrier of the disk is designed and manufactured to rupture.

[0014] It has been discovered that a structure can be used to reinforce a barrier of a rupture disk to substantially prevent deformation of the barrier, thereby preventing premature rupturing of the barrier. As used herein, "substantially prevent" means that the barrier of the rupture disk may possibly deform a small amount, but the deformation does not result in premature rupturing of the barrier. The structure can be held in a fixed position that provides structural reinforcement to

the barrier until the preset pressure differential across the barrier is applied. When a first predetermined pressure differential, which is within the factory set pressure differential range, is applied across the barrier, the structure moves away from the barrier allowing the barrier to be ruptured at the first predetermined pressure differential, but not before the first predetermined pressure differential is applied.

[0015] According to certain embodiments, an inflow control device is provided that can include a body, a first flow passage which extends through the body, a piston reciprocally disposed in the first flow passage, a barrier that initially prevents fluid flow through the ICD, and a shear device that initially prevents movement of the piston relative to the body.

[0016] According to other embodiments, a method of actuating an inflow control device that can include preventing actuation of the inflow control device by maintaining a pressure in an interior of a well tool below an actuation pressure of the inflow control device, where the inflow control device can include (A) a body, (B) a flow passage which extends through the body, (C) a piston reciprocally disposed in the flow passage, (D) a barrier that initially prevents fluid flow through the inflow control device, and (E) a shear device that initially prevents movement of the piston relative to the body, and increasing the pressure in the well tool to be greater than or equal to the actuation pressure, thereby actuating the inflow control device by shearing the shear device and moving the piston in a first direction, where the increasing is preformed after the preventing.

[0017] According to yet other embodiments, a method of actuating an inflow control device in multiple well tools that can include preventing actuation of the inflow control devices by maintaining a pressure in an interior of the well tools below

an actuation pressure of the inflow control device, and wherein each of the inflow control devices can include (A) a body, (B) a flow passage which extends through the body, (C) a piston reciprocally disposed in the flow passage, (D) a barrier that initially prevents fluid flow through the inflow control device, and (E) a shear device that initially prevents movement of the piston relative to the body, and increasing the pressure in the well tools to be greater than or equal to the actuation pressure, thereby actuating two or more of the inflow control devices by shearing the shear device in each of the two or more inflow control devices, where the increasing is preformed after the preventing.

[0018] Any discussion of the embodiments regarding the inflow control device or any component related to the inflow control device is intended to apply to all of the apparatus and method embodiments.

[0019] Turning to the Figures, **Fig. 1** depicts a well system **100**, which can include at least one wellbore **102**. The subterranean formation **110** can be a portion of a reservoir or adjacent to a reservoir. The wellbore **102** can include a substantially vertical section **104** and a substantially horizontal section **106**. The vertical section **104** can include a casing **108** cemented at an upper portion of the vertical section **104**. The horizontal section **106** can extend through a subterranean formation **110** with one or more production zones without having a casing **108** (e.g., open-hole wellbore). **Fig. 1** depicts multiple well tools **120** that can each include an ICD **114** and a screen assembly **116**. However, many other configurations of these items are possible.

[0020] A tubing assembly can include a tubing string **112** or pipe extending from the surface within wellbore **102**. The flow passage **128** can provide a conduit for formation fluids to

travel from the horizontal section **106** to the surface. Multiple well tools **120** can each include an ICD **114** and a screen assembly **116**. The well tools **120** can be positioned along the tubing string **112** in various production intervals. On each side of the well tool **120** is a packer **118** that can provide a fluid seal between the tubing string **112** and the wall of the wellbore **102**, thereby preventing fluid flow through the annulus **126** between the production zones. The ICD **114** can control the fluid that flows through the screen assemblies **116**. However, it is not required that the ICDs **114** control fluid flow through the screen assemblies **116**. The ICD **114** can merely control fluid flow through a wall of the tubing string without the fluid flowing through a screen assembly **116**. For example, the ICDs **114** can be used to control fluid flow through a wall of the tubing string **112** (or mandrel of the well tool **120**) to set a packer **118** or extend slips (not shown) into engagement with the tubing string's **112** inner surface. Also, the ICDs **114** are not required to be positioned in the tubing string **112** adjacent a screen assembly **116**. It should be clearly understood that any number of zones may be included in the well system **100** with any number of ICDs **114** per zone and any number (including zero) of screen assemblies **116** per zone. Therefore, the current disclosure is not limited by the number of zones, ICDs **114**, or screen assemblies **116** as shown in **Fig. 1**.

[0021] Therefore, it should be clearly understood that the well system **100** illustrated in the drawings and described herein is merely one example of a wide variety of well systems in which certain embodiments can be utilized. It should be clearly understood that the principles of this disclosure are not limited to any of the details of the well system **100**, or components thereof, depicted in the drawings or described herein. Furthermore, the well system **100** can include other

components not depicted in the drawing. For example, the well system **100** can include perforating gun assemblies, anchoring slips, isolation valves, etc.

[0022] **Fig. 2A** depicts a partial cross-sectional view of an end of the well tool **120**. The well tool **120** can include an ICD **114** that is positioned adjacent to a screen assembly **116** with ports **136** that provide fluid communication between the ICD **114** and the screen assembly **116**. The screen assembly **116** can include a shroud **130** with perforations **132** for filtering fluid flow through the screen assembly **116**. Fluid can flow from the flow passage **128**, through the ICD **114** and into the screen assembly **116** (e.g., for injection/treatment operations, for flowing an activating agent to the screen assembly to degrade temporary plug material, etc.), or from the screen assembly **116**, through the ICD **114**, and into the flow passage **128** (e.g., for production operations, gravel packing operations, etc.). The ICD **114** can include a temporary plug **200** that can be secured in an opening **138** in the wall of the tubing string **112**, in an opening **138** in the wall of a mandrel **140** of the well tool **120**, which is interconnected in the tubing string **112**, or in an opening in any other pressure bearing wall. The ICD **114** may also include other features, such as a flow restrictor **134** with a flow path **135**, through which fluid flow through the well tool assembly **120** is restricted. **Fig. 2A** depicts the flow restrictor **134** positioned between the first and second chambers **124**, **125**, which can be annular chambers contained within a housing **122** of the ICD **114**. However, it is not required that the ICD **114** includes a housing **122** and a flow restrictor **134**. In certain embodiments, the ICD **114** can include only the temporary plug **200**.

[0023] **Fig. 2B** depicts another partial cross-sectional view of an end of the well tool **120**. **Fig. 2B** is very similar to

Fig. 2A, except that the flow restrictor **134** includes a plug **200** instead of the flow path **135**. The plug **200** is secured in an opening in an annular ring **148**, where the ring **148** pressure isolates the first chamber **124** from the second chamber **125**. The annular ring **148** can include one or more plugs **200** spaced apart around the ring **148**. Multiple plugs **200** in the annular ring **148** can provide additional fluid flow paths through the well tool **120**. **Fig. 2B** depicts the plug **200** installed in an orientation that is actuated by an actuation pressure applied from the internal flow passage **128**. However, the plug **200** may be installed in a reverse orientation that is actuated by an actuation pressure applied from the annulus **126**. Either one of these plug **200** orientations can support either injection or production operations. It should be clearly understood that the plugs **200** in **Figs. 2A and 3** can also be installed in either orientation. It should be clearly understood that the plug **200** can be installed in other tool configurations. For example, the plug **200** can be installed in a pressure bearing wall of a side-pocket mandrel to control fluid flow through the side-pocket mandrel.

[0024] **Fig. 3** depicts another partial cross-sectional view of an end of the well tool **120**. **Fig. 3** is very similar to **Fig. 2A**, except that there is no flow restrictor **134**, only one annular chamber **124**, and most notably, there are at least two various embodiments of the temporary plug **200**. One plug **200** is secured in a wall of the tubing string **112** (or mandrel **140**) with an end extending into the flow passage **128**. This plug **200** includes a structure (e.g., a piston) that provides reinforcement to a barrier that deforms when a first predetermined pressure is applied to the flow passage **128**. The other plug **200** can also be similarly secured in a wall of the tubing string **112** (or mandrel **140**) with an end that only

slightly extends (if at all) into the flow passage **128**. This plug **200** is depicted as extending into the chamber **124** and aligned with a protrusion **228** mounted to an inner surface of the housing **122**. When the first predetermined pressure is applied to the flow passage **128**, a piston is released and the protrusion is forced through a barrier on the end of the piston in response to the movement of the piston. Therefore, multiple plugs **200** can be used in an ICD **114**, which can also include multiple configurations of the plug **200**.

[0025] **Figs. 4 - 5** depict a cross-sectional view of a certain embodiment of a temporary plug **200**. The plug **200** can include a body **202**, a first flow passage **212**, a second flow passage **204**, a piston (or structure) **206**, a barrier **208**, and a shear device **210**. The body **202** can be secured in an opening **138** of the tubing string **112** (or mandrel **140**) by threading the body into threads **218** (as seen in **Figs. 4 - 8**), by welding the plug **200** in the opening **138**, and/or by any suitable securing means that will prevent removal of the plug **200** from the opening **138** when a first predetermined pressure is applied to the flow passage **128**. A seal **216** can be used to prevent fluid flow between the plug **200** and the opening **138**. However, the seal **216** may not be required if the threads **218** provide a threaded connection that is sufficient to prevent fluid flow and pressure loss past the plug **200**.

[0026] The piston **206** can be reciprocally disposed in the first flow passage **212** and can provide reinforcement to the barrier **208**, thereby preventing any substantial deformation of the barrier **208** as pressure **P1** in the flow passage **128** is adjusted to pressures that are below the predetermined pressure. A shear device **210** (e.g., shear bolt, shear ring, shear pin, etc.) prevents movement of the piston **206** within the first flow passage **212**, until the first predetermined pressure is applied

to the flow passage **128**. When the pressure **P1** is increased to the first predetermined pressure, a pressure differential across the plug **200** causes a force **F1**, which is applied to the barrier **208** and the piston **206**, to shear the shear device **210**, thereby releasing the piston **206** to move freely within the first flow passage **212**. When the shear device **210** is sheared, the piston **206** is forced against the snap ring **214** which can be disposed in a recess **215**. The snap ring **214** can prevent the piston **206** from exiting the first flow passage **212**. However, it should be clearly understood that any other suitable means may be used to stop the piston **206** from traveling out of the first flow passage **212**, such as a cover (with holes) that is welded to the top **144** of the plug **200**, a pin disposed in a recess in the first flow passage, etc.

[0027] The snap ring (or other stopping means) may also be used to maintain a reinforcement against the deformed barrier **208**, thereby preventing the deformed barrier **208** from further deforming into the first flow passage **212** past the generally concave surface **220**. Continued deformation of the barrier **208** may not be desirable because it can result in fluid communication through the second flow passage **204** prior to the barriers **208** in other plugs **200** being actuated (i.e., deformed against the concave surface **220**). It should also be understood that a stop may not be necessary at all. The piston **206** can be allowed to exit the first flow passage **212** after the shear device **210** is sheared. When the shear device **210** is sheared by the application of the first predetermined pressure, then the piston **206** moves in a first direction along the first flow passage **212**. Without a stop (such as a snap ring, recessed pin, etc.), the piston **206** is free to continue moving in the first direction until it exits the first flow passage **212**. The applied force **F1**, and an abrupt release of the piston **206** in

response to the sheared device **210**, can cause the piston **206** to be ejected from the first flow passage **212**. In this configuration, the piston **206** would not move in a second direction after the first predetermined pressure is removed because it is removed from the first flow passage **212**. This can result in additional flow through the ICD **114** with both the first and second flow passages **212**, **204** are free of obstructions.

[0028] Referring again to Figs. **4 - 5**, the movement of the piston **206** removes the reinforcement from the barrier **208** and allows the barrier **208** to deform against the generally concave surface **220**, which removes the barrier **208** from the recess **222**. The deformed barrier **208** continues to prevent fluid flow through the first and second flow passages **212**, **204**, and allows the pressure **P1** in the flow passage **128** to be maintained at or above the first predetermined pressure. Therefore, if multiple plugs **200** are utilized in the well system **100**, the pressure **P1** can be maintained at or above the first predetermined pressure to ensure that all plugs **200** are actuated by moving each piston **206** and deforming each barrier **208**, assuming all plugs **200** in the system are actuated at the same preset pressure differential. Multiple plugs **200** with varied preset pressure differentials can be used, but this can require pressure-isolating regions of the internal flow passage **128** by using bridge plugs, isolation valves, etc. to maintain the desired pressures in the regions for actuating the particular group of plugs **200**.

[0029] Fig. **5** depicts the plug **200** with the shear device **210** being sheared, and the piston **206** being moved against the snap ring **214**, with the deformed barrier **208** providing a blockage **226** in the first flow passage **212** and a blockage **224** in the second flow passage **204**. Blockages **226**, **224** continue to

prevent fluid flow through the first and second flow passages **212**, **204**, respectively, while a positive pressure differential exists between pressure **P1** in the flow passage **128** (which is the interior of the tubing string **112** or the well tool **120**) and pressure **P2** in the annulus **126** and/or the chamber **124** (which is the exterior of the tubing string **112** or the well tool **120**).

[0030] When it is desired to allow fluid flow through the plug **200** (or inflow control device **114**), then the pressure **P1** in the flow passage **128** can be reduced to a second predetermined pressure, which causes the pressure differential across the plug **200** to reduce the force **F1** to a level that allows the barrier to fall out of or be dispensed from the plug **200**. The pressure **P1** can be reduced to cause a pressure differential between **P2** and **P1**, thereby causing force **F2** to be applied to the piston **206** and barrier **208** through the first flow passage **212**. Force **F2** urges the piston **206** to move in a second direction which is opposite of the first direction, thereby assisting in dispensing the deformed barrier **208** from the plug **200**. Alternatively, or in addition to, the force **F2** can be caused by fluid flow through the first flow passage **212**, which can also urge the piston **206** to move in the second direction.

[0031] Fig. 4 depicts the barrier **208** as having a diameter **D2** that is greater than a diameter **D1** of an opening **142** in the bottom end **146** of the plug **200**. This prevents the barrier **208** from being dispensed from the opening **142** prior to the barrier **208** being deformed. However, as depicted in Fig. 5, the diameter **D2** of the barrier **208** has been reduced to a diameter that is less than the diameter **D1**. Therefore, when the force **F1** is reduced to a level that allows the deformed barrier **208** to fall away from the concave surface **220**, the barrier **208** can continue to fall out of or be dispensed from the plug **200**, thereby removing blockages **226**, **224** from the first and second

flow passages **212**, **204**, respectively. With the blockages **226**, **224** removed, fluid is permitted to flow through the first and second flow passages **212**, **204**. In **Fig. 5**, arrows **205** depict fluid flow in either direction in the second flow passage **204**. It should be clearly understood that fluid may also flow in either direction in the first flow passage **212** by flowing past the piston **206**. Additionally, another flow passage (not shown) can be provided through the piston **206**, allowing additional fluid flow through the plug **200** when the barrier is dispensed from the plug **200**.

[0032] It should be clearly understood that many configurations of flow passages through the plug can be utilized. For example, if a flow passage through the piston **206** is provided, then the flow passage **204** may not be needed. Therefore, the second flow passage **204** can be a flow passage through the piston **206**, instead of the flow passage as seen in **Figs. 4 - 5**. Also, **Figs. 4 - 5** depict the second flow passage **204** as extending from the concave surface **220** to a top **144** end of the plug **200**. However, if the plug **200** is mounted in the opening **138** similar to the plug **200** in **Fig. 3** (the one that extends into the chamber **124**), then the second flow passage **204** may extend from the concave surface **220** to a sidewall of the plug **200** instead of to the top **144**. These flow passages **212**, **204** can be of any configuration so long as they are blocked while the plug(s) **200** are being actuated and are opened when the pressure differential across the plug **200** is reduced to allow the barrier **208** to be removed from the plug **200**.

[0033] **Figs. 4 - 5** depict the piston **206** as having a generally T-shaped cross section, where the diameter of one end is larger than a diameter of an opposite end. However, it should be clearly understood that the piston **206** can be many different shapes. For example, the piston **206** can be a rod with

a continuous cross section along its length, where the cross section can be circular, oval, rectangular, square, octagonal, star-shaped, triangular, etc. The rod can provide reinforcement to the barrier **208**, with a shear device **210** preventing movement of the rod within the first flow passage **212**. When **F1** causes the shear device **210** to shear, the rod can move in a first direction to engage a stop (such as snap ring **214** or another type of stop), allowing the barrier **208** to deform. When the pressure **P1** is reduced to the second predetermined pressure and the barrier **208** is dispensed from the plug **200**, the rod may also be dispensed from the first flow passage **212**, thereby enabling even greater flow of fluid through the plug **200**.

[0034] **Figs. 6 - 8** depict a cross-sectional view of another certain embodiment of a temporary plug **200**. The plug **200** can include a body **202**, a first flow passage **212**, a second flow passage **204**, a piston **206**, a barrier **208**, and a shear device **210**. The body **202** can be secured in an opening **138** of the tubing string **112** or mandrel **140** by any suitable securing means (e.g., threading, welding, etc.) that will prevent removal of the plug from the opening **138** when a first predetermined (or actuation) pressure is applied to the flow passage **128**. The plug **200** may extend into the flow passage **128**, as seen in **Figs. 6 - 8**, or it may extend into the chamber **124**, as seen in **Fig. 3**. This clearly shows that the plug **200** can be installed into the opening **138** with a portion of the plug **200** extending into the flow passage **128**, extending into the chamber **124**, or at least partially extending into both. One benefit of the plug **200** extending into the flow passage **128** is that a shearing tool can be used to shear off the bottom end **146** of the plug **200** that extends into the flow passage **128**, thereby enabling flow through the plug **200** without having to deform or rupture the barrier **208**. This may be necessary if pressure in the flow passage **128**

cannot be increased to the actuation pressure of the plug **200**, thereby preventing actuation of the plug **200**. Actuation of the plug includes shearing the shear device **210** and moving the piston **206** in a first direction in the first flow passage **212**.

[0035] The piston **206** can be reciprocally disposed in the first flow passage **212** with a biasing device **232** that urges the piston **206** against a snap ring **214** that is located proximate to the end **146** of the plug **200** that extends into the flow passage **128**. The piston **206** can also include one or more seals **238** that seal between an inner bore of the first flow passage **212** and the outer surface of the piston **206**. The piston **206** can include the second flow passage **204** that extends through the piston **206**. The barrier **208** seals off the second flow passage **204** at the top end of the piston **206**. Therefore, the barrier **208** can work in cooperation with the seals **216**, **238** to at least initially prevent pressure and fluid communication through the plug **200**. A shear device **210** (e.g., shear bolt, shear ring, shear pin, etc.) prevents movement of the piston **206** within the first flow passage **212** until the actuation pressure is applied to the flow passage **128**. When the pressure **P1** is increased to the actuation pressure, a pressure differential across the plug **200** causes a force **F1**, which is applied to the barrier **208** and the piston **206**, to shear the shear device **210**, thereby releasing the piston **206** to move freely within the first flow passage **212**. When the shear device **210** is sheared, the piston **206** is moved away from the snap ring **214** and compresses the biasing device **232**. Figs. 6 - 8 show the biasing device **232** as a spring, but it should be clearly understood that any biasing device may be used to urge the piston **206** toward the snap ring **214**.

[0036] When the force **F1** shears the shear device **210**, the piston **206** is abruptly moved away from the snap ring **214**, thereby compressing the biasing device **232** and causing a

protrusion 228 to puncture the barrier 208. The protrusion 228 is shown to be an inverted cone, but any shape can be used, as long as the protrusion 228 can puncture the barrier 208 and maintain a pressure seal between the punctured barrier 208 until the pressure P1 is reduced to a second predetermined pressure. The protrusion 228 can be mounted to a structure 234, which overlays the plug 200 and which aligns the protrusion 228 with the second flow passage 204. The structure 234 can include flow ports (e.g., ports 230) to allow fluid flowing through the plug 200 to flow through ports 230 as indicated by arrows 236. However, it should be clearly understood that the structure 234 is not necessary. As seen in Fig. 3, the protrusion can be mounted to the inner surface of the housing 122 without using a separate structure 234.

[0037] When the shear device 210 is sheared, and the barrier 208 is punctured, the pressure P1 can be maintained at the actuation pressure to ensure that any other plugs 200 are actuated before the pressure P1 is reduced. Fig. 7 depicts the barrier 208 punctured by the protrusion 228. After ensuring that all plugs 200 have been actuated, the pressure P1 can be reduced to a second predetermined pressure that no longer overcomes the biasing force of the biasing device 232. At the second predetermined pressure, the biasing device 232 begins to move the piston 206 in a second direction, which is toward the snap ring 214 and away from the protrusion 228. This removes the protrusion 228 from the barrier 208, thereby removing a blockage 224 from the flow passage 204 and leaving an opening 240 in the barrier 208 through which fluid can flow.

[0038] Fig. 8 depicts that the piston 206 is once again urged against the snap ring 214 by the biasing device 232. The barrier 208 is punctured, forming an opening 240 in the barrier through which fluid can flow. The plug 200 has actuated and

blockage removed from the second flow passage **204** to allow fluid flow in either direction as indicated by arrows **205**.

[0039] Therefore, the present system is well adapted to attain the ends and advantages mentioned as well as those that are inherent therein. The particular embodiments disclosed above are illustrative only, as the present invention may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Furthermore, no limitations are intended to the details of construction or design herein shown, other than as described in the claims below. It is, therefore, evident that the particular illustrative embodiments disclosed above may be altered or modified and all such variations are considered within the scope and spirit of the present invention. As used herein, the words "comprise," "have," "include," and all grammatical variations thereof are each intended to have an open, non-limiting meaning that does not exclude additional elements or steps. While compositions and methods are described in terms of "comprising," "containing," or "including" various components or steps, the compositions and methods also can "consist essentially of" or "consist of" the various components and steps.

[0040] Whenever a numerical range with a lower limit and an upper limit is disclosed, any number and any included range falling within the range is specifically disclosed. In particular, every range of values (of the form, "from about a to about b," "from approximately a - b," or, equivalently, "from approximately a to b") disclosed herein is to be understood to set forth every number and range encompassed within the broader range of values. Also, the terms in the claims have their plain, ordinary meaning unless otherwise explicitly and clearly defined by the patentee. Moreover, the indefinite articles "a"

or "an," as used in the claims, are defined herein to mean one or more than one of the element that it introduces. If there is any conflict in the usages of a word or term in this specification and one or more patent(s) or other documents that may be incorporated herein by reference, the definitions that are consistent with this specification should be adopted.

What is claimed is:

1. An inflow control device comprising:
 - a body;
 - a first flow passage which extends through the body;
 - a piston reciprocally located within the first flow passage;
 - a barrier that initially prevents fluid flow through the inflow control device; and
 - a shear device that initially prevents movement of the piston relative to the body.
2. The inflow control device according to Claim 1, wherein the body is secured in an opening in a pressure bearing wall.
3. The inflow control device according to Claim 1, wherein the shear device is sheared when a pressure in a tubing string is increased to a first predetermined pressure.
4. The inflow control device according to Claim 3, wherein a blockage to fluid flow through the inflow control device is removed in response to a second predetermined pressure being applied in the tubing string, wherein the second predetermined pressure is less than the first predetermined pressure.
5. The inflow control device according to Claim 3, wherein the first predetermined pressure moves the piston in a first direction in response to the shear device being sheared.
6. The inflow control device according to Claim 5, wherein the first predetermined pressure deforms the barrier in response to the movement of the piston.

7. The inflow control device according to Claim 6, wherein the barrier maintains pressure isolation between the interior and the exterior of the tubing string until the pressure is reduced to a second predetermined pressure.

8. The inflow control device according to Claim 7, wherein a blockage to fluid flow through the inflow control device is removed when the pressure is reduced to the second predetermined pressure, and wherein the application of the second predetermined pressure dispenses the barrier from the inflow control device, retracts a protrusion from the barrier, or combinations thereof.

9. The inflow control device according to Claim 5, wherein the movement of the piston forces a protrusion through the barrier, thereby puncturing the barrier, and wherein pressure isolation between the interior and the exterior of the tubing string is maintained while the protrusion remains in the barrier.

10. The inflow control device according to Claim 9, wherein fluid flow through the first flow passage moves the piston in a second direction which is opposite of the first direction when the pressure is reduced to a second predetermined pressure.

11. The inflow control device according to Claim 9, wherein a biasing device moves the piston in a second direction which is opposite of the first direction when the pressure is reduced to a second predetermined pressure.

12. The inflow control device according to Claim 11, wherein the protrusion is removed from the barrier in response to the

movement of the piston in the second direction, and wherein fluid flow through the barrier is permitted when the protrusion is removed from the barrier.

13. The inflow control device according to Claim 1, further comprising a second flow passage which extends through at least one of the piston and the body.

14. The inflow control device according to Claim 13, wherein fluid flow through the second flow passage is initially prevented by the barrier, and wherein fluid flow through the second flow passage is permitted when the barrier is removed.

15. A method of actuating an inflow control device, the method comprising:

preventing actuation of the inflow control device by maintaining a pressure in an interior of a well tool below an actuation pressure of the inflow control device, wherein the inflow control device comprises:

- (A) a body;
- (B) a flow passage which extends through the body;
- (C) a piston reciprocally located within the flow passage;
- (D) a barrier that initially prevents fluid flow through the inflow control device; and
- (E) a shear device that initially prevents movement of the piston relative to the body; and

increasing the pressure in the well tool to be greater than or equal to the actuation pressure, thereby actuating the inflow control device by shearing the shear device and moving the piston in a first direction, wherein the step of increasing is performed after the step of preventing.

16. The method according to Claim 15, wherein the step of preventing further comprises cycling the pressure in the well tool between at least a first pressure and a second pressure, wherein the first and second pressures are below the actuation pressure.

17. The method according to Claim 15, wherein the step of increasing further comprises at least one of: deforming the barrier; and puncturing the barrier with a protrusion, wherein the deforming, puncturing, or both are performed while maintaining a pressure isolation between an interior and an exterior of the well tool.

18. The method according to Claim 15, further comprising decreasing the pressure in the well tool, thereby removing a blockage in the inflow control device and permitting fluid flow through the inflow control device in response to the removal of the blockage, wherein the step of decreasing is performed after the step of increasing.

19. The method according to Claim 18, wherein the step of decreasing comprises at least one of: dispensing the barrier from the inflow control device; and retracting a protrusion from the barrier that was punctured by the protrusion when the actuation pressure was applied to the interior of the well tool.

20. A method of actuating an inflow control device in each of multiple well tools, the method comprising:

preventing actuation of the inflow control devices by maintaining a pressure in an interior of the well tools below an actuation pressure of the inflow control devices, and wherein each of the inflow control devices comprises:

- (A) a body;
- (B) a first flow passage which extends through the body;
- (C) a piston reciprocally located within the first flow passage;
- (D) a barrier that initially prevents fluid flow through the inflow control device; and
- (E) a shear device that initially prevents movement of the piston relative to the body; and

increasing the pressure in the well tools to be greater than or equal to the actuation pressure, thereby actuating two or more of the inflow control devices by shearing the shear device in each of the two or more inflow control devices, wherein the step of increasing is performed after the step of preventing.

21. The method according to Claim 20, wherein the step of preventing further comprises cycling the pressure in the well tools between at least a first pressure and a second pressure, wherein the first and second pressures are below the actuation pressure.

22. The method according to Claim 20, further comprising decreasing the pressure in the well tools, thereby removing a blockage in each of the two or more inflow control devices and permitting fluid flow through the two or more inflow control

devices in response to the removal of the blockage, wherein the step of decreasing is performed after the step of increasing.

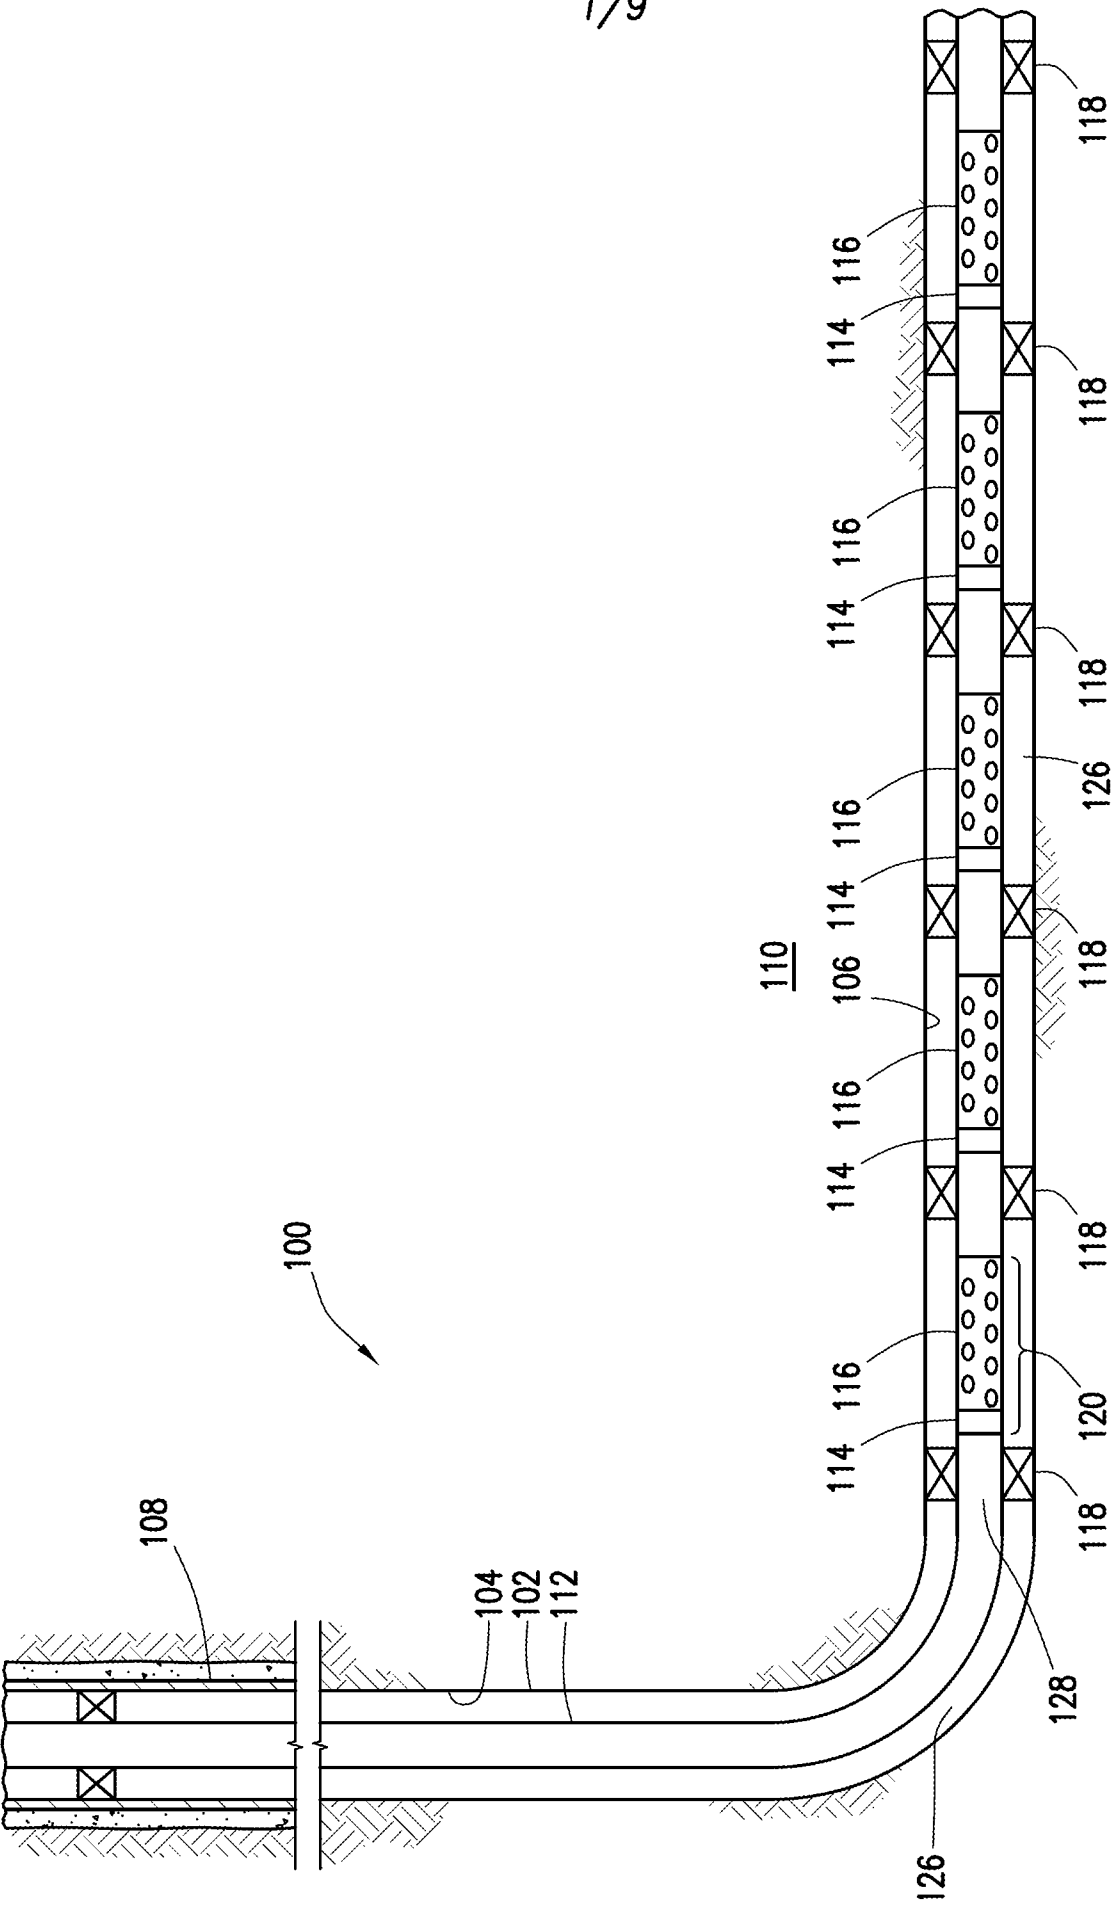


FIG. 1

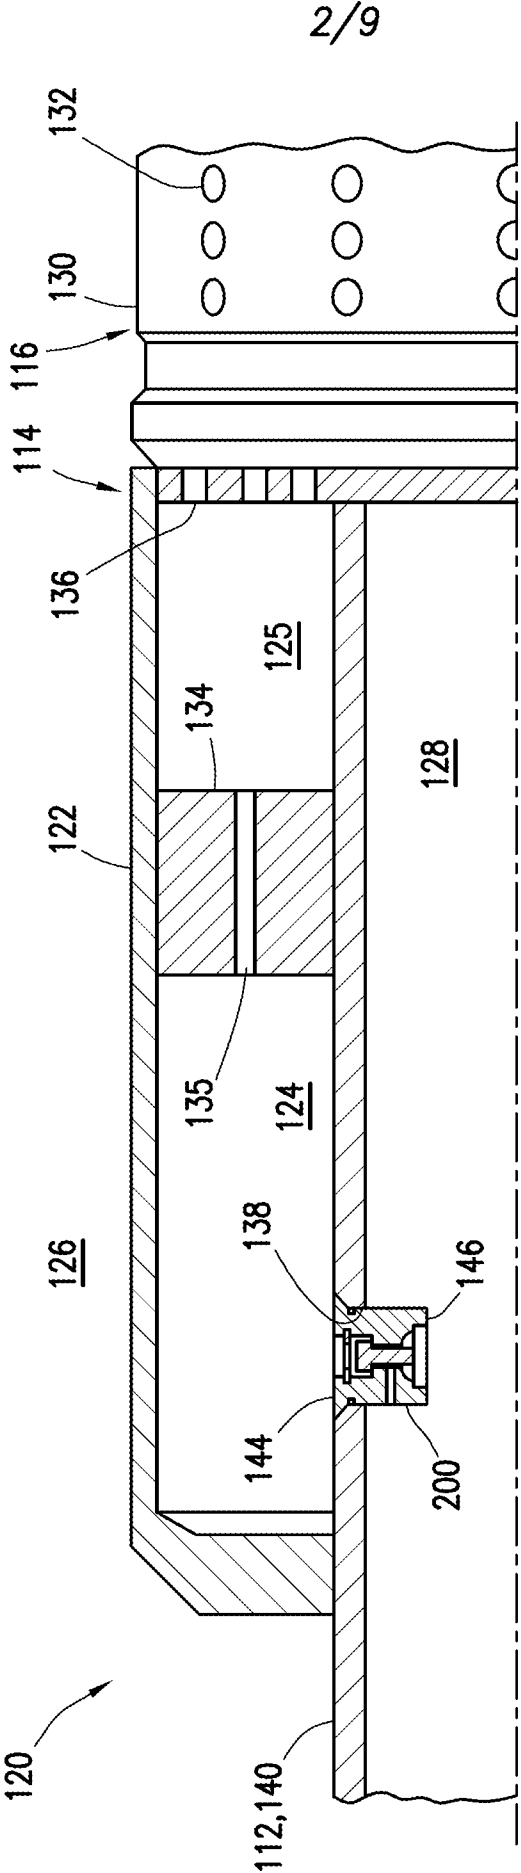


FIG. 2A

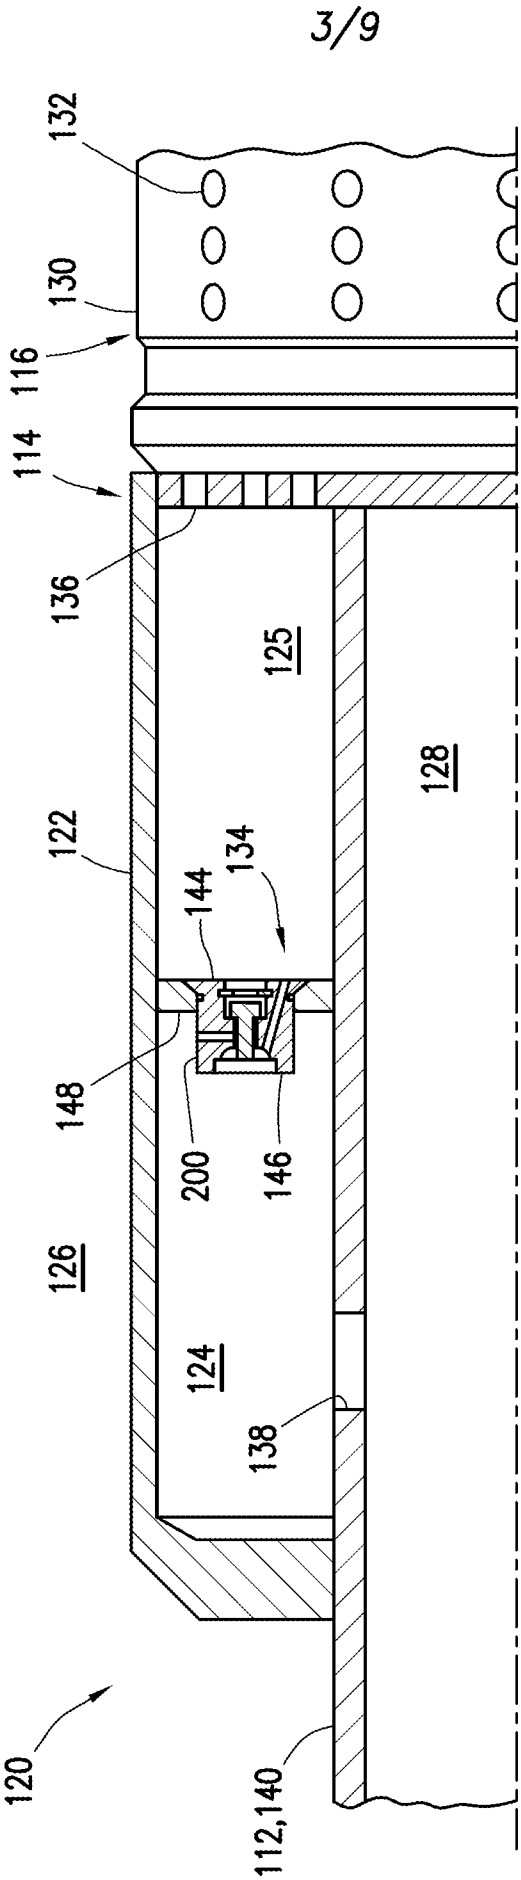


FIG. 2B

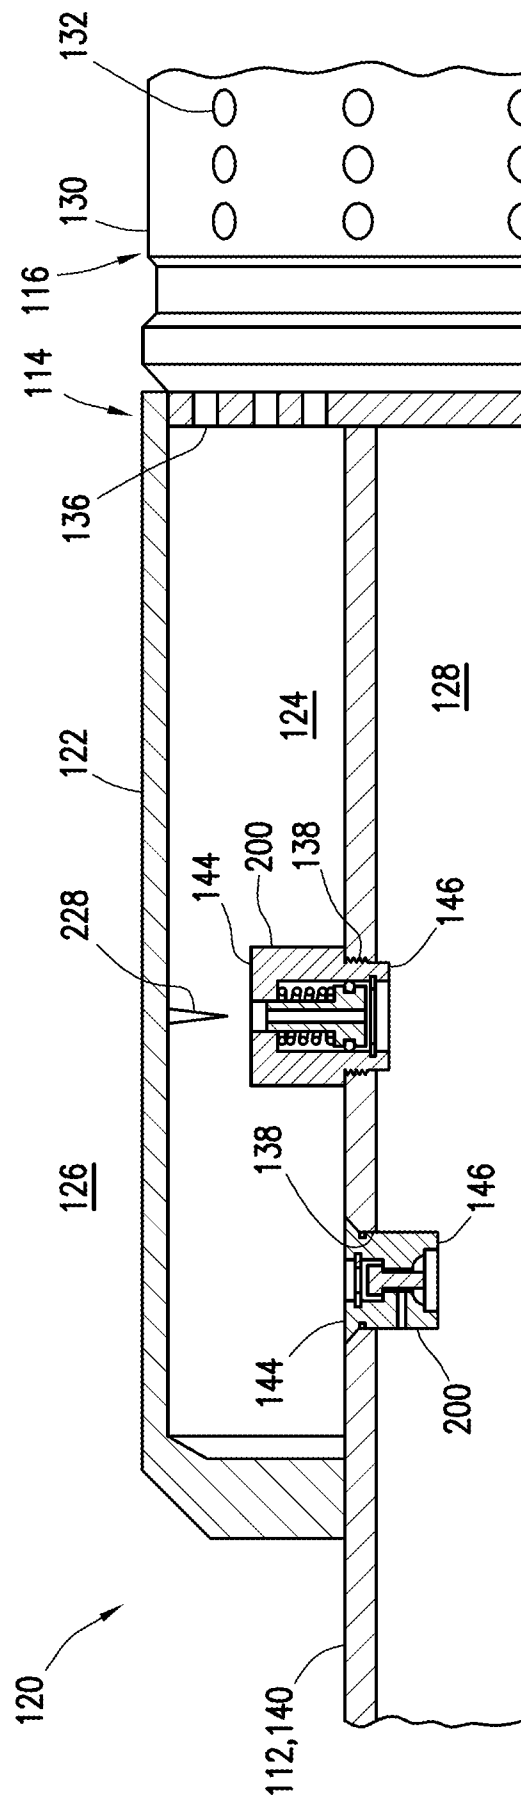


FIG. 3

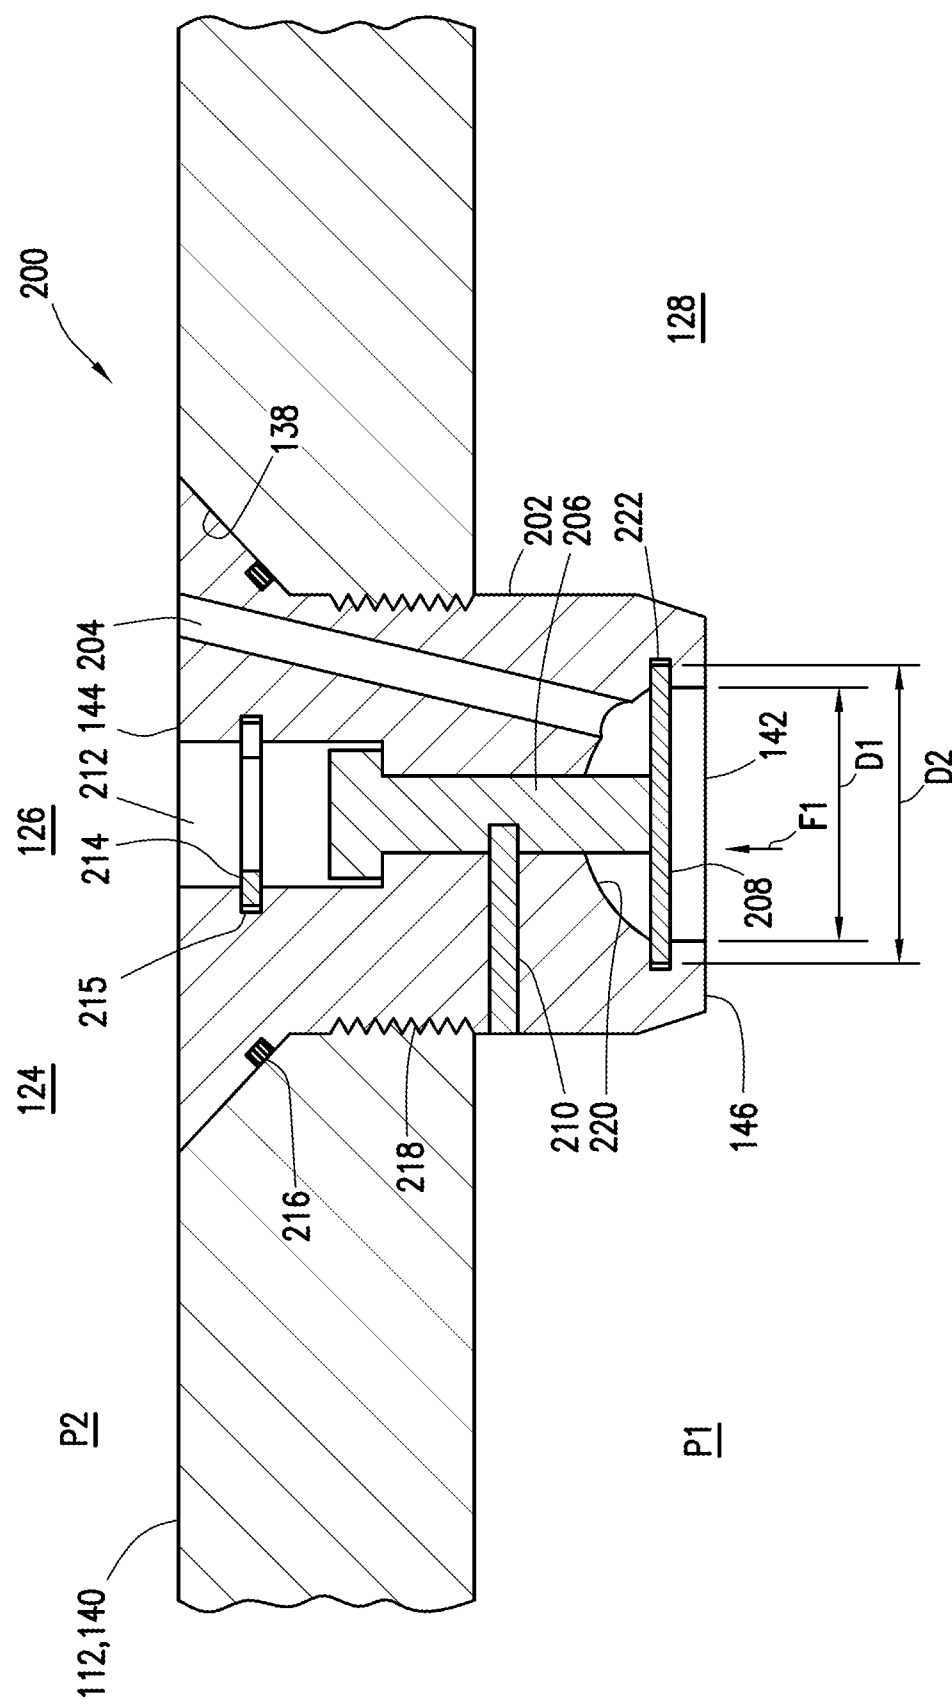


FIG. 4

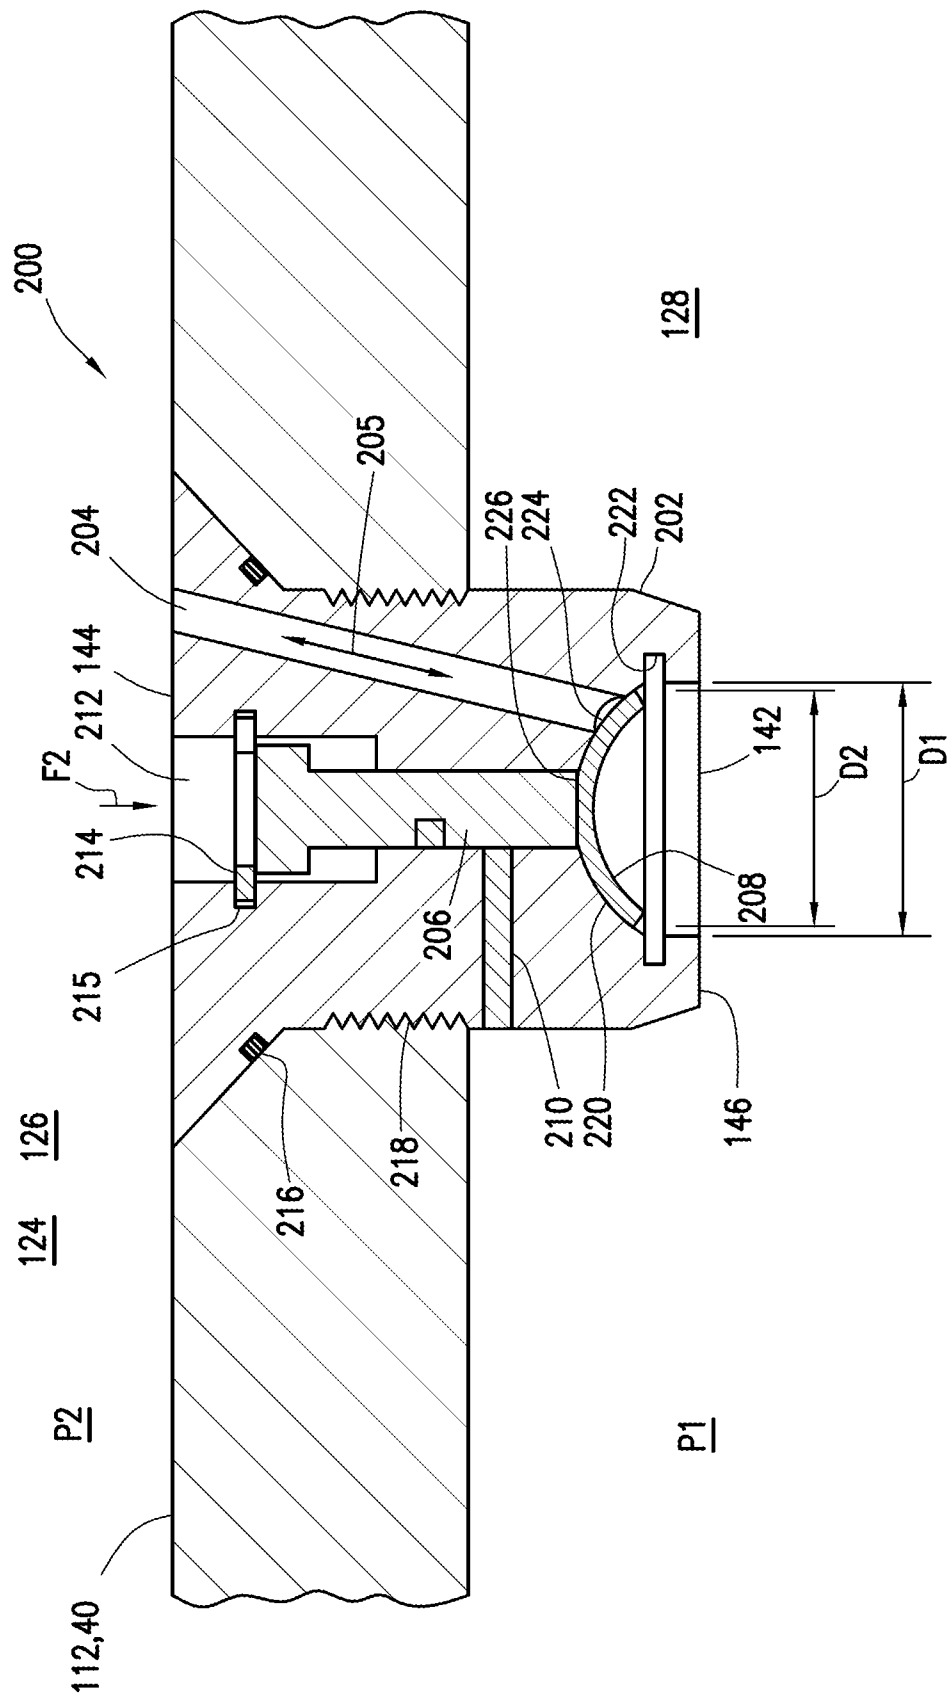


FIG. 5

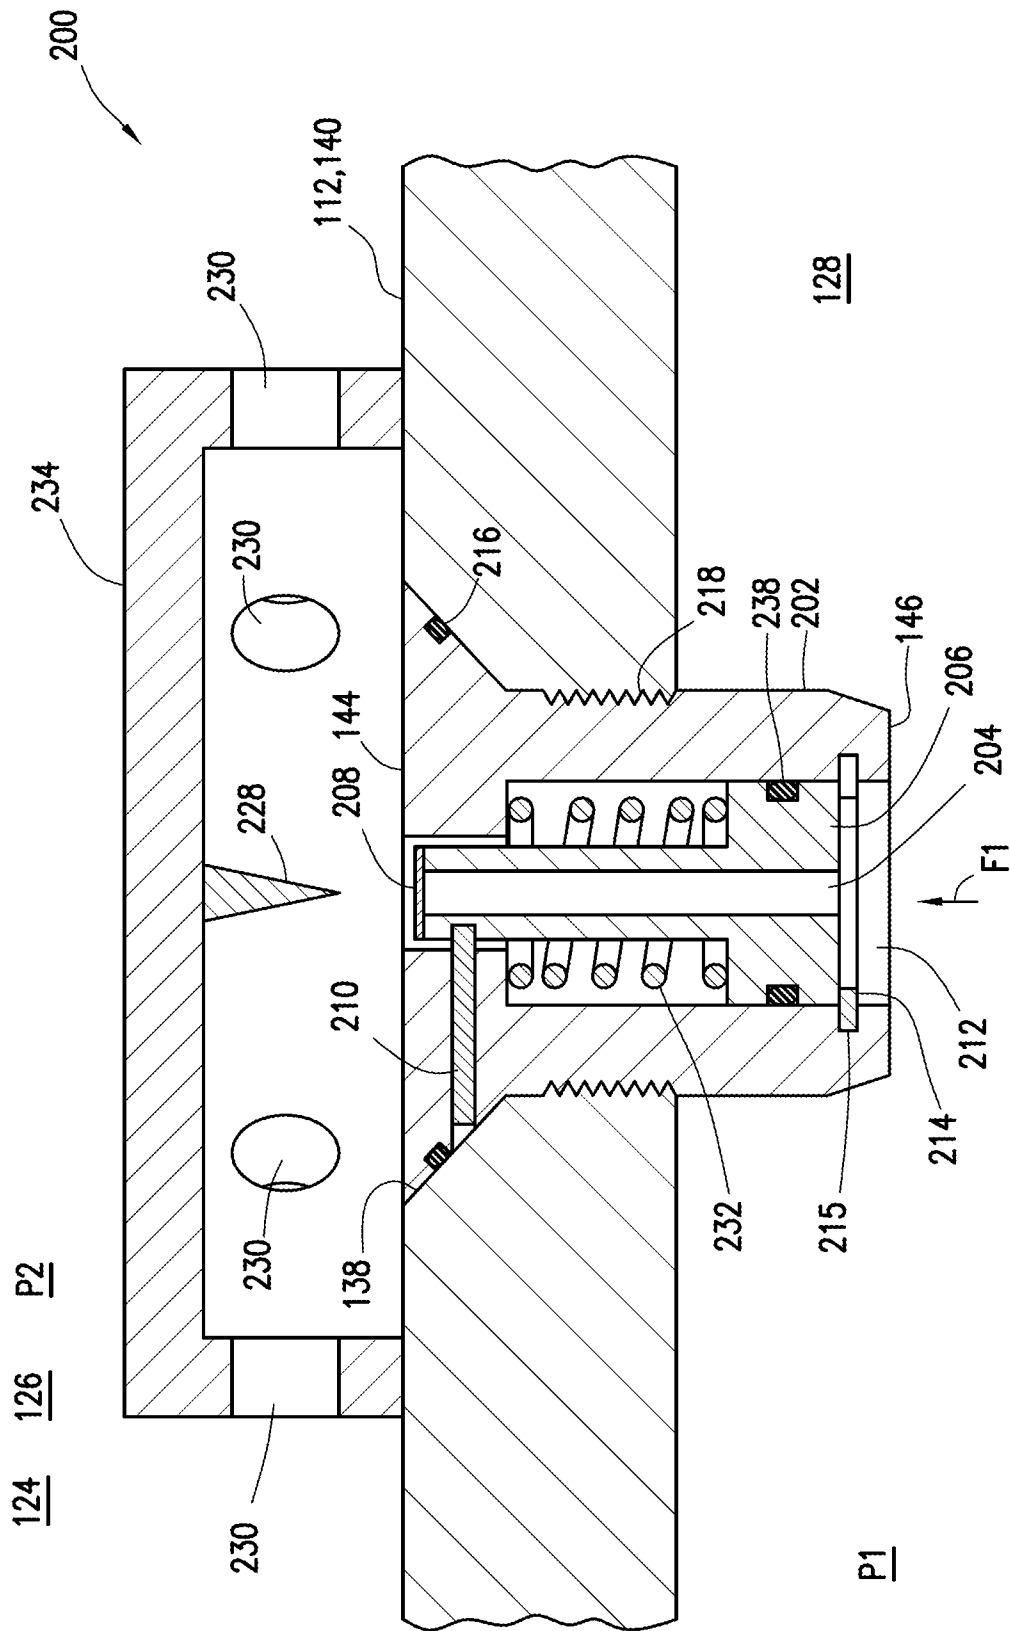


FIG. 6

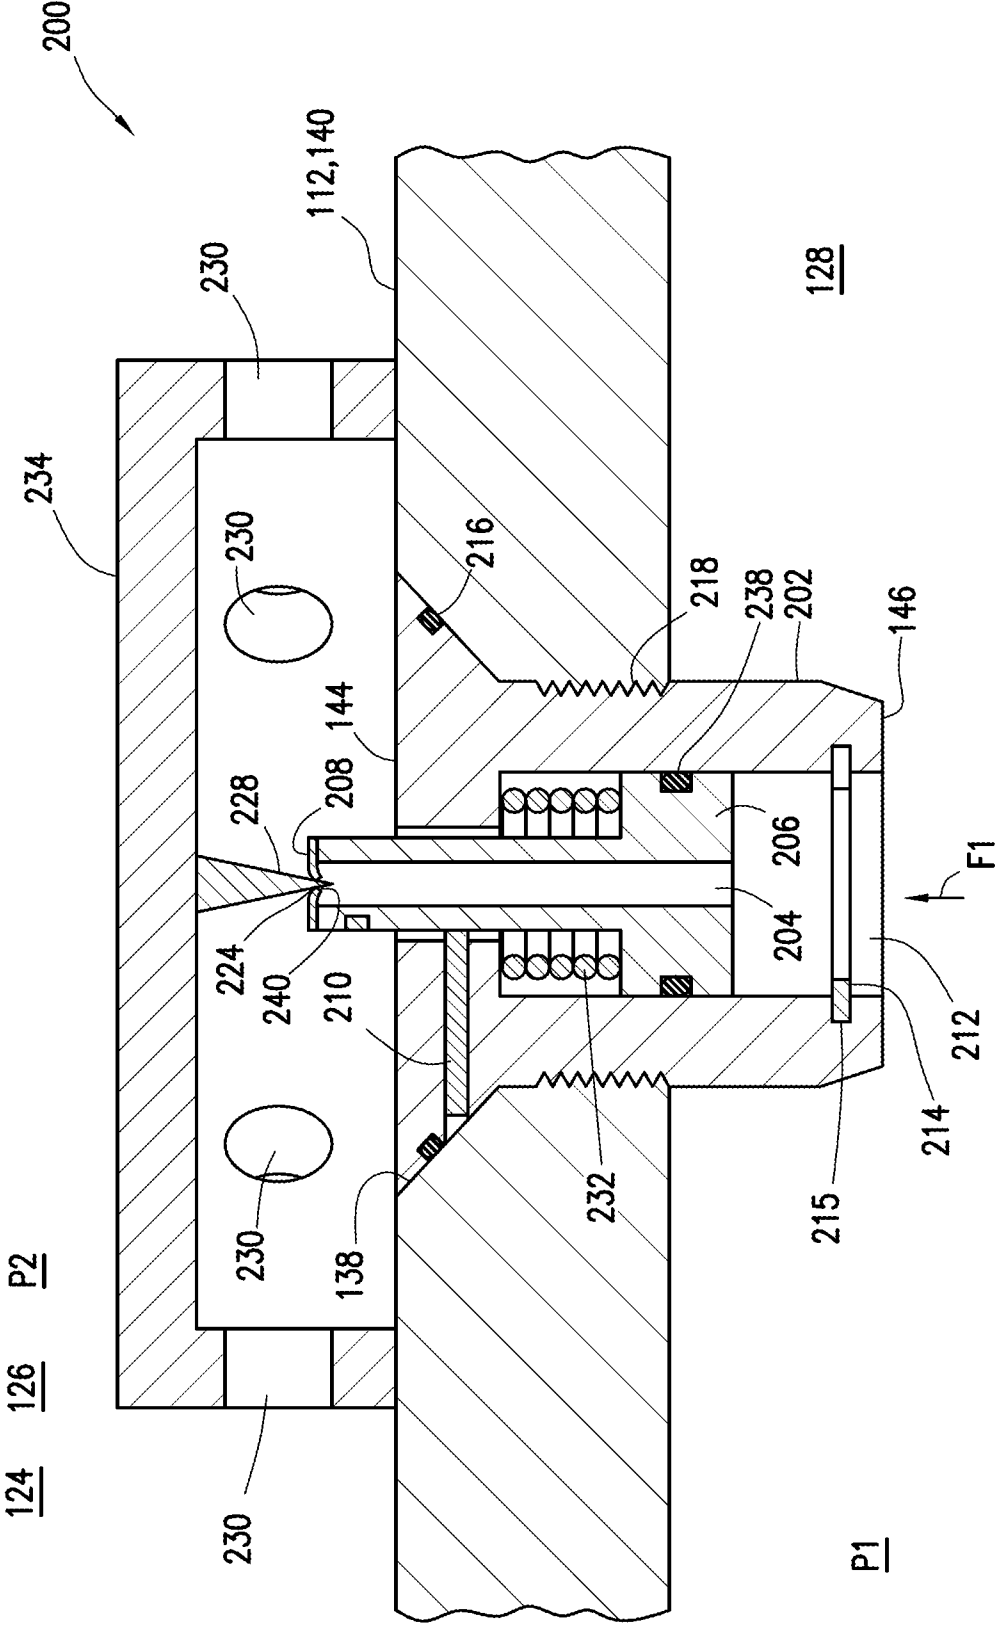


FIG. 7

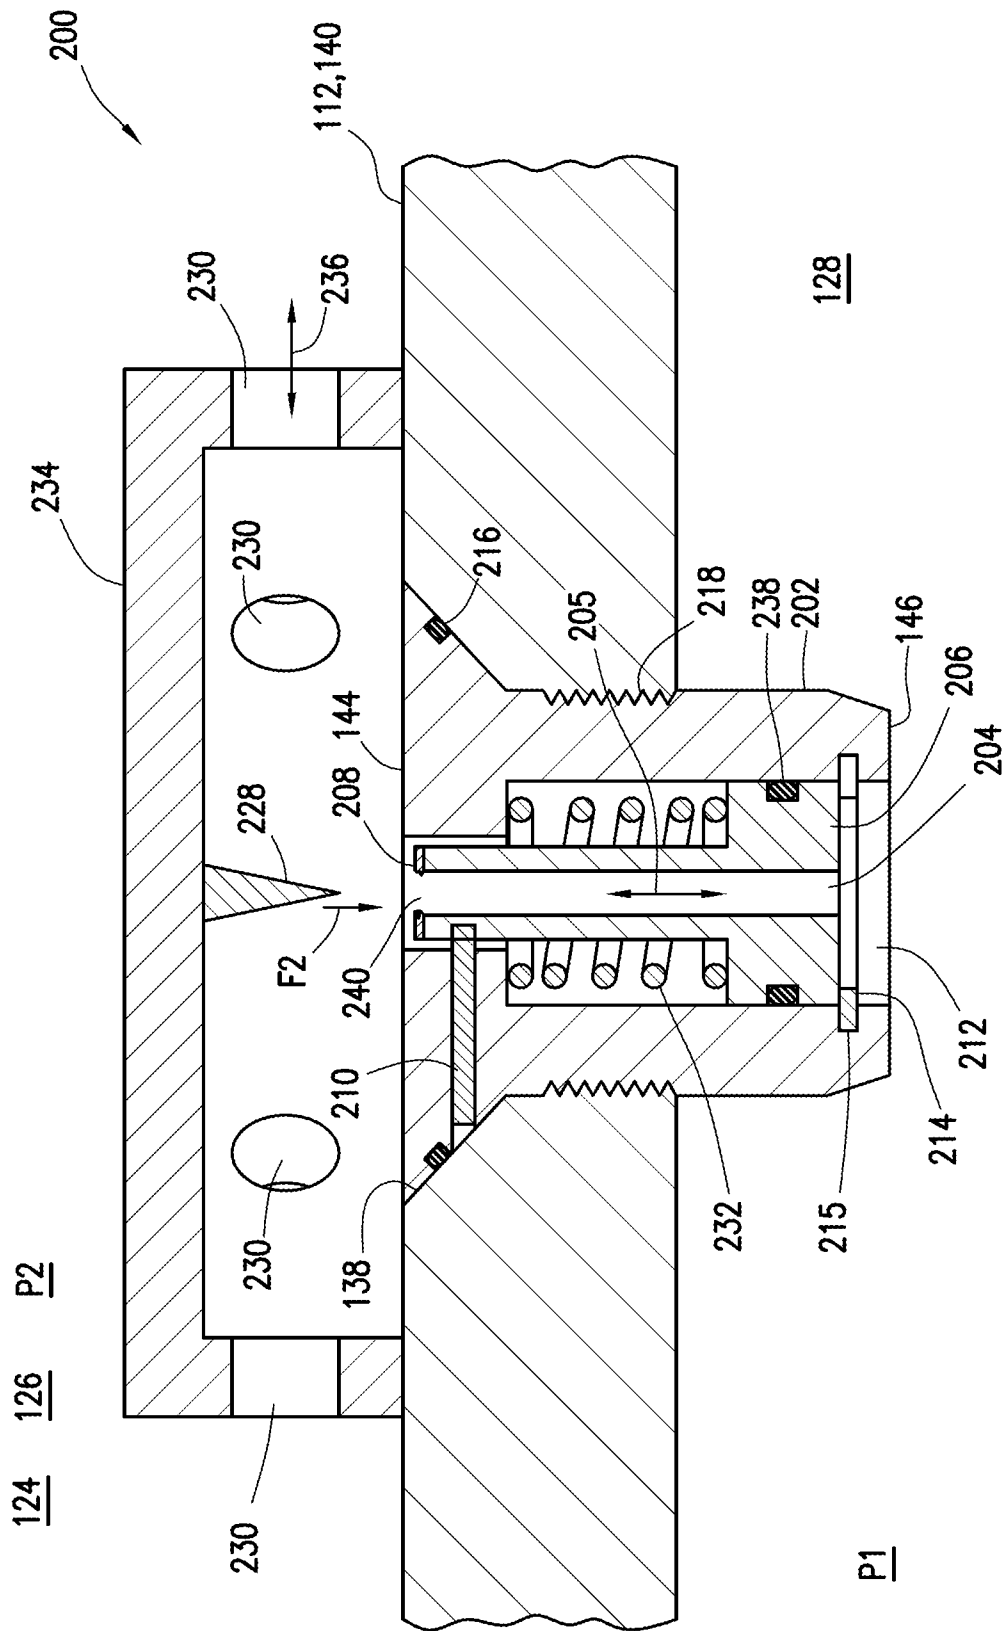


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/019337**A. CLASSIFICATION OF SUBJECT MATTER****E21B 34/06(2006.01)i, E21B 21/08(2006.01)i, E21B 43/12(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
E21B 34/06; E21B 43/12; E03B 3/18; E21B 33/12; E21B 34/10; E21B 34/08; E21B 21/08Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: barrier, pressure, ICD, shear, deform, piston, prevent**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2014-0338922 A1 (HALLBURTON ENERGY SERVICES, INC) 20 November 2014 See paragraphs [0002]-[0004], [0019]-[0022], [0033], [0041], [0058]-[0062], [0068]; and figures 1, 2A-2B, 6A-6B.	1-7, 9-11, 13-18, 20-22
A		8, 12, 19
Y	US 2015-0027726 A1 (DARCY TECHNOLOGIES LIMITED) 29 January 2015 See paragraphs [0022]-[0024], [0102]-[0110], [0113]-[0114]; and figures 4, 4c, 5-9.	1-7, 9-11, 13-18, 20-22
A	US 2011-0253391 A1 (VEIT et al.) 20 October 2011 See paragraphs [0011]-[0014], [0033], [0037], [0041]-[0048]; and figures 5-6, 7A-7B, 8.	1-22
A	WO 2011-067371 A1 (WELLTEC A/S et al.) 09 June 2011 See page 11, line 29 - page 15, line 19; and figures 2-6.	1-22
A	US 2009-0151925 A1 (RICHARDS et al.) 18 June 2009 See paragraphs [0041]-[0044], [0080]-[0084], [0090]-[0092]; and figures 3-5, 13-16.	1-22



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 September 2015 (30.09.2015)

Date of mailing of the international search report

01 October 2015 (01.10.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 35208,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

PARK, Tae Wook

Telephone No. +82-42-481-3405



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/019337

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014-0338922 A1	20/11/2014	WO 2014-123539 A1	14/08/2014
US 2015-0027726 A1	29/01/2015	AU 2013-229230 A1	12/09/2013
		CA 2866428 A1	12/09/2013
		CN 104395552 A	04/03/2015
		EP 2836672 A2	18/02/2015
		GB 2492193 A	26/12/2012
		GB 2492193 B	19/06/2013
		WO 2013-132254 A2	12/09/2013
		WO 2013-132254 A3	28/08/2014
US 2011-0253391 A1	20/10/2011	AU 2011-201485 A1	03/11/2011
		AU 2011-201485 B2	05/03/2015
		EP 2378057 A2	19/10/2011
		US 8256522 B2	04/09/2012
WO 2011-067371 A1	09/06/2011	CA 2782717 A1	09/06/2011
		CN 102639811 A	15/08/2012
		DK 201170425 A	03/08/2011
		DK 201170426 A	03/08/2011
		EP 2333235 A1	15/06/2011
		EP 2339112 A1	29/06/2011
		EP 2507472 A1	10/10/2012
		EP 2507473 A1	10/10/2012
		RU 2012-126669 A	20/01/2014
		US 2012-0234556 A1	20/09/2012
		US 2012-0305243 A1	06/12/2012
		WO 2011-067372 A1	09/06/2011
US 2009-0151925 A1	18/06/2009	AU 2008-338356 A1	25/06/2009
		AU 2008-338356 B2	17/05/2012
		CN 101903603 A	01/12/2010
		GB 2470489 A	24/11/2010
		GB 2470489 B	10/07/2013
		MY 151364 A	15/05/2014
		US 8474535 B2	02/07/2013
		WO 2009-079612 A1	25/06/2009