



- (51) International Patent Classification:
E21B 29/00 (2006.01) *E21B 37/02* (2006.01)
- (21) International Application Number:
PCT/EP2018/070975
- (22) International Filing Date:
02 August 2018 (02.08.2018)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20171418 01 September 2017 (01.09.2017) NO
- (71) Applicant: NORSE OILTOOLS AS [NO/NO]; P. O. Box 234, 4098 Tananger (NO).
- (72) Inventor: STANGELAND, Jan; Kjelsbergsvingen 4, 4050 Sola (NO).
- (74) Agent: ONSAGERS AS; P. O. Box 1813 Vika, 0123 Oslo (NO).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(54) Title: MILLING TOOL

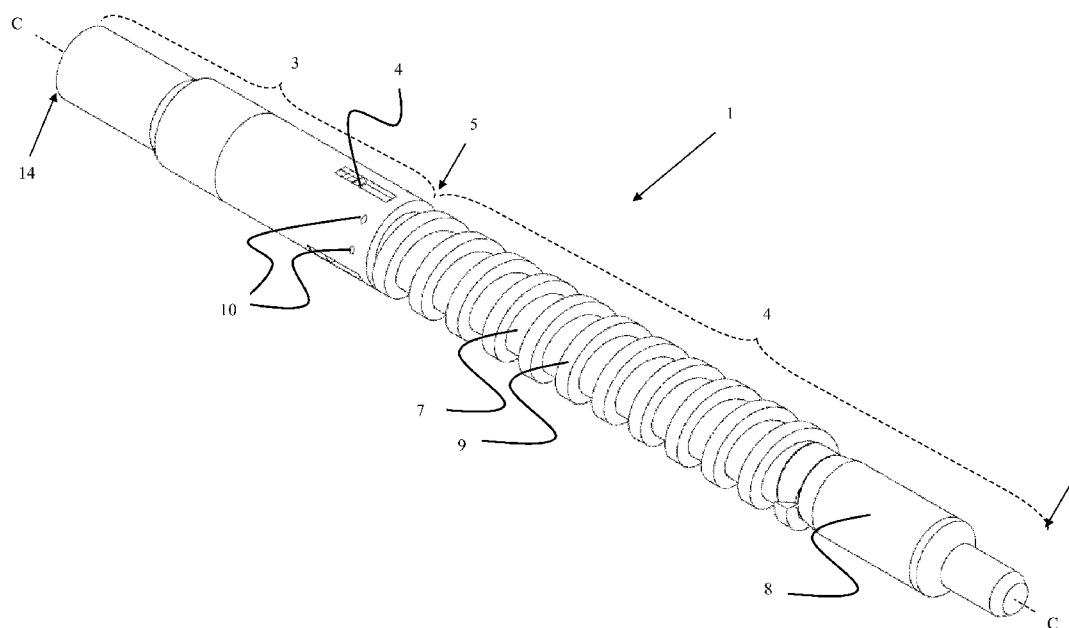


Fig. 1

(57) Abstract: The present invention provides a milling tool (1) for a wellbore, comprising a milling section (2) and a metal cuttings removal section (3), the milling section (2) comprises radially arranged milling elements (4); and the metal cuttings removal section (3) has a first end (5) and a second end (6) and comprises a cylinder-shaped magnetic element (7), a rotation generating device (8) and a helix-shaped longitudinal guide element (9), wherein the first end (5) is connected to the milling section; the helix-shaped longitudinal guide element (9) is arranged around the cylinder-shaped magnetic element (7); the rotation generating device (8) is operably connected to the cylinder-shaped magnetic element (7) or the helix-shaped longitudinal guide element (9); wherein the cylinder-shaped magnetic element and the helix-shaped longitudinal guide element (9) are rotatable relative to each other around a common centreline (C), and configured such that metal cuttings accumulating on the cylinder-shaped magnetic element during use is guided by the helix-shaped

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

MILLING TOOL

Technical field

- 5 The present invention relates to the field of milling tools, and more specifically to a milling tool and a method of using said milling tool.

Background

- 10 Offshore oil and gas industry faces an increasing demand from governments and regulatory institutions to permanently seal/plug unproductive wells. Unproductive or abandoned wells which are not permanently plugged represents a large potential environmental threat.
- 15 In a common plugging and abandonment operation (P&A), a section of the well casing(s) in a wellbore is milled away and a cement plug is subsequently set at said section to permanently seal off the well. The milling operation produces large amounts of metal cuttings which may interfere with both the milling operation itself and the subsequent plug cementing operation. Contrary to most operations
- 20 performed in preproduction and producing wells, P&A does not really require that the metal cuttings (often termed swarf) are removed from the wellbore after performing a milling/cutting operation, since a plugged and abandoned well does not contain any well equipment, such as a Blow-Out Preventer (BOP), that may be damaged by the presence of metal cuttings. The only requirement is that the metal
- 25 cuttings are removed from the area of the well section in which the plug is set. This is to avoid that metal cuttings are present in the milled section, since the cuttings may compromise or interfere with the plug cementing operation causing improper sealing of the wellbore. Various P&A equipment and methods are comprehensively reviewed by Thomas Ringe in the thesis "*Section milling during plug and*
- 30 *abandonment of petroleum wells*", Faculty of Science and Technology, University of Stavanger.

- To avoid transporting the metal cuttings topside, various milling tools and methods have been proposed. Avoiding topside handling of such cuttings is highly
- 35 advantageous since it is time-consuming/costly, requires additional handling equipment and provides a number of HSE issues. These prior art milling tools and methods have two features in common; the section milling is performed while moving the tool in an upward direction within the wellbore and the produced metal cuttings are deposited/transported further down in the wellbore.

- 40 US 6679328 B2 discloses a milling tool for milling a section of casing. The milling is performed while pulling the milling tool in an upward direction by use of a

hydraulic thrusting mechanism. The produced metal cuttings are moved downwards into the wellbore by use of a spiral auger.

5 WO 2010/120180 A1 discloses a milling tool for milling a section of casing. The milling is performed while pulling the milling tool in an upward direction presumably by use of a drill pipe. The produced metal cuttings are moved downwards into the wellbore by use of a fluid conduit and optionally a spiral auger.

10 The present invention provides a milling tool, wherein at least some of the disadvantages of the prior art is alleviated or avoided.

Summary of the invention

15 The present invention is defined by the appended claims and in the following:

In a first aspect, the present invention provides a milling tool for wellbores, comprising a milling section and a metal cuttings removal section,

- 20 - the milling section comprises radially arranged milling elements; and
- the metal cuttings removal section has a first end and a second end and comprises a cylinder-shaped magnetic element, a rotation generating device and a helix-shaped longitudinal guide element, wherein
 - 25 ○ the first end is connected to the milling section;
 - the helix-shaped longitudinal guide element is arranged around the cylinder-shaped magnetic element;
 - the rotation generating device is operably connected to the cylinder-shaped magnetic element or the helix-shaped longitudinal guide element;

wherein

30 the cylinder-shaped magnetic element and the helix-shaped longitudinal guide element are rotatable relative to each other around a common centreline, and configured such that metal cuttings accumulating on the cylinder-shaped magnetic element during use is guided by the helix-shaped longitudinal guide element
35 towards the second end of the metal cuttings removal section when the rotation generating device is operated.

The rotation generating device is preferably connected to the helix-shaped longitudinal guide element.

40 The cylinder-shaped magnetic element is preferably rigidly connected to the milling section, such that the magnetic element co-rotates with the milling section. The

helix-shaped longitudinal guide element is made in a suitable non-magnetic material.

5 The milling section is rotatable relative a wellbore, preferably by a connected well string or drill pipe. Alternatively, the milling section is rotated by a second rotation generating device, such as any suitable type of hydraulic or electric motor.

10 In one embodiment of the milling tool, the metal cuttings removal section is configured such that metal cuttings accumulating on the cylinder-shaped magnetic element during use is pushed away from the milling tool, and preferably further down into the well bore. In all embodiments, the metal cuttings removal section is configured such that metal cuttings accumulating on the cylinder-shaped magnetic element during use is pushed away from the milling section.

15 In one embodiment of the milling tool, the milling section comprises multiple nozzles for drilling mud, or drilling mud nozzles, the outlet of the nozzles are arranged such that metal cuttings formed/produced during a milling operation are guided towards the metal cuttings removal section during use. Preferably, the nozzles are arranged to eject drilling mud in the downwards direction of the well
20 bore. The drilling mud flow from the nozzles contributes to push the metal cuttings down into the wellbore. The multiple nozzles are preferably radially arranged at the circumference of the milling section.

25 In one embodiment, the milling tool comprises a central passage, e.g. a fluid conduit along the centerline of the tool, for supply of drilling mud to the drilling mud nozzles, for moving the cutters into the activated position, and/or for driving the rotation generating device.

30 In one embodiment of the milling tool, an end section of the scrape, the end section being distal to the milling section, is arranged around a cylinder-shaped non-magnetic element. The non-magnetic element extends a distance from the magnetic element, the distance being sufficient to eliminate the magnetic attraction between the metal cuttings and the cylinder-shaped magnetic element.

35 In one embodiment of the milling tool, the radially arranged milling elements are multiple radially arranged cutters. Preferably three to eight cutters. In one embodiment, the milling section comprises a cylindrical housing in which the cutters are arranged. The cutters may be in a non-activated position, wherein the cutters are retracted in the housing or milling section, and an activated position,
40 wherein the cutters are radially extended. In one embodiment, the cutters are moved into the activated position by hydraulic pressure provided by drilling mud.

In one embodiment, the milling tool is for use in plug and abandonment operations. Preferably, the milling tool is a section mill for milling a radial section of all casing strings in a plug and abandonment operation.

5 In one embodiment, the milling section is arranged at a level above the metal cuttings removal section during use.

10 In one embodiment of the milling tool, the rotation generating device is a hydraulic motor, preferably a drilling mud operated motor, or a centralizing anti-torque element. The drilling mud operated motor is preferably a roller vane motor.

15 The centralizing anti-torque element is connected to the helix-shaped longitudinal guide element and is able to interact with an inner surface of a wellbore, such that the helix-shaped longitudinal guide element is held substantially rotationally stationary relative the cylinder-shaped magnetic element when said magnetic element rotates along with the milling section.

20 In one embodiment of the milling tool, the rotation generating device is a hydraulic or electric motor, preferably a drilling mud operated motor, arranged at the second end of the metal cuttings removal section and operatively connected to rotate the helix-shaped longitudinal guide element relative the magnetic element.

25 In one embodiment of the milling tool, the milling section or the cuttings removal section comprises a connecting end distal to the cuttings removal section or the milling section, respectively, the connecting end being suitable for connecting the tool to a wireline, a power cable, an umbilical, a well string, a drill pipe or a coiled tubing.

30 In one embodiment of the milling tool, the milling section comprises a connecting end distal to the metal cuttings removal section, the connecting end being suitable for connecting the tool to a wireline, a power cable, an umbilical, a well string, a drill pipe or a coiled tubing.

35 In a second aspect, the present invention provides a method of plugging and abandoning a well bore, comprising the steps of:

- lowering a milling tool according to any embodiment of the first aspect of the invention into the well bore; and
 - milling a radial section through all the casing strings present in the well bore during movement of the milling tool in a downwards direction, while simultaneously pushing metal cuttings from the milling away from the milling tool and further down into the well bore.
- 40

In one embodiment, the method comprises the steps of:

- retrieving the milling tool topside; and
- 5 - performing the required operations to cementing a plug at the milled radial section.

10 The term “metal cuttings” is intended to mean any type of metal debris and particles, commonly termed “swarf” produced during a milling operation.

The term “milling elements” are intended to mean any type of edged milling feature arrangeable on a milling tool for grinding/cutting junk, casings etc. present in a wellbore.

15

Short description of the drawings

The present invention is described in detail by reference to the following drawings:

20 Fig. 1 is a perspective view of a first embodiment of a milling tool according to the invention.

Fig. 2 is a cross-sectional side view of the milling tool in fig. 1.

25 Fig. 3 is an expanded cross-sectional view of the milling section of the milling tool in figs 1 and 2.

Fig. 4 is an expanded cross-sectional view of the rotation generating device of the milling tool in figs 1 and 2.

30

Fig. 5 is an expanded view of the rotation generating device of a second embodiment of the invention.

35 Detailed description of the invention

A first embodiment of a milling tool according to the present invention is shown in figs. 1-4.

40 The inventive milling tool is particularly suitable for section milling in plug and abandonment operations (P&A). As opposed to the prior art milling tools, the milling tool according to the invention is able to perform milling in a downwards

direction while at the same time pushing/guiding produced metal cutting further down in the well bore. Further, the present milling tool avoids or alleviates the interference of produced metal cuttings with the milling itself, i.e. the metal cuttings are prevented from nesting/clogging the cutters.

5

The milling tool comprises a milling section 2 and a metal cuttings removal section 3. The milling section features four radially arranged cutters 4 (i.e. milling elements) suitable for milling a wellbore casing. The cutters may move between a passive and an active position. In the passive position, as shown in figs. 1-3, the cutters are retracted into the milling section. The cutters are pretensioned into the passive position by a spring 11, and upon activation by drilling mud pressure via the passage 12, a piston assembly 18 will push the cutters radially outwards into an active position, in which the cutters are in contact with a wellbore casing to be cut and milled. Various solutions for designing milling sections with retractable cutters, as well as the design of the cutters themselves, are well known to the skilled person and described in for instance WO 95/03473, US5265675A, US 2015/0129195 A1 and WO 2016/108837 A1.

10

15

20

25

30

The metal cuttings removal section 3 has a first end 5 and a second end 6 and comprises a cylinder-shaped magnetic element 7, a roller vane motor 8 (i.e. a rotation generating device) and a scraper 9 formed as a helix (i.e. a helix-shaped longitudinal guide element). The first end 5 is connected to the milling section. The scraper 9 is coaxially arranged around the cylinder-shaped magnetic element 7 and is operably connected to the roller vane motor 8. The roller vane motor 8 is driven by drilling mud entering the motor via the central longitudinal mud passage 12 and the mud inlets 13. Various roller vane motors suitable for use in a milling tool according to the invention are known and described in for instance WO 93/08374, WO 94/16198 and US 6302666 B1. In addition to roller vane motors, any suitable type of hydraulic or electric motor may be used to rotate the scrape relative the magnetic element.

35

The magnetic element 7 and the scraper 9 are rotatable relative to each other around a common centreline C, and configured such that metal cuttings accumulating on the magnetic element during use is guided by the scraper towards the second end 6 of the metal cuttings removal section 3 when the roller vane motor 8 is operated. A part 17 of the scrape 9 being proximal the second end 6 is arranged around a cylinder-shaped non-magnetic element 16 of the metal cuttings removal section. The scraper 9 is preferably made in non-magnetic stainless steel, e.g. a suitable type of austenitic stainless steel.

40

The inner surface of the scrape (i.e. the surface turned towards the circumferential surface of the magnetic element) is slightly spaced (0.1-0.5 mm) from the

circumferential surface. Further details, function and features of a suitable helix-shaped scrape and a corresponding magnetic element is disclosed in WO 2016/155852 A1, the content of which is hereby incorporated by reference.

5 The milling section 3 features a connecting end 14 distal from the metal cuttings removal section 4. The connecting end of the present embodiment is suitable for connecting the milling tool to a drill pipe (not shown). The drill pipe will provide the required rotation of the milling section 3, while at the same time providing mud to the roller vane motor 8 for rotating the scraper 9 relative the magnetic element 7,
10 as well as a required hydraulic pressure for activation of the cutters 4. To aid in guiding the metal cuttings toward the magnetic element, the milling section features multiple mud nozzles. The outlets of the nozzles are arranged in a direction such that the produced metal cuttings are moved towards the metal cuttings removal section during use. The mud exiting the nozzles are also advantageous in that it
15 contributes to a more effective milling by guiding the metal cutting away from the cutters.

An exploded view of the metal cuttings removal section 4 of a second embodiment of a milling tool according to the invention is shown in fig. 5. The second
20 embodiment differs from the milling tool in figs. 1-4 in that the roller vane motor 8 is replaced by a centralizing anti-torque element 15 or anchor (i.e. an alternative rotation generating device) connected to the scraper 9. During milling, the anti-torque element 15 is radially extended to provide an adequate frictional contact with the inner surface of the wellbore/casing, such that the scraper 9 obtains a rotational
25 movement relative the magnetic element 2. The anti-torque element is only shown schematically, however detailed designs of suitable anti-torque elements would be obvious to the skilled person based on the present disclosure and the prior art. The anti-torque element 15 may for instance be similar to the anti-torque anchor devices disclosed in US 6679328 B2 or the gripper mechanism disclosed in WO
30 2015/112353 A1, both of which are hereby incorporated by reference. The centralizing anti-torque element 15 may for instance comprise radially extendable sections which are hydraulically activated by drilling mud via the central longitudinal mud passage 12.

35 The milling tool according to the present invention is described in detail by reference to embodiments particularly suitable for section milling in connection with P&A operations, wherein the cuttings removal section is arranged to guide/push the produced metal cuttings further down into the wellbore. However, the main features of the inventive milling tool, i.e. the combination of the milling
40 section 2 and the metal cuttings removal section 3 will provide an advantageous effect in a number of different milling tools having different types of milling elements (including both retractable cutters and fixed cutters/blades), such as top

mills, taper mills, junk mills etc. since the produced metal cuttings, and any other metal debris, are efficiently guided away from the milling section. This effect contributes to avoid clogging of metal debris at the site of milling and also to lower the wear of the milling elements. The advantageous effect is further increased by the feature of having nozzles 10 providing a drilling mud flow guiding the metal cuttings/debris away from the milling elements and towards the metal cuttings removal section.

10

15

20

25

30

35

40

Claims

1. A milling tool (1) for a wellbore, comprising a milling section (2) and a metal cuttings removal section (3),
- 5 - the milling section (2) comprises radially arranged milling elements (4);
 and
- the metal cuttings removal section (3) has a first end (5) and a second end (6) and comprises a cylinder-shaped magnetic element (7), a rotation generating device (8) and a helix-shaped longitudinal guide element (9),
- 10 wherein
- the first end (5) is connected to the milling section;
- the helix-shaped longitudinal guide element (9) is arranged around the cylinder-shaped magnetic element (7);
- the rotation generating device (8) is operably connected to the
- 15 cylinder-shaped magnetic element (7) or the helix-shaped longitudinal guide element (9);
- wherein
- the cylinder-shaped magnetic element and the helix-shaped longitudinal
- 20 guide element (9) are rotatable relative to each other around a common centreline (C), and configured such that metal cuttings accumulating on the cylinder-shaped magnetic element during use is guided by the helix-shaped longitudinal guide element towards the second end (6) of the metal cuttings removal section when the rotation generating device is
- 25 operated.
2. A milling tool according to claim 1, wherein the metal cuttings removal section (3) is configured such that metal cuttings accumulating on the cylinder-shaped magnetic element (7), during use, is pushed away from the
- 30 milling tool (1).
3. A milling tool according to any of the preceding claims, wherein the milling section comprises multiple nozzles (10) for drilling mud, the outlets of the nozzles are arranged such that metal cuttings are guided towards the metal
- 35 cuttings removal section during use.
4. A milling tool according to any of the preceding claims, wherein an end section (17) of the helix-shaped longitudinal guide element (9), the end section being distal to the milling section (2), is arranged around a cylinder-shaped non-magnetic element (16).
- 40

5. A milling tool according to any of the preceding claims, wherein the radially arranged milling elements are multiple radially arranged cutters (4).
6. A milling tool according to any of the preceding claims, wherein the rotation generating device (8) is a hydraulic motor, preferably a drilling mud operated motor, or a centralizing anti-torque element (15).
7. A milling tool according to any of the preceding claims, wherein the rotation generating device (8) is a drilling mud operated motor arranged at the second end (6) of the metal cuttings removal section (3) and connected to rotate the helix-shaped longitudinal guide element (9) relative the magnetic element (7).
8. A milling tool according to any of the preceding claims, wherein the milling section (2) or the cuttings removal section (3) comprises a connecting end (14) distal to the cuttings removal section (3) or the milling section (2), respectively, the connecting end (14) being suitable for connecting the milling tool (1) to a wireline, a power cable, an umbilical, a well string, a drill pipe or a coiled tubing.
9. A method of plugging and abandoning a well bore, comprising the steps of:
- lowering a milling tool according to any of the preceding claims into the well bore; and
 - milling a radial section through all the casing strings present in the well bore during movement of the milling tool in a downwards direction, while simultaneously pushing metal cuttings from the milling away from the milling tool and further down into the well bore.
10. A method according to claim 1, further comprising the steps of:
- retrieving the milling tool topside; and
 - performing the required operations to cementing a plug at the milled radial section.

35

40

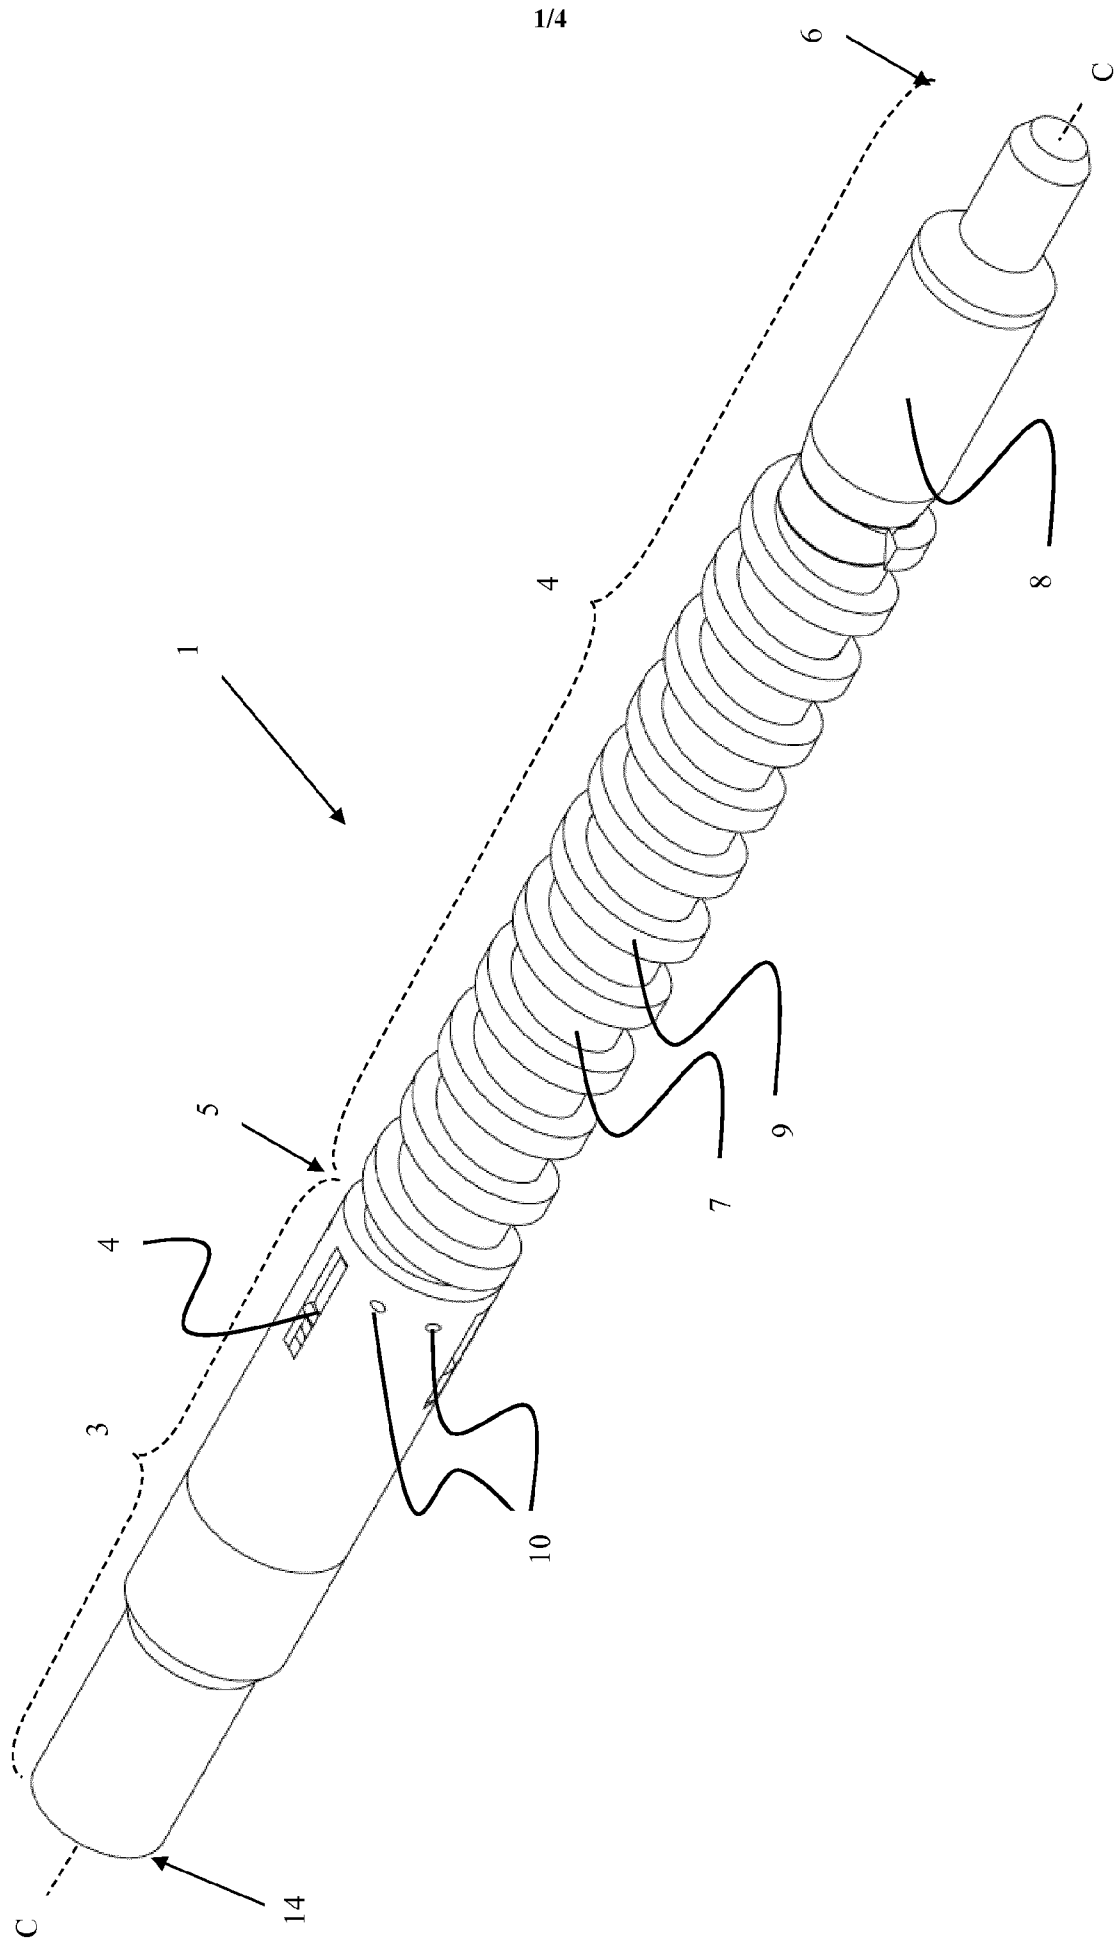


Fig. 1

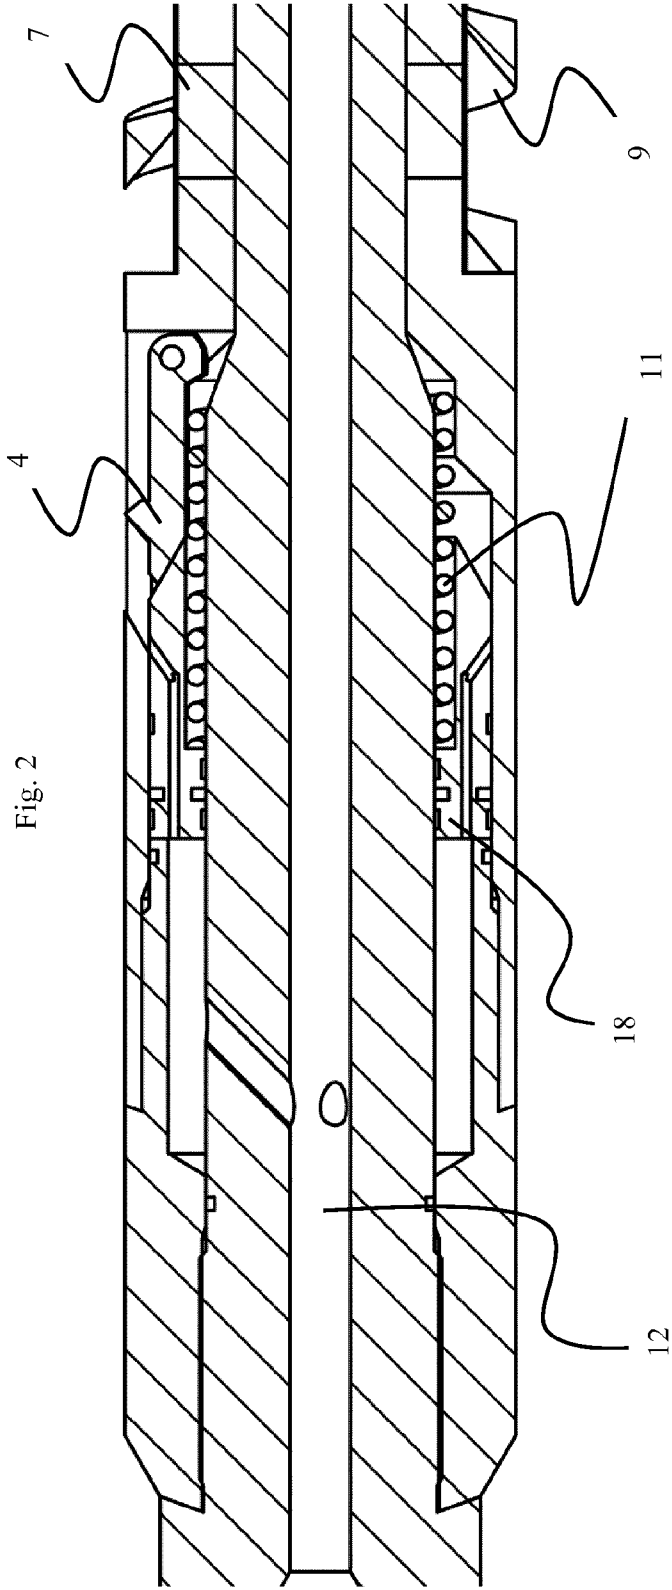
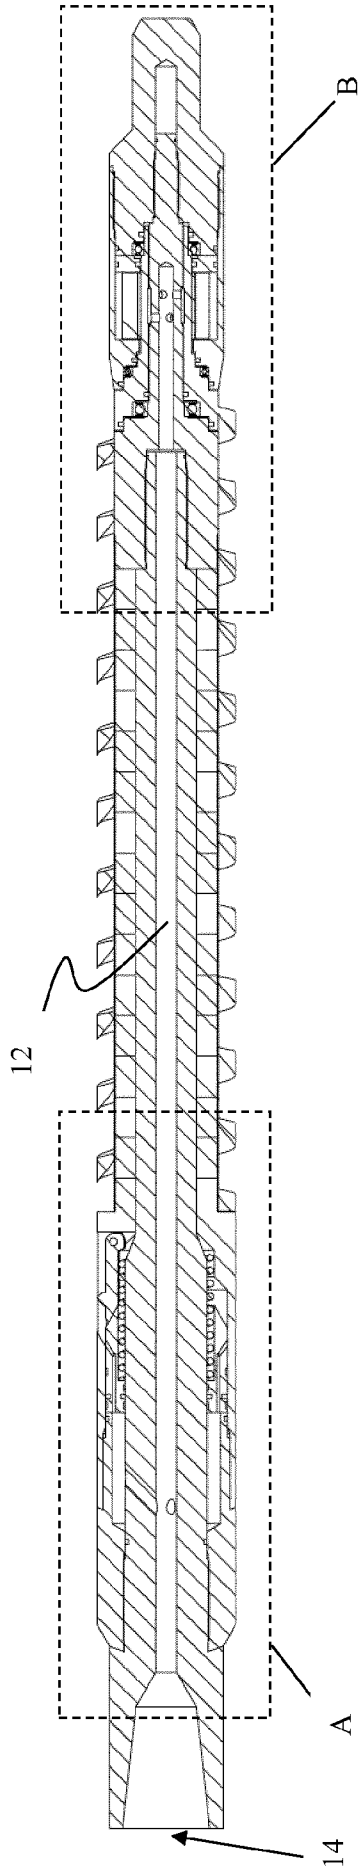


Fig. 2

Fig. 3 (Section A)

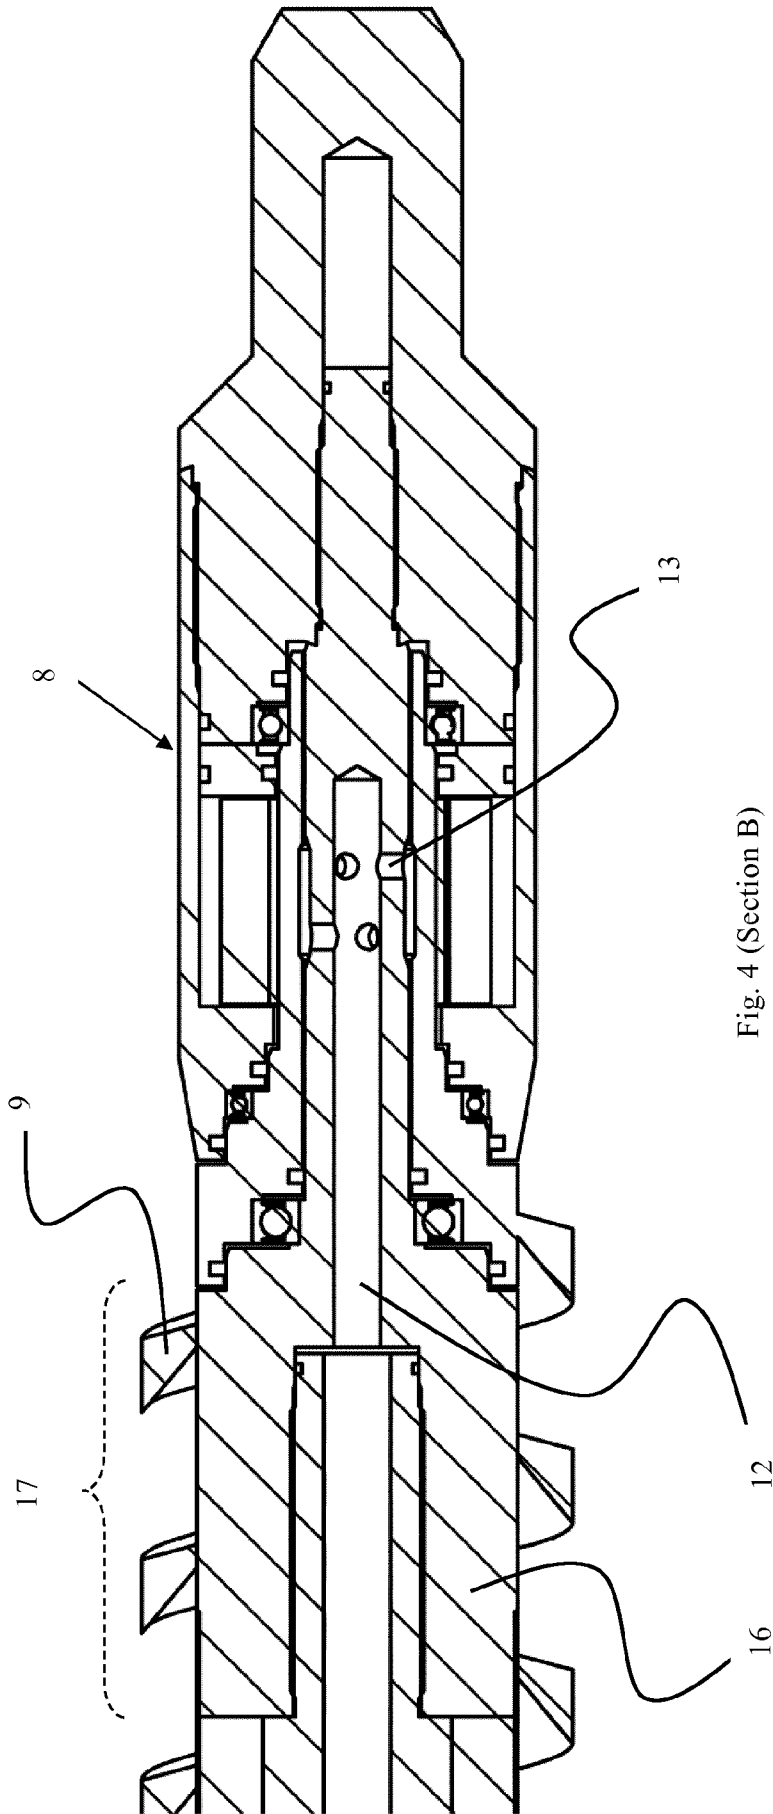


Fig. 4 (Section B)

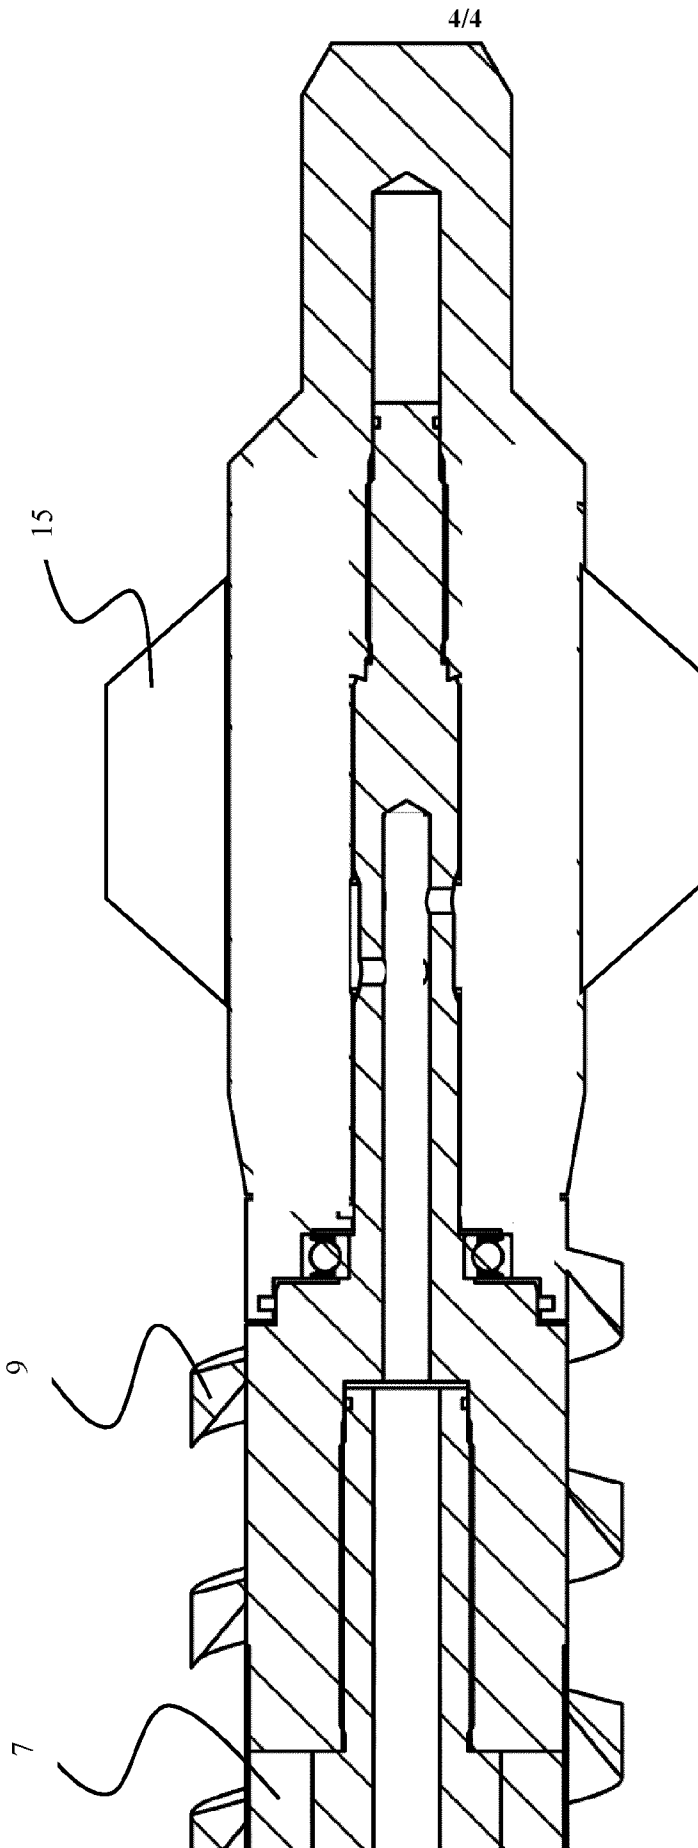


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/070975

A. CLASSIFICATION OF SUBJECT MATTER
INV. E21B29/00 E21B37/02
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
E21B
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 679 328 B2 (BAKER HUGHES INC [US]) 20 January 2004 (2004-01-20) cited in the application the whole document	1-10
A	----- WO 2016/155852 A1 (NORSE OILTOOLS AS [NO]) 6 October 2016 (2016-10-06) cited in the application the whole document	1-10
A	----- WO 2010/120180 A1 (WEST PRODUCTION TECHNOLOGY AS [NO]; KROHN HELGE [NO]; GRINROED MADS [N]) 21 October 2010 (2010-10-21) cited in the application the whole document -----	1-10

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 4 October 2018	Date of mailing of the international search report 26/10/2018
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Dekker, Derk
--	--

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2018/070975

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 6679328	B2	20-01-2004	AU 2002348294 A1	17-06-2003
			CA 2468729 A1	12-06-2003
			DE 10297474 T5	02-12-2004
			GB 2399372 A	15-09-2004
			NO 331250 B1	07-11-2011
			US 2002162659 A1	07-11-2002
			WO 03048510 A1	12-06-2003
WO 2016155852	A1	06-10-2016	BR 112017021082 A2	03-07-2018
			CA 2980242 A1	06-10-2016
			EP 3277917 A1	07-02-2018
			NO 338348 B1	08-08-2016
			US 2018016860 A1	18-01-2018
			WO 2016155852 A1	06-10-2016
WO 2010120180	A1	21-10-2010	AU 2010237175 A1	17-11-2011
			CA 2758448 A1	21-10-2010
			CN 102395749 A	28-03-2012
			EA 201190248 A1	30-05-2012
			EP 2419601 A1	22-02-2012
			NO 329613 B1	22-11-2010
			US 2012118570 A1	17-05-2012
			WO 2010120180 A1	21-10-2010