



(51) International Patent Classification:

H02G 15/00 (2006.01) *H02G 15/117* (2006.01)
H02G 15/113 (2006.01) *H01R 4/70* (2006.01)

(21) International Application Number:

PCT/US2009/064778

(22) International Filing Date:

17 November 2009 (17.11.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/115,746 18 November 2008 (18.11.2008) US
12/619,965 17 November 2009 (17.11.2009) US

(71) Applicant (for all designated States except US): **TYCO ELECTRONICS CORPORATION** [US/US]; 1050 Westlakes Drive, Berwyn, Pennsylvania 19312 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PULLIUM, III, George W.** [US/US]; 313 Zachary Way, Garner, North Carolina 27529 (US). **MARKS, Jimmy E.** [US/US]; 306 S Fayetteville Avenue, Dunn, North Carolina 28334 (US).

(74) Agent: **TYCO ELECTRONICS CORPORATION**; 309 Constitution Drive, M/S R34-2A, Menlo Park, California 94025-1164 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: SEALANT-FILLED ENCLOSURES AND METHODS FOR ENVIRONMENTALLY PROTECTING A CONNECTION

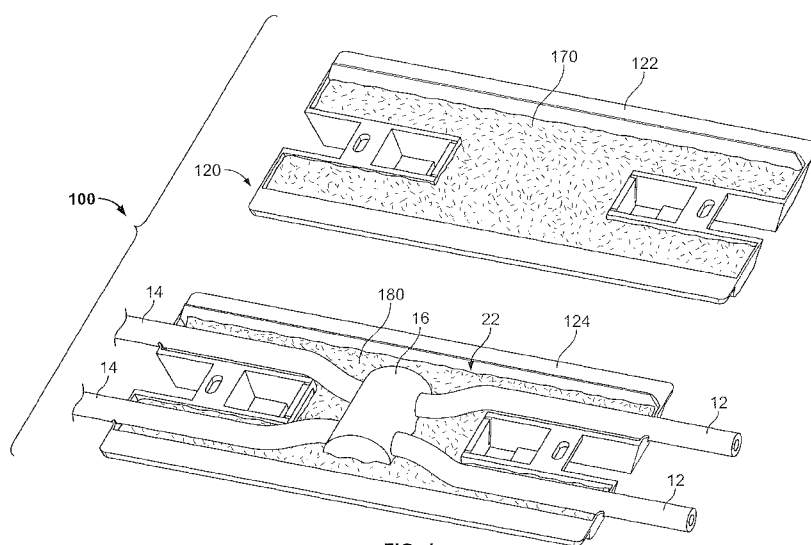


FIG. 1

(57) Abstract: A sealant-filled enclosure assembly for environmentally protecting a connection includes a housing, a mass of sealant and a sealant valve mechanism. The housing includes a main cavity to receive the connection. The mass of sealant is disposed in the main cavity. The sealant valve mechanism includes an overflow chamber and a gate member between the main cavity and the overflow chamber. The gate member is selectively positionable in each of a closed position, wherein the gate member substantially prevents displacement of the sealant from the main cavity to the overflow chamber, and an open position, wherein the gate member permits displacement of the sealant from the main cavity to the overflow chamber.



SEALANT-FILLED ENCLOSURES AND METHODS FOR ENVIRONMENTALLY PROTECTING A CONNECTION

Related Application(s)

[001] The present application claims the benefit of and priority from U.S. Provisional Patent Application Serial No. 61/115,746, filed November 18, 2008, the disclosure of which is incorporated herein by reference.

Field of the Invention

[002] The present invention relates to environmentally protective enclosures and, more particularly, to enclosures for environmentally protecting cable connections and the like.

Background of the Invention

[003] Sealant-filled environmentally protective enclosures are employed to protect cable connections. Such enclosures may be used to environmentally protect the connections between telecommunications signal transmission cables, the electrical power transmission cables, etc. For example, U.S. Patent No. 5,763,835 to Huynh-Ba et al. discloses a gel-filled enclosure including a pair of cavities that are hingedly connected and closable in clam shell fashion. When the enclosure is closed about the cables, gel is typically displaced and thereby elongated and seals about a cable splice or the like.

[004] However, such enclosures are typically adapted to suitably seal about a limited range of connection/cable sizes. Additionally, for relatively large connections and cables, the force required to close an enclosure about the connection/cables may be unduly large. However, such enclosures are typically adapted to suitably seal about a limited range of connection/cable sizes. Additionally, for relatively large connections and cables, the force required to close an enclosure about the connection/cables may be unduly large. In general, for larger enclosures and cable/connector volumes, there may be large difference in volume from the minimum to the maximum intended cable/connector configurations. As a result, it

may be difficult to provide an amount of gel in the enclosure sufficient to properly seal the smallest intended configuration but which will still allow the operator to easily close the enclosure. When a large volume of gel must be displaced to accommodate a large cable/connector, the gel may extrude through an end of the enclosure or even climb over side walls (in which case, the gel may accumulate at a latch area). These actions may generate substantial internal pressure in the enclosure that makes the enclosure difficult to close.

Summary of the Invention

[005] According to embodiments of the present invention, a sealant-filled enclosure assembly for environmentally protecting a connection includes a housing, a mass of sealant and a sealant valve mechanism. The housing includes a main cavity to receive the connection. The mass of sealant is disposed in the main cavity. The sealant valve mechanism includes an overflow chamber and a gate member between the main cavity and the overflow chamber. The gate member is selectively positionable in each of a closed position, wherein the gate member substantially prevents displacement of the sealant from the main cavity to the overflow chamber, and an open position, wherein the gate member permits displacement of the sealant from the main cavity to the overflow chamber.

[006] According to method embodiments of the present invention, a method for environmentally protecting a connection includes providing a sealant-filled enclosure assembly. The sealant-filled enclosure assembly includes a housing, a mass of sealant and a sealant valve mechanism. The housing includes a main cavity to receive the connection. The mass of sealant is disposed in the main cavity. The sealant valve mechanism includes an overflow chamber and a gate member between the main cavity and the overflow chamber. The gate member is selectively positionable in each of a closed position, wherein the gate member substantially prevents displacement of the sealant from the main cavity to the overflow chamber, and an open position, wherein the gate member permits displacement of the sealant from the main cavity to the overflow chamber. The method further includes: placing the connection in the main cavity; transitioning the gate member from the closed position to the open position; and displacing a portion of the sealant from the main cavity to the overflow chamber.

[007] Further features, advantages and details of the present invention will be appreciated by those of ordinary skill in the art from a reading of the figures and the detailed

description of the embodiments that follow, such description being merely illustrative of the present invention.

Brief Description of the Drawings

[008] **Figure 1** is a top perspective view of a sealant-filled enclosure assembly according to embodiments of the present invention in an open position and with a connection partially installed therein.

[009] **Figure 2** is a top perspective view of a housing forming a part of the sealant-filled enclosure assembly of **Figure 1** in an open position.

[0010] **Figure 3** is a cross-sectional view of the housing of **Figure 2** taken along the line 3-3 of **Figure 2**.

[0011] **Figure 4** is a cross-sectional view of the housing of **Figure 2** taken along the line 4-4 of **Figure 2**.

[0012] **Figure 5** is a cross-sectional view of the housing of **Figure 2** taken along the line 5-5 of **Figure 2**.

[0013] **Figure 6** is a top perspective view of the sealant-filled enclosure assembly of **Figure 1** installed about the connection to form a connection assembly.

[0014] **Figure 7** is a cross-sectional view of the connection assembly of **Figure 6** taken along the line 7-7 of **Figure 6**, wherein the gate members of the sealant-filled enclosure assembly are in their closed positions.

[0015] **Figure 8** is a cross-sectional view of the connection assembly of **Figure 6** taken along the line 8-8 of **Figure 7**, wherein the gate members of the sealant-filled enclosure assembly are in their closed positions.

[0016] **Figure 9** is a cross-sectional view of the connection assembly of **Figure 6** taken along the line 9-9 of **Figure 7**, wherein the gate members of the sealant-filled enclosure assembly are in their closed positions.

[0017] **Figure 10** is a cross-sectional view of the connection assembly of **Figure 6** taken along the line 7-7 of **Figure 6**, wherein the gate members of the sealant-filled enclosure assembly are in their open positions.

[0018] **Figure 11** is a top perspective view of a sealant-filled enclosure assembly according to further embodiments of the present invention in an open position.

[0019] **Figure 12** is a top perspective view of a cover member of a housing forming a part of the sealant-filled enclosure assembly of **Figure 11** in an open position.

[0020] **Figure 13** is a bottom perspective view of the cover member of **Figure 12**.

[0021] **Figure 14** is a cross-sectional view of the cover member of **Figure 12** taken along the line 14-14 of **Figure 12**.

[0022] **Figure 15** is a longitudinal, center cross-sectional view of the sealant-filled enclosure assembly of **Figure 11** installed on a connection to form a connection assembly, wherein the gate members thereof are in their open positions and supplemental stop members of the sealant-filled enclosure assembly are in their deployed positions.

Detailed Description of Embodiments of the Invention

[0023] The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which illustrative embodiments of the invention are shown. In the drawings, the relative sizes of regions or features may be exaggerated for clarity. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[0024] It will be understood that, although the terms first, second, etc. may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer or section from another region, layer or section. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the present invention.

[0025] Spatially relative terms, such as "beneath", "below", "lower", "above", "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "below" or "beneath" other elements or features would then be oriented "above" the other elements or features. Thus, the exemplary term "below" can encompass both an orientation of above and below. The device may be otherwise oriented (rotated 90° or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

[0026] As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless expressly stated otherwise. It will be further understood that the terms "includes," "comprises," "including" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. It will be understood that when an element is referred to as being "connected" or "coupled" to another element, it can be directly connected or coupled to the other element or intervening elements may be present. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

[0027] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of this specification and the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

[0028] According to embodiments of the present invention, a sealant-filled enclosure assembly for protecting a connection includes a housing defining a main cavity, a mass of sealant disposed in the main cavity, and a sealant valve mechanism. The sealant valve mechanism includes an overflow chamber, and a gate member between the main chamber and the overflow chamber and selectively positionable in each of a closed position, wherein the gate member prevents displacement of the sealant from the main cavity to the overflow chamber, and an open position wherein the gate member permits displacement of the sealant from the main cavity to the overflow chamber.

[0029] With reference to **Figures 1-10**, a sealant-filled enclosure assembly **100** according to some embodiments of the present invention is shown therein. The enclosure assembly **100** is adapted to form a sealed enclosure about a connection and/or cables or the like. For example, the enclosure assembly **100** may be used to form an environmentally protective enclosure about a plurality of cables **12, 14** (e.g., electrical power lines) joined by a connector **16** to form a connection assembly **9** as best shown in **Figures 6-10**.

[0030] With reference to **Figure 1**, the sealant-filled enclosure **100** includes a housing **120** including a first shell or cover member **122** and a second shell or cover member **124** adapted to be relatively positioned between an open position as shown in **Figure 1** and a

closed position as shown in **Figure 6**. Optionally, the cover members **122**, **124** can be joined by a hinge (*e.g.*, a living hinge). Masses of sealant **170**, **180** are disposed in the cover members **122**, **124**. According to some embodiments, and as discussed in more detail below, each of the sealants **170**, **180** may be a gel. In the open position, the enclosure assembly **100** can receive the connector **16** and adjacent portions of the conductors **12**, **14**. In the closed position, the enclosure assembly **100**, including the sealants **170**, **180**, may operate to seal about and environmentally protect the connector **16**. In the closed position, the enclosure assembly **100** defines an enclosure cavity **106** (**Figures 7 and 9**) and opposed pairs of ports **108** (**Figure 6**) communicating with the enclosure cavity **106**.

[0031] Turning to the housing **120** in more detail and as best seen in **Figures 2-5**, the cover members **122**, **124** are constructed in generally the same manner. Each cover member **122**, **124** includes a bottom wall **130**. Opposed side walls **132** and opposed end walls **134** extend upwardly from the bottom wall **130**. Opposed pairs of port extensions **140** extend longitudinally from either end of each cover member **122**, **124**. Each port extension **140** is terminated by a port wall **142**. According to other embodiments, the port walls **142** may be frangible. For example, the port walls **142** may include corrugations comprising a series of fingers joined by relatively thin membranes as shown. According to other embodiments, the port walls may be rigid or semi-rigid breakaway panels releasably secured closed by frangible regions.

[0032] The upper edges of the walls **132**, **134** form a perimeter edge **138** defining an opening **138A**. The walls **130**, **132**, **134** and the port extensions **140** of each cover member **122**, **124** define an overall cover member chamber or cavity **136** communicating with opening **138A**. The cavity **136** includes a main cavity portion **136A** and conductor port subchannels **136B** defined within each port extension **140**.

[0033] Opposed tie slots **146** are defined in each cover member **122**, **124**. Ties **30** can be used to secure the cover members **122**, **124** together as shown in **Figures 6 and 7**. Other mechanisms may be used to secure the cover members **122**, **124** together such as snaps or latches.

[0034] Each cover member **122**, **124** further includes an adjustable sealant volume control system **151**. Each system **151** includes a pair of opposed sealant valve mechanisms **150** each located between a respective pair of the port subchannels **136B**. The mechanisms **150** may be constructed and operate in substantially the same manner and, therefore, only one

of the mechanisms **150** will be described in detail hereinafter, it being appreciated that such description likewise applies to the other mechanism **150**.

[0035] The sealant valve mechanism **150** includes an overflow chamber **156** and a valve port **152** fluidly connecting the chamber **156** with the cavity **136**. The mechanism **150** further includes a gate member **154** that, in a closed position as shown in **Figure 2**, spans the port **152** (**Figures 2** and **10**) to prevent or substantially eliminate fluid communication between the chamber **156** and the cavity **136**. The gate member **154** may be a substantially rigid member or panel. The gate member **154** is pivotally joined to the bottom wall of the cover member **122**, **124** by a hinge **154A** (*e.g.*, a living hinge; **Figure 2**). Frangible connector portions **154B** releasably secure the gate member **154** to sidewalls **154C** to hold the gate member **154** in the closed position. When the connector portions **154B** are severed, the gate member **154** can be pivoted about the hinge **154A** into one or more open positions to provide fluid communication between the cavity **136** and the chamber **156** through the port **152**. The mechanism **150** further includes an outlet **158** to the environment and a base stop wall **160**.

[0036] The housing **120** may be formed of any suitable material. According to some embodiments, the housing **120** is formed of or with an electrically insulative material. In some embodiments, the housing **120** is formed of a vacuum formed or molded polymeric material. The housing **120** may be formed of polypropylene, nylon, polyethylene, ABS and/or PMMA. The housing **120** may be formed of a flame retardant material. The housing material may be any color or transparent.

[0037] Prior to use, the sealant **170** may be contained in the cavity **136** of the cover member **122** such that a main sealant portion of the sealant is disposed in the main cavity **136** and port sealant portions are disposed in the port subchannels **136B**. Prior to use, the sealant **180** may be contained in the cavity **136** of the cover member **124** such that a main sealant portion of the sealant is disposed in the main cavity **136** and port sealant portions are disposed in the port subchannels **136B**.

[0038] The sealants **170**, **180** may be any suitable sealants. According to some embodiments, the sealants **170**, **180** are gel sealants. As used herein, “gel” refers to the category of materials which are solids extended by a fluid extender. The gel may be a substantially dilute system that exhibits no steady state flow. As discussed in Ferry, “Viscoelastic Properties of Polymers,” 3rd ed. P. 529 (J. Wiley & Sons, New York 1980), a polymer gel may be a cross-linked solution whether linked by chemical bonds or crystallites

or some other kind of junction. The absence of the steady state flow may be considered to be the definition of the solid-like properties while the substantial dilution may be necessary to give the relatively low modulus of gels. The solid nature may be achieved by a continuous network structure formed in the material generally through crosslinking the polymer chains through some kind of junction or the creation of domains of associated substituents of various branch chains of the polymer. The crosslinking can be either physical or chemical as long as the crosslink sites may be sustained at the use conditions of the gel.

[0039] Gels for use in this invention may be silicone (organopolysiloxane) gels, such as the fluid-extended systems taught in U.S. Pat. No. 4,634,207 to Debbaut (hereinafter “Debbaut ‘207”); U.S. Pat. No. 4,680,233 to Camin et al.; U.S. Pat. No. 4,777,063 to Dubrow et al.; and U.S. Pat. No. 5,079,300 to Dubrow et al. (hereinafter “Dubrow ‘300”), the disclosures of each of which are hereby incorporated herein by reference. These fluid-extended silicone gels may be created with nonreactive fluid extenders as in the previously recited patents or with an excess of a reactive liquid, *e.g.*, a vinyl-rich silicone fluid, such that it acts like an extender, as exemplified by the Sylgard[®] 527 product commercially available from Dow-Corning of Midland, Michigan or as disclosed in U.S. Pat. No. 3,020,260 to Nelson. Because curing is generally involved in the preparation of these gels, they are sometimes referred to as thermosetting gels. The gel may be a silicone gel produced from a mixture of divinyl terminated polydimethylsiloxane, tetrakis (dimethylsiloxy)silane, a platinum divinyltetramethyldisiloxane complex, commercially available from United Chemical Technologies, Inc. of Bristol, Pennsylvania, polydimethylsiloxane, and 1,3,5,7-tetravinyltetra-methylcyclotetrasiloxane (reaction inhibitor for providing adequate pot life).

[0040] Other types of gels may be used, for example, polyurethane gels as taught in the aforementioned Debbaut ‘261 and U.S. Pat. No. 5,140,476 to Debbaut (hereinafter “Debbaut ‘476”) and gels based on styrene-ethylene butylenestyrene (SEBS) or styrene-ethylene propylene-styrene (SEPS) extended with an extender oil of naphthenic or nonaromatic or low aromatic content hydrocarbon oil, as described in U.S. Pat. No. 4,369,284 to Chen; U.S. Pat. No. 4,716,183 to Gamarra et al.; and U.S. Pat. No. 4,942,270 to Gamarra. The SEBS and SEPS gels comprise glassy styrenic microphases interconnected by a fluid-extended elastomeric phase. The microphase-separated styrenic domains serve as the junction points in the systems. The SEBS and SEPS gels are examples of thermoplastic systems.

[0041] Another class of gels which may be used are EPDM rubber-based gels, as

described in U.S. Pat. No. 5,177,143 to Chang et al.

[0042] Yet another class of gels which may be used are based on anhydride-containing polymers, as disclosed in WO 96/23007. These gels reportedly have good thermal resistance.

[0043] The gel may include a variety of additives, including stabilizers and antioxidants such as hindered phenols (*e.g.*, Irganox™ 1076, commercially available from Ciba-Geigy Corp. of Tarrytown, New York), phosphites (*e.g.*, Irgafos™ 168, commercially available from Ciba-Geigy Corp. of Tarrytown, New York), metal deactivators (*e.g.*, Irganox™ D1024 from Ciba-Geigy Corp. of Tarrytown, New York), and sulfides (*e.g.*, Cyanox LTDP, commercially available from American Cyanamid Co. of Wayne, New Jersey), light stabilizers (*e.g.*, Cyasorb UV-531, commercially available from American Cyanamid Co. of Wayne, New Jersey), and flame retardants such as halogenated paraffins (*e.g.*, Bromoklor 50, commercially available from Ferro Corp. of Hammond, Indiana) and/or phosphorous containing organic compounds (*e.g.*, Fyrol PCF and Phosflex 390, both commercially available from Akzo Nobel Chemicals Inc. of Dobbs Ferry, New York) and acid scavengers (*e.g.*, DHT-4A, commercially available from Kyowa Chemical Industry Co. Ltd through Mitsui & Co. of Cleveland, Ohio, and hydrotalcite). Other suitable additives include colorants, biocides, tackifiers and the like described in "Additives for Plastics, Edition 1" published by D.A.T.A., Inc. and The International Plastics Selector, Inc., San Diego, Calif.

[0044] The hardness, stress relaxation, and tack may be measured using a Texture Technologies Texture Analyzer or like machine, having a load cell to measure force, a 5 gram trigger, and ¼ inch (6.35 mm) stainless steel probe. For measuring the hardness, for example, of a 20mL glass vial containing 12 grams of gel, the probe is forced into the gel at the speed of 0.2 mm/sec to a penetration distance of 4.0 mm. The hardness of the gel is the force in grams required to force the probe at that speed to penetrate the gel specified for 4.0 mm. Higher numbers signify harder gels.

[0045] The tack and stress relaxation are read from the stress curve generated by tracing the force versus time curve experienced by the load cell when the penetration speed is 2.0 mm/second and the probe is forced into the gel a penetration distance of about 4.0 mm. The probe is held at 4.0 mm penetration for 1 minute and withdrawn at a speed of 2.00 mm/second. The stress relaxation is the ratio of the initial force (F_i) resisting the probe at the pre-set penetration depth minus the force resisting the probe (F_f) after 1 min divided by the

initial force F_i , expressed as a percentage. That is, percent stress relaxation is equal to

$$1. \frac{(F_i - F_f)}{F_i} \times 100\%$$

[0046] where F_i and F_f are in grams. In other words, the stress relaxation is the ratio of the initial force minus the force after 1 minute over the initial force. It may be considered to be a measure of the ability of the gel to relax any induced compression placed on the gel. The tack may be considered to be the amount of force in grams resistance on the probe as it is pulled out of the gel when the probe is withdrawn at a speed of 2.0 mm/second from the preset penetration depth.

[0047] An alternative way to characterize the gels is by cone penetration parameters according to ASTM D-217 as proposed in Debbaut '261; Debbaut '207; Debbaut '746; and U.S. Pat. No. 5,357,057 to Debbaut et al., each of which is incorporated herein by reference in its entirety. Cone penetration ("CP") values may range from about 70 (10^{-1} mm) to about 400 (10^{-1} mm). Harder gels may generally have CP values from about 70 (10^{-1} mm) to about 70 (10^{-1} mm). Softer gels may generally have CP values from about 200 (10^{-1} mm) to about 400 (10^{-1} mm), with particularly preferred range of from about 250 (10^{-1} mm) to about 375 (10^{-1} mm). For a particular materials system, a relationship between CP and Voland gram hardness can be developed as proposed in U.S. Pat. No. 4,852,646 to Dittmer et al.

[0048] According to some embodiments, the gel has a Voland hardness, as measured by a texture analyzer, of between about 5 and 100 grams force. The gel may have an elongation, as measured by ASTM D-638, of at least 55%. According to some embodiments, the elongation is of at least 100%. The gel may have a stress relaxation of less than 80%. The gel may have a tack greater than about 1 gram.

[0049] While, in accordance with some embodiments, the sealants **170**, **180** are gels as described above, other types of sealants may be employed. For example, the sealants **170**, **180** may be silicone grease or hydrocarbon-based grease.

[0050] The enclosure assembly **100** may be formed in the following manner. The cover members **122**, **124** can be molded (*e.g.*, injection molded or vacuum formed). According to other embodiments, the cover members **122**, **124** are integrally formed with a hinge and may be unitarily molded.

[0051] If the sealant **170**, **180** is a material, such as a curable gel, that requires curing, the sealant may be cured *in situ*.

[0052] The enclosure assembly **100** can be used as follows in accordance with methods of the present invention to form the enclosed connection **9** (**Figures 6-9**). A connection **22** is first formed by installing the connector **16** on the conductors **12, 14**. The sealant valve mechanisms **150** may be set or adjusted as described below to desirably control displacement of the sealant. Thereafter, the enclosure assembly **100** is installed over the connection **22** and portions of the conductors **12, 14**. The enclosure assembly **100** may be held in an open position as shown in **Figure 1** and the connection **22** may be inserted into one of or between the cover members **122, 124**. The enclosure assembly **100** is then closed by urging one or both of the cover members **122, 124** together as shown in **Figures 6-9**, and then secured in this position by installing tie wraps **30** through the tie slots **146**. Latches or clips may be used to secure the cover members **122, 124**, as well.

[0053] The closed housing **120** defines an enclosure cavity **106** including a main enclosure cavity and contiguous port channels **109** (**Figure 8**; collectively defined by the port extensions **140**). The connection **22** is encapsulated within the sealant **170, 180**, and the sealant **170, 180** and the connection **22** are in turn encapsulated within the housing **120** (*i.e.*, contained within the enclosure cavity **106**). The portions of the conductors **12, 14** within the connection **22** and extending from the connection **22** and through the port channels **109** to the port walls **142** are likewise encapsulated in the sealant **170, 180**.

[0054] Prior to or as the enclosure assembly **100** is closed, the conductors **12, 14** may break or splay the frangible walls **142** so that the conductors **12, 14** pass therethrough and are generally surrounded thereby. Because the walls **142** may be angled outwardly, they tend to be splayed outwardly by the conductors **12, 14**.

[0055] According to some embodiments and as illustrated, the volumes and configurations of the sealants **170, 180** are selected to ensure that the connection **22** displaces at least one, and according to some embodiments, both of the sealants **170, 180** when the enclosure assembly **100** is transitioned from the opened position to the closed position with the connection **22** disposed therein.

[0056] According to some embodiments, the combined volume of the connector **16**, the portions of the conductors **12, 14** in the enclosure cavity **106**, and the sealants **170, 180** is greater than the volume of the enclosure cavity **106**.

[0057] According to some embodiments, when the enclosure assembly **100** is installed as described herein, the closing of the cover members **122, 124** about the connection

22 forcibly displaces the sealants **170, 180** about the connector **16** such that the sealants **170, 180** flow around the connector **16** and, in some cases, into interstices within the connector **16**.

According to some embodiments, the sealants **170, 180** substantially fully encapsulate the connector **16**.

[0058] The sealant valve mechanisms **150** may be used to adjust or tune the performance or effective capacity of the enclosure assembly **100**. For example, the enclosure assembly **100** may be configured for use with connections **22** that are relatively large or small in size. In order to provide a satisfactory sealant seal for a small connection **22**, at least a certain volume of the cavities **136** must be filled with the sealants **170, 180**. However, when the enclosure assembly **100** is to be installed on a large connection **22**, the connection **22** may displace so much sealant **170, 180** that the cover members **122, 124** cannot be closed without undue effort.

[0059] In the case of a small connection **22**, the operator can leave the valve gate members **154** in their closed positions. The gate members **154** will remain closed and the sealants **170, 180** will be displaced in known manner when the cover members **122, 124** are closed, as shown in **Figures 7-9**. That is, the sealants **170, 180** are prevented from flowing into the chambers **156** by the gate members **154**.

[0060] In the case of a large connection **22**, the operator can break away the valve gate member **154** of each valve mechanism **150** and pivot it down about the hinge **154A** into the confined space of the chamber **156** to open the valve port **152**. As the cover members **122, 124** are closed, the displaced sealant **170, 180** will be expelled or exuded through the ports **152** and into the chambers **156** as shown in **Figure 10**. In this manner, the effective volume of the cavity **106** is supplemented by the volumes of the chambers **156**. As a result, the internal pressure of the sealant **170,180** is reduced, allowing easier closing of the cover members **122, 124**.

[0061] As discussed above, according to some embodiments, each gate member **154** is substantially rigid or semi-rigid. According to some embodiments, the stiffness of each gate member **154** is sufficient to withstand a pressure from the interior side (*i.e.*, the cavity **136** side) of at least 0.2 psi, and according to some embodiments at least 0.5 psi, without deforming or deflecting an amount sufficient to permit the sealant **170, 180** to pass through the corresponding port **152**.

[0062] According to some embodiments, the connection(s) between each gate member **154** and the housing **120** (e.g., the frangible connector portions **154B**) are sufficient to require at least 0.2 psi, and according to some embodiments at least 0.5 psi, of pressure on the interior side to break the gate member **154** away and open the corresponding port **152**. According to some embodiments, a minimum gate opening force of at least 0.2 pounds-force, and according to some embodiments at least 0.5 pounds-force, must be applied to the gate member **154** in order to open the gate member.

[0063] Further levels of adjustment may be set as well. The operator may selectively open the gate members **154**. For example, in one configuration, one of the gate members **154** may be open and the other gate member **154** remains closed.

[0064] While the foregoing procedures are described as including a step of the operator breaking away the gate members **154**, according to some embodiments the operator does not break away the gate members **154**. Instead, the gate member connector portions **154B** are left intact and configured such that they automatically tear and permit the gate members **154** to be opened when the internal pressure of the sealant **170**, **180** exceeds a prescribed threshold pressure. The threshold pressure may be exceeded during installation (i.e., as the cover members **122**, **124** are being closed) or when the temperature of the sealant **170**, **180** is elevated causing volumetric thermal expansion of the sealant **170**, **180**.

[0065] According to some embodiments, the volume of each chamber **156** when the associated gate member **154** is opened to the base stop **160** is in the range of from about 2 to 50 percent.

[0066] By selectively configuring the valve mechanisms **150**, the operator may ensure that the housing **120** can be closed without requiring undue force, but nonetheless that the sealants **170**, **180** are displaced and forced to flow about the connection **22** and also that the sealants **170**, **180** sufficiently engage with one another at the interface between the cover members **122**, **124** to provide adequate insulation and sealing.

[0067] The valve mechanisms **150** can also provide a controlled space for the sealant **170**, **180** to expand into and out of and still maintain the desired insulation and sealing. For example, when pressure is created during a heating cycle, the sealant **170**, **180** will expand into the chambers **156**, and then recover and retract from the chambers **156** into the main cavity **106** as the sealant **170**, **180** cools.

[0068] In some embodiments, an opening **156A** is present in the housing **120** and

connects the chamber **156** to the exterior of the housing **120**. These openings **156A** may be provided to facilitate molding of the housing **120**. These openings **156A** may also provide a path for air to escape from the chambers **156** as sealant **170, 180** enters the chambers **156**. According to some embodiments, the housing **120** is configured such that the gate members **154** when open will close off at least a portion of the openings **156A** to prevent or inhibit the sealant **170, 180** from escaping through the openings **156A** (*i.e.*, provide a closed chamber **156**). In some embodiments, the gate members **154** close off a majority of each associated opening **156A** and, in some embodiments, fully close off the openings **156A**.

[0069] While the valve mechanisms **150** are illustrated located between the conductor port subchannels **136B**, other locations may be employed as appropriate for the intended cable/connector configurations.

[0070] As will be appreciated from the description herein, the sealant **170, 180** engages portions of the conductors **12, 14** to form seals thereabout. The sealant **170, 180** also forms a sealing block that surrounds the connector **16**, thereby sealing the connector **16**. Notably, in the illustrated enclosure assembly **100**, the sealant masses **170, 180** connect with one another to encapsulate the connector **16** and conductors **12, 14**.

[0071] The enclosure assembly **100** may be sized and configured to accommodate and seal multiple or a range of sizes of connectors **16** and conductors **12, 14**.

[0072] The enclosure assembly **100** may provide a number of advantages. The enclosure assembly **100** may provide a reliable seal about the connection **22**. This seal may prevent or inhibit the ingress of moisture that would otherwise cause corrosion of the connection **22**. The sealant **170, 180**, particularly gel sealant, may accommodate conductors of different sizes within a prescribed range. The interfacing sealant masses **170, 180** and the relationship between the connector or connection volume and the sealant volumes may ensure that a suitable seal is provided by and between the sealant masses for a broadened range of sizes connections **22** positioned in the enclosure assembly **100**.

[0073] When the sealant **170, 180** is a gel, the conductors **12, 14** and the housing **120** may apply a compressive force to the sealant **170, 180** as the assembly **100** is transitioned from the open position to the closed position. The gel may thereby be elongated and be generally deformed and substantially conform to the outer surfaces of the connector **16**, the conductors **12, 14** and to the inner surface of the housing **120**. Some shearing of the gel may occur as well. At least some of the gel deformation may be elastic. The restoring force in the

gel resulting from this elastic deformation generally causes the gel to operate as a spring exerting an outward force between the housing **120** and the connector **16** and the conductors **12, 14**. The compressive loading and restoring force are maintained by the closure of the cover members **122, 124**.

[0074] Various properties of the gel as described above may ensure that the gel sealant **170, 180** maintains a reliable and long lasting seal between the housing **120** and the connector **16** and the conductors **12, 14**. The elastic memory of and the retained or restoring force in the elongated, elastically deformed gel generally cause the gel to bear against the mating surfaces of the connector **16**, the conductors **12, 14** and the interior surface of the housing **120**. Also, the tack of the gel may provide adhesion between the gel and these surfaces. The gel, even though it is cold-applied, is generally able to flow about the connector **16**, the conductors **12, 14** and the housing **120** to accommodate their irregular geometries.

[0075] According to some embodiments, the sealant **170, 180** is a self-healing or self-amalgamating gel. This characteristic, combined with the aforementioned compressive force between the connector **16**, conductors **12, 14** and the housing **120**, may allow the sealant **170, 180** to re-form into a continuous body if the gel is sheared by the insertion of the conductors **12, 14** into the enclosure assembly **100**. The gel may also re-form if the connector **16** and conductors **12, 14** are withdrawn from the gel.

[0076] The sealant **170, 180**, particularly when formed of a gel as described herein, may provide a reliable moisture barrier for the conductors **12, 14** and the connector **16**, even when the enclosure assembly **100** is subjected to extreme temperatures and temperature changes. The housing **120** may be made from an abrasion resistant material that resists being punctured by the abrasive forces.

[0077] The gel sealant may also serve to prevent or inhibit corrosion of the connection **22** by depositing a layer of oil from the gel on the exposed surfaces of the connector **16** and conductor portions **12, 14** in the enclosure cavity **106**. Even if the gel is removed from the connection **22**, the oil may remain to coat the connection surfaces as a barrier to moisture.

[0078] With reference to **Figures 11-15**, a sealant-filled enclosure assembly **200** according to further embodiments of the present invention is shown therein. The enclosure assembly **200** is constructed in the same manner as the enclosure assembly **100** except that each valve mechanism **250** (corresponding to the valve mechanism **150**) of the enclosure

assembly **200** further includes a supplemental stop member or tab **262** pivotally mounted via a living hinge **262A**.

[0079] In use, the operator may selectively configure the enclosure assembly **200** to accommodate a small, medium or large connection **22**. Configuration for a small or large connection **22** can be executed as discussed above with regard to the enclosure assembly **100**.

[0080] In the case of a medium connection **22**, the operator can bend each supplemental stop member **262** from its stored position (**Figures 11 and 14**) to a deployed position (**Figure 15**). The operator can break away the valve gate member **254** of each valve mechanism **250** and pivot it down about the hinge **254A** to open the valve port **252**. As the cover members **222, 224** are closed, the displaced sealant **270, 280** will be expelled or exuded through the ports **252** and into the chambers **256**. The pivot of the gate members **254** is limited by the respective supplemental stop member **262**. In this manner, the effective volume of the cavity **206** is supplemented by the volumes of the chambers **256**. However, because the gate member **254** is only permitted to pivot to a partially open position, the supplemental volume provided by the chambers **256** will be less than in the case where the gate members **254** are opened to the base stops **260**. Thus, each valve mechanism **250** can be selectively adjusted to provide three different volumes to contain the sealant **170, 180**.

[0081] According to some embodiments, the volume of each chamber **256** when the associated gate member **254** is opened to the base stop **260** is in the range of from about 1 to 50 percent and the volume of each chamber **256** when the associated gate member **254** is opened to the supplemental stop member **262** is in the range of from about 1 to 25 percent.

[0082] As will be appreciated from the description herein, enclosure assemblies according to the present invention may be provided as pre-formed and fully assembled units, with pre-cured gel or other sealant therein as described above, that may be cold applied about a connection to form a seal.

[0083] It will be appreciated that enclosures in accordance with the present invention may have components (*e.g.*, cover members, walls, etc.) and cavities or chambers having shapes, configurations and/or sizes different than those shown and described herein.

[0084] Embodiments of the present invention have been described above and, although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation. The following claim is provided to ensure that the present application meets all statutory requirements as a priority application in all jurisdictions and

shall not be construed as setting forth the scope of the present invention.

That which is Claimed is:

1. A sealant-filled enclosure assembly for environmentally protecting a connection, the sealant-filled enclosure assembly comprising:
 - a housing including a main cavity to receive the connection;
 - a mass of sealant disposed in the main cavity; and
 - a sealant valve mechanism including:
 - an overflow chamber; and
 - a gate member between the main cavity and the overflow chamber;wherein the gate member is selectively positionable in each of a closed position, wherein the gate member substantially prevents displacement of the sealant from the main cavity to the overflow chamber, and an open position, wherein the gate member permits displacement of the sealant from the main cavity to the overflow chamber.
2. The sealant-filled enclosure assembly of Claim 1 wherein:
 - the housing is selectively configurable in an open position to receive the connection and a closed position to contain the connection; and
 - the housing is configured such that, when the housing is closed about the connection, the connection will displace an overflow portion of the sealant from the main cavity into the overflow chamber.
3. The sealant-filled enclosure assembly of Claim 1 wherein the sealant valve mechanism is configured to automatically open the gate member responsive to an internal pressure of the sealant in the main cavity exceeding a prescribed threshold pressure.
4. The sealant-filled enclosure assembly of Claim 3 wherein the sealant valve mechanism is configured to automatically open the gate member responsive to an internal pressure of the sealant in the main cavity exceeding the prescribed threshold pressure due to volumetric thermal expansion of the sealant in service.
5. The sealant-filled enclosure assembly of Claim 1 wherein the sealant valve mechanism is configured such that repositioning the gate member from the closed position to

the open position requires an operator to deliberately force the gate member open.

6. The sealant-filled enclosure assembly of Claim 1 wherein:
 - the gate member is positionable in each of first and second prescribed open positions wherein the gate member permits displacement of the sealant from the main cavity to the overflow chamber;
 - the first open position and the second open position are different from one another and provide a first overflow volume and a second overflow volume, respectively, in the overflow chamber to receive sealant displaced from the main cavity; and
 - the second overflow volume is larger than the first overflow volume.

7. The sealant-filled enclosure assembly of Claim 6 including a supplemental stop member selectively operable to limit the gate member to the first open position.

8. The sealant-filled enclosure assembly of Claim 1 wherein the housing includes a cover member and the gate member is integrally and unitarily molded with the cover member.

9. The sealant-filled enclosure assembly of Claim 8 wherein the gate member is joined to the cover member by a living hinge and is pivotable about the living hinge between the closed position and the open position.

10. The sealant-filled enclosure assembly of Claim 8 wherein:
 - the gate member is joined to the cover member in the closed position by a frangible connection portion; and
 - the frangible connection portion must be torn in order to reposition the gate member from its closed position to its open position.

11. The sealant-filled enclosure assembly of Claim 1 including a second sealant valve mechanism including:
 - a second overflow chamber; and
 - a second gate member between the main cavity and the second overflow

chamber;

wherein the second gate member is selectively positionable in each of a closed position, wherein the second gate member substantially prevents displacement of the sealant from the main cavity to the second overflow chamber, and an open position, wherein the second gate member permits displacement of the sealant from the main cavity to the second overflow chamber.

12. The sealant-filled enclosure assembly of Claim 1 wherein the sealant valve mechanism includes an outlet between the overflow chamber and the environment.

13. The sealant-filled enclosure assembly of Claim 12 wherein the gate member, when in the open position, closes at least a portion of the outlet.

14. The sealant-filled enclosure assembly of Claim 1 wherein the housing defines a pair of opposed cable channels to receive cables extending into the main cavity and the gate member is interposed between the cable channels.

15. The sealant-filled enclosure assembly of Claim 1 wherein the sealant is an elastically elongatable gel.

16. A method for environmentally protecting a connection, the method comprising:

providing a sealant-filled enclosure assembly including:

a housing including a main cavity to receive the connection;

a mass of sealant disposed in the main cavity; and

a sealant valve mechanism including:

an overflow chamber; and

a gate member between the main cavity and the overflow chamber;

wherein the gate member is selectively positionable in each of a closed position, wherein the gate member substantially prevents displacement of the sealant from the main cavity to the overflow chamber, and an open position, wherein the gate member permits


displacement of the sealant from the main cavity to the overflow chamber;
placing the connection in the main cavity;
transitioning the gate member from the closed position to the open position;
and
displacing a portion of the sealant from the main cavity to the overflow chamber.

17. The method of Claim 16 wherein:
the housing is selectively configurable in an open position to receive the connection and a closed position to contain the connection; and
displacing a portion of the sealant from the main cavity to the overflow chamber includes closing the housing about the connection.

18. The method of Claim 17 wherein transitioning the gate member from the closed position to the open position includes deliberately repositioning the gate member from the closed position to the open position prior closing the housing about the connection.

19. The method of Claim 16 wherein transitioning the gate member from the closed position to the open position includes automatically opening the gate member responsive to an internal pressure of the sealant in the main cavity exceeding a prescribed threshold pressure.

20. The sealant-filled enclosure assembly of Claim 1 wherein the sealant is an elastically elongatable gel.

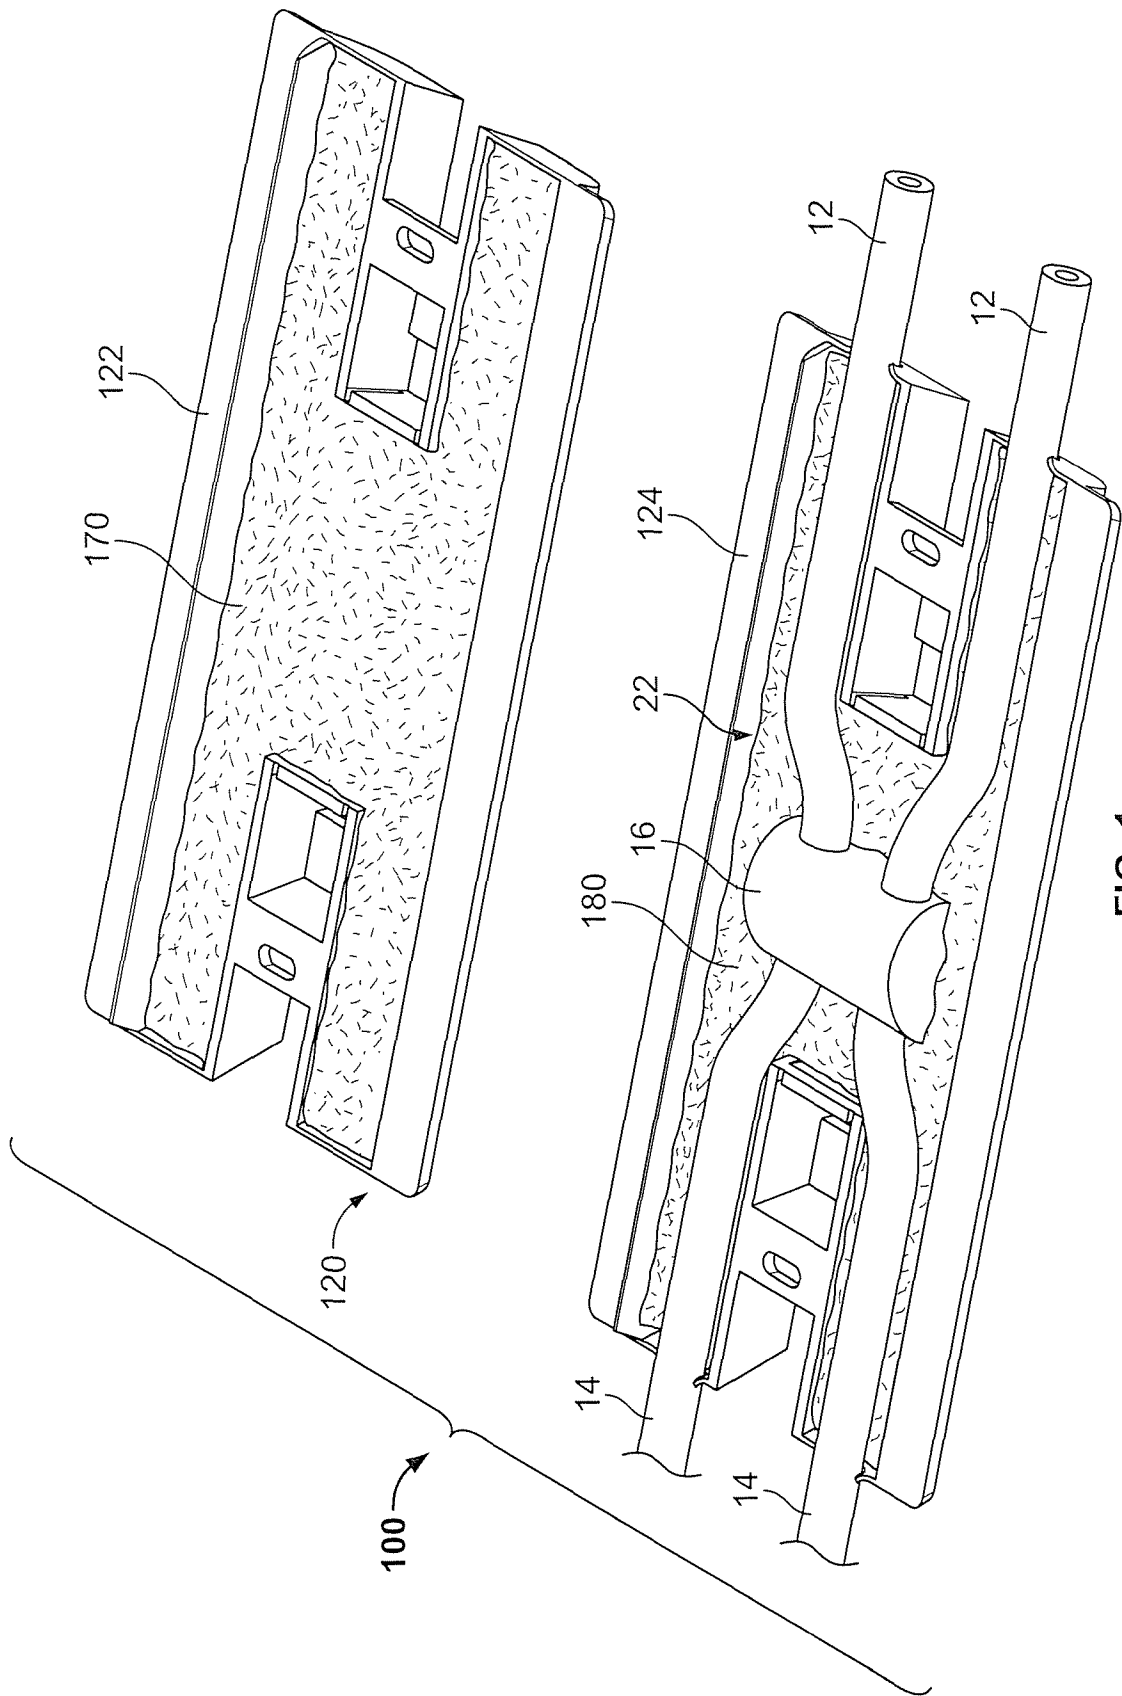

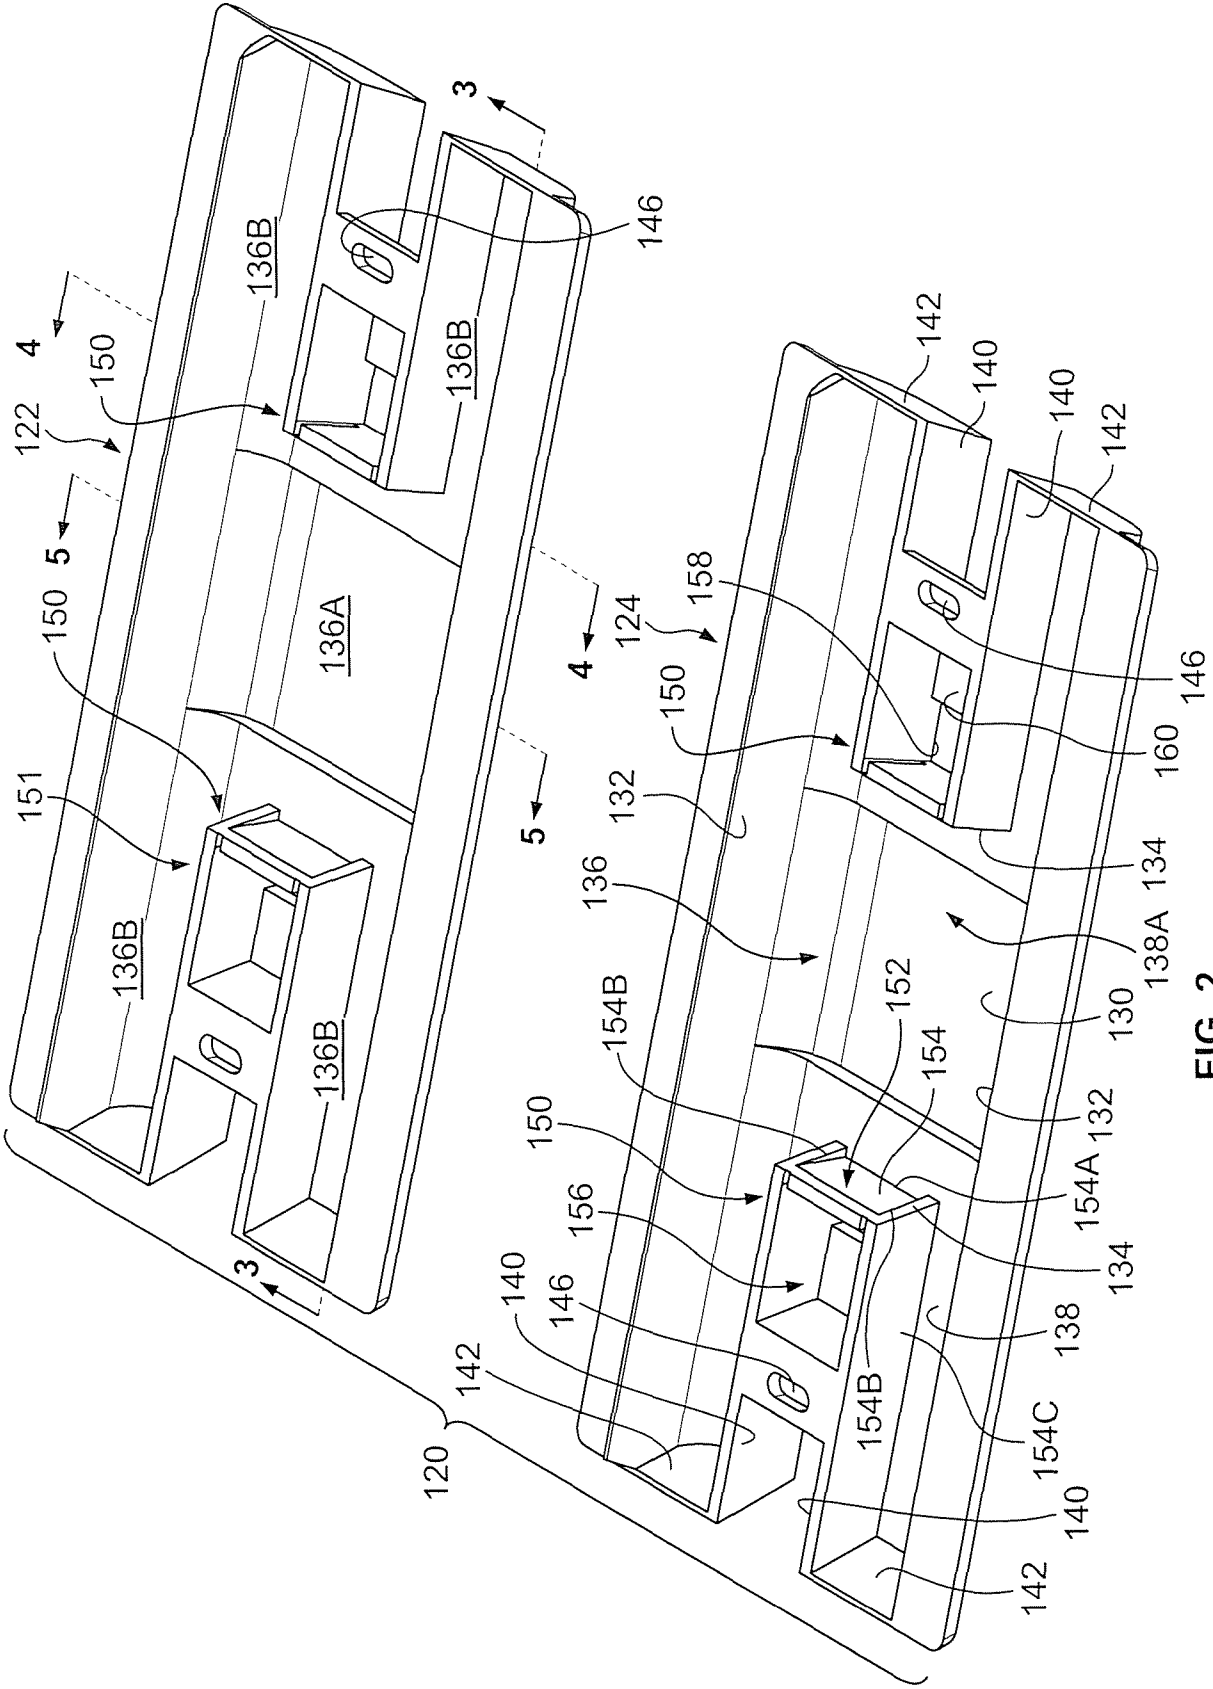


FIG. 2

122

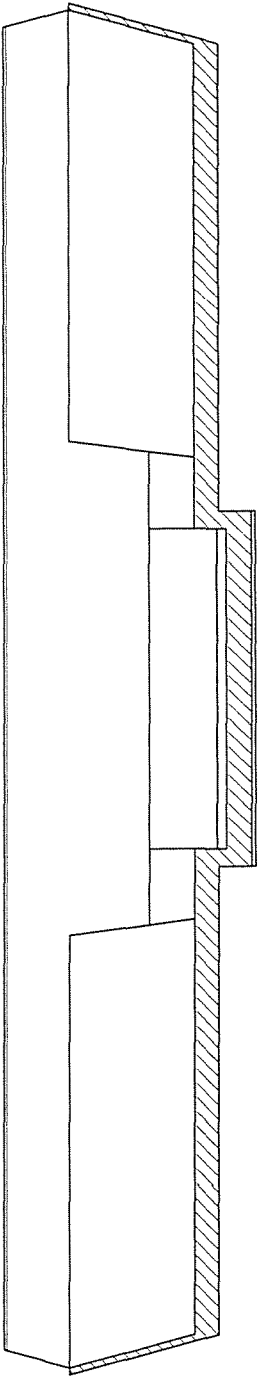


FIG. 3

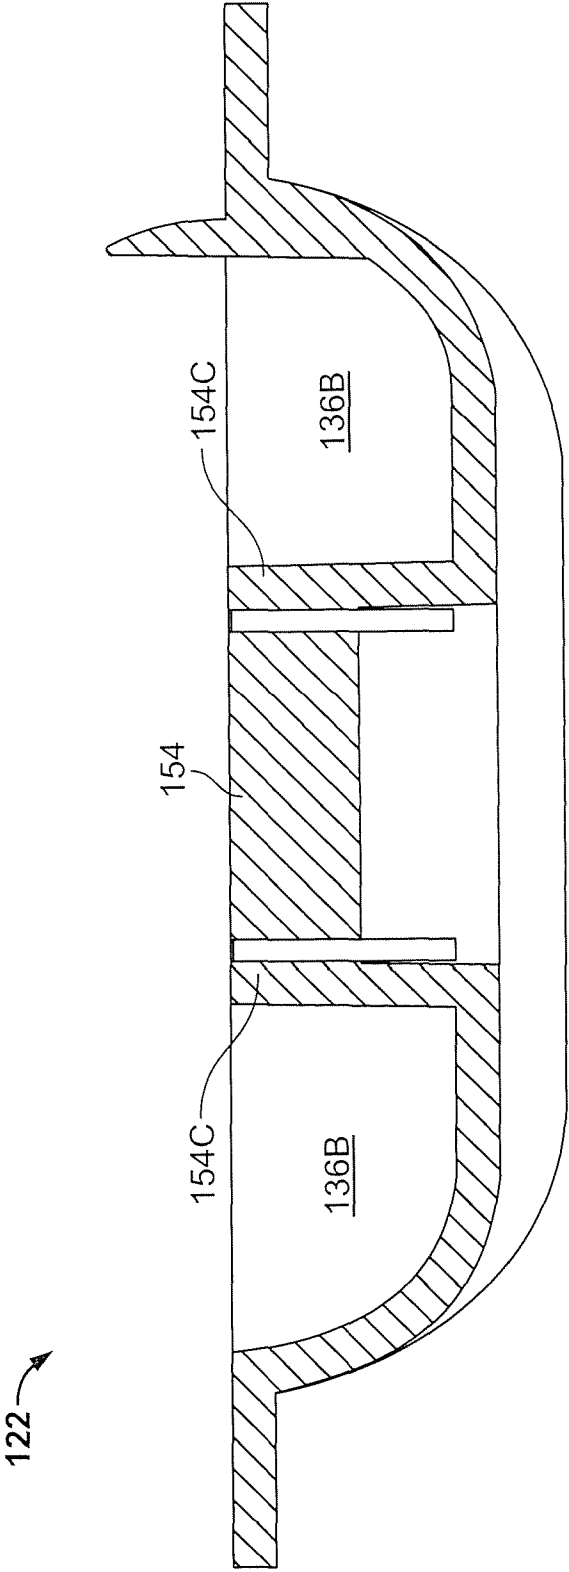


FIG. 4

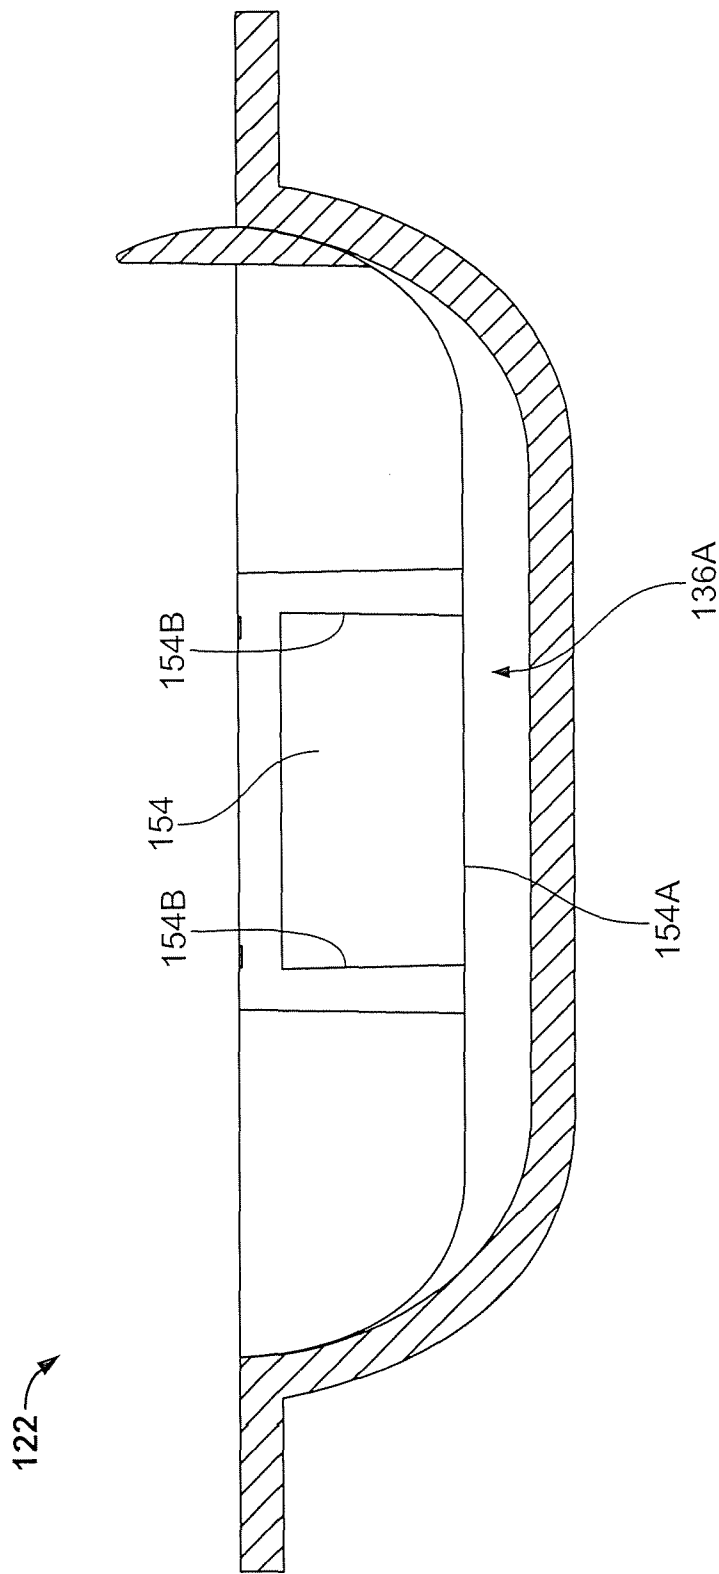


FIG. 5

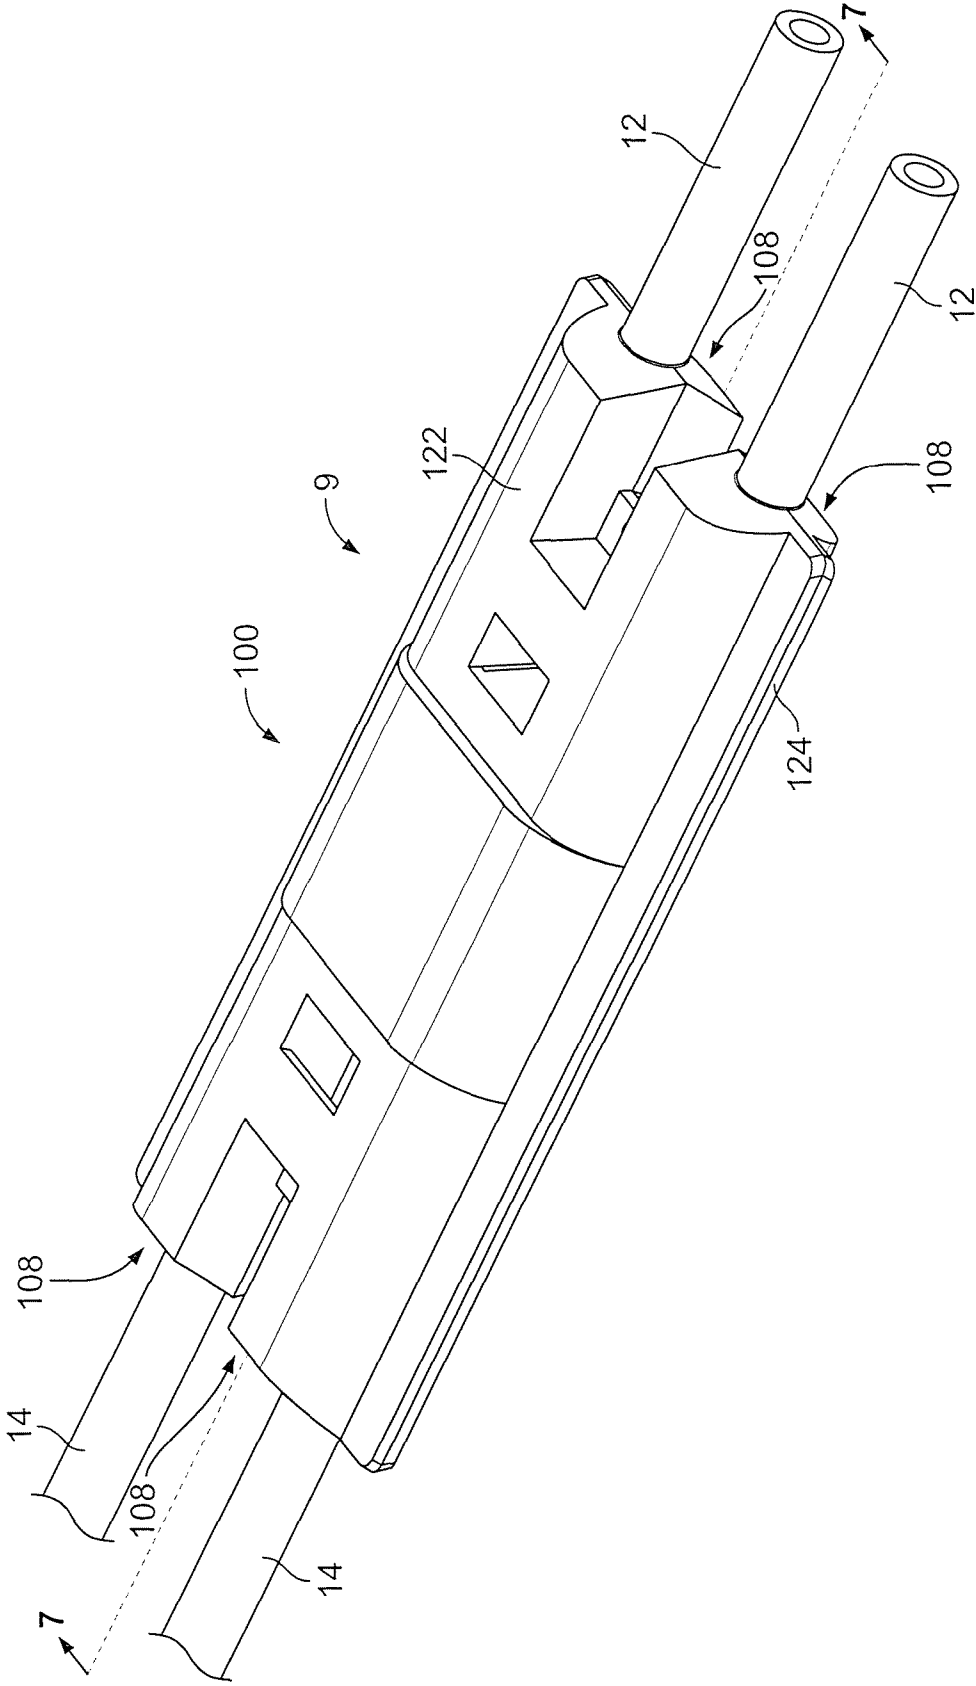


FIG. 6

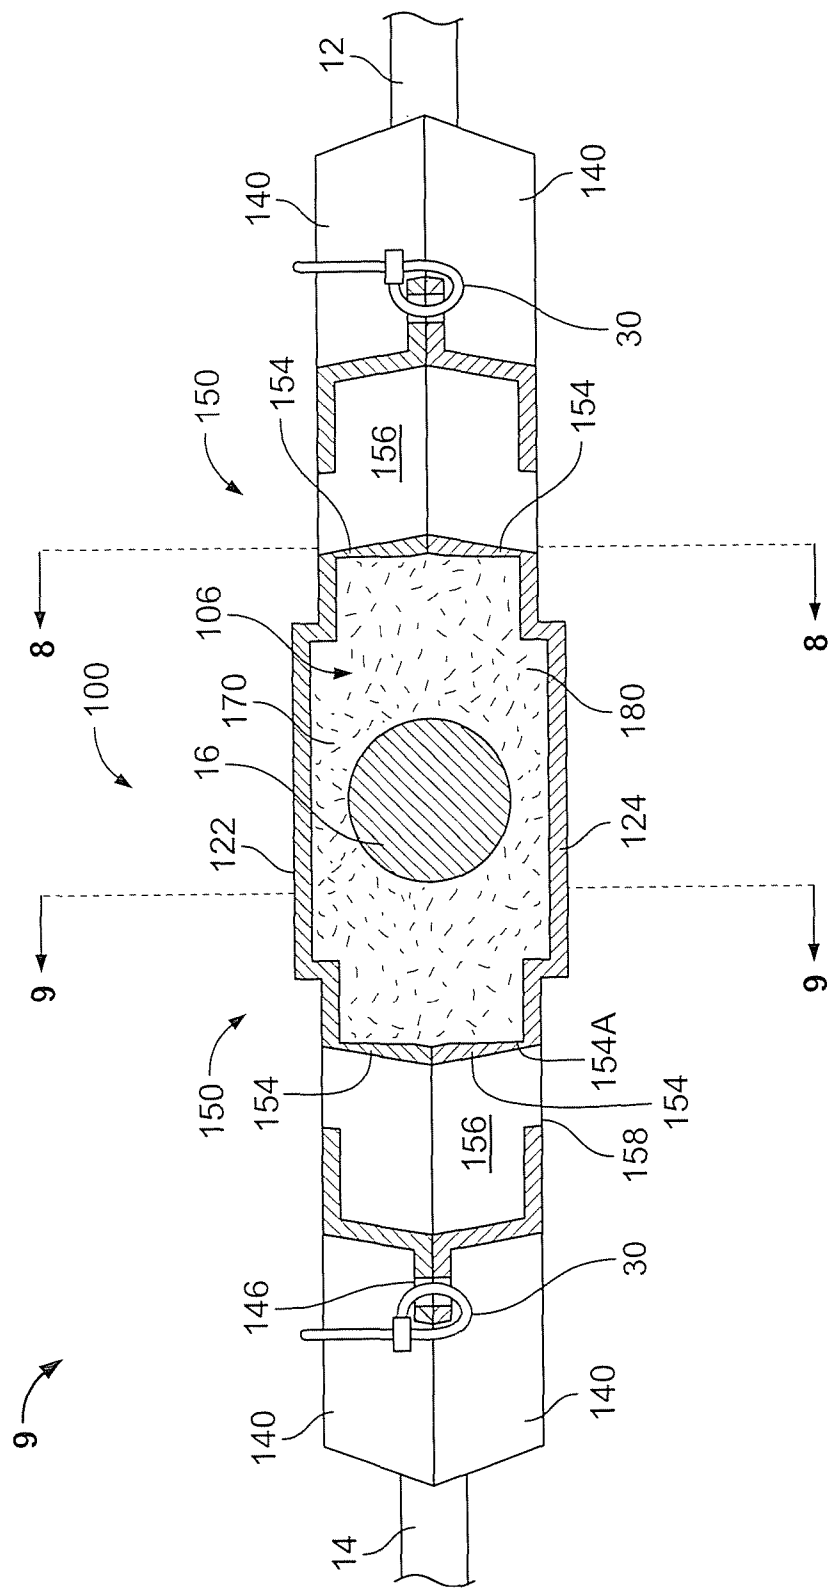


FIG. 7

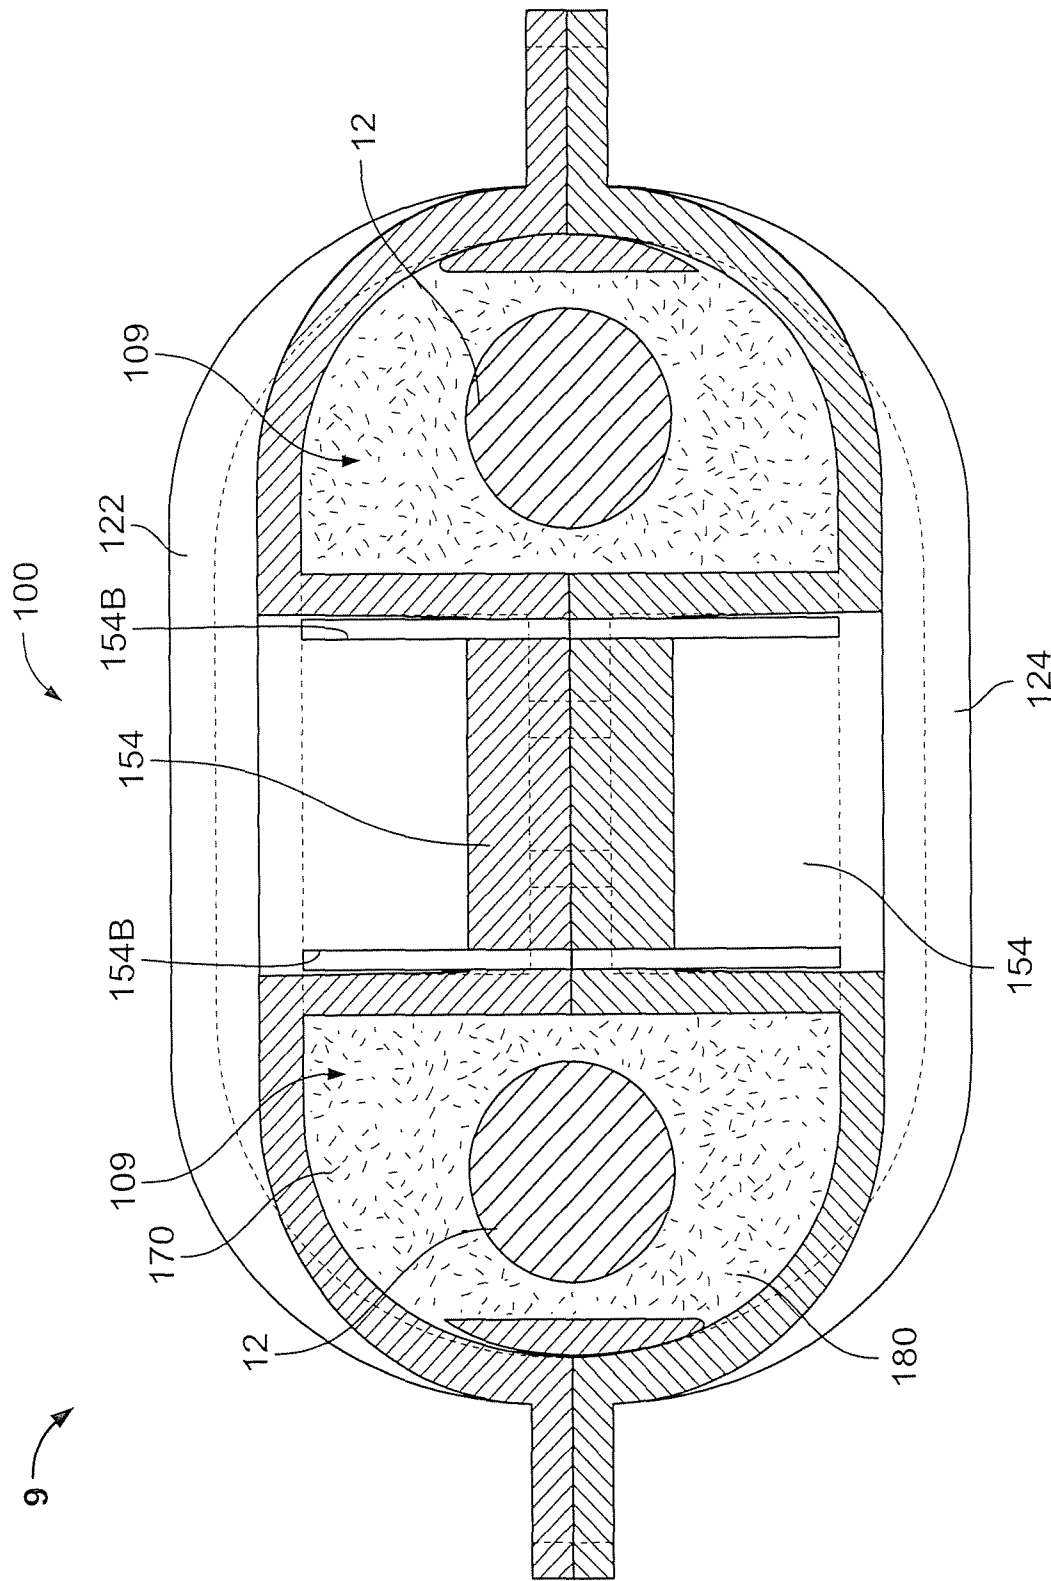


FIG. 8

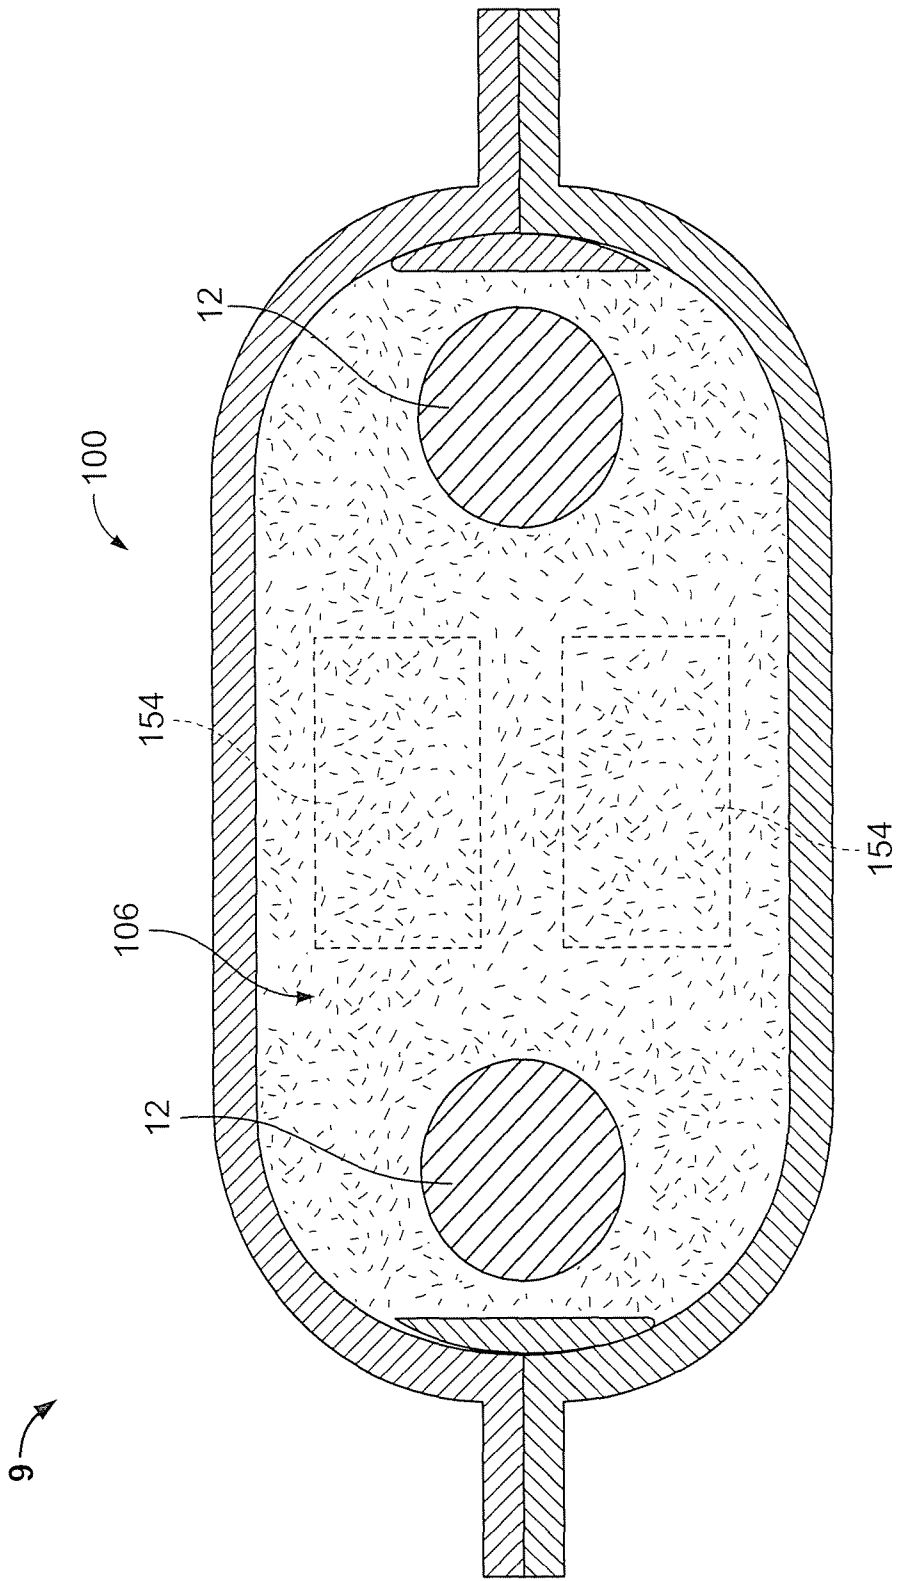


FIG. 9

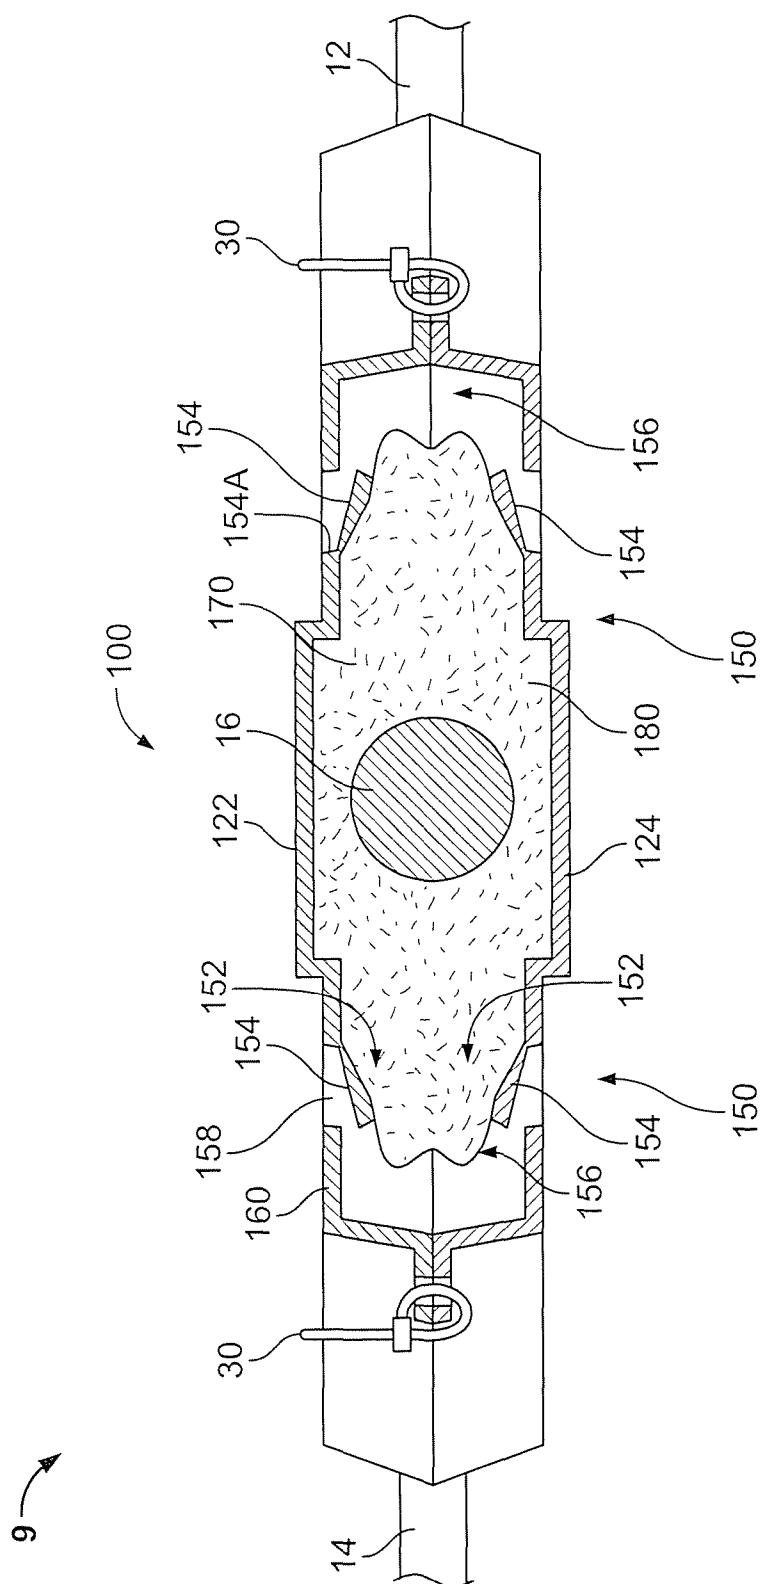


FIG. 10

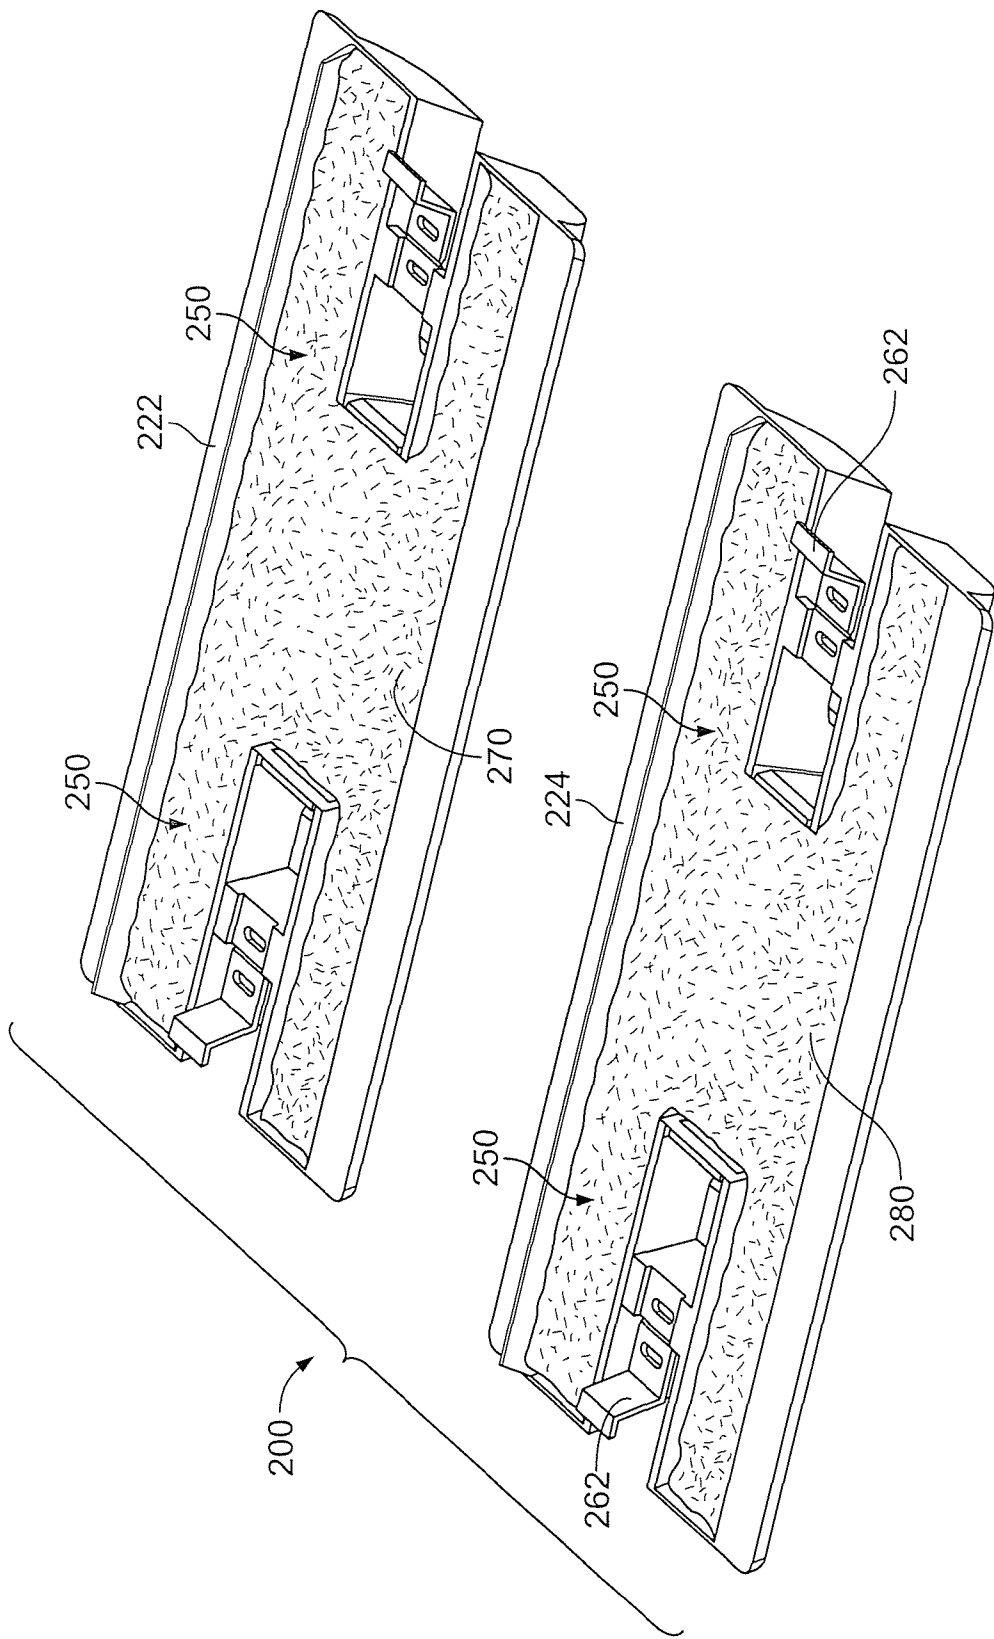


FIG. 11

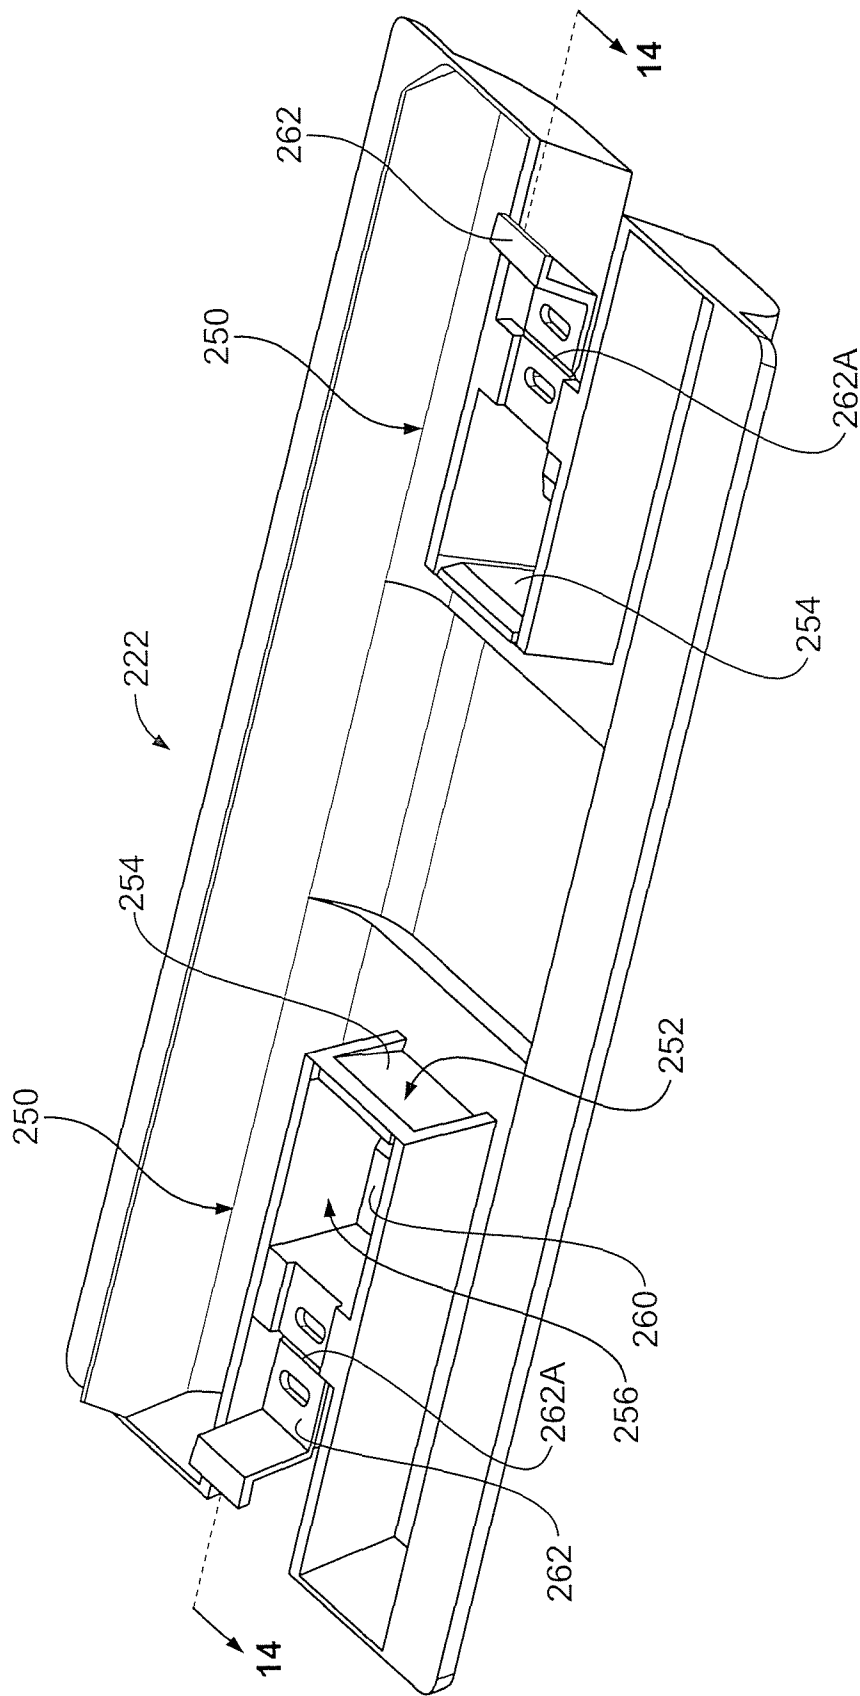


FIG. 12

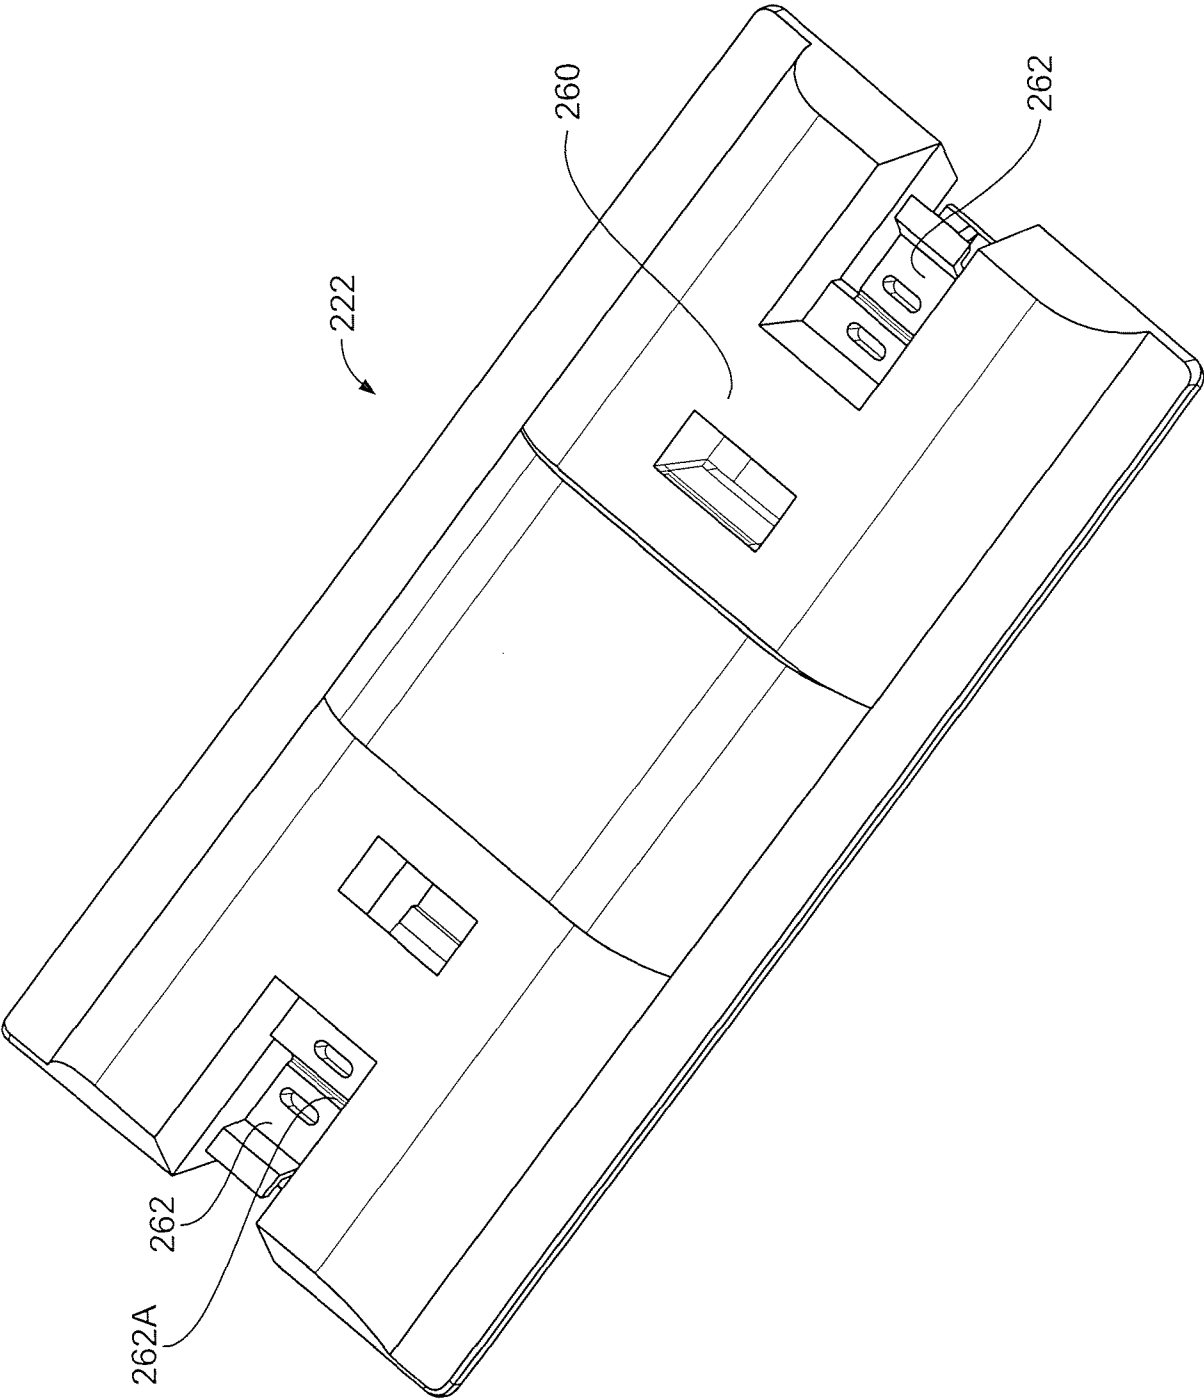


FIG. 13

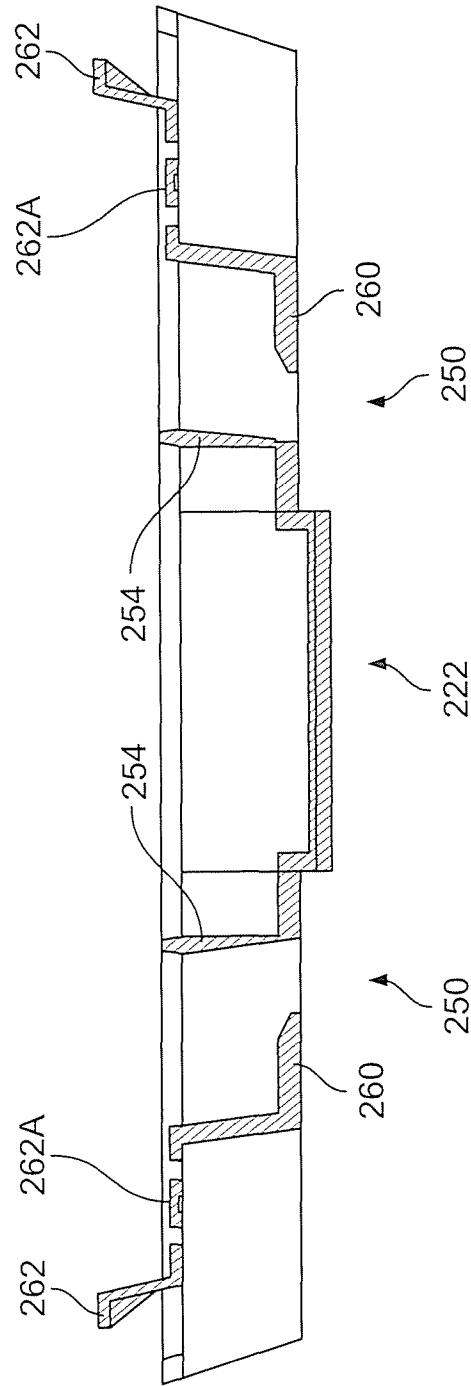


FIG. 14

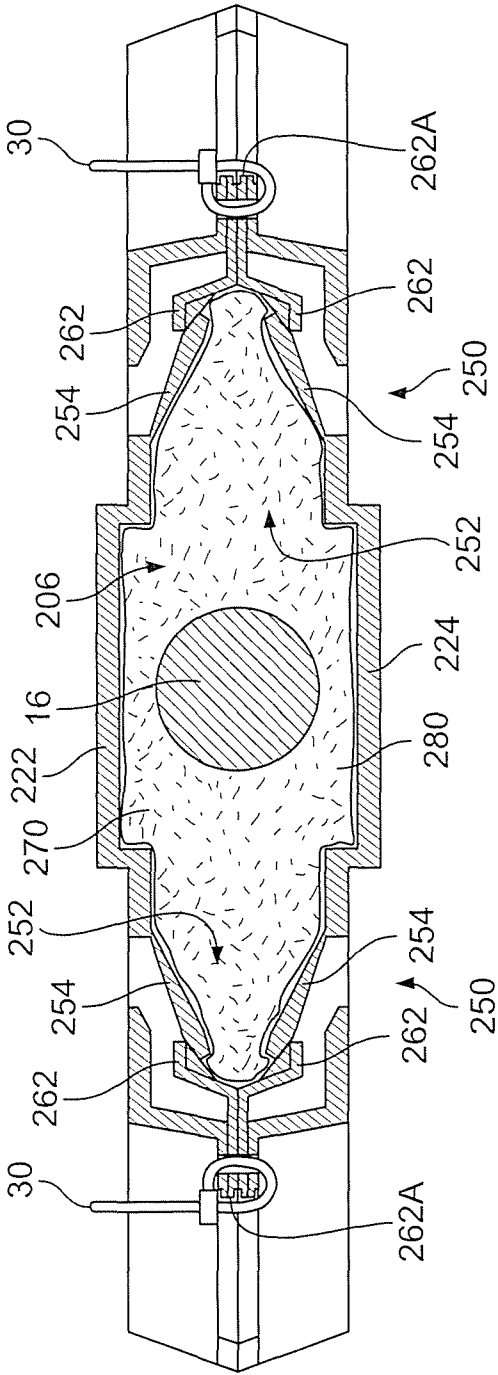


FIG. 15