

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
3 November 2005 (03.11.2005)

PCT

(10) International Publication Number  
**WO 2005/102720 A1**

(51) International Patent Classification<sup>7</sup>: **B41J 29/38**

(21) International Application Number:  
PCT/US2004/008851

(22) International Filing Date: 23 March 2004 (23.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **LEX-  
MARK INTERNATIONAL, INC** [US/US]; 740 West  
New Circle Road, Lexington, KY 40550 (US).

(72) Inventors: **PARISH, George, Keith**; 11 Fontaine Blvd.,  
Winchester, KY 40391 (US). **ROWE, Kristi, Maggard**;  
2091 Powhatan Trail, Richmond, KY 40475 (US).

(74) Agent: **BARKER, Scott, N.**; Lexmark International, Inc.,  
740 West New Circle Road, Lexington, KY 40550 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR FIRING NOZZLES IN AN INK JET PRINTER

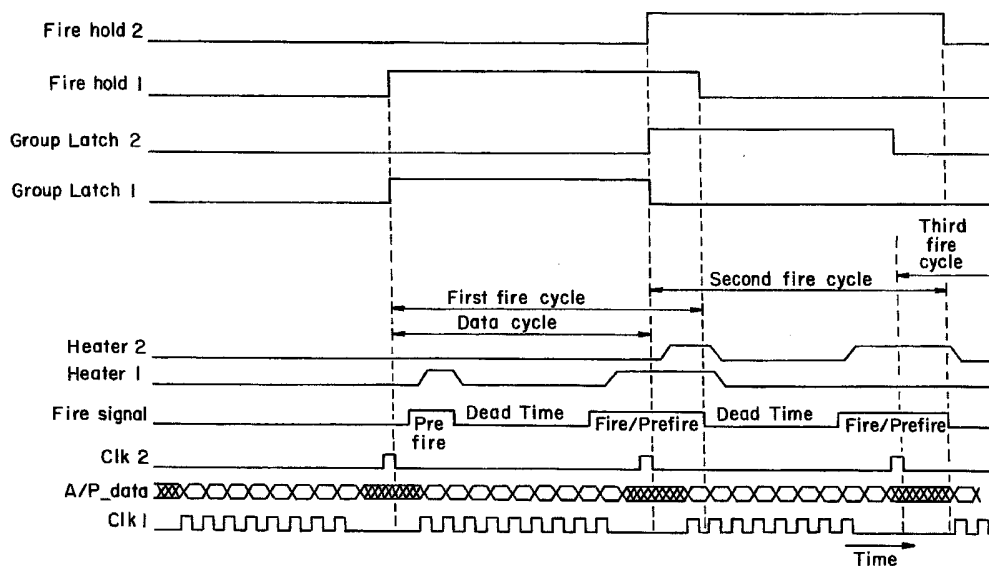

(57) Abstract: A method of firing a plurality of jetting heaters in an ink jet printer includes identifying a first of the jetting heaters to be fired. A second of the jetting heaters to be fired immediately after the firing of the first jetting heater is also identified. Power is simultaneously applied to each of the first jetting heater and the second jetting heater.

**METHOD AND APPARATUS FOR FIRING**  
**NOZZLES IN AN INK JET PRINTER**

**BACKGROUND OF THE INVENTION**

5     **1.     Field of the invention.**

          The present invention relates to an ink jet printer, and, more particularly, to firing nozzles in an ink jet printer.

**2.     Description of the related art.**

          An ink jet printer typically includes an ink jet printhead assembly having a  
10    nozzle plate which is mounted in spaced apart relationship to a printhead. The nozzle plate includes a plurality of ink emitting orifices which are respectively disposed in association with a plurality of heater elements mounted on the printhead. When a particular heater element is actuated or fired, ink disposed adjacent thereto rapidly expands to form a vapor bubble. Ink is expelled through the orifice by the bubble and  
15    is jetted onto the print medium.

          It is known to improve print quality by applying a short prefire pulse to a heater element in order to raise the temperature of the ink before a fire pulse is applied to the heater element. The fire pulse causes a vapor bubble and jetting of the ink, but the prefire pulse does not. A problem is that the time required to apply the prefire  
20    pulse adds to the total printing time and reduces the throughput of the printer. Thus, there is a trade-off between the quality of printing, which benefits from the application of prefire pulses, and the speed of printing, which is decreased by the application of prefire pulses.

          It is also known to control the ejection of ink by adjusting, among other  
25    factors, the width, i.e., time duration, of driving pulses that are applied to the ink heaters. In general, longer driving pulses result in better print quality. Again, there is a trade-off between the quality of printing, which benefits from longer driving pulses, and printing speed, which benefits from shorter driving pulses.

          The speed and print quality of ink jet printers is constantly increasing,  
30    although there is an engineering trade-off between these two attributes, as described above. Increasing print speed in many cases implies that there will be a decrease in print quality. This is true because ink bubble formation parameters, which produce better ink drop shapes and thus better print quality, are often compromised to increase

print speed. Conversely, an increase in print quality is often achieved at the expense of print speed.

What is needed in the art is a way to either increase print speed without decreasing print quality, or increase print quality without decreasing print speed.

5

## SUMMARY OF THE INVENTION

The present invention provides a method of using a single fire input/output (I/O) to simultaneously raise the energy level in two groups of heaters for different amounts of time. This single fire pulse can be used to fire one group of heaters to ink nucleation and to pre-fire a second group of heaters for a shorter amount of time simultaneously.

The invention comprises, in one form thereof, a method of firing a plurality of jetting heaters in an ink jet printer. A first of the jetting heaters to be fired is identified. A second of the jetting heaters to be fired immediately after the firing of the first jetting heater is also identified. Power is simultaneously applied to each of the first jetting heater and the second jetting heater.

An advantage of the present invention is that increased printing speed and/or improved print quality resulting from a longer fire cycle for prefire and nucleation is provided.

Another advantage is that there is no need to increase I/O (input-output), such as by creating additional fire I/O, in order to implement the method of the present invention.

25

## BRIEF DESCRIPTION OF THE DRAWINGS

The above-mentioned and other features and advantages of this invention, and the manner of attaining them, will become more apparent and the invention will be better understood by reference to the following description of an embodiment of the invention taken in conjunction with the accompanying drawings, wherein:

30

Fig. 1 is a schematic view of an embodiment of an ink jet printhead of the present invention, illustrating a typical configuration of ink emitting orifices and jetting heaters;

Fig. 2 is a timing diagram of typical serial data produced by an embodiment of the method of the present invention;

Fig. 3 is a schematic diagram of the printhead chip and heaters of Fig. 1;

Fig. 4 is a timing diagram of typical serial data produced by another  
5 embodiment of the method of the present invention;

Fig. 5 is a schematic diagram of another embodiment of the printhead chip and heaters; and

Fig. 6 is a schematic diagram of a fire hold circuit of Fig. 5.

Corresponding reference characters indicate corresponding parts throughout  
10 the several views. The exemplifications set out herein illustrate one preferred embodiment of the invention, in one form, and such exemplifications are not to be construed as limiting the scope of the invention in any manner.

### DETAILED DESCRIPTION OF THE INVENTION

15

Referring now to the drawings, and, more particularly, to Fig. 1, there is shown a printhead 10 including a nozzle plate 12 having a plurality of ink emitting orifices 14 formed therein. Printhead 10 also includes a substrate 16 which is connected to nozzle plate 12. A plurality of jetting heaters 18 are mounted on  
20 substrate 16 and positioned relative to respective ink emitting orifices 14. More particularly, each of the plurality of jetting heaters 18 is positioned substantially in axial alignment with a respective ink emitting orifice 14. Actuation of a jetting heater 18 rapidly heats the ink disposed adjacent thereto, and creates a gas bubble which jets ink from the associated ink emitting orifice 14. Jetting heaters 18 are actuated by a  
25 printhead chip 20 in response to signals from a controller 22.

Input heater address data is loaded in some serial fashion through one or more shift registers. At a predetermined frequency and bit count, the amount of time required to load the external input data into a shift register and latch the data onto the printhead chip is referred to as the "data cycle", as shown in Fig. 2. The heaters are  
30 controlled, i.e., turned on and off, by a cyclical "fire signal". The fire signal is a cyclically repeated series of the following: a short prefire pulse followed by a period of dead time when the heater is not turned on, followed by a longer fire pulse that causes the ink nucleation over the heater. The total of these is referred to as the "fire

cycle". Both the data cycle and the fire cycle can be defined by the falling edges of adjacent clock 2 pulses

Heater 1 is an example of a heater that fires in a first fire cycle only. That is, an associated first ink emitting orifice 23 is caused to emit ink in response to the firing of Heater 1 in the first fire cycle. Heater 2 is an example of a heater that fires in a second fire cycle only. That is, an associated second ink emitting orifice 25 is caused to emit ink in response to the firing of Heater 2 in the second fire cycle. As can be seen in Fig. 2, adjacent fire cycles do not overlap with each other. The length of the data cycle is set equal to the length of the fire cycle as a compromise between the printer needing to print faster and the fire pulse needing to be longer due to thermal parameter studies of the heater stack.

Fig. 3 is a schematic view of the circuitry of printhead chip 20 driving jetting heaters 18 as shown in Fig. 2. Only eight jetting heaters 18 and their associated driving circuitry of printhead chip 20 are shown in Fig. 3 for ease of illustration. However, it is to be understood that the circuitry of Fig. 3 can be replicated as many times as necessary to support a desired number of ink emitting orifices 14.

A pair of group data shift registers 24 are used to create four ( $2^2$ ) addresses for heaters 18 at four respective group latches 26 via a decode circuit 28. The number of heaters 18 that can be driven by a common address is determined by how many primitive data shift registers 30 are provided. For example, in Fig. 3, each pair of vertically adjacent heaters 18 is driven by a respective group latch 26 and by two separate primitive latches 32. That is, heaters 18a are driven by group latch 26a and by primitive latches 32a and 32b. Thus, the eight heaters 18a-18d shown in Fig. 3 are driven by the four group latches 26a-26d and primitive latches 32a and 32b. In general, the number of heaters that can be driven is equal to the number of group latches 26 multiplied by the number of primitive latches 32. Latches 26, 32 latch the current data state from Clock 2 falling edge to falling edge.

In operation, only one of group latches 26a-26d produces a logic "1" on its Q output, i.e., goes "high", at any point in time. Thus, only the heaters 18 associated with the "high" group latch 26 can be turned on at any point in time. For example, if group latch 26a is high, only heaters 18a can be turned on. Whether one, both or neither of heaters 18a is actually turned on is determined by the outputs of primitive latches 32a and 32b. When group latch 26a goes "low", i.e., produces a logic "0" on

its Q output, group latch 26b can then go high, allowing heaters 18b to be turned on. Group latches 26a-26d go high and low in sequence, i.e., latch 26a goes high then low, latch 26b goes high then low, latch 26c goes high then low, and finally latch 26d goes high then low. This sequence is then cyclically repeated.

5 As can be seen in Fig. 2, there is a delay between a rising edge of a prefire pulse or a fire pulse and a heater being turned on. Likewise, there is a delay between a falling edge of a prefire pulse or a fire pulse and a heater being turned off. These delays are due to the response time of power transistors 33.

10 A timing diagram of typical serial data produced by another embodiment of the method of the present invention is shown in Fig. 4. In this embodiment, adjacent fire cycles overlap with each other. Power is applied to only Heater 1 immediately before the rising edge of the second clock 2 pulse. Power is simultaneously applied to each of Heater 1 and Heater 2 during the period of overlap between the first fire cycle and the second fire cycle, after the falling edge of the second clock 2 pulse. The  
15 merging of the fire pulses with the respective, immediately following prefire pulses causes the overlapping of the first and second fire cycles. As can be seen in Fig. 4, the fire pulse and the prefire pulse of the fire signal are not distinct, as they are in the embodiment of Fig. 2. Rather, the fire pulse is extended into the prefire pulse to form one continuous fire/prefire pulse.

20 Power continues to be simultaneously applied to Heater 1 and Heater 2 for a short period of time after the end of the first fire cycle due to the response time of power transistors 33, as discussed above. The fire/prefire pulse during the overlap between the first fire cycle and the second fire cycle serves as both a fire pulse for Heater 1 and as a prefire pulse for Heater 2. That is, Heater 1 fires during the first fire  
25 cycle, and Heater 2 fires during the second fire cycle.

As can be seen in Fig. 4, there is also an overlap of the second fire cycle and the third fire cycle. The fire/prefire pulse during the overlap between the second fire cycle and the third fire cycle serves as both a fire pulse for Heater 2 and as a prefire pulse for Heater 3. That is, Heater 2 fires during the second fire cycle, and Heater 3  
30 fires during the third fire cycle. Overlapping of adjacent fire cycles continues, with each fire/prefire pulse serving as both a fire pulse for the preceding heater and as a prefire pulse for the succeeding heater.

As illustrated, a fire cycle is longer than a data cycle. Thus, the fire cycle can be set to be longer than the fire cycle of Fig. 2, with the lengths of the data cycles being equal, resulting in better print quality. In Fig. 2, a fire cycle is equal to the time value of:

5           Pre-fire pulse + dead time + fire pulse.

In Fig. 4, the length of the fire cycle increases by the time value of the pre-fire pulse of the next state. This produces more efficient ink nucleation, and, thus, better formed drops of ink and, in the end, better print quality.

Alternatively, the length of the fire cycle can be set equal to the length of the  
10   fire cycle of Fig. 2, with the data cycle being shorter than that of Fig. 2, resulting in faster printing. In Fig. 2, the data cycle, as well as the fire cycle, is equal to the time value of:

Pre-fire pulse + dead time + fire pulse.

The length of the data cycle can be decreased by the time value of the prefire pulse of  
15   the next state. This would allow for a faster printing speed.

As a third option, the fire cycle can be made slightly longer and the data cycle can be made slightly shorter than in Fig. 2, resulting in slightly better print quality and slightly faster printing.

Fig. 5 is a schematic view of the circuitry of a printhead chip 34 driving jetting  
20   heaters 18 as shown in Fig. 4. Printhead chip 34 includes fire hold circuits 36, the details of one of which are shown in Fig. 6. The gain in function is achieved by triggering an extra latch 38 for each data bit to hold the state of the bit in order to provide the extended fire cycle time. In order to extend the fire cycle, a second latch 38 is required to hold the past data state, dependent on whether the heater 18 was  
25   firing or not. Fire hold circuit 36 makes the decision of whether or not to extend the fire cycle or start a new prefire with every new data set. As seen in Fig. 4, the output of the first fire hold remains high after the first group latch has transitioned from high to low. The second fire hold goes high as soon as the second group latch has transitioned from low to high. Thus, for a short period of time, the outputs of the fire  
30   holds are high simultaneously, thereby causing two associated heaters to be turned on simultaneously.

In operation, group latch 26a produces a logic "1" on its Q output. In response, fire hold circuit 36a produces a logic "1" on its Q output. Group latch 26a

then goes low and group latch 26b goes high, as in the previous embodiment. Fire hold circuit 36a does not go low when group latch 26a goes low, however. Rather, fire hold circuit 36a maintains a logic "1" on its Q output until the falling edge of the fire/prefire pulse. While fire hold circuit 36a is maintained in its high state, fire hold  
5 circuit 36b also goes high in response to group latch 26b going high. Thus, power is simultaneously applied to heater(s) 18a and heater(s) 18b, as shown in the overlap between the first fire cycle and the second fire cycle in Fig. 4. Group latches 26-26d go high and low sequentially, as in the previous embodiment. This allows heaters 18a and 18b to be turned on simultaneously, then heaters 18b and 18c to be turned on  
10 simultaneously, etc.

The logic of Fig. 6 satisfies the statement:

If (Clock 2 has a Falling Edge and (Present State of the Output of the Fire Hold Circuit=0)) or (Fire Signal has a Falling Edge and (Present State of the Output of the Fire Hold Circuit =1))

15 Then the Output of the Fire Hold Circuit (the Latched Address Bit to the Heater Decode) takes on the value of the Latched Group or Primitive Data Input

Else the Output of the Fire Hold Circuit remains at its Present State.

Printhead chip 34 provides the ability to create a longer fire cycle, or shorter  
20 data cycle, by simultaneously holding constant a high state of a previous heater address and a high state of a current address during a fire pattern.

While this invention has been described as having a preferred design, the present invention can be further modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or  
25 adaptations of the invention using its general principles. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this invention pertains and which fall within the limits of the appended claims.

**WHAT IS CLAIMED IS:**

1. A method of firing a plurality of jetting heaters in an ink jet printer, said method comprising:
  - identifying a first of the jetting heaters to be fired;
  - identifying a second of the jetting heaters to be fired immediately after the firing of the first jetting heater; and
  - 5 simultaneously applying power to each of the first jetting heater and the second jetting heater.
2. The method of claim 1, wherein power is applied to the first jetting heater before power is applied to the second jetting heater.
3. The method of claim 2, wherein the power to the first jetting heater causes an associated first ink emitting orifice to emit ink, the power to the second jetting heater being insufficient to cause an associated second ink emitting orifice to emit ink.
4. The method of claim 2, comprising the further step of providing a clock pulse, power being applied to the first jetting heater before and after the clock pulse, power being applied to the second jetting heater after the clock pulse.
5. The method of claim 1, wherein said step of simultaneously applying power includes supplying a cyclical fire signal.
6. The method of claim 1, wherein said step of simultaneously applying power includes using a fire hold circuit.
7. A method of operating an ink jet printer, said method comprising:
  - identifying at least one first jetting heater to be fired;
  - identifying at least one second jetting heater to be fired immediately after the firing of the at least one first jetting heater; and
  - 5 simultaneously applying a fire pulse to each of the at least one first jetting heater and the at least one second jetting heater.
8. The method of claim 7, wherein the fire pulse is applied to the at least one first jetting heater before the fire pulse is applied to the at least one second jetting heater.
9. The method of claim 8, wherein the fire pulse to the at least one first jetting heater causes nucleation of ink, the fire pulse to the at least one second jetting heater being insufficient to cause nucleation of ink.

10. The method of claim 8, comprising the further step of providing a clock pulse, the fire pulse being applied to the at least one first jetting heater before and after the clock pulse, the fire pulse being applied to the at least one second jetting heater after the clock pulse.

11. The method of claim 7, wherein said step of simultaneously applying the fire pulse includes supplying a cyclical fire signal.

12. The method of claim 7, wherein said step of simultaneously applying the fire pulse includes using a fire hold circuit.

13. A method of operating an ink jet printer, said method comprising:

at least one of repetitively loading external input data into a shift register and repetitively latching the data onto a printhead chip, said loading and latching steps occurring at a selected frequency defining a data cycle; and

5       controlling a plurality of jetting heaters with a fire signal defining a fire cycle, the fire cycle being longer than the data cycle.

14. The method of claim 13, wherein the fire signal includes a series of fire pulses, each jetting heater being warmed to a first level insufficient to cause ink nucleation by a corresponding leading one of the fire pulses and warmed to a second level sufficient to cause ink nucleation by a trailing one of the fire pulses immediately  
5       after the leading fire pulse.

15. The method of claim 14, wherein each said fire pulse serves as a leading fire pulse to at least one of the jetting heaters and as a trailing fire pulse to at least one other one of the jetting heaters.

16. The method of claim 14, wherein each said leading fire pulse comprises a prefire pulse.

17. The method of claim 13, comprising the further step of supplying a clock signal having the selected frequency.

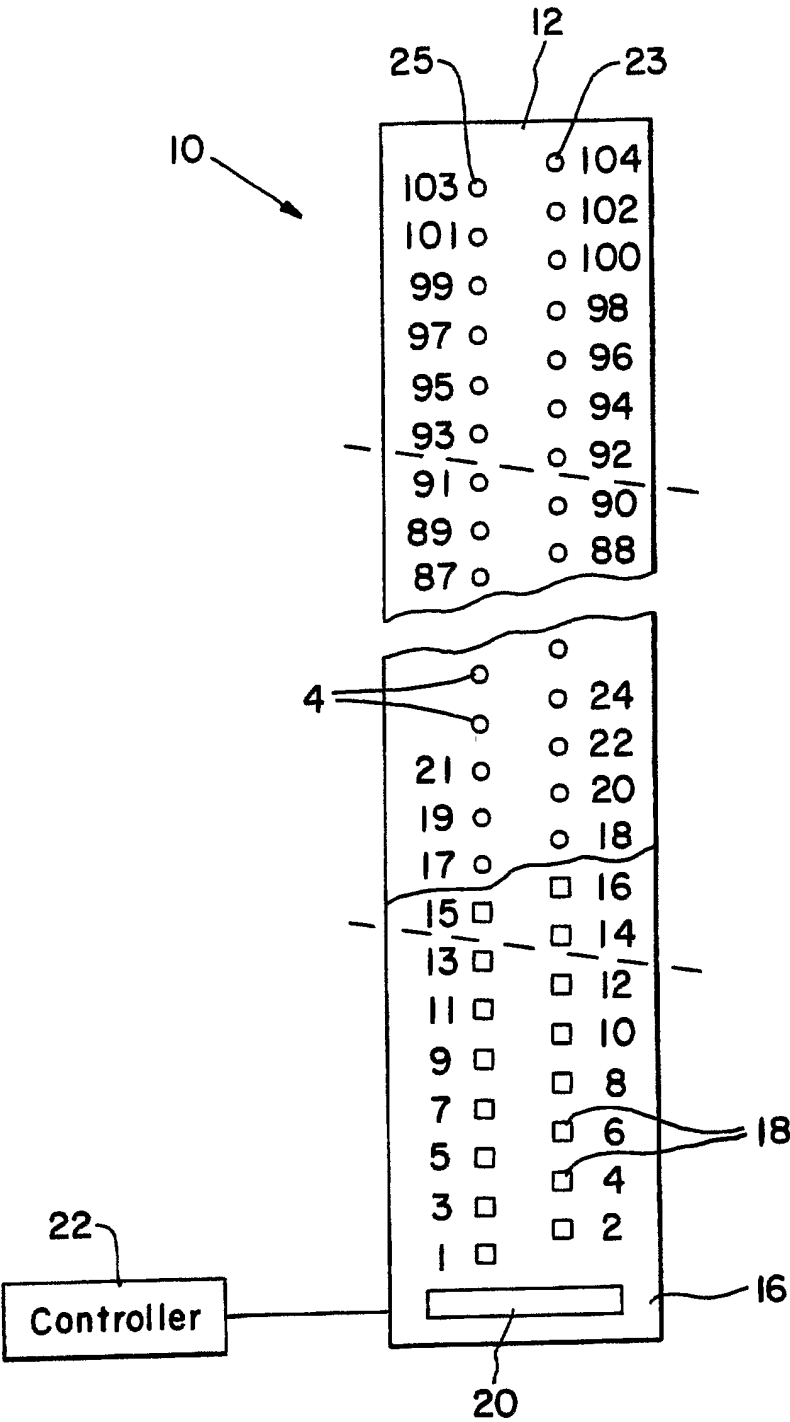


Fig. 1

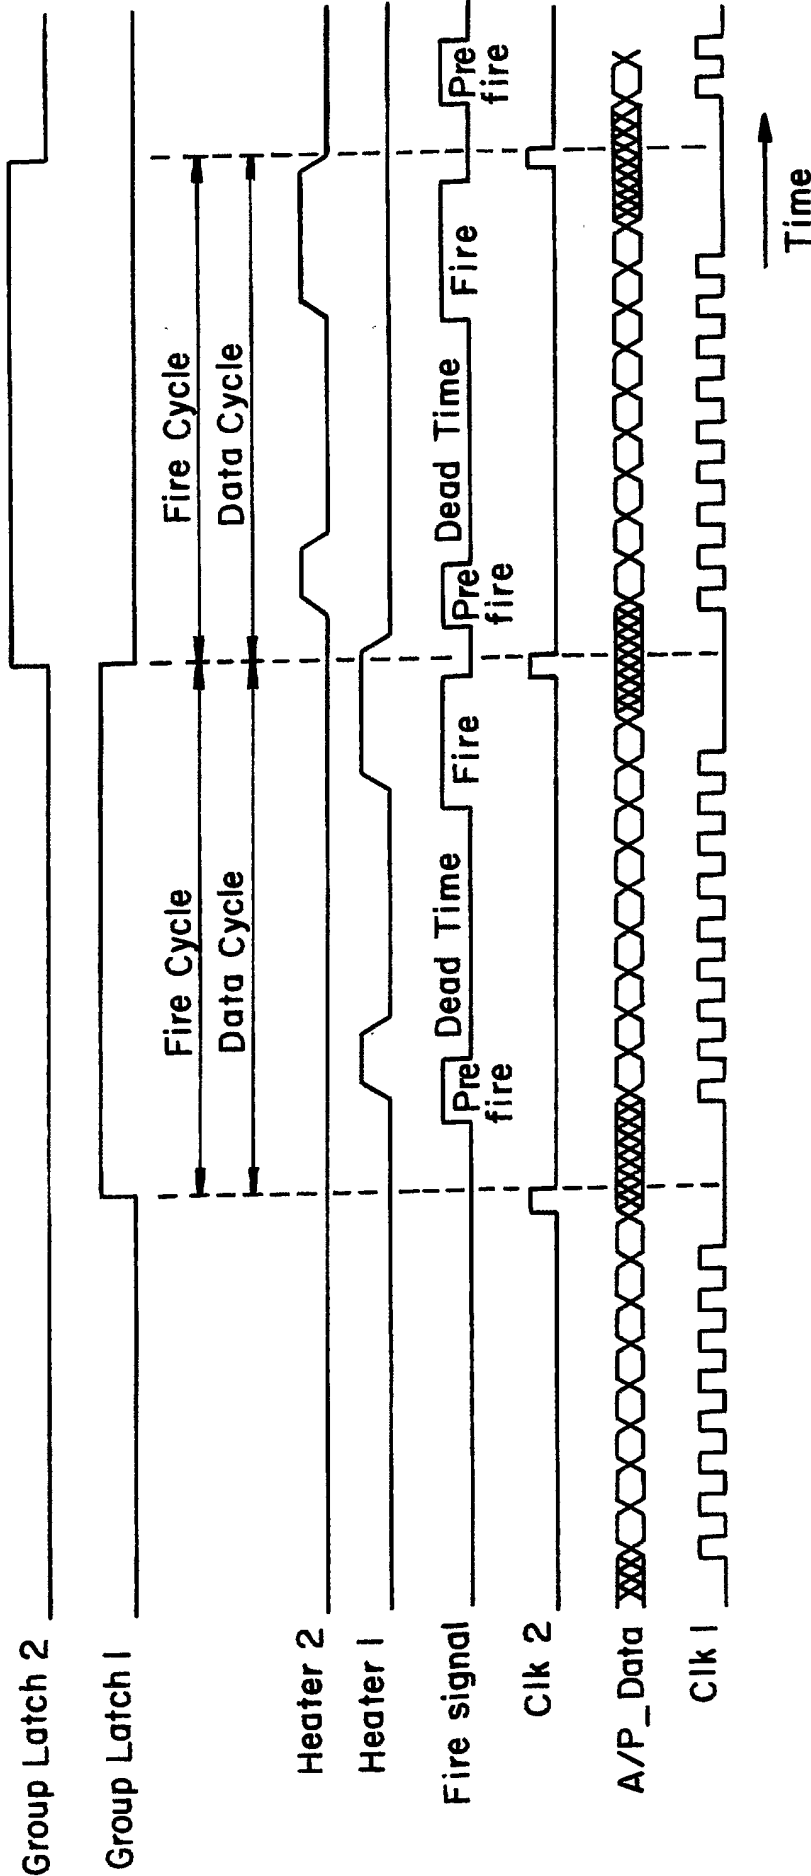


fig. 2

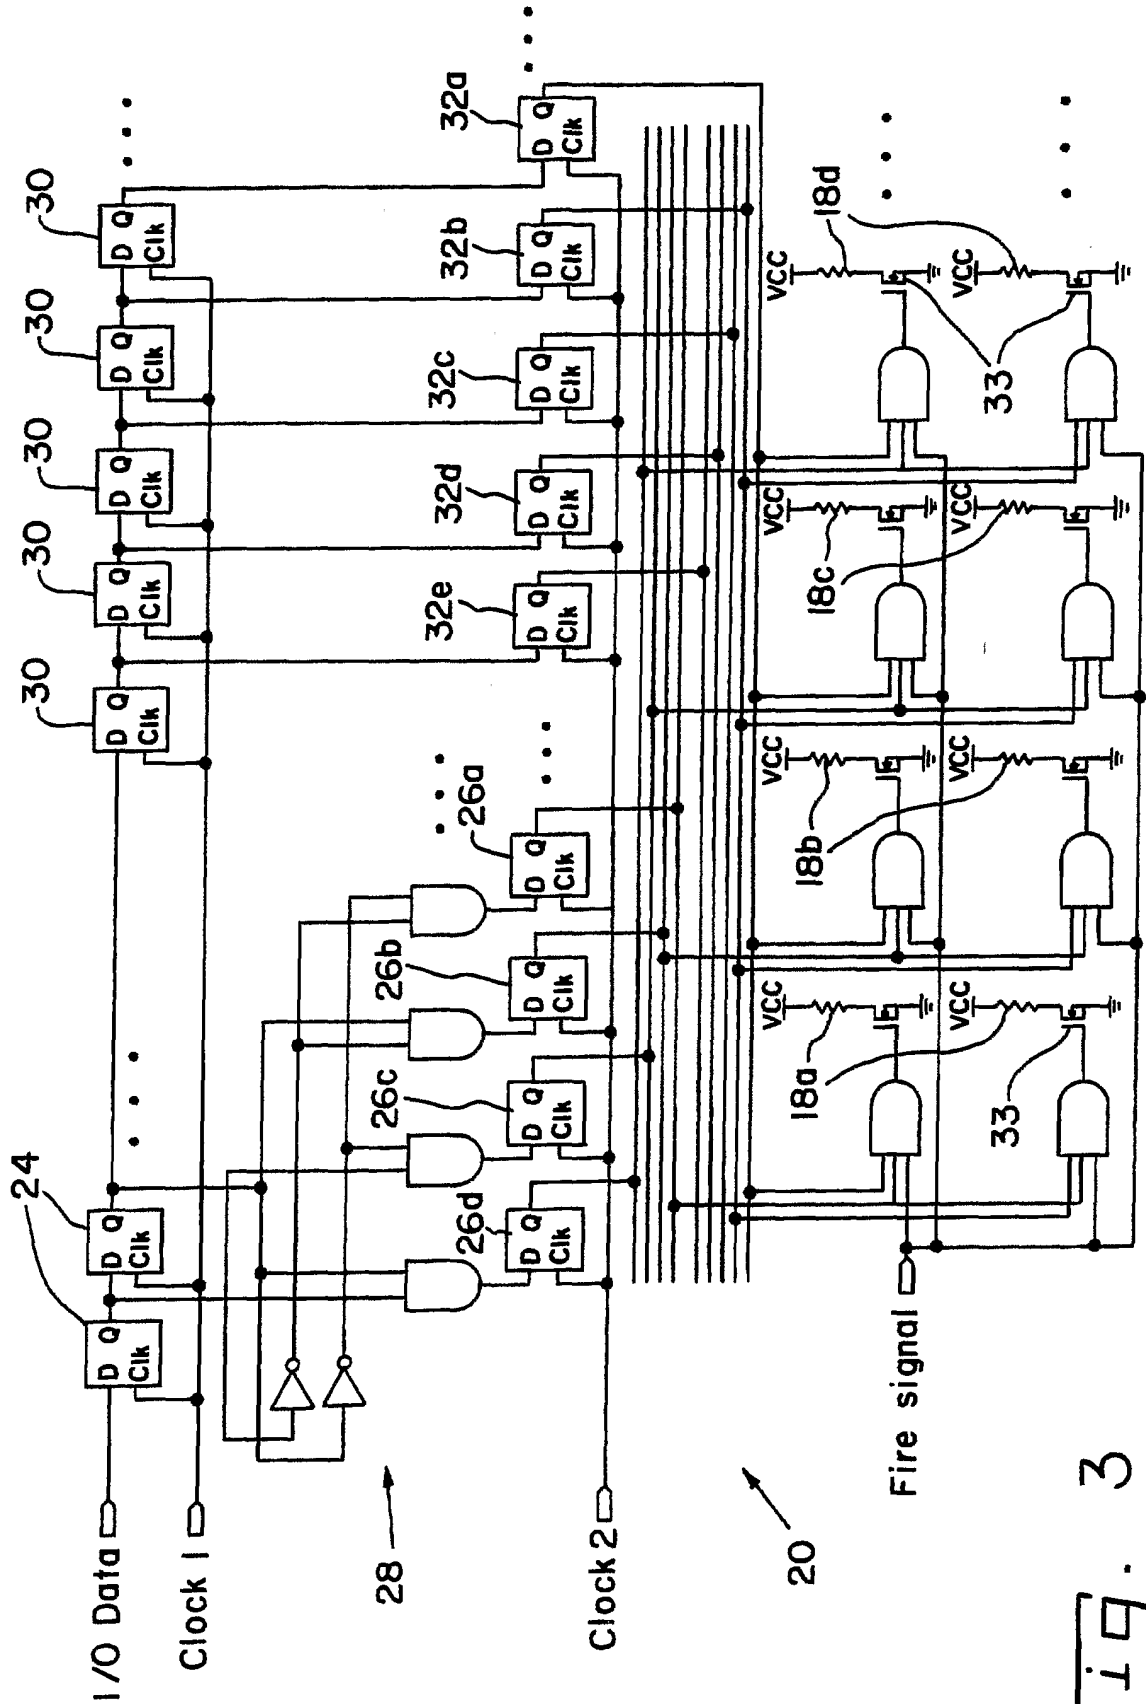


Fig. 3


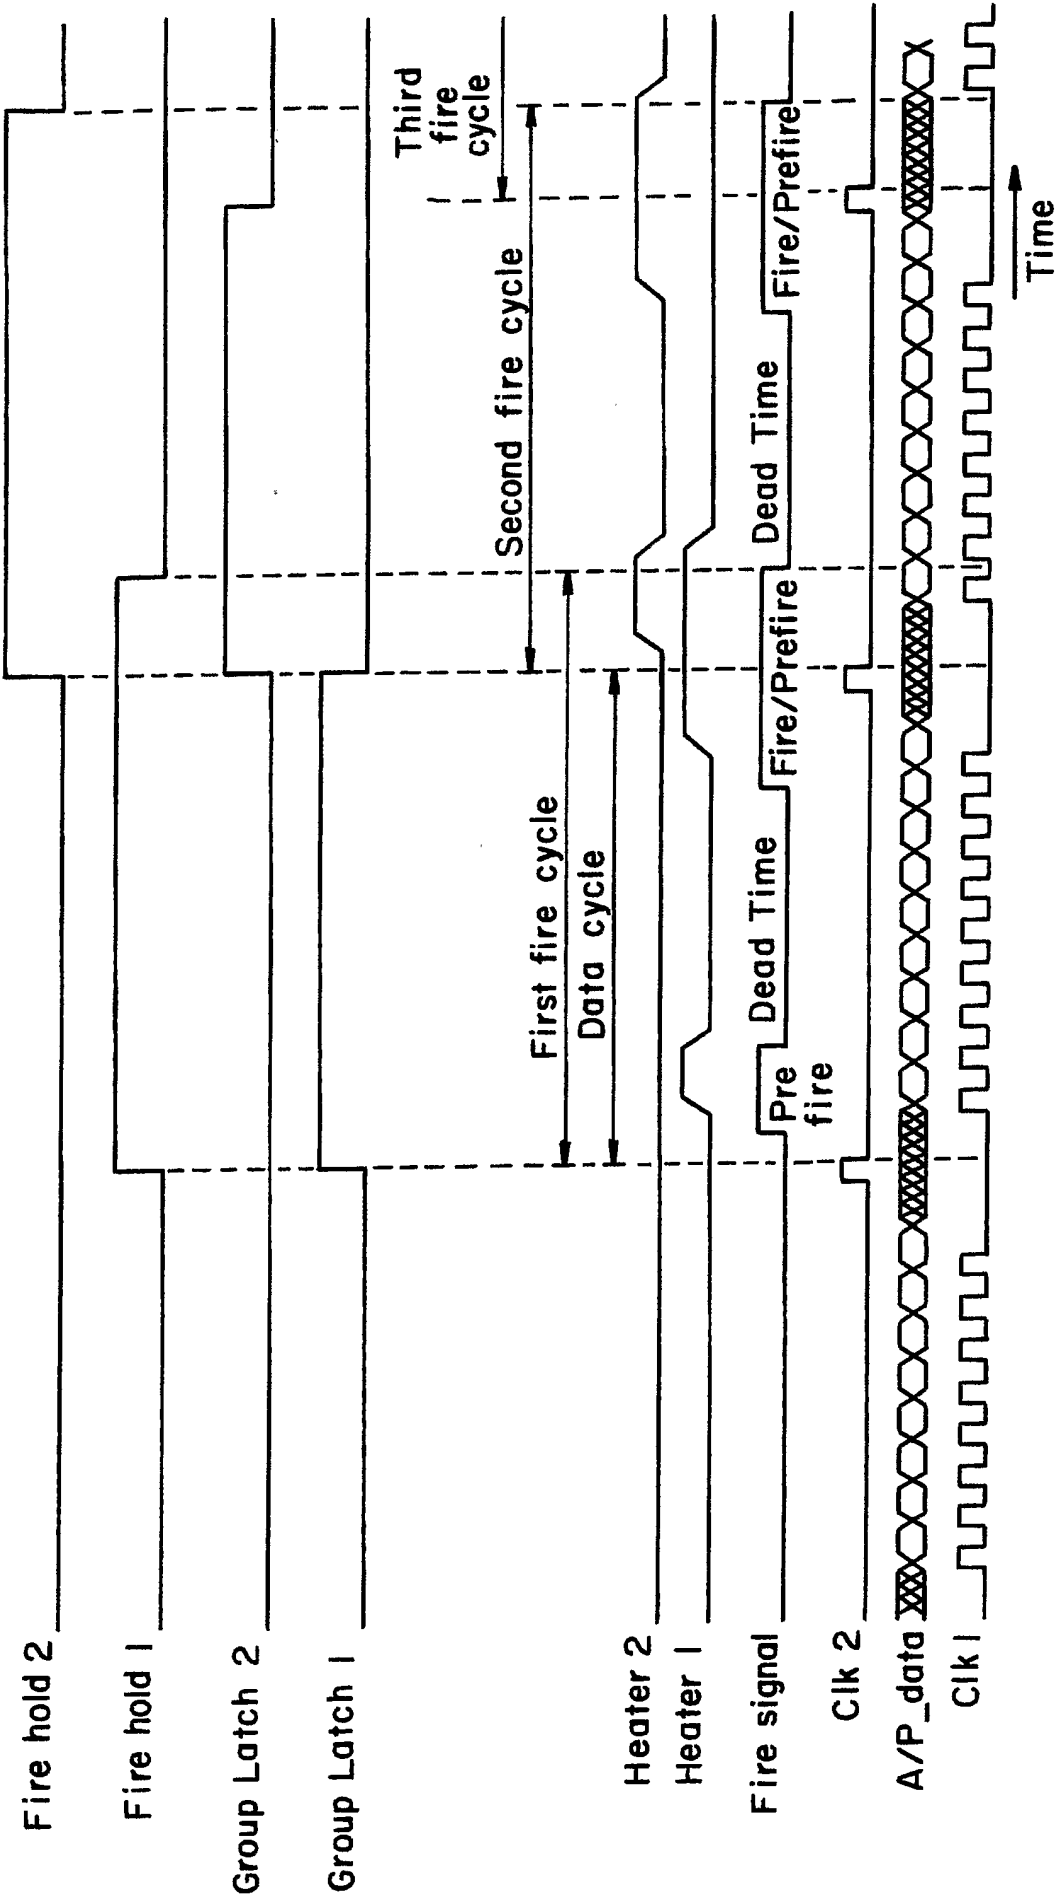


Fig. 4

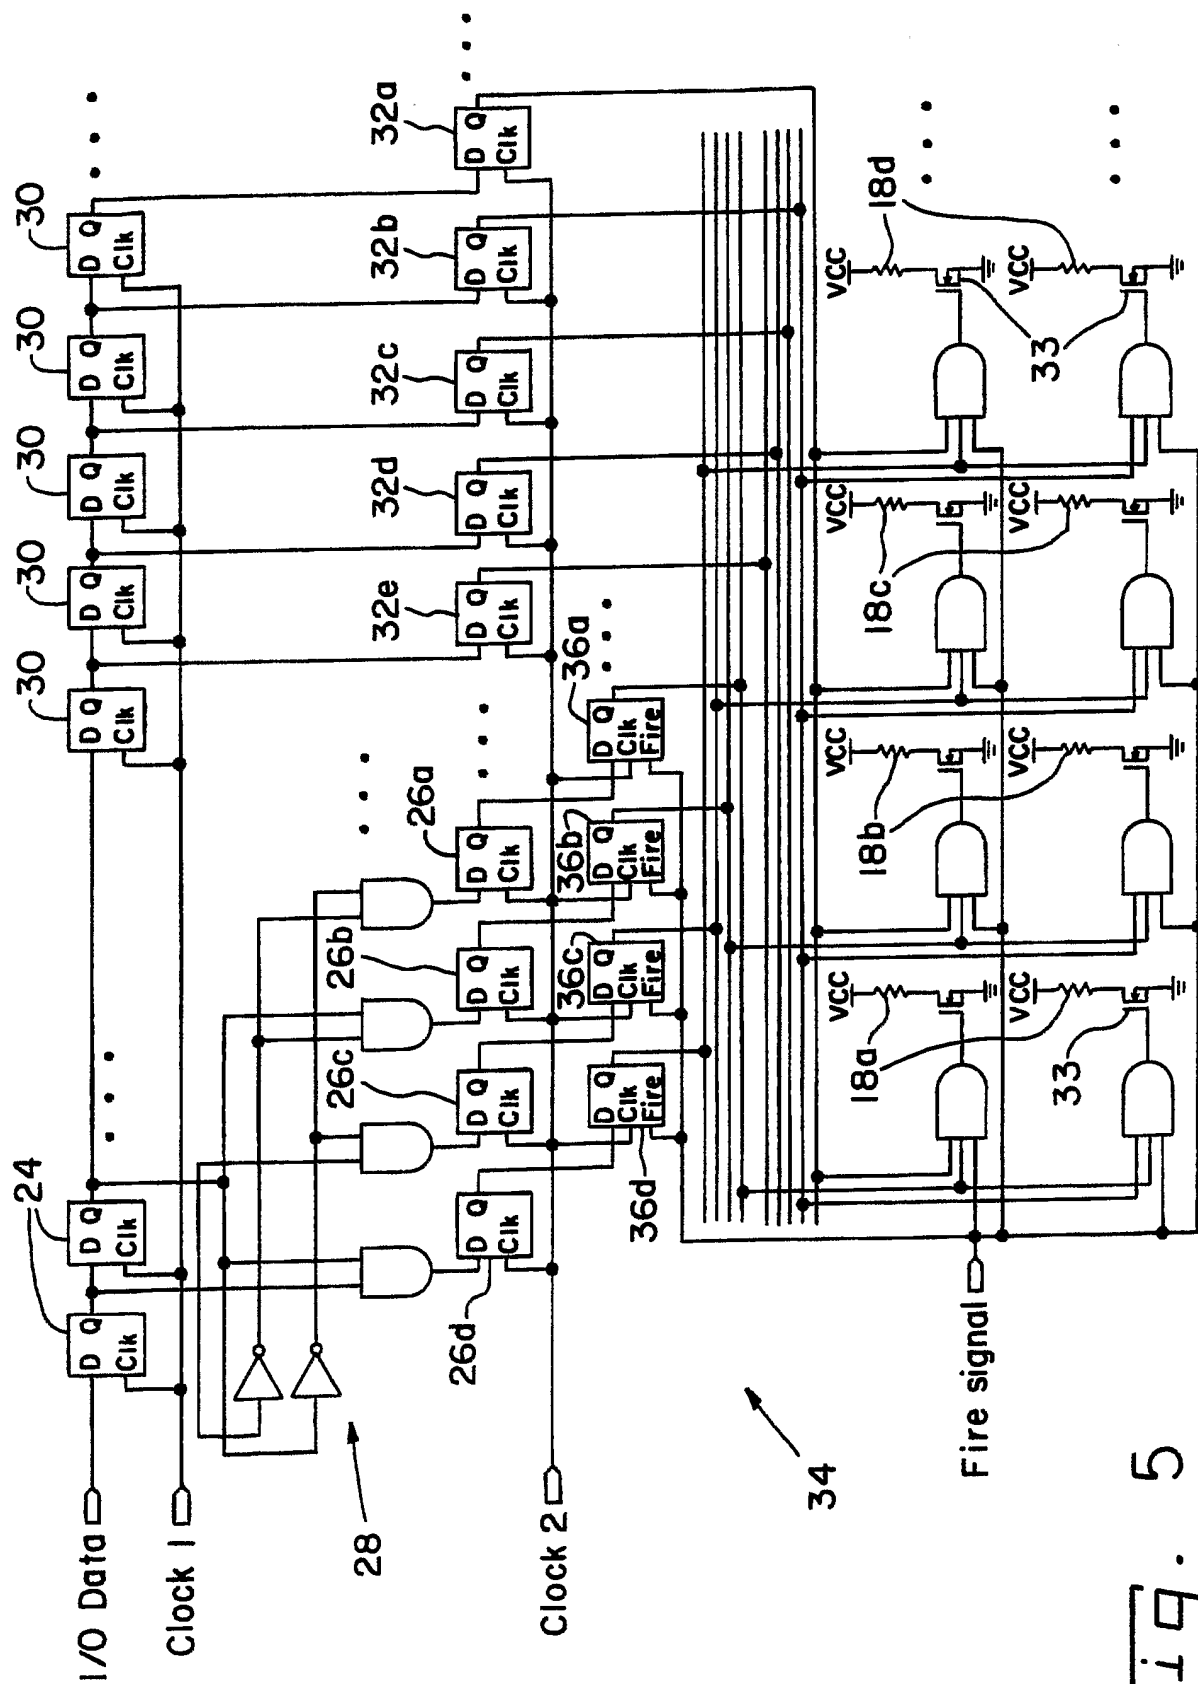

5. bit

36

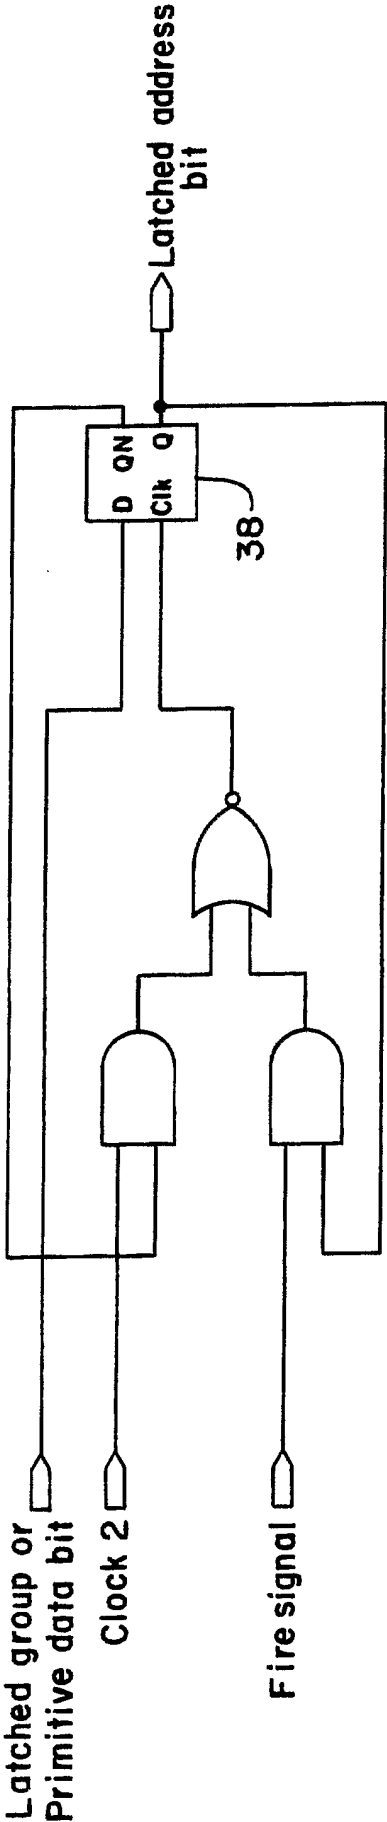


Fig. 6

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US04/08851

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : B41J 29/38

US CL : 347/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 347/12 347/12,48,57,60

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

USPAT;USPGPUB;EPO,JPO,DERWENT;IBM\_TDP

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages                              | Relevant to claim No. |
|------------|-----------------------------------------------------------------------------------------------------------------|-----------------------|
| X          | US 5,988,785 A (Katayama) 23 November 1999 (23.11.1999), figures 9-14B, column 6, line 44 - column 8, line 30.  | 1,2,4-8,10-13,17      |
| X          | US 5,917,509 A (Becerra et al.) 29 June 1999 (29.06..1999), figures 5-7, column 5, line 53- column 10, line 63. | 13-17                 |
| X          | JP 2003-334954A (Tamura) 25 November 2003 (25.11.2003), figure 1, abstract.                                     | 1-12                  |

☐

Further documents are listed in the continuation of Box C.

☐

See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

10 March 2005 (10.03.2005)

Date of mailing of the international search report

12 APR 2005

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US

Commissioner for Patents

P.O. Box 1450

Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

Blaise L. Mouttet

Telephone No. (571) 272-2150

*James R. Matthews*