



(19) **United States**

(12) **Patent Application Publication**

MITCHELL et al.

(10) **Pub. No.: US 2001/0042094 A1**

(43) **Pub. Date: Nov. 15, 2001**

(54) **METHODS AND APPARATUS FOR
EFFICIENTLY TRANSMITTING
INTERACTIVE APPLICATION DATA
BETWEEN A CLIENT AND A SERVER
USING MARKUP LANGUAGE**

(76) Inventors: **DAVID C. MITCHELL**, OREM, UT
(US); **BEN WALTERS**, SALT LAKE
CITY, UT (US); **DALE MITCHELL**,
OREM, UT (US)

Correspondence Address:
TESTA, HURWITZ & THIBEAULT, LLP
HIGH STREET TOWER
125 HIGH STREET
BOSTON, MA 02110 (US)

(*) Notice: This is a publication of a continued pros-
ecution application (CPA) filed under 37
CFR 1.53(d).

(21) Appl. No.: **09/391,068**

(22) Filed: **Sep. 7, 1999**


Publication Classification

(51) **Int. Cl.⁷** **G06F 15/16**

(52) **U.S. Cl.** **709/203**

(57) **ABSTRACT**

A method for efficiently transferring data between a client and a server includes the steps of: providing an application program; providing an application-independent client process effecting a plurality of client states; providing an application-independent server process effecting a plurality of server states; transferring data from the server process to the client process in response to an application program; and updating at least one client state in response to the transferred data. A related apparatus is also disclosed.

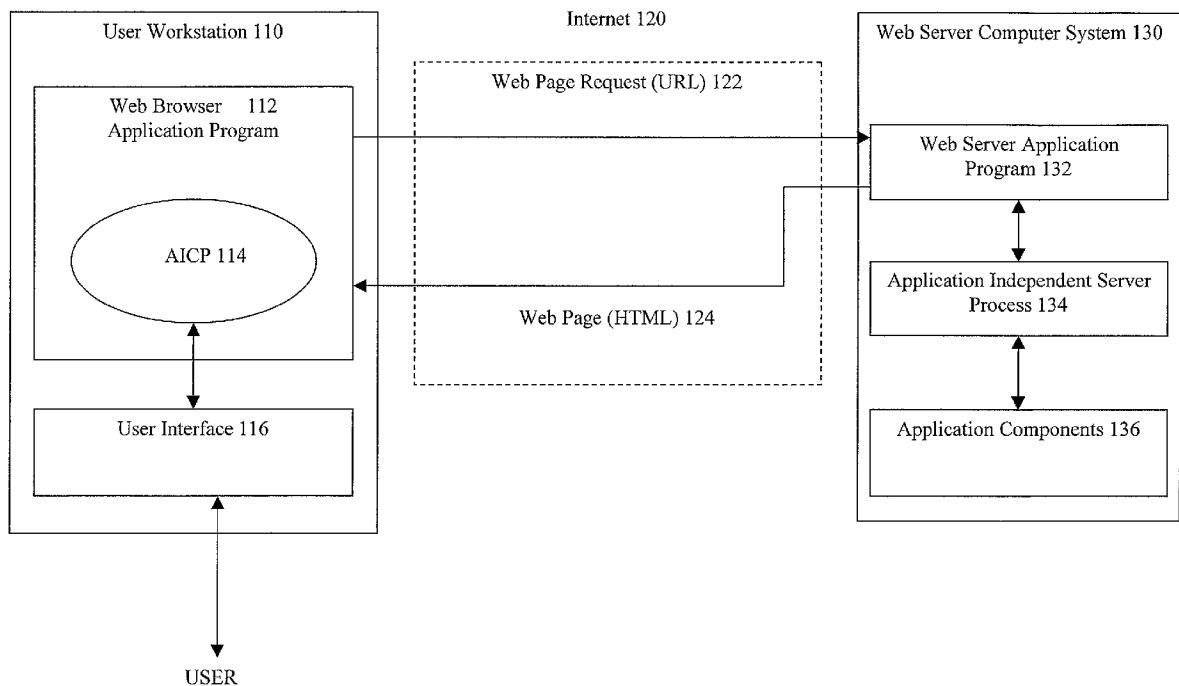

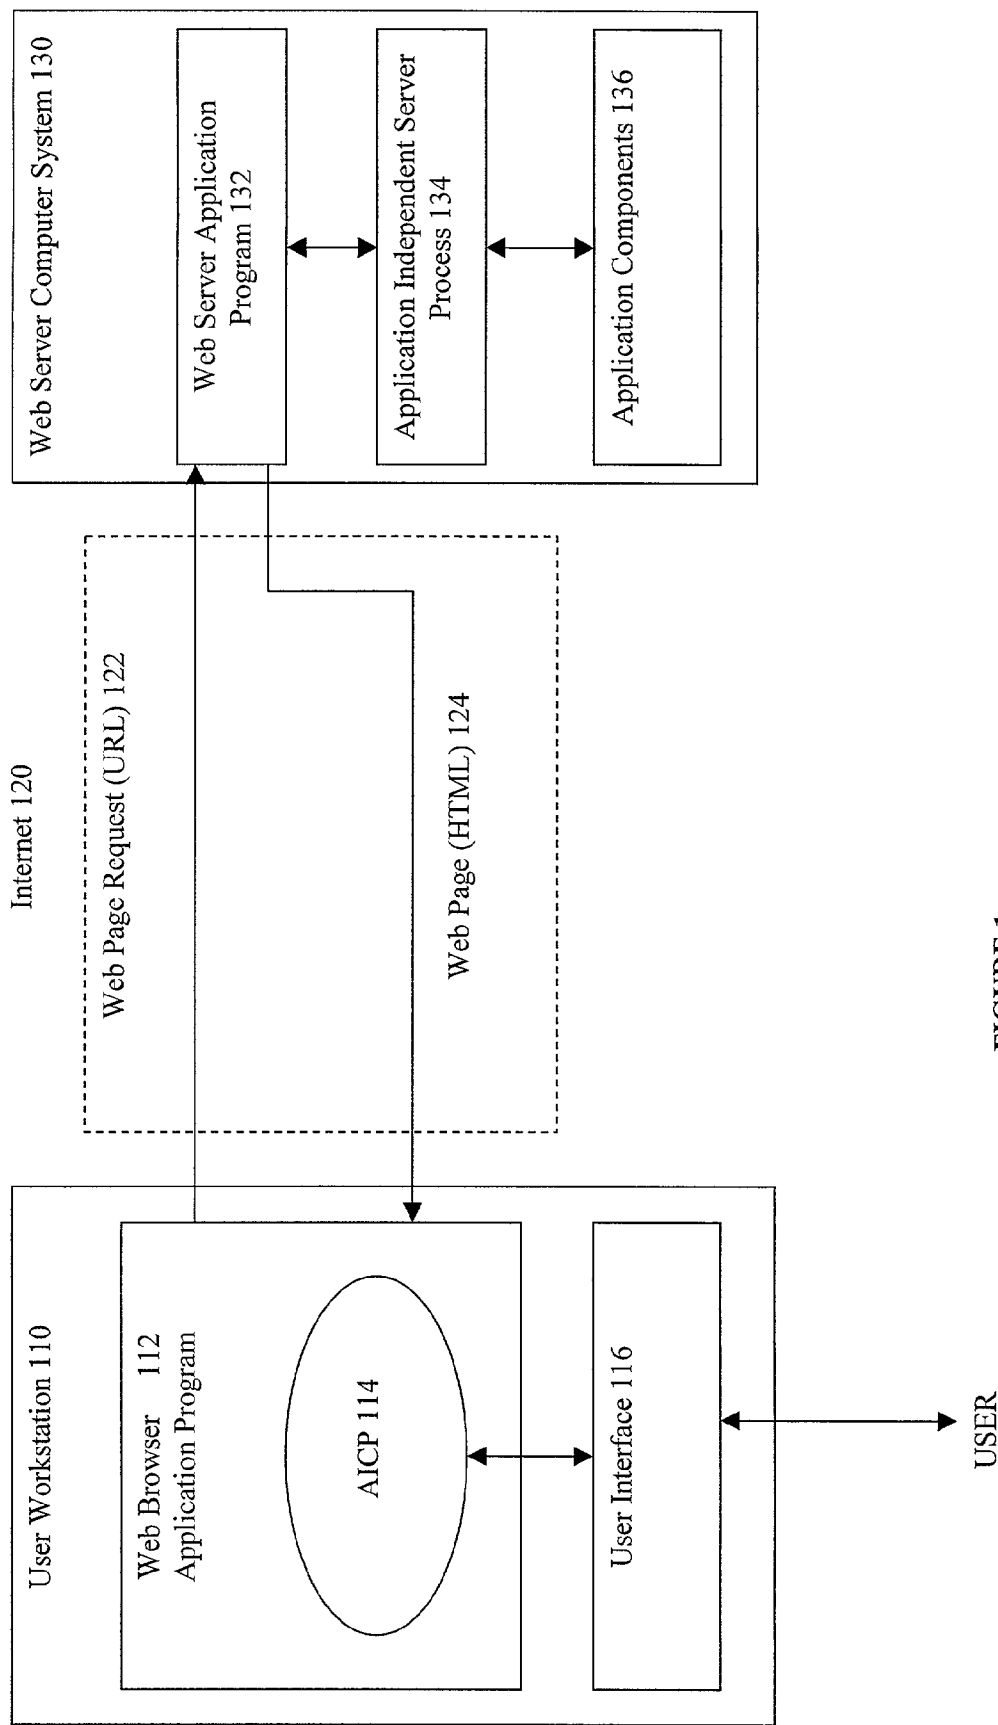
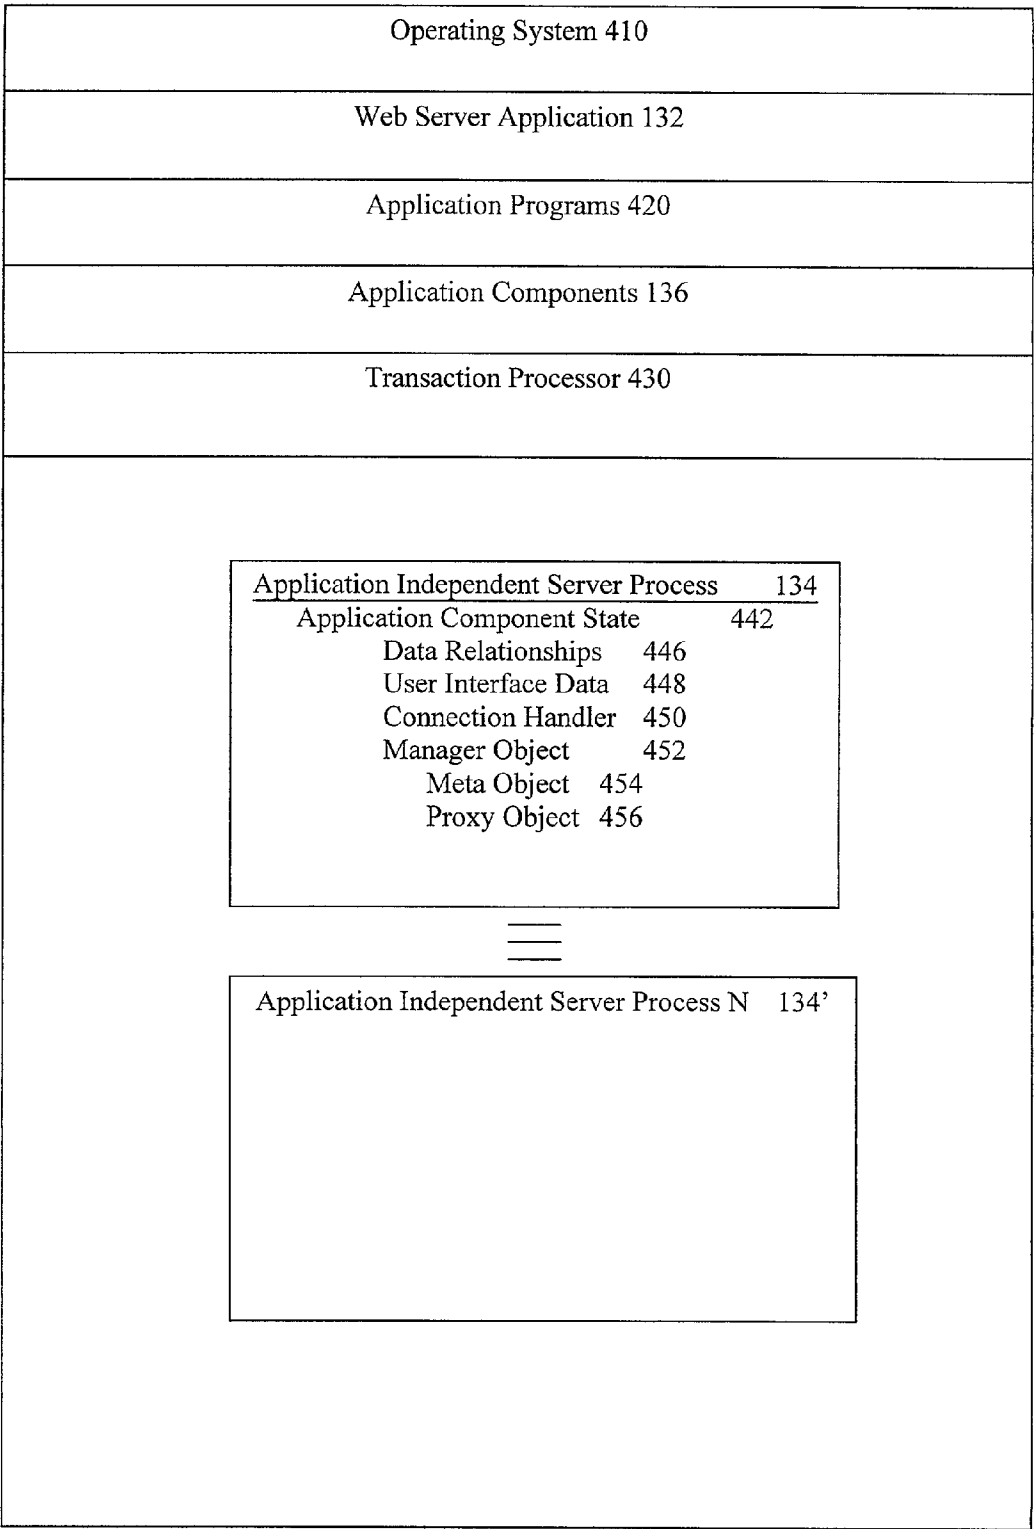


FIGURE 1

FIGURE 2



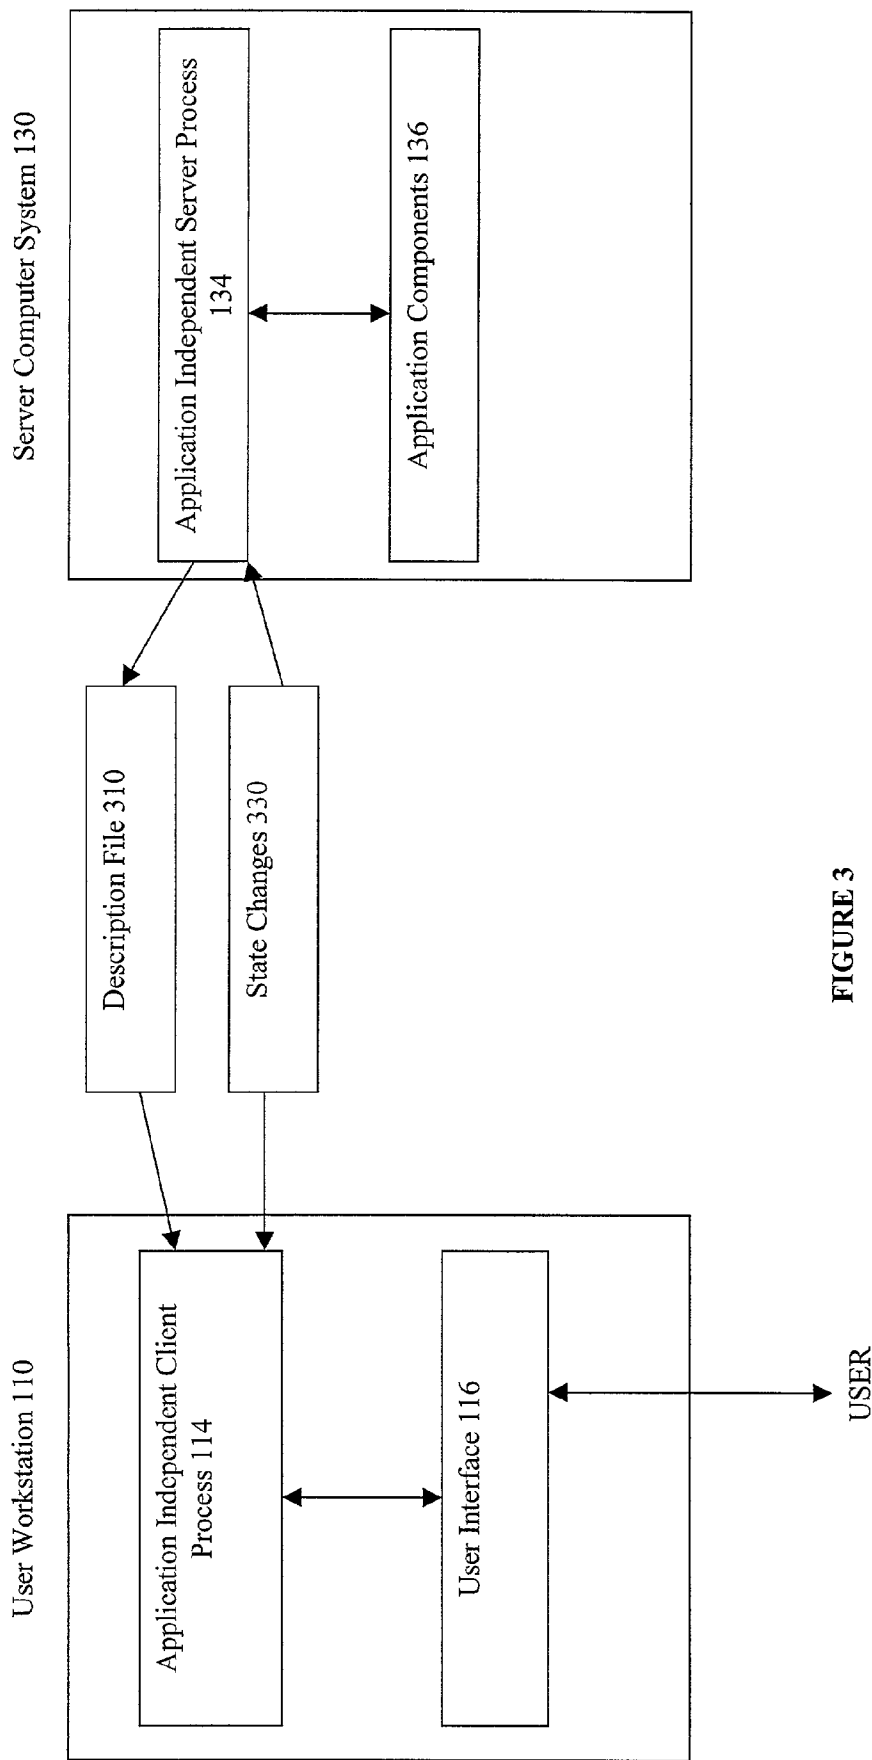


FIGURE 3

FIGURE 4

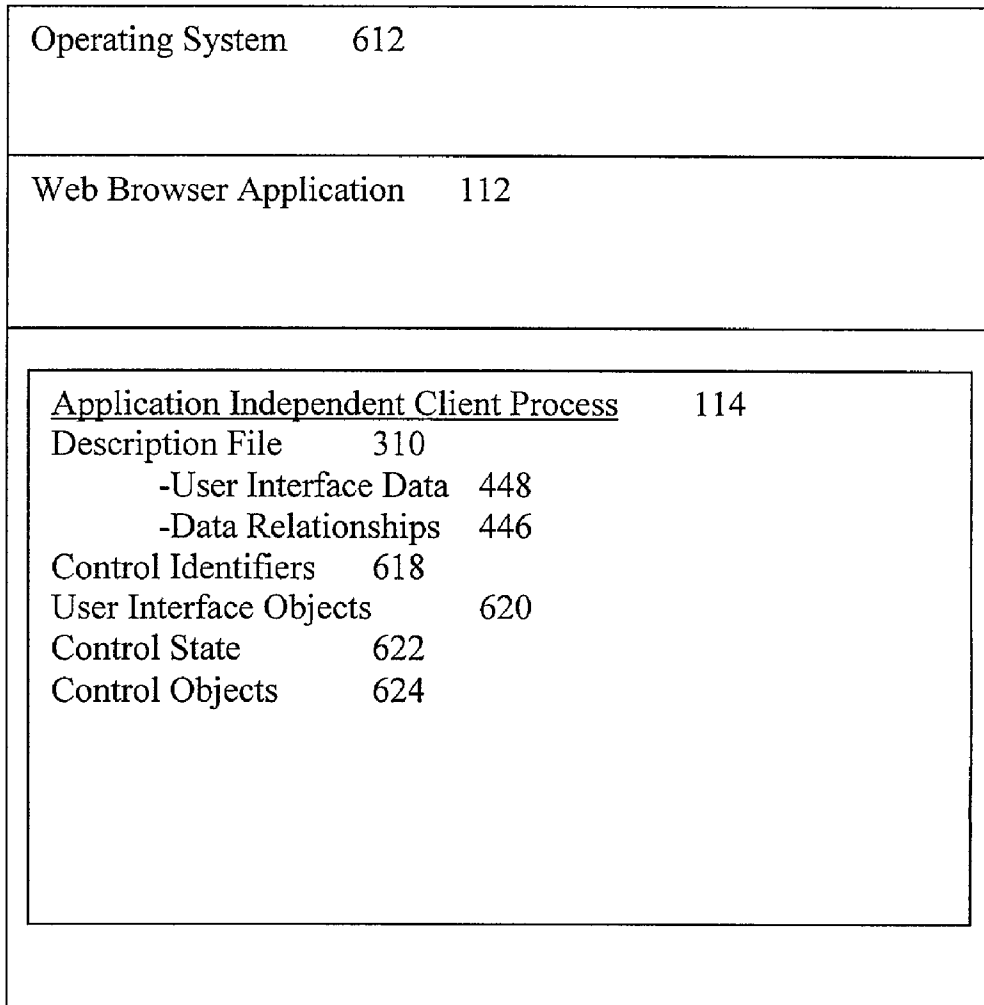


FIGURE 5


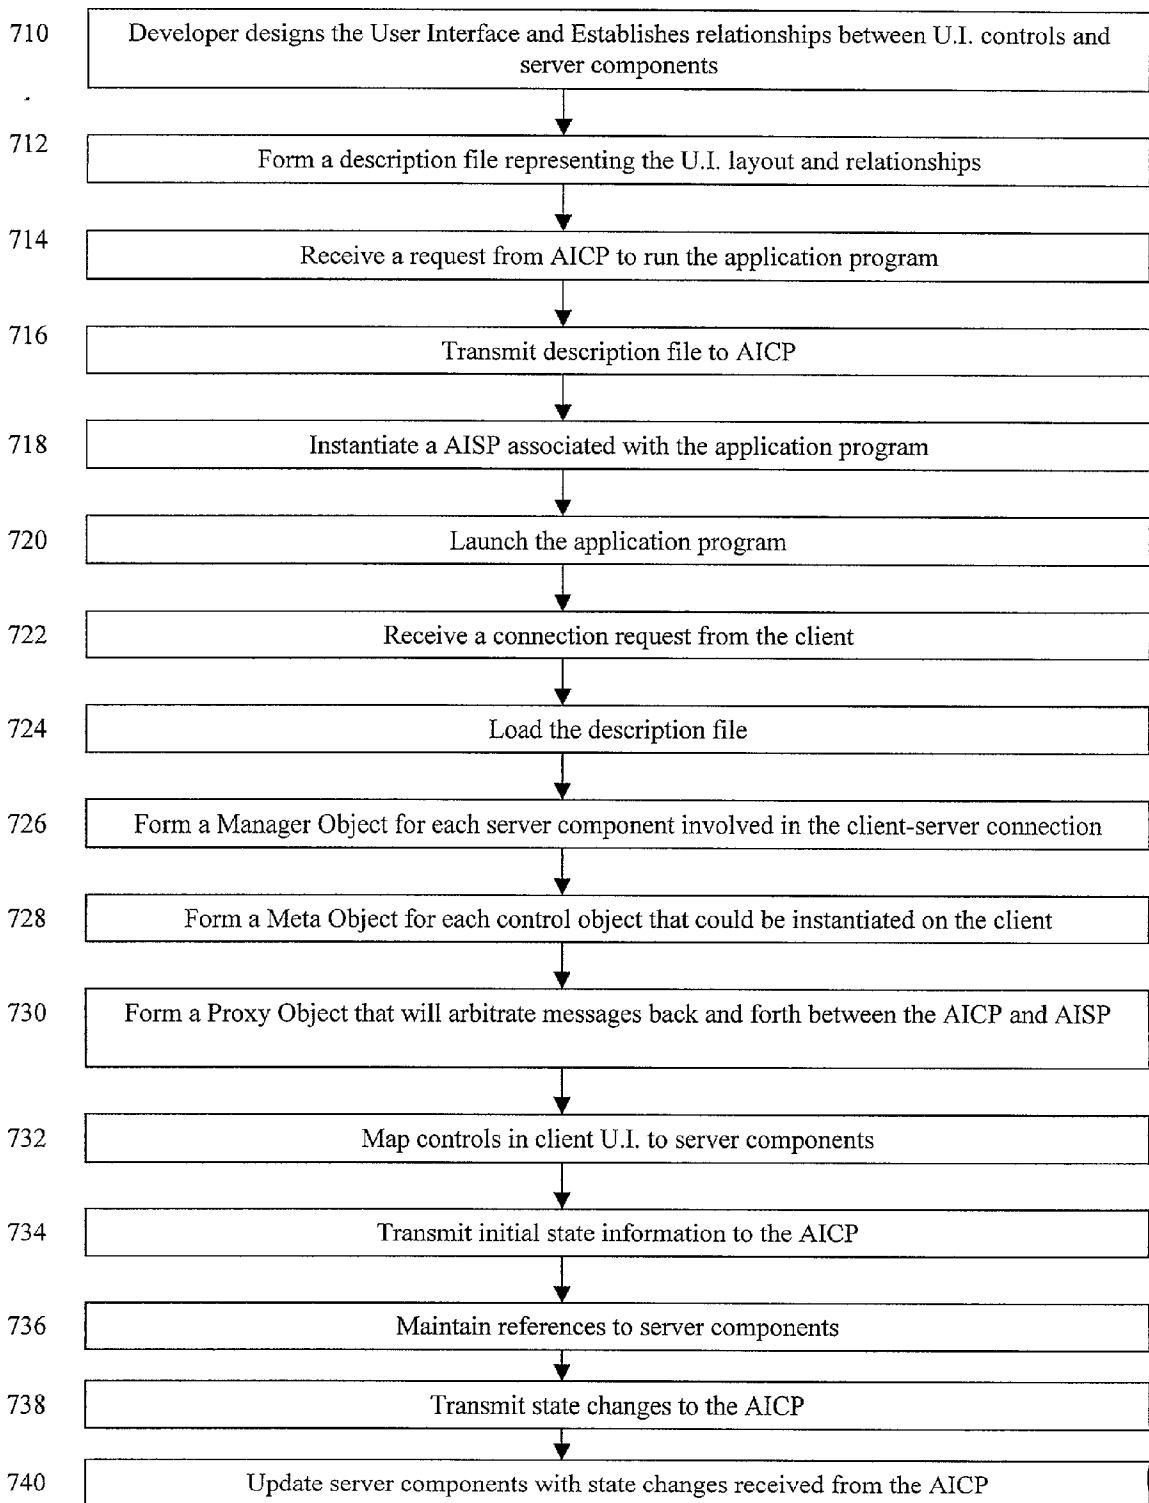


FIGURE 6

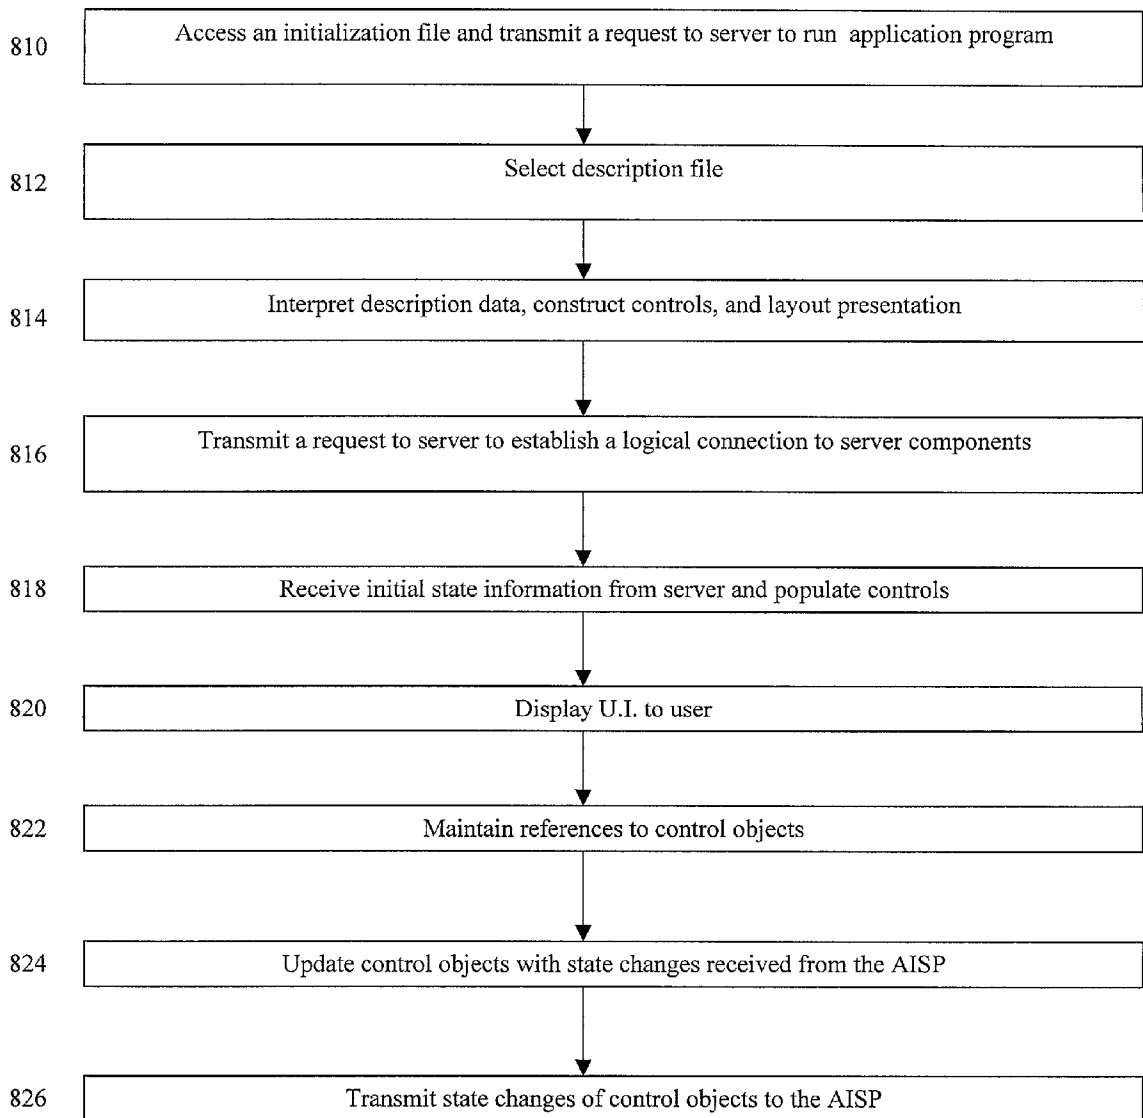

METHODS AND APPARATUS FOR EFFICIENTLY TRANSMITTING INTERACTIVE APPLICATION DATA BETWEEN A CLIENT AND A SERVER USING MARKUP LANGUAGE

FIELD OF THE INVENTION

[0001] The present invention relates to client-server networks and, in particular, to methods and apparatus for remotely executing an application and displaying application output.

BACKGROUND OF THE INVENTION

[0002] Contemporary computer networks consist of a number of computer systems, called nodes, communicating with other computer systems via communication links. Typically, some of the nodes are client nodes and other nodes are server nodes. A client node formulates and delivers queries to a server node. A user of the client node enters the queries through a user interface operating on the client node. The server node evaluates the queries and delivers responses to the client node for display on the client user interface.

[0003] Usually, the server nodes host a variety of application programs or processes that can be accessed and executed by client nodes. When a client node launches an application program, the execution of that application program can occur at either the client node or the server node, depending upon the computing model followed by the computer network.

[0004] In a client-based computing model, the application program is packaged and sent down to, or pre-installed on, the client node, allowing the client node to run the application using the resources of the client node. This approach has several drawbacks. First, the client node must have sufficient memory, disk space, and processing power to effectively execute the application. A related problem that occurs using this model is that the number of applications a given client is able to execute is limited due to client resource constraints. Further, applications built this way are complex to develop and maintain and typically require modification or "porting" for all supported client computer system types. Moreover, this technique exacerbates the administration burden on a network administrator.

[0005] In a server-based computing model, the server node executes the application program, and only the control information for the client user interface is transmitted across the computer network to the client node for display. Using this approach, user interface events must be sent between the client and the server in order for the server application to process the events. This results in perceived delays of user interface response. Further, the application program must be specifically written, or changed, to support the user interface on the client node. This increases the complexity of the application and prevents this technique from being useful with off-the-shelf applications.

[0006] A refinement of the server-based model is to supplant the device driver to which the application communicates in order to send screen and device updates back and forth between the client and the server. This approach avoids requiring applications to be rewritten. However, this approach requires device information to be sent between the

client and the server in order to maintain the client display, again introducing perceived latency into the interface. Further, server-side processing requirements are increased in order to satisfy resulting device information required for communication with each connected client.

[0007] A recent, further refinement of the server-based model is to deploy the user interface portion of the application as a mark-up language document such as Hyper Text Markup Language (HTML) document. However in using this approach, information sent from the server application to the client begins to "age" immediately. In other words the information may change on the server but the client would not automatically be notified and updated. Further, with this approach interactivity requires context switching between pages even to perform simple tasks.

[0008] The present invention avoids these shortcomings.

SUMMARY OF THE INVENTION

[0009] The present invention provides a mechanism by which the user interface portion of the application can be delivered to the computer user either on the same machine on which the application is executing or on another machine remote from the machine executing the application. The invention separates the user interface from the underlying application enabling the user interactive portion of the application to be extremely simple. The invention also permits the user interactive portion to be deployed on a wide range of client hardware environments without bringing with it all the required logic for performing the functionality of a particular application. These features give the user the effect of directly interacting with whole application even though the main part of the application is potentially running somewhere else.

[0010] Thus, the present invention overcomes many of the problems faced by traditional approaches outlined above. User interface, event handling and screen rendering logic stay on the client, thus dramatically reducing network traffic and latency. The entire user interface and how that interface connects to application components on the server are sent as a pure data description to the client (rather than code). This description is "interpreted" by the client to render the graphics user interface (GUI) and connect to the application (through the transfer of state) running either in the same process space (same machine) or on the server (remote machine).

[0011] Because the server can communicate with a particular application client with simply a data description, no additional code needs to be installed on the client machine. An application-independent client process (AICP) reads the description and presents that description to the user as a typical client user interface. Therefore, the AICP can communicate with an unlimited number of server applications with a new data file description for each program (which can be cached automatically as required or as specified by the client). No application specific administration is required for executing an AICP-deployed application using this approach.

[0012] With the AICP, no server side processing is required to either render the user interface portion or handle the GUI events portion of the application. The server does, however, coordinate state information being passed to and

from the client and sends that information automatically to the appropriate application components involved (both client and server initiated data changes).

[0013] Using the AICP, the developer can focus primarily on the functional or business logic portion of the application and let the AICP handle all of the user interface rendering, event handling, and connection of the user interface controls with the underlying application components. A builder component allows the developer to layout the user interface windows as well as create a relationship between the visual control and the underlying application server component with which it is associated. With the AICP no application specific code needs to be sent to the client. Only user interface controls need be sent if required. Even though there is no code on the client, the user's experience with the client application is similar to hand-coded clients found in the client based mode. In one embodiment the AICP is embedded in an HTML browser environment which enables web deployment within an HTML page without the limitation associated with HTML.

[0014] The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of the embodiments of the invention, as illustrated in the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] FIG. 1 is a block diagram of an embodiment of the system of the invention;

[0016] FIG. 2 is a block diagram of an embodiment of the memory configuration of a server constructed in accordance with the invention;

[0017] FIG. 3 is an operational block diagram showing an embodiment of the communications between a server and a client node constructed in accordance with the invention;

[0018] FIG. 4 is a block diagram of an embodiment of the memory configuration of a client constructed in accordance with the invention;

[0019] FIG. 5 is a flow diagram of an embodiment of the operation of the server constructed in accordance with the invention; and

[0020] FIG. 6 is a flow diagram of an embodiment of the operation of the client node constructed in accordance with the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0021] Although the method and apparatus of the present invention is described in the context of a web server and web browser process communicating over the Internet, those skilled in the art will recognize that the present invention can also be practiced over any other type of network (e.g., telephone, cable, LAN, WAN, wireless, fiber), within the same physical computer system, or with portions of the invention (e.g. the application independent client process) operating in an Internet appliance or cable TV set-top box. For those individuals who are not familiar with the Internet, the world-wide web, web servers, and web browsers, a brief overview of these concepts is presented here.

[0022] Referring to FIG. 1, a user that wishes to access information and execute applications on the Internet 120

typically has a computer workstation 110 that executes an application program known as a web browser 112. An application independent client process (AICP) 114, in accordance with the present invention, in one embodiment, is provided as a plug-in to the web browser 112. The user interacts with the web browser 112 and AICP 114 via a user interface 116 that in one embodiment includes a data entry device (e.g., a keyboard) and a visual display device (e.g., a computer monitor). Under the control of web browser 112, the user workstation 110 sends a web page request 122 over the Internet 120. Web page data can be in the form of text, graphics and other forms of information. Each web server computer system 130 on the Internet 120 has a known address (a URL) which the user must supply to the web browser 112 in order to connect to the appropriate web server 130. Because web server 130 can contain more than one web page, the user will also specify in the address which particular web page 124 he or she wants to view on web server 130. The web server computer system 130 executes a web server application program 132, monitors requests, and services requests for which it has responsibility. When a request specifies web server 130, web server application program 132 generally accesses a web page 124 corresponding to the specific web page request 122, and transmits the web page 124 to the user workstation 110. The web page request 122 also includes, in one embodiment, a request to execute an application program on the web server computer system 130. An application independent server process (AISP) 134 receives information contained in this request and responds by executing the desired application program and accessing application components 136 that are needed by the AICP 114.

[0023] In general, a web page contains the primary visual data displayed on the user interface 116 of the user workstation 110. When the web server 130 receives a web page request 122, it builds a web page in HTML and transmits it across the Internet 120 to the requesting web browser 112. Web browser 112 interprets the HTML and outputs the web page 124 to the monitor of the user workstation 110. The web page 124 displayed on the user's screen may contain text, graphics, and links (which are addresses of other web pages). These other web pages (i.e., those represented by links) may be on the same or on different web servers. The user can go to these other web pages by clicking on these links using a mouse or other pointing device. This entire system of web pages with links to other web pages on other servers across the world is known as the "World Wide Web".

[0024] With the present invention, an interactive graphical user interface is embedded in the web page or may be brought up as a separate dialog from the web page. In one embodiment, the AICP is an ActiveX control embedded in the previously mentioned HTML page. The ActiveX control interprets XML data that is subsequently downloaded in a description file (described below) and renders a graphical user interface. This embedded control is an embodiment of the AICP.

[0025] Referring to FIG. 2, located in memory in the server system 130 is an operating system 410, a web server application 132, application programs 420, application components 136, a transaction processor 430, state information, object information, and data (not shown), and one or more instances of an AISP 134.

[0026] The application programs **420** are executed by the CPU of the server system **130** under the control of operating system **410**. Application programs **420** can be executed using program data as input, such as that received from the AICP **114**. Application programs can also output their results as program data in memory.

[0027] The transaction processor **430** is a program that receives information from the web server application **132** via a common gateway interface (not shown), interprets the information to determine whether a specific instance of an AISP **134** is required, and launches the instance AISP **134** to further process the request received from the AICP **114**.

[0028] Referring to FIG. 3, the present invention includes the AICP **114** and the AISP **134**. The AICP **114** renders the graphical user interface (GUI) that is displayed to the user on the user interface **116**. The AICP **114** also maintains a relationship between the control objects displayed on the user interface **116** and the application components **136** maintained on the web server **130**. The AISP **134** tracks the state of the application components **136** along with the control objects displayed on the user workstation **110** that require updates of these application components. Whenever the state changes on either the client (control state) or the server (component state), the AICP **114** and AISP **134** take appropriate action based on the data description that defines the relationship between the GUI controls and the server application components **136** (hereafter referred to as server components) they represent.

[0029] Referring also to FIG. 4, the relationship **446** between the control objects **624** displayed on the user interface **116** of the user workstation **110** and the server components **136** maintained on the web server **130** include data that describes an explicit relationship between their respective object interfaces. This data will hereafter be referred to as a connection. The AICP and AISP contain logic that can interpret connections that relate a visual control to an application component.

[0030] For example, a scroll bar control is representative of a type of control object that can be displayed on the user interface **116** of the user workstation **110**. The scroll bar control can be associated with the value of an application component, such as the temperature of an industrial process. As the server application detects a temperature change, the state of the Application Components **136** is changed and these state changes **330** are forwarded to the client. The scrollbar is subsequently redrawn by the AICP to reflect the new value. Likewise, if a scroll bar is connected to an Application Component **136** that controls a thermostat, then when the user interacts with the scroll bar on the user interface **116**, the state change is transmitted to the Web Server Application Program **132** which would change the state of the appropriate Application Component **136** which would subsequently set the thermostat.

[0031] Although this is a simple example, connections can form relationships (e.g., data relationships **446** in FIG. 2) between very complex object types like composite components (components that contain component references) as well as component collections (a list of components). Controls can be tied (connected) to complex components or a composite of controls (commonly referred to as a dialog). The more complex the relationship **446** (FIG. 2) the more verbose the connection information. However, connection

information can be packaged as a named entity, which can be referred to in another context so that connection reuse is possible.

[0032] A physical connection exists between the AICP **114** and AISP **134**. This physical connection can be either network based (server and client being different nodes on a network) or memory based (server and client being on the same computer system). This means that control objects can be connected to server components where they both exist on the same or different physical machines (as well as the same process on the same machine or different processes on different machines).

[0033] The connection information can be delineated in a description file in a variety of formats, such as in XML format as discussed below. The XML data also includes the GUI layout description (i.e., user interface data **448** in FIG. 2). Whenever a control object **624** is associated to a server component **136** within a GUI layout (a dialog window), the connection description is included (in context) with the layout information. This is the information the AICP **114** uses to run the application and display the results to the user. Once a dialog is running via the AICP **114**, state changes that occur on either the control objects (control states) or server components (component state **442**, FIG. 2) are packaged and sent between the AICP **114** and AISP **134**. This is a two-way connection and is asynchronous to minimize interactive latency.

[0034] The description file can be in an XML format, which is a convenient format for deployment of data over a network and resembles an attributed file structure, for example as shown in the Appendix. A number of other suitable database formats are also available, such as flat file, SQL, OODB, etc. The XML format consists of name, type, and value pairs, which allow both the AICP **114** and the AISP **134** to traverse and interpret the information in the same file format during runtime. The XML file that is interpreted by the client and AISPs at runtime can be identical. The data contained in the XML file will be interpreted differently by the AICP **114** and AISP **134** in accordance with the different functions that need to be performed on each side of the connection. Although the description file is discussed herein as being located on the same computer systems as the AICP **114** and AISP **134**, those skilled in the art will recognize that the description file can be located in any networked location that is accessible by the AICP and AISP.

[0035] Referring to FIGS. 2, and 4, the AISP **134** performs the following functions: sends the XML data stream to the AICP **114**, reads the description file **310** (FIG. 3) (which can be transmitted as an XML data stream), responds to requests from the AICP **114** to attach to server components **136**, maintains a stateful connection, and tracks context on the web server **130**. Note that multiple AISPs **134'** can exist in the memory of the web server **130** at any given time.

[0036] In use, and referring to FIG. 5, a developer first designs (step **710**) the layout of the user interface **116** that will ultimately be displayed on the user workstation **110** and in so doing establishes the relationships between the control objects **624** (FIG. 4) and the server components **136**. Once this information is formulated, it is stored (step **712**) in a description file **310**. When the AICP **114** transmits a request to execute an application program **420** on the web server

130, the transaction processor **430** (FIG. 2) receives (step **714**) the request, instantiates (step **718**) an AISP **134** associated with the application program **420** if an instance is not already loaded in memory, and launches (step **720**) the application program **420**. Once the AICP **114** receives the description file **310**, it transmits a connection request to the AISP **134**. The AISP **134** receives (step **722**) the connection request and loads (step **724**) the description file **310** associated with the requested application program **420** into server memory.

[**0037**] The description file **310** associated with the requested application program **420** is loaded in order to connect the AICP **114** with the appropriate server components **136**. The description file **310** contains sufficient information with respect to the relationships between control objects **624** (FIG. 4) and server components **136** to enable the AISP **134** to manage the server components and the AICP **114** to manage the control objects.

[**0038**] Upon loading the description file **310**, the AISP **134** forms (step **726**) a manager object **452** for each server component **136** that will likely be involved in that client/server connection. In addition a unique manager object is created (step **728**) for each control that could be instantiated on the client (referred to as the Meta object **454**) as well. The Meta object **454** stores data such as member information, dialog information, connection information, object-to-object connection information, and a reference to a client manager component in order to effectively connect control objects **624** to server components **136**.

[**0039**] Member information includes the properties, functions, and events available on the interface of a control object. This information is used to tell a connection handler **450** how to communicate with particular control objects (as well as server components) involved in the connection during runtime. Dialog information is the GUI layout information that is used by the AICP **114** to render the user interface **116** on the user workstation **110**. The dialog information also specifies the type of control object **624** or server component **136** that will be involved in the connection. Connection information describes how a particular control object **624** is associated with a particular server component **136**. Object-to-object connection information provides a connection description that enables a client to server component connection and a server component to server component connection. This allows server components to communicate with each other without knowing any specific details of the objects they are connected to.

[**0040**] The client manager component provides a standard interface allowing the AISP **134** to talk to the back end application program **420**. The client manager is a component interface that must be implemented by the server application program **420** in order to initialize the behavior of the AICP **114**. The client manager component interface, in one embodiment, includes 4 functions: ClientCanConnect(), ClientCanDisconnect(), ClientConnected(), ClientDisconnected(). These functions are called whenever a new AICP **114** wants to connect or disconnect an application program **420** on the web server **130**.

[**0041**] When a dialog is created in the AICP **114**, the AISP **134** is notified that it must create a physical attachment to the relevant instance of the server component **136** on the server **130**. In order to establish this physical attachment, the AISP

134 maps (step **732**) the object controls in the user interface **116** to server components **136**. The dialog description of the server component **136** can be found in the Meta object **454**. At this point the AISP **134** obtains the name of the dialog that is to be created on the AICP **114** and receives access to an instance of server component **136**. A connection handler **450** is instantiated for each control that requires connection to a part of the server component instance. The connection handler **450** initializes and maintains the connection between the control object **624** and server component **136**. Only connection handlers **450** that are marked as "run on the server" would be created at this point. If they were marked as "run on the client" then the AICP **114** would have already created one. The connection handler **450** is assigned an identifier **618** (FIG. 4) that is identical to that provided for the control object **624** of the AICP **114**. This identifier **618** is used to synchronize the information messages going back and forth between the AICP **114** and the AISP **134**.

[**0042**] Similar to the dialog object described in the AICP section, the server forms (step **730**) a client-side proxy object **456** that arbitrates messages sent between the client side of the server connection and the AICP **114**. The connection handler **450** communicates with this proxy object **456** as if it were the control object **624** itself. The proxy object **456** transmits a value for the control object **624** to the AICP **114** which in turn will modify the control object **624** on the user interface **116**. In this manner, the proxy object **456** can transmit initial state information to the AICP **114** (step **734**) as well as updating the AICP **114** with state changes **330** of a particular server component **136** on the server **130** (step **738**). Similarly, when the control state **622** of a control object **624** on the AICP **114** changes, the modified control state is sent to the AISP (using the control identifier **618** assigned to that particular control object **624**) via the proxy object **456**. Once the modified control state had been received by the proxy object **456**, the proxy object **456** notifies the connection handler **450** that the state of the control object has changed so that the modified state can be incorporated into the appropriate server component **136**.

[**0043**] Similar to the AICP **114**, the AISP **134** maintains (step **736**) the connection for the duration of the dialog. When the dialog is closed by the user, or via some other fashion (e.g., a notification by a server component to close all connected dialogs), the AISP **134** removes and deletes each of the connection handlers **450** associated with the connection to the dialog. In addition, the proxy objects **456** used to communicate on behalf of the control objects **624** are discarded as well.

[**0044**] The AISP **134** uses a component manager (not shown) to maintain a list of components involved in client side connections. The component manager keeps track of all the dialogs that are actively attached to server components for the duration of the dialog. Each time a dialog is created on an AICP **114**, a reference to the dialog is added to the list maintained by the component manager. This reference identifies all of the server side connection handlers, which in turn reference control proxies involved in a connection. When a dialog is closed, the AISP **134** refers to this list to lookup the dialog connection information and removes the dialog reference from the list.

[**0045**] Although the AICP **114** and AISP **134** perform different roles, much of their respective code is identical.

The key to making both the AICP and AISP nearly identical is in providing a standard object interface that connects control objects 624 on the AICP 114 and server components 136 on the AISP 134. The interpreter logic of the application independent processes can connect each respective side (client or server) in exactly the same way (through a standard object interface). The fact that the control object is visual is just a side affect of the implementation of the object. Therefore, the present invention can be applied to a number of implementations that do not require a visual presentation.

[0046] Referring again to FIG. 4, the AICP 114 can reside in the memory of the user workstation 110. The memory also holds the operating system 612 installed on the user workstation 110 and the web browser application program 112 within which the AICP 114 is launched. The AICP 114 performs the following functions: reads the data description file 310, renders the user interface 116, attaches connected controls, maintains a stateful connection, and tracks the context on the client.

[0047] Referring also to FIG. 6, the AICP 114 is first installed on the user workstation 110. The most common installation method is to manually install the AICP 114 through the system install procedure (e.g., in the Microsoft Windows operating system, using the "Add/Remove Programs" function). Alternatively, the AICP 114 can be automatically installed through a web based plug-in protocol.

[0048] Because there is no code on the client that represents the application program 420, the AICP 114 supports a number of approaches in establishing the initial connection to the server side application program 420. The information required by the AICP 114 to interact with the application program 420 includes: the name of the server process to execute, the location of the description file 310 on a network server, any initial arguments that must be communicated to the application program 420 when connected, and the current version of the description file. This information can be contained in an initialization file that is loaded when the AICP 114 is launched.

[0049] When the AICP 114 is started, it will access (step 810) the initialization file and, using the information contained therein, will transmit a request to the server 134 to run the desired application program 420. As previously discussed, the transaction processor 430 on the server 130 sends a description file 310 to the AICP 114 which then compares the version stamp of the description file received to that contained in the local memory 610 of the user workstation 110 (obtained from a prior transaction or during installation of the AICP 114). The AICP 114 can then determine (step 812) which version of the description file 310 to load. By default, the AICP 114 only downloads the description file 310 from the transaction processor 430 if the version stamp of the file on the server is later than a cached file already resident on the client. The description file 310 is peculiar to a specific application program 420.

[0050] Once downloaded (or loaded locally from a file cache), the description file 310 provides the AICP 114 with the dialog description of the application program 420. The AICP 114 then proceeds to interpret (step 814) the description data of that dialog in order to construct the control objects 624 that exist within the dialog and lay out the control objects 624 onto the user interface 116 for presentation to the user.

[0051] Meanwhile, the AICP 114 transmits a request (step 816) to the AISP 134 to establish a logical connection to the server components 136. Upon successfully connecting to the server components 136 on the server 130, the AICP 114 receives (step 818) and subsequently populates the dialog control objects 624 with control state information 622 corresponding to the server component state 442.

[0052] State changes for a particular visual context (e.g., a dialog) are sent to the AICP 114 as one logical packet for optimization reasons, although the structure of the state change packet is identical regardless if a single state change or a plurality of state changes occurred. At this point, the control objects 624 are actively connected to the server components 136 so that state changes on either side are reflected in the other. Once the control objects 624 reflect the current server component state 442, the dialog is then displayed (step 820) to the user via the user interface 116.

[0053] Control objects 624 are associated with the server components 136 by a reference property that is provided as part of the description of the control object 624, which is included in the overall dialog layout description. This reference can be the name assigned to the connection description and the type of the associated server component 136. A unique control identifier 618 is computed for each of the control objects 624 that are connected to server components 136. This control identifier 618 is used to coordinate state changes 330 with the AISP 134 when connecting to the appropriate server component instance that is assigned to that control object 624. Note that many control objects can be tied to the same server component 136. Since the AICP 114 and the AISP 134 are largely identical processes, some of the connections can reside on the client. At times, it is useful to instantiate the connection logic that binds a client's control object 624 to a server's application component 136 on either the AICP 114 or the AISP 134. The selection of where to instantiate the connection logic depends on the volume of information flow coming into each side of the connection. For example, if the load is heaviest on the client side, then it is better to instantiate the connection handler on the client. In this way, bandwidth utilization can be tailored based on the kind of connection and the client and server components involved.

[0054] For as long as a dialog is displayed on a particular AICP 114, the connection handlers 450 maintain (step 822) a real time stateful connection to the associated server components 136. The connection handler 450 responds to state changes 330 on either the client control object 624 or on its associated server component 136. The connection handler 450 is also able to transform the data based on a set of rules defined by the developer. The connection handler 450 is able to maintain state on each side of the connection by maintaining (step 822) references to the control objects 624 involved in the connection.

[0055] The connection handler 450 also maintains a stateful connection whenever a member of a complex component changes. This happens when a property (which is a member of a complex component which can hold a value of a particular type or be empty) of a complex control is assigned a new value (which itself can be a complex or simple component). When the connection handler 450 detects a property change, it executes the appropriate connection transformation. In addition, if a control object 624 was

attached to that property it would not be connected to the new value. The connection handler involved would remove the reference to the old value and create a reference to the newly assigned value (of the property). In this manner, the control objects **624** are updated (step **824**) with state changes **330** that are received from the AISP **134** and the state changes occurring in a control object **624** are transmitted (step **826**) to the AISP **134** in order to update the appropriate server components **136**.

[**0056**] A GUI application involves several relationships that describe the user access to the underlying application. For example, a dialog can contain a button (which is an example of a control object), that when selected will popup another dialog. It is important for the AICP **114** and AISP **134** to actively maintain this context with the server components **136**. A popup dialog usually represents a complex property member of a complex component. Another popup scenario is when the popup dialog provides an argument to a function that is a member of a complex component. These data relationships **446** represent application context that is tracked by the AIP, thereby freeing the developer from having to explicitly create and maintain them.

[**0057**] The AICP **114** creates a container object for each dialog that is created on the user workstation **110**. This container object tracks the duration of the dialog with respect to the server component **136**. The container object detects when the dialog is closed by the user and takes appropriate action for closing down the connection handlers **450** associated with the control objects **624** within the dialog. The container object also coordinates processing of state change messages that flow between the AICP **114** and the AISP **134**. Whenever the container object receives a state change **330** from the AISP **134**, it extracts the control identifier **618** contained in the message, locates the control objects **624** associated with that control identifier **618**, and uses the component interface of the control object **624** to effect the state change directly on the control object **624**. Likewise when the control object **624** changes state, the container object is notified of the change, packages up the state change message, and sends it to the AISP **134**.

[**0058**] The container object sends state changes to the AISP **134** for the parts of the control object's interface in which the connection handler **450** is interested. The connection handler **450** is interested in the control members delineated in the description file **310** that were used to create the connection handler **450**. The container object that wraps the dialog also creates an object container for each control object **624** instantiated within the dialog in order to maintain its stateful lifetime.

[**0059**] Both the AICP **114** and AISP **134** have container objects that manage the state of the components to which they are connected. These containers track the state of the objects as well as the application context in which these objects reside. The application context refers to the manner in which objects are referenced by the AICP **114** and the AISP **134**. For example, when a dialog is connected to a server component **136**, the AICP **114** creates a container for the dialog and the AISP **134** creates a container for the server component **136**. When the user closes the dialog, the client container detects this action and notifies the server container. Each container can then take appropriate action based on the type of operation. The nature of the containers are hierar-

chical in that each container can hold other containers based on the complexity of the objects involved in a particular connection.

[**0060**] There are two types of client containers—a dialog container and a control container. The dialog container manages the life of the dialog and the control container manages the flow of state information to the individual control. These containers enable the attachment of the user interface elements to server side objects as well as maintain the state integrity during the life of the connection.

[**0061**] The dialog container is an object that is created for each window displayed on the user interface **116**. The dialog container is created in accordance with the XML description in the description file **310**. The dialog container processes the XML description and creates the dialog layout as well as the control objects contained within the description. In addition, the dialog container creates a control container for any controls that are connected to data on the server. Controls that are created for display purposes only do not need a control container (for example, a label or bitmap decoration). The dialog container supports several functions, including: rendering the window itself, creating the control containers as needed, notifying the AISP **134** when the dialog is closed and deleting subordinate control container objects, and closing child dialogs that depend from parent dialogs as appropriate.

[**0062**] The control container is created for each control object **624** that is tied to data. The control container computes and holds a unique control identifier **618** that is used to send messages to the AISP **134** and to access the appropriate server components **136**. When the AISP **134** initially transmits state data to the AICP **114**, the control container sets the state on the control object **624** during initialization. The control container also receives state change messages during the connection life of the control object **624** and updates the control object **624** in accordance therewith. When the state of the control object **624** changes, the control container detects the change and sends a state change message to the appropriate server element via the AISP **134** (using the control identifier **618** and an identifier of the AISP instance). It is noteworthy that only the control container processes the state changes that are involved in a connection description and that most state changes on the control object **624** do not involve the connection, thus reducing unnecessary network traffic.

[**0063**] In addition to the control containers, there are two kinds of server containers component containers and member containers. For as long as the client dialog is open, the server component container maintains a reference to the underlying component instance that the client is connected to. The member container manages the flow of state information on the individual member of the component (similar to function and property). These containers enable the attachment of the user interface elements to client side control objects as well as maintain the state integrity during the life of the connection.

[**0064**] A component container is created by the AISP **134** for each server component **136** that is connected to a client dialog. The component container adds a reference count to the server component **136** so that it will not be lost during the life of the remote client dialog. For each member of the server component **136** that is involved in a connection to a

control object **624**, a member container object is created which will be responsible for maintaining the member's state during the life of the connection. When the dialog is closed on the client, the component container destroys all the child member containers that were used to maintain that dialog's connection on the server.

[0065] A member container is created for each member of a server component **136** that is involved in a connection to a control object **624**. The member container computes and stores a unique control identifier that is used to send messages to the AICP **114** in order to access the correct control object **624**. The member container also sends initial state information to the control object **624** during the initialization of the dialog. Further, the member container receives data change message from the AICP **114** and updates the appropriate member of the server component **136** in accordance therewith.

[0066] Whenever the state of the component member changes, the member container detects the change and subsequently sends a message, containing the state change information, to the appropriate control object **624** (using the control identifier **618** and the server instance identifier). It is noteworthy that only the member container processes the state changes that are involved in connection description and that most of the state changes on the server are not involved in a connection, thus reducing unnecessary network traffic.

[0067] One of the capabilities of the AIP invention is its ability to allow multiple AICPs to attach to the same AISP. The first time that a client requests a connection to a server, an AISP assigned to the application will be instantiated. The AISP in turn instantiates the client manager object for that application. At any time, another client can request to attach to the same application instance on the server. Instead of instantiating another AISP for that application, the same AISP instance will be used (as well as the client manager that was created for it). If two clients are then accessing the same server component instance on the server, they will be able to interact and access the same state. This allows real time collaborative access to shared state that is not easily provided with traditional forms of client deployment.

[0068] With collaboration deployment, a list of dialogs running on a particular client is associated with a client manager object that resides on the server. A list of client managers resides within the AISP (that reflects the current number of active clients attached to the same server appli-

cation). Even though many clients can see the same information on the server they do not always have to view exactly the same components in the same way. The client manager can direct different clients to have different dialog representations of the same server components. Also, based on the client user's navigation through their own dialog instances, each client user may see dramatically different information at any given time.

[0069] The present invention may be provided as one or more computer-readable programs embodied on or in one or more articles of manufacture. The article of manufacture may be a floppy disk, a hard disk, a CD ROM, a flash memory card, a PROM, a RAM, a ROM, or a magnetic tape. In general, the computer-readable programs may be implemented in any programming language. Some examples of languages that can be used include C, C++, or JAVA. The software programs may be stored on or in one or more articles of manufacture as object code.

[0070] While the invention has been particularly shown and described with reference to several exemplary embodiments thereof, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention.

What is claimed is:

1. A method for transferring data between a client and a server, comprising the steps of:

- executing, by a server node, an application program that affects an application component corresponding to a graphical user interface element;
- providing an application-independent client process, said application-independent client process (AICP) affecting a display of one or more graphical user interface elements on said client associated with the application;
- providing an application-independent server process, said application-independent server process transferring data to said application-independent client process, said transferred data representative of a change to one of the application components
- updating by said application-independent client process one of the graphical user interface elements in response to said transferred data.

* * * * *