

(19)



(11)

EP 3 808 627 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
23.11.2022 Bulletin 2022/47

(21) Application number: **19880513.7**

(22) Date of filing: **05.07.2019**

(51) International Patent Classification (IPC):
B61D 27/00 ^(2006.01) **B61D 17/12** ^(2006.01)

(52) Cooperative Patent Classification (CPC):
B61D 27/009; B61D 17/12

(86) International application number:
PCT/CN2019/094837

(87) International publication number:
WO 2020/087965 (07.05.2020 Gazette 2020/19)

(54) RAIL VEHICLE AND RAIL VEHICLE VENTILATION DEVICE THEREFOR

SCHIENENFAHRZEUG UND BELÜFTUNGSVORRICHTUNG FÜR SCHIENENFAHRZEUG

VÉHICULE FERROVIAIRE ET DISPOSITIF DE VENTILATION DE VÉHICULE FERROVIAIRE POUR CELUI-CI

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **30.10.2018 CN 201811277387**

(43) Date of publication of application:
21.04.2021 Bulletin 2021/16

(73) Proprietor: **CRRC Zhuzhou Locomotive Co., Ltd. Zhuzhou, Hunan 412001 (CN)**

(72) Inventors:
• **LIU, Qiang**
Zhuzhou, Hunan 412001 (CN)
• **MAO, Yejun**
Zhuzhou, Hunan 412001 (CN)
• **ZHU, Maohua**
Zhuzhou, Hunan 412001 (CN)
• **WANG, Wei**
Zhuzhou, Hunan 412001 (CN)
• **LI, Shimin**
Zhuzhou, Hunan 412001 (CN)

- **LI, Shilin**
Zhuzhou, Hunan 412001 (CN)
- **XU, Li**
Zhuzhou, Hunan 412001 (CN)
- **YANG, Sheng**
Zhuzhou, Hunan 412001 (CN)
- **CHEN, Shiwen**
Zhuzhou, Hunan 412001 (CN)

(74) Representative: **Sharman, Thomas Alexander Reddie & Grose LLP**
The White Chapel Building
10 Whitechapel High Street
London E1 8QS (GB)

(56) References cited:
CN-A- 102 390 390 CN-A- 102 765 400
CN-A- 106 828 514 CN-A- 107 415 969
CN-A- 109 398 393 CN-U- 202 138 188
CN-U- 205 439 878 US-A- 3 845 700
US-A- 6 126 538

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 808 627 B1

Description

[0001] The present application claims the priority to Chinese Patent Application No. 201811277387.X, titled "RAIL VEHICLE AND RAIL VEHICLE VENTILATION DEVICE THEREFOR", filed with the China National Intellectual Property Administration on October 30, 2018.

FIELD

[0002] The present application relates to the technical field of ventilation design for rail vehicles, and in particular to a rail vehicle ventilation device, and further relates to a rail vehicle.

BACKGROUND

[0003] At present, an air inlet device of a rail vehicle ventilator is generally mounted on a surface of a rail vehicle, such as a roof, a side wall or a side suspension beam. The air inlet surface at the ventilator is in negative pressure area.

[0004] Document CN 107415969 A, discloses an air volume distribution structure for an air supply duct of a rail vehicle, the air volume distribution structure comprising: a main air duct, wherein two sides of the main air duct are respectively provided with a plurality of air outlets, the main air duct being provided with a horizontally arranged U-shaped plate, and upper and lower ends of the U-shaped plate are respectively attached to top and bottom pipe walls of the main air duct. An opening end of the U-shaped plate faces one end of the main air duct and a side air duct is respectively formed between each side of the U-shaped plate and the main air duct. The top of the main air duct, located at a closed end of the U-shaped plate, is provided with an air inlet. In a position, where the main air duct is located in front of an opening end of the U-shaped plate, it is provided with two flow guiding plates arranged symmetrically, the two flow guiding plates respectively corresponding to two side plates of the U-shaped plate, a notch is arranged between the two flow guiding plates, and an air flow flows in from the air inlet; and outer sides of the main air duct, located at the side air duct at two sides, are respectively provided with an air outlet, and two sides, located at a rear portion of the two flow guiding plates, of the main air duct are respectively provided with an air outlet.

[0005] When a rail vehicle is running, there is a negative pressure difference between an air inlet and an outlet of a ventilation branch. With the increasing of vehicle speed, the negative pressure value of the air inlet surface at the ventilator may continue to increase, resulting in a decrease of the ventilation volume. If the vehicle speed reaches a certain level, the negative pressure difference between the air inlet and outlet may be greater than or equal to the ventilator pressure value, and at this time, the ventilation volume is zero. Further, the unstable air volume in the ventilation branch may directly affect the

working state of the components needing ventilation and cooling in rail vehicles.

[0006] Therefore, a technical issue to be addressed by those skilled in the art is to solve the problem that the ventilator cannot take in air when the vehicle is at a high speed.

SUMMARY

[0007] In view of this, an object of the present application is to provide a rail vehicle ventilation device, which can adjust the ventilation volume to adapt to the vehicle speed, and the ventilation volume can also be ensured when the vehicle is running at high speed. Another object of the present application is to provide a rail vehicle including the above rail vehicle ventilation device, and its ventilation device can adjust the ventilation volume to adapt to the vehicle speed, and the ventilation volume can also be ensured when the vehicle is running at high speed.

[0008] To achieve the above object, the present application provides the following technical solution as defined by the features of claim 1:

a rail vehicle ventilation device includes an air inlet duct, and a first airport and a second airport are respectively provided at two sides of the air inlet duct, the first airport being arranged opposite to the second airport, wherein a top of the air inlet duct is provided with a top airport and a bottom is provided with an air outlet. In a free state, the top airport, the first airport, the second airport and the air outlet are in communication with each other;

a first guide plate, a second guide plate, and, a connecting rod hinged between the first guide plate and the second guide plate are arranged in the air inlet duct. A top of the first guide plate is hinged to the air inlet duct at a position above the first airport, and the top of the second guide plate is hinged to the air inlet duct at a position above the second airport. The first guide plate and the second guide plate are connected by the connecting rod to form a trapezoidal connecting rod structure, and the upper end is a large diameter end. The second guide plate can swing to a state of sealing the second airport.

[0009] Preferably, the first guide plate can swing to a state of sealing the first airport.

[0010] Preferably, the connecting rod structure is a symmetrical structure in the free state, and the first airport and the second airport have the same structure.

[0011] Preferably, the top airport, the first airport and the second airport are each provided with a protective net.

[0012] Preferably, at least two connecting rods are connected between the first guide plate and the second guide plate, and all the connecting rods are arranged in parallel.

[0013] Preferably, the top plate of the air inlet duct is detachably connected to the air inlet duct body, the top airport is provided on the top plate, and the top airport is provided in the middle of the top of the air inlet duct.

[0014] Preferably, the connecting rod is connected to the middle of the first guide plate and the second guide plate.

[0015] Preferably, the first guide plate and the air inlet duct, the second guide plate and the air inlet duct, the connecting rod and the first guide plate, and the connecting rod and the second guide plate are each connected by a hinge.

[0016] Preferably, the air inlet duct has a mirror symmetrical structure in a free state, and the symmetrical plane is located at the middle position of the first airport and the second airport; where, the first airport and the second airport are mirror symmetric with respect to the symmetry plane, and the first guide plate and the second guide plate are mirror symmetric with respect to the symmetry plane.

[0017] A rail vehicle includes the rail vehicle ventilation device described in any one of the above.

[0018] In the rail vehicle ventilation device provided by the present application, the trapezoidal connecting rod structure, consisting of the first guide plate, the second guide plate, and the connecting rod, is arranged to guide the wind. The connecting rod structure can adaptively adjust its own structure under the action of wind power, so as to automatically adjust the angle between the guide plate and the corresponding airport according to the change of vehicle speed, thus achieving the purpose of basically stabilizing the ventilation volume of the air outlet, and ensuring the ventilation volume when the vehicle runs at high speed. The ventilation device is mounted at the air inlet of the ventilator in the negative pressure area of the locomotive surface, and automatically adjusts the inclination angle of the guide plate according to the running speed of the vehicle or locomotive and the air volume demand in the ventilator, which can effectively avoid that too much air volume will cause overflow of the ventilator, and avoid that the air volume is too small to meet the ventilation volume requirements of the ventilator.

[0019] According to the rail vehicle including the rail vehicle ventilation device provided by the present application, the ventilation device can adjust the ventilation volume according to the vehicle speed, and the ventilation volume can be ensured when the vehicle runs at high speed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] For more clearly illustrating embodiments of the present application or the technical solutions in the conventional technology, drawings referred to for describing the embodiments or the conventional technology will be briefly described hereinafter. Apparently, the drawings in the following description are only embodiments of the present application, and for the person skilled in the art,

other drawings may be obtained based on the provided drawings without any creative efforts.

Figure 1 is a schematic diagram of a rail vehicle ventilation device provided by the present application when the vehicle is running at a low speed or in a stationary state, in which a solid arrows indicates a forward direction of the vehicle, and hollow arrows indicate a direction of wind;

Figure 2 is a schematic diagram of the rail vehicle ventilation device provided by the present application when the vehicle is running at a high speed, in which a solid arrow indicates the forward direction of the vehicle, and hollow arrows indicate the direction of wind;

Figure 3 is a top view of the rail vehicle ventilation device provided by the present application;

Figure 4 is a sectional view taken along the line A-A in Figure 3;

Figure 5 is a side view of the rail vehicle ventilation device provided by the present application;

Figure 6 is an internal top view of the rail vehicle ventilation device provided by the present application;

Figure 7 is a force analysis diagram of the first guide plate of the rail vehicle ventilation device provided by the present application, in which a solid arrow indicates the forward direction of the vehicle.

[0021] In Figures 1 to 7:

1	first airport	2	top plate
3	first guide plate	4	connecting rod
5	hinge	6	fastener
7	second guide plate	8	protective net
9	second airport	11	air outlet

DETAILED DESCRIPTION

[0022] The technical solutions according to the embodiments of the present application will be described clearly and completely as follows in conjunction with the drawings in the embodiments of the present application. It is apparent that the described embodiments are only a part of the embodiments according to the present application, rather than all of the embodiments. Based on the embodiments in the present application, all of other embodiments, made by the person skilled in the art without any creative efforts, fall into the scope of the present application.

[0023] A core of the present application is to provide a

rail vehicle ventilation device, which can adjust the ventilation volume to adapt to the vehicle speed, and the ventilation volume can also be ensured when the vehicle is running at high speed. Another core of the present application is to provide a rail vehicle including the above rail vehicle ventilation device, and its ventilation device can adjust the ventilation volume to adapt to the vehicle speed, and the ventilation volume can also be ensured when the vehicle is running at high speed.

[0024] In a specific embodiment of the rail vehicle ventilation device provided by the present application, referring to Figure 3, an air inlet duct is included. A first airport 1 and a second airport 9 are respectively provided at two sides of the air inlet duct, the first airport 1 is arranged opposite to the second airport 9, the top of the air inlet duct is provided with a top airport 10 and the bottom of the air inlet duct is provided with an air outlet 11. In a free state, the top airport 10, the first airport 1, the second airport 9 and the air outlet 11 are in communication. A first guide plate 3, a second guide plate 7, and, a connecting rod 4 hinged between the first guide plate 3 and the second guide plate 7 are arranged in the air inlet duct. The connecting rod 4 is rotatable relative to the first guide plate 3 and the connecting rod 4 is rotatable relative to the second guide plate 7. The top of the first guide plate 3 is hinged to the air inlet duct at a position above the first airport 1, and the top of the second guide plate 7 is hinged to the air inlet duct at a position above the second airport 9. The first guide plate 3 and the second guide plate 7 are connected by the connecting rod 4 so as to form a trapezoidal connecting rod structure, and an upper end is a larger diameter end. The trapezoid refers to a shape in which the top spacing of two guide plates is greater than the bottom spacing of two guide plates and the spacing gradually decreases from top to bottom, that is, the connecting rod structure is a structure in which the spacing between two guide plates gradually decreases from top to bottom. The second guide plate 7 can swing to the state of sealing the second airport 9, that is, the wind cannot circulate at the second airport 9.

[0025] The air inlet direction and air volume can be changed by the movement of the guide plates, and the connecting rod 4 can support and limit the guide plates. The first guide plate 3 can swing relative to the air inlet duct, and the second guide plate 7 can swing relative to the air inlet duct. The first guide plate 3 and the second guide plate 7 are linked through the connecting rod 4. The connecting rod structure formed by the first guide plate 3, the second guide plate 7 and the connecting rod 4 is a movable structure relative to the air inlet duct. Since the connecting rod structure is a trapezoidal structure, guide channels can be formed between the first airport 1 and the first guide plate 3, and between the second airport 9 and the second guide plate 7, so as to guide the incoming wind to the air outlet 11.

[0026] In order to control the intake air volume of the flow guide device within a certain range, the flow guide device can automatically adjust the included angle α be-

tween the two flow guide plates and the air inlet duct according to the vehicle speed, so as to achieve the purpose of adjusting the intake air volume.

[0027] Referring to Figure 1, when the vehicle runs at a low speed or in a static state, the guide plate and the connecting rod 4 automatically return to the free state by their own gravity. The top airport 10, the first airport 1, the second airport 9 and the air outlet 11 are in communication, and the wind enters the interior of the air inlet duct from all air inlet surfaces of the ventilation device, including the top airport 10, the first airport 1 and the second airport 9. Since the guide plate sags under the action of gravity, it plays a certain shielding effect on the airport.

[0028] Referring to Figure 2, when the vehicle is running at high speed, the mounting direction of the whole ventilation device is that the front and rear air inlet surface is the same as the forward direction of the vehicle. The first airport 1 is arranged on the windward side, and the first guide plate 3 is pushed by the wind thrust to push the connecting rod 4, and force is exerted on the second guide plate 7 through the connecting rod 4. When the vehicle speed reaches a set critical value, the second guide plate 7 swings toward the second airport 9 to seal the second airport 9, and the second airport 9 is in a sealed state and cannot ventilate. After the position of the second guide plate 7 is secured, the first guide plate 3 can be restricted by the connecting rod 4, so that the connecting rod structure is dynamically balanced and stationary. After the structure of the connecting rod structure is stable, the intake air all comes from the intake air of the first airport 1, and the second airport 9 is sealed to prevent the wind from flowing. The guiding action of the first guide plate 3 can guide the wind toward the air outlet, so that the wind can flow out from the outlet. In addition, the top of the air inlet duct is a negative pressure area, which can divide and outflow part of the air inlet, so that the air flow out of the air outlet 11 can be kept within a set range, which ensures that wind can always enter the air inlet duct through the airport arranged on the side of the air inlet duct at high speed.

[0029] When the vehicle is running at high speed, the force on the first guide plate 3 is shown in Figure 7. The windward force F_n acts on the first guide plate 3 and is decomposed into a longitudinal force F_y and a transverse force F_x . The transverse force F_x is balanced after the second guide plate 7 and the connecting rod 4 react with the first guide plate 3, and the longitudinal force F_y is dynamically balanced with the reaction force of the second guide plate 7 and the connecting rod 4 plus gravity F_g of the guide plate and the connecting rod 4.

[0030] In the rail vehicle ventilation device provided by the embodiment, the trapezoidal connecting rod structure consisting of the first guide plate, the second guide plate and the connecting rod 4 is arranged to guide the wind. The connecting rod structure can adaptively adjust its own structure under the action of wind power, so as to automatically adjust the angle between the guide plate

and the corresponding airport according to the change of vehicle speed, thus achieving the purpose of basically stabilizing the ventilation volume of the air outlet 11, and ensuring the ventilation volume when the vehicle runs at high speed. The ventilation device is mounted at the air inlet of the ventilator in the negative pressure area of the locomotive surface, and automatically adjusts the inclination angle of the guide plate according to the running speed of the vehicle or locomotive and the air volume demand in the ventilator, which can effectively avoid too much air volume causing overflow of the ventilator, and avoid the air volume too small not meeting the ventilation volume requirements of the ventilator.

[0031] Based on the above embodiment, the first guide plate 3 can swing to the state where the first airport 1 is sealed, so that when the first airport 1 or the second airport 9 is located on the leeward side, the rail vehicle ventilation device can play the role in limiting the air volume during high-speed operation.

[0032] Based on the above embodiment, the connecting rod structure can be symmetrical in the free state, the two guide plates are the same, and the connecting position between the connecting rod 4 and the first guide plate 3 corresponds to the connecting position between the connecting rod 4 and the second guide plate 7. The first airport 1 and the second airport 9 have the same structure, which is convenient for machining and can make the first airport 1 and the second airport 9 have the same capacity of limiting air volume.

[0033] Based on any one of the above embodiments, the top airport 10, the first airport 1 and the second airport 9 can all be provided with a protective net 8. Since the top airport 10, the first airport 1 and the second airport 9 may all be used as air inlets during the running of the vehicle, the mounting of the protective net 8 can reduce the entry of foreign matters into the air inlet duct and effectively play a protective role.

[0034] Based on any one of the above embodiments, at least two connecting rods 4 may be connected between the first guide plate 3 and the second guide plate 7, and all the connecting rods 4 may be arranged in parallel. Specifically, two or other numbers of connecting rods 4 may be provided. By arranging at least two connecting rods 4, the stability of the connecting rod structure can be ensured and the connecting rod structure can work reliably.

[0035] Based on any one of the above embodiments, the top plate 2 of the air inlet duct can be detachably connected to the air inlet duct body. The top airport 10 is arranged on the top plate 2. Specifically, the top plate 2 and the air inlet duct body may be connected by bolts or other fasteners 6. Since the top plate 2 is detachably connected to the air inlet duct body, the maintenance of the air inlet duct is convenient. Of course, the air inlet duct may also be integrally formed, or the top plate 2 is connected with the air inlet duct body by welding.

[0036] Based on any one of the above embodiments, the top airport 10 may be arranged in the middle of the

top of the air inlet duct to further improve the symmetry of the ventilation device.

[0037] Based on any one of the above embodiments, the connecting rod 4 may be connected to the middle of the first guide plate 3 and the second guide plate 7, so as to improve the swinging flexibility of the first guide plate 3 and the second guide plate 7, and the relative positions of the first guide plate 3 and the connecting rod 4 and the second guide plate 7 and the connecting rod 4 can be conveniently determined, thereby facilitating installation.

[0038] Based on any one of the above embodiments, the first guide plate and the air inlet duct, the second guide plate and the air inlet duct, the connecting rod 4 and the first guide plate, and the connecting rod 4 and the second guide plate may be respectively connected by hinges 5. The hinge 5 is used for connection, and the angle of two connected parts can be adjusted at will, which is convenient for installation. Of course, hinge can also be realized by other manners, for example, the first guide plate is hinged with the air inlet duct through a hinge shaft.

[0039] Based on any one of the above embodiments, referring to Figure 4, the air inlet duct may have a mirror-symmetrical structure in the free state, and the symmetry plane is located in the middle of the first airport 1 and the second airport 9. The first airport 1 and the second airport 9 are mirror symmetric with respect to the symmetry plane, and the first guide plate and the second guide plate are mirror symmetric with respect to the symmetry plane. Correspondingly, the connecting rod forms mirror symmetry with respect to the symmetry plane itself, thus ensuring that the flow guiding effect of the ventilation device is not limited by the forward or backward movement of the vehicle at all. Whether the first airport 1 is on the windward side or the second airport 9 is on the windward side, the air inlet duct has the same flow guiding effect, and can ensure the air intake reliably.

[0040] Besides the above rail vehicle ventilation device, the present application further provides a rail vehicle including rail vehicle ventilation device, and the rail vehicle ventilation device can be any one of the rail vehicle ventilation devices provided by the above embodiments. The beneficial effects can be referred to the above embodiments accordingly. Please refer to the prior art for the structure of the other parts of the rail vehicle, which will not be repeated here.

[0041] The above embodiments are described in a progressive manner. Each of the embodiments is mainly focused on describing its differences from other embodiments, and references may be made among these embodiments with respect to the same or similar parts.

[0042] A rail vehicle and rail vehicle ventilation device therefor according to the present application is described in detail hereinbefore. The principle and the embodiments of the present application are illustrated herein by specific examples. The above description of examples is only intended to facilitate the understanding of the

method of the present application. It should be noted that, for the person skilled in the art, many modifications and improvements may be made to the present application without departing from the principle of the present application, and these modifications and improvements are also deemed to fall into the protection scope of the present application defined by the claims.

Claims

1. A rail vehicle ventilation device, comprising,

an air inlet duct, wherein a first airport (1) and a second airport (9) are respectively provided at two sides of the air inlet duct, the first airport (1) being arranged opposite to the second airport (9), wherein

a top of the air inlet duct is provided with a top airport (10) and a bottom of the air inlet duct is provided with an air outlet (11); wherein in a free state, the top airport (10), the first airport (1), the second airport (9) and the air outlet (11) are in communication with each other;

and a first guide plate (3), a second guide plate (7), and, a connecting rod (4) hinged between the first guide plate (3) and the second guide plate (7) are arranged in the air inlet duct; wherein

a top of the first guide plate (3) is hinged to the air inlet duct at a position above the first airport (1), and a top of the second guide plate (7) is hinged to the air inlet duct at a position above the second airport (9), the first guide plate (3) and the second guide plate (7) being connected by the connecting rod (4) to form a trapezoidal connecting rod structure, wherein an upper end of the trapezoidal connecting rod structure is a large diameter end, and wherein the second guide plate (7) is configured to swing to a state of sealing the second airport (9).

2. The rail vehicle ventilation device according to claim 1, wherein, the first guide plate (3) is configured to swing to a state of sealing the first airport (1).

3. The rail vehicle ventilation device according to claim 2, wherein, the connecting rod structure is a symmetrical structure in the free state, and the first airport (1) and the second airport (9) have the same structure.

4. The rail vehicle ventilation device according to claim 3, wherein, the top airport (10), the first airport (1) and the second airport (9) are each provided with a protective net (8).

5. The rail vehicle ventilation device according to claim

4, wherein, at least two connecting rods (4) are connected between the first guide plate (3) and the second guide plate (7), and all the connecting rods (4) are arranged in parallel.

6. The rail vehicle ventilation device according to claim 5, wherein, the top plate (2) of the air inlet duct is detachably connected to the air inlet duct body, the top airport (10) is provided on the top plate (2), and the top airport (10) is provided in the middle of the top of the air inlet duct.

7. The rail vehicle ventilation device according to claim 4, wherein, the connecting rod (4) is connected to the middle of the first guide plate (3) and the second guide plate (7).

8. The rail vehicle ventilation device according to claim 4, wherein, the first guide plate (3) and the air inlet duct, the second guide plate (7) and the air inlet duct, the connecting rod (4) and the first guide plate (3), and the connecting rod (4) and the second guide plate (7) are each connected by a hinge (5).

9. The rail vehicle ventilation device according to claim 1, wherein, the air inlet duct has a mirror symmetrical structure in the free state, and a symmetrical plane is located at the middle position of the first airport (1) and the second airport (9); the first airport (1) and the second airport (9) are mirror symmetric with respect to the symmetry plane, and the first guide plate (3) and the second guide plate (7) are mirror symmetric with respect to the symmetry plane.

10. A rail vehicle, comprising the rail vehicle ventilation device according to any one of claims 1 to 9.

Patentansprüche

1. Belüftungsvorrichtung für ein Schienenfahrzeug, die Folgendes beinhaltet:

einen Lufteinlasskanal, wobei eine erste Luftöffnung (1) und eine zweite Luftöffnung (9) jeweilig an zwei Seiten des Lufteinlasskanals bereitgestellt sind, die erste Luftöffnung (1) dabei gegenüber der zweiten Luftöffnung (9) angeordnet ist, wobei

ein oberes Ende des Lufteinlasskanals mit einer oberen Luftöffnung (10) versehen ist und ein unteres Ende des Lufteinlasskanals mit einem Luftauslass (11) versehen ist; wobei

in einem freien Zustand die obere Luftöffnung (10), die erste Luftöffnung (1), die zweite Luftöffnung (9) und der Luftauslass (11) miteinander in Strömungsverbindung stehen; und eine erste Führungsplatte (3), eine zweite Führungsplatte

- (7) und eine Verbindungsstange (4), die über Gelenke zwischen der ersten Führungsplatte (3) und der zweiten Führungsplatte (7) angebracht ist, in dem Lufteinlasskanal angeordnet sind; wobei ein oberes Ende der ersten Führungsplatte (3) an einer Position über der ersten Luftöffnung (1) an dem Lufteinlasskanal angelenkt ist und ein oberes Ende der zweiten Führungsplatte (7) an einer Position über der zweiten Luftöffnung (9) an dem Lufteinlasskanal angelenkt ist, die erste Führungsplatte (3) und die zweite Führungsplatte (7) dabei durch die Verbindungsstange (4) miteinander zu einer trapezförmigen Verbindungsstangenkonstruktion verbunden sind, wobei ein oberes Ende der trapezförmigen Verbindungsstangenkonstruktion ein Ende mit großem Durchmesser ist und wobei die zweite Führungsplatte (7) zum Schwenken in einen Zustand, in dem sie die zweite Luftöffnung (9) dicht verschließt, gestaltet ist.
2. Belüftungsvorrichtung für ein Schienenfahrzeug nach Anspruch 1, wobei die erste Führungsplatte (3) zum Schwenken in einen Zustand, in dem sie die erste Luftöffnung (1) dicht verschließt, gestaltet ist.
 3. Belüftungsvorrichtung für ein Schienenfahrzeug nach Anspruch 2, wobei die Verbindungsstangenkonstruktion in dem freien Zustand eine symmetrische Konstruktion ist und die erste Luftöffnung (1) und die zweite Luftöffnung (9) die gleiche Konstruktion aufweisen.
 4. Belüftungsvorrichtung für ein Schienenfahrzeug nach Anspruch 3, wobei die obere Luftöffnung (10), die erste Luftöffnung (1) und die zweite Luftöffnung (9) jeweils mit einem Schutznetz (8) versehen sind.
 5. Belüftungsvorrichtung für ein Schienenfahrzeug nach Anspruch 4, wobei mindestens zwei Verbindungsstangen (4) zwischen der ersten Führungsplatte (3) und der zweiten Führungsplatte (7) angebracht sind und die Verbindungsstangen (4) alle parallel angeordnet sind.
 6. Belüftungsvorrichtung für ein Schienenfahrzeug nach Anspruch 5, wobei die obere Platte (2) des Lufteinlasskanals abnehmbar mit dem Körper des Lufteinlasskanals verbunden ist, die obere Luftöffnung (10) an der oberen Platte (2) bereitgestellt ist und die obere Luftöffnung (10) in der Mitte des oberen Endes des Lufteinlasskanals bereitgestellt ist.
 7. Belüftungsvorrichtung für ein Schienenfahrzeug nach Anspruch 4, wobei die Verbindungsstange (4) mit der Mitte der ersten Führungsplatte (3) und der

zweiten Führungsplatte (7) verbunden ist.

8. Belüftungsvorrichtung für ein Schienenfahrzeug nach Anspruch 4, wobei die erste Führungsplatte (3) und der Lufteinlasskanal, die zweite Führungsplatte (7) und der Lufteinlasskanal, die Verbindungsstange (4) und die erste Führungsplatte (3) und die Verbindungsstange (4) und die zweite Führungsplatte (7) jeweils durch ein Gelenk (5) verbunden sind.
9. Belüftungsvorrichtung für ein Schienenfahrzeug nach Anspruch 1, wobei der Lufteinlasskanal im freien Zustand eine spiegelsymmetrische Konstruktion aufweist und eine Symmetrieebene sich an der mittleren Position der ersten Luftöffnung (1) und der zweiten Luftöffnung (9) befindet; die erste Luftöffnung (1) und die zweite Luftöffnung (9) in Bezug auf die Symmetrieebene spiegelsymmetrisch sind und die erste Führungsplatte (3) und die zweite Führungsplatte (7) in Bezug auf die Symmetrieebene spiegelsymmetrisch sind.
10. Schienenfahrzeug, das die Belüftungsvorrichtung für ein Schienenfahrzeug nach einem der Ansprüche 1 bis 9 beinhaltet.

Revendications

1. Dispositif de ventilation de véhicule ferroviaire, comprenant :
 - un conduit d'admission d'air, dans lequel un premier orifice d'air (1) et un deuxième orifice d'air (9) sont fournis respectivement à deux côtés du conduit d'admission d'air, le premier orifice d'air (1) étant arrangé à l'opposé du deuxième orifice d'air (9), dans lequel un dessus du conduit d'admission d'air est pourvu d'un orifice d'air supérieur (10) et un fond du conduit d'admission d'air est pourvu d'une sortie d'air (11) ;
 - dans lequel, dans un état libre, l'orifice d'air supérieur (10), le premier orifice d'air (1), le deuxième orifice d'air (9) et la sortie d'air (11) sont en communication l'un avec l'autre ; et
 - une première plaque de guidage (3), une deuxième plaque de guidage (7), et une tige de raccordement (4) articulée entre la première plaque de guidage (3) et la deuxième plaque de guidage (7), sont arrangées dans le conduit d'admission d'air ;
 - dans lequel un dessus de la première plaque de guidage (3) est articulé au conduit d'admission d'air à une position au-dessus du premier orifice d'air (1) et un dessus de la deuxième plaque de guidage (7) est articulé au conduit d'admission d'air à une position au-dessus du deuxième orifice d'air (9), la première plaque de guidage (3)

- et la deuxième plaque de guidage (7) étant raccordées par la tige de raccordement (4) pour former une structure de tige de raccordement trapézoïdale,
dans lequel une extrémité supérieure de la structure de tige de raccordement trapézoïdale est une extrémité de grand diamètre, et dans lequel la deuxième plaque de guidage (7) est configurée pour osciller à un état obturant hermétiquement le deuxième orifice d'air (9).
2. Dispositif de ventilation de véhicule ferroviaire selon la revendication 1, dans lequel, la première plaque de guidage (3) est configurée pour osciller à un état obturant hermétiquement le premier orifice d'air (1).
 3. Dispositif de ventilation de véhicule ferroviaire selon la revendication 2, dans lequel, la structure de tige de raccordement est une structure symétrique dans l'état libre, et le premier orifice d'air (1) et le deuxième orifice d'air (9) ont la même structure.
 4. Dispositif de ventilation de véhicule ferroviaire selon la revendication 3, dans lequel, l'orifice d'air supérieur (10), le premier orifice d'air (1) et le deuxième orifice d'air (9) sont pourvus chacun d'un filet de protection (8).
 5. Dispositif de ventilation de véhicule ferroviaire selon la revendication 4, dans lequel, au moins deux tiges de raccordement (4) sont raccordées entre la première plaque de guidage (3) et la deuxième plaque de guidage (7), et toutes les tiges de raccordement (4) sont arrangées en parallèle.
 6. Dispositif de ventilation de véhicule ferroviaire selon la revendication 5, dans lequel, la plaque supérieure (2) du conduit d'admission d'air est raccordée de manière détachable au corps du conduit d'admission d'air, l'orifice d'air supérieur (10) est fourni sur la plaque supérieure (2), et l'orifice d'air supérieur (10) est fourni au milieu du dessus du conduit d'admission d'air.
 7. Dispositif de ventilation de véhicule ferroviaire selon la revendication 4, dans lequel, la tige de raccordement (4) est raccordée au milieu de la première plaque de guidage (3) et de la deuxième plaque de guidage (7).
 8. Dispositif de ventilation de véhicule ferroviaire selon la revendication 4, dans lequel, la première plaque de guidage (3) et le conduit d'admission d'air, la deuxième plaque de guidage (7) et le conduit d'admission d'air, la tige de raccordement (4) et la première plaque de guidage (3), et la tige de raccordement (4) et la deuxième plaque de guidage (7), sont raccordés chacun par une charnière (5).
 9. Dispositif de ventilation de véhicule ferroviaire selon la revendication 1, dans lequel, le conduit d'admission d'air a une structure symétrique en miroir dans l'état libre, et un plan symétrique est situé à la position centrale du premier orifice d'air (1) et du deuxième orifice d'air (9); le premier orifice d'air (1) et le deuxième orifice d'air (9) sont symétriques en miroir par rapport au plan de symétrie, et la première plaque de guidage (3) et la deuxième plaque de guidage (7) sont symétriques en miroir par rapport au plan de symétrie.
 10. Véhicule ferroviaire comprenant le dispositif de ventilation de véhicule ferroviaire selon l'une quelconque des revendications 1 à 9.

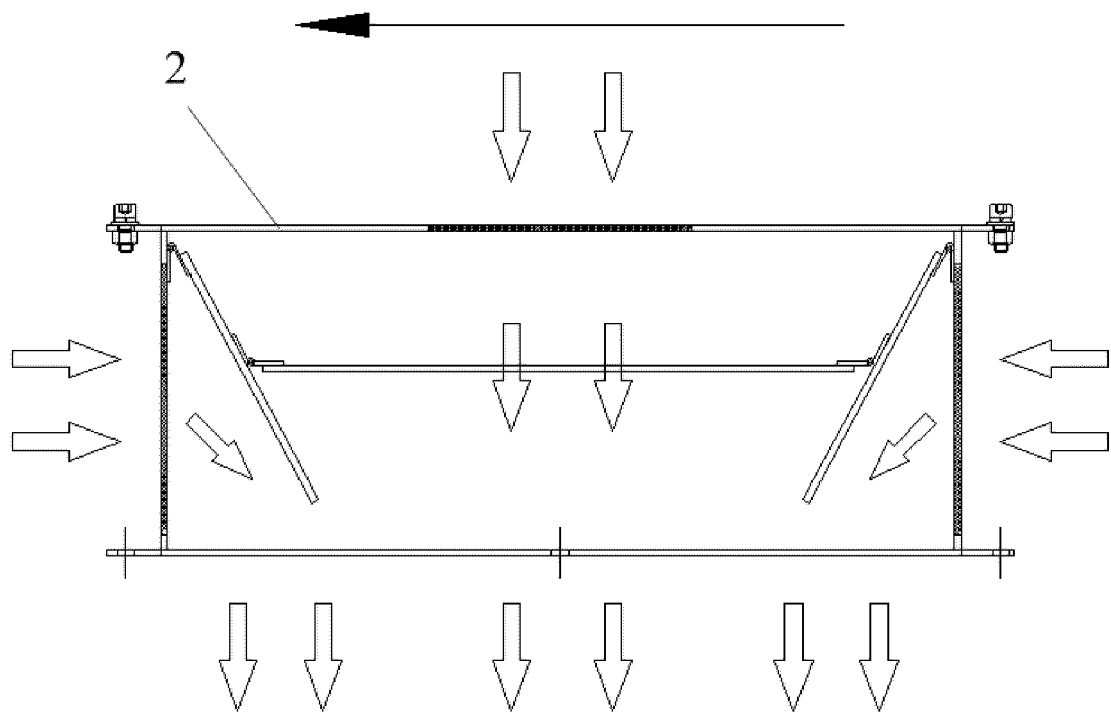


Fig. 1

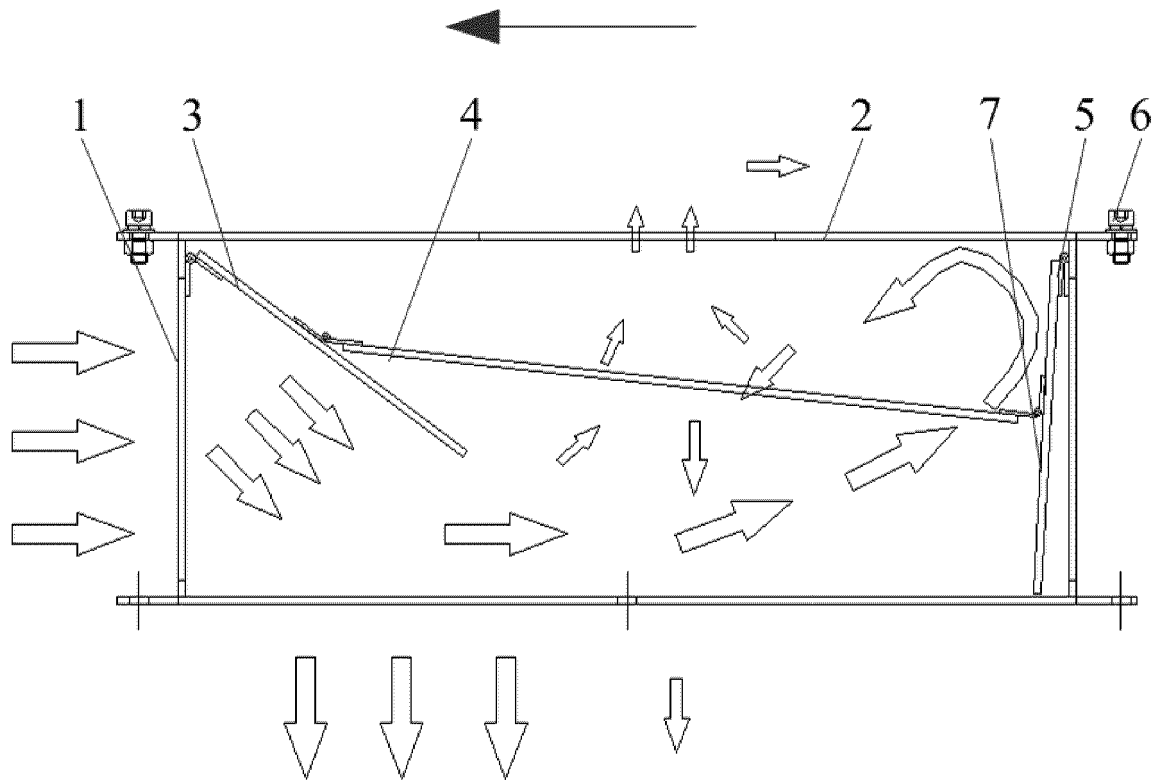


Fig. 2

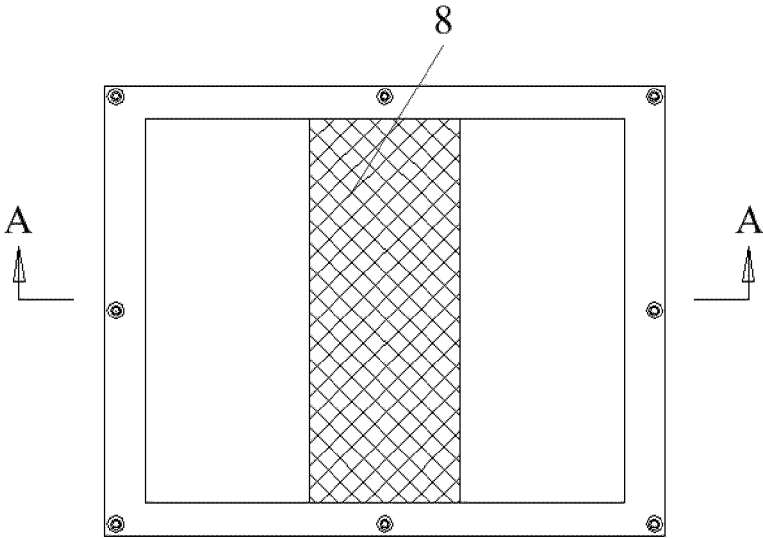


Fig. 3

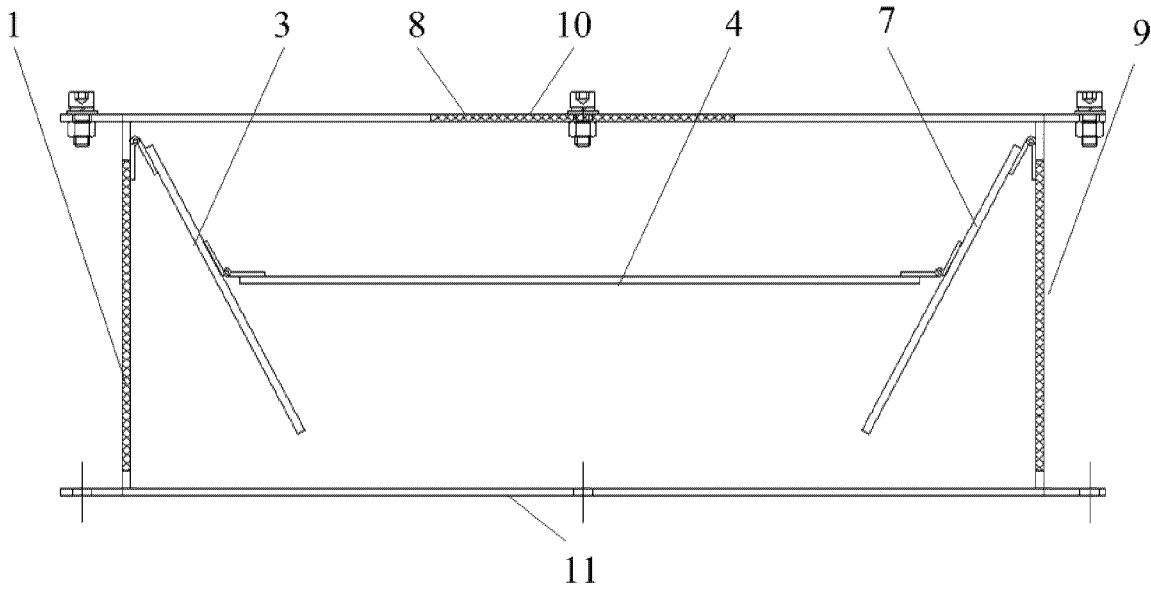


Fig. 4

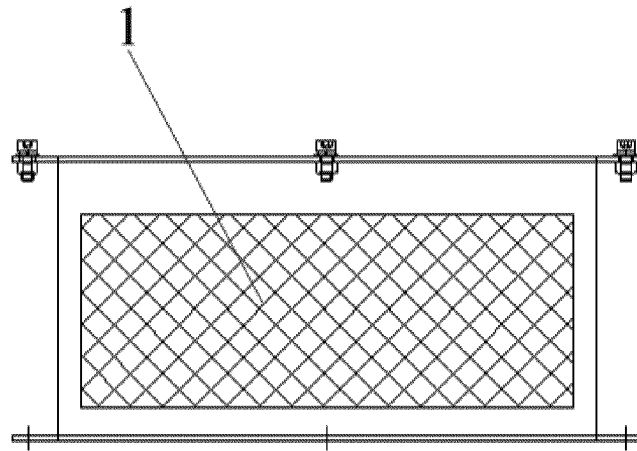


Fig. 5

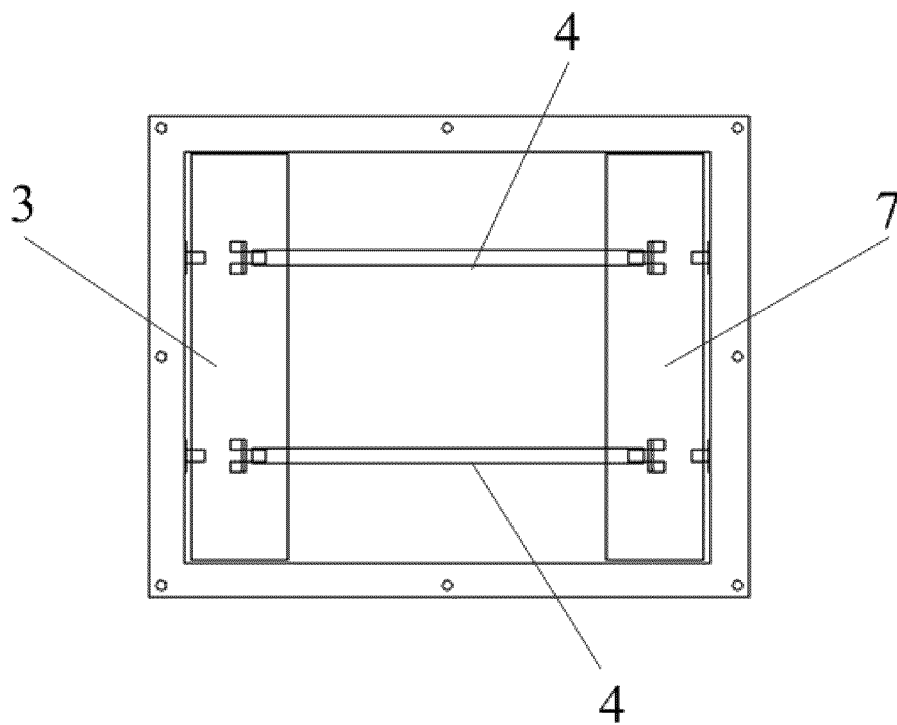


Fig. 6

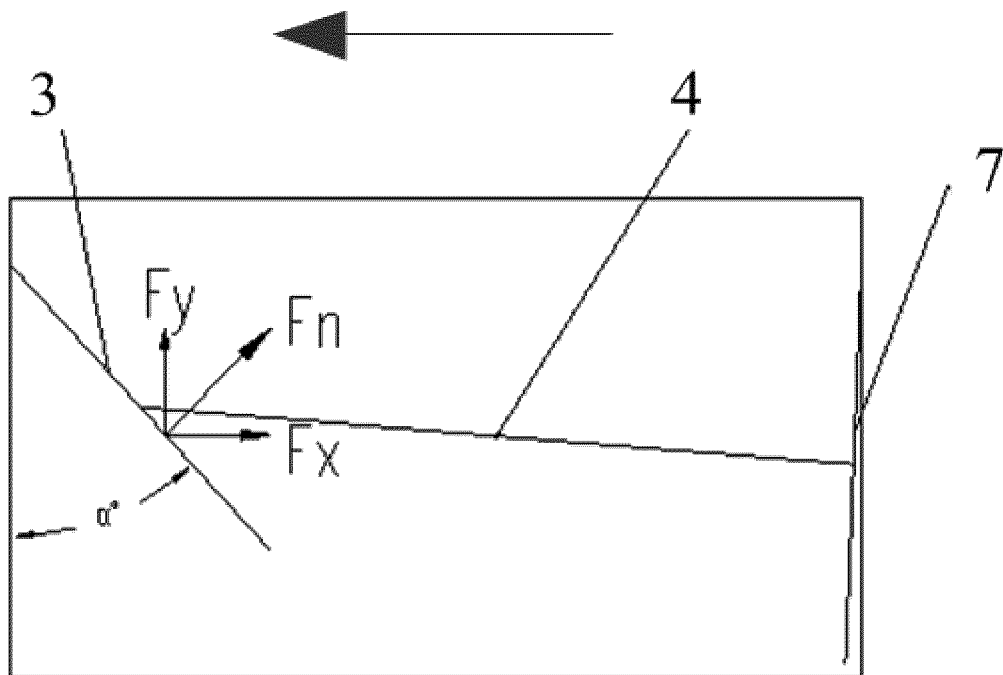


Fig. 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201811277387X [0001]
- CN 107415969 A [0004]