

(12) STANDARD PATENT APPLICATION (11) Application No. AU 2019201848 A1

(19) AUSTRALIAN PATENT OFFICE

(54) Title

RAILCAR ADAPTER FOR CONNECTING A RAILCAR BODY TO A BEARING

(51) International Patent Classification(s)

B61F 5/14 (2006.01)

(21) Application No: **2019201848**

(22) Date of Filing: **2019.03.18**

(30) Priority Data

(31) Number
15/994,070

(32) Date
2018.05.31

(33) Country
US

(43) Publication Date: **2019.12.19**
(43) Publication Journal Date: **2019.12.19**

(71) Applicant(s)
Aktiebolaget SKF

(72) Inventor(s)
Fenayon, Ludovic;Jenart, Gautier;Le Moigne, Thierry

(74) Agent / Attorney
Phillips Ormonde Fitzpatrick, PO Box 323, Collins Street West, VIC, 8007, AU


ABSTRACT

RAILCAR ADAPTER FOR CONNECTING A RAILCAR BODY TO A BEARING

The invention relates to a railcar adapter (14) for radially connecting a railcar body to a bearing (16). The railcar adapter (14) comprises two lateral channels (42) each delimited by a pair of opposed lugs (42b, 42c) and a lateral guiding surface (42a) perpendicular to said opposed lugs (42b, 42c), lateral channels (42) being adapted to cooperate with the railcar body. The said lateral guiding surfaces (42a) of lateral channels (42), in cross-section through a plane perpendicular to the axis of rotation of bearing, are curved.

Reference: Figure 1.

FIG. 1

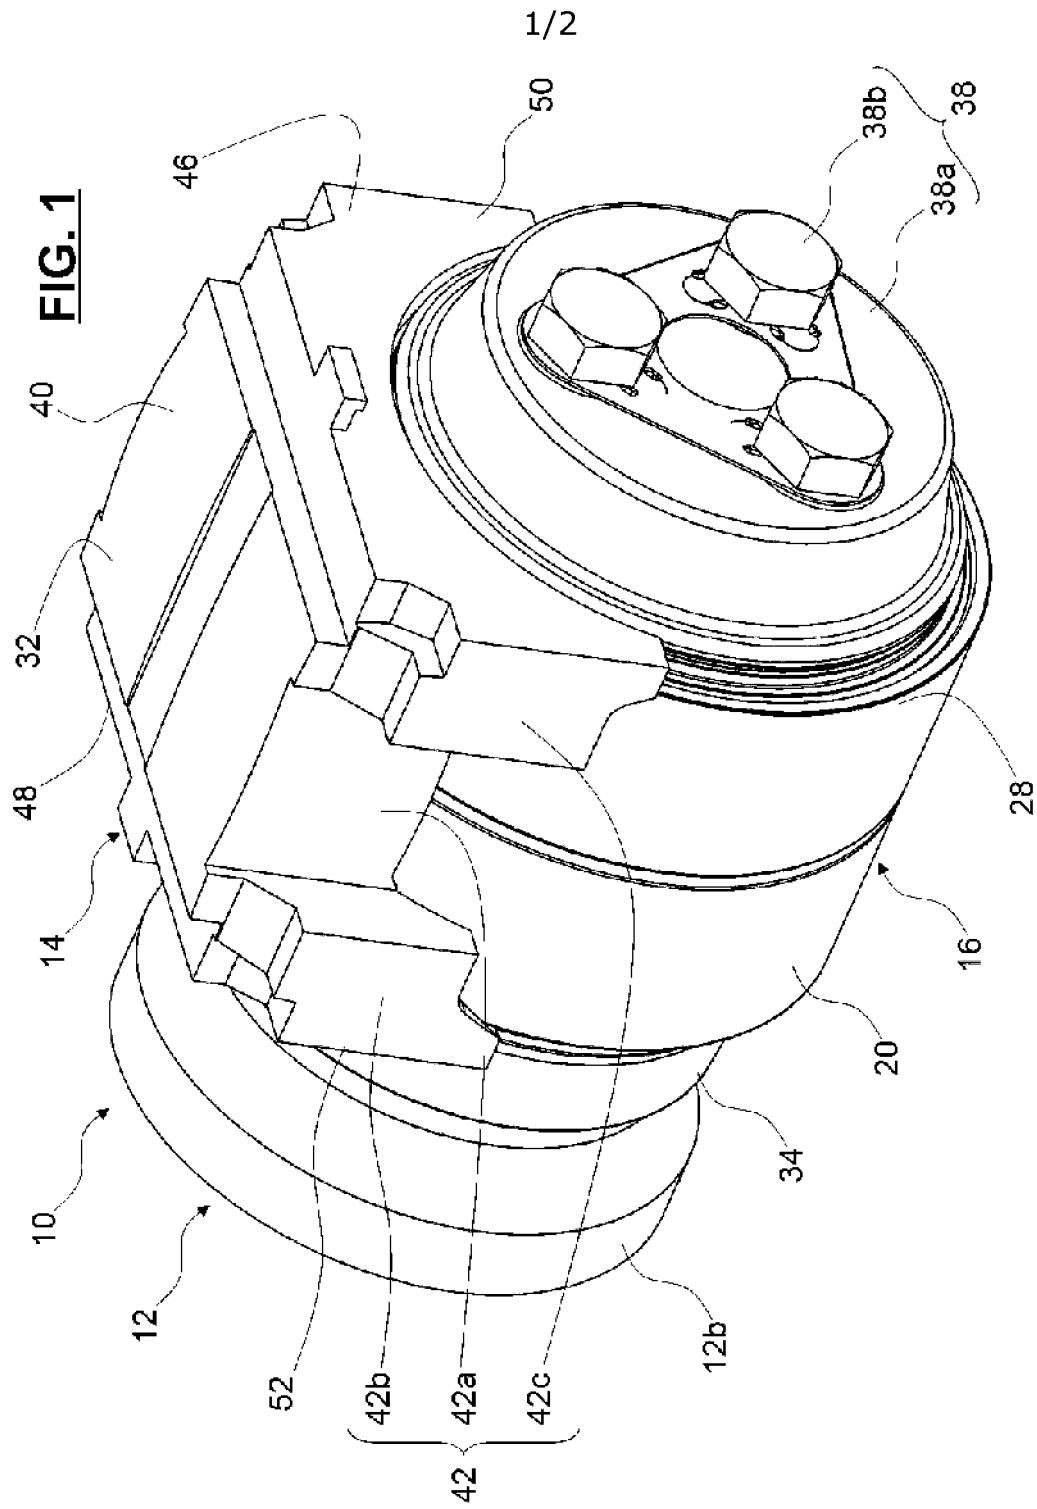

RAILCAR ADAPTER FOR CONNECTING A RAILCAR BODY TO A BEARING

This application claims priority from US Application No. 15/994,070 filed on 31
5 May 2018, the contents of which are to be taken as incorporated herein by this
reference.

TECHNOLOGICAL FIELD

[0001] The present invention relates to the field of bearing adapters
10 for a railcar.

BACKGROUND

[0002] A railcar generally comprises a bogie frame provided with a
pair of side frames on each side having downwardly opening jaws. A
15 bearing adapter is vertically moveable within the jaws and rests on a
bearing mounted on a railcar axle carrying a wheel of said railcar. The
bearing adapter is thus a rigid connection between the bogie frame of
the railcar and the bearing. Typically, a bearing for a railcar axle fits
around a journal at the end of the railcar axle where it is mounted
20 between a backing ring assembly and an end cap.

[0003] However, the railcar adapter may move with respect to the
bearing. The railcar adapter may be misaligned with respect to the
bearing when the railcar runs over curved rail tracks. This results in
unexpected wear of some parts, in particular lugs of lateral channels
25 engaging a lug of a jaw of the bogie frame, and then reduce their
service life.

[0004] The load applied by the bogie frame through the adapter may
not be well distributed on the bearing, notably on the rolling elements
when the bearing is of the rolling bearing type. This results in wear on
30 the inner surface and the outer surface of the railcar adapter, as well
as in failure of the bearing.

[0005] These and other problems are addressed by embodiments of the
present invention.

SUMMARY

[0006] To this end, the invention relates to a railcar adapter for radially connecting a railcar body to a bearing. The railcar adapter comprises two lateral channels each delimited by a pair of opposed lugs and a lateral guiding surface perpendicular to said opposed lugs. Lateral channels are adapted to cooperate with the railcar body. The railcar adapter comprises two frontal flanges that inwardly protrude with respect to the inner surface, and that delimit with the inner surface a housing for said bearing. The railcar adapter comprises an inner surface acting as a bearing seat for said bearing. The railcar adapter comprises an outer surface that is adapted to be in direct radial contact with the railcar body.

[0007] According to the invention, the said lateral guiding surfaces of lateral channels, in cross-section through a plane perpendicular to the axis of rotation of bearing, are curved.

[0008] Such arrangement improves the service life of the railcar adapter and the bearing by reducing wear. The curved outer lateral guiding surfaces of railcar adapter compensate the relative misalignment between the railcar body and the bearing. The load applied by the bogie frame through the adapter is uniformly distributed on the bearing, notably on the rolling elements when the bearing is of the rolling bearing type.

[0009] Such arrangement improves the service life of the railcar adapter and the bearing by preventing relative misalignment and wear.

[0010] According to further aspects of the invention which are advantageous but not compulsory, such a railcar adapter may incorporate one or several of the following features:

[0011] The inner surface has, for example, a concave shape of constant radius so as to sit on the bearing.

[0012] The said outer surface of railcar adapter, in cross-section through the axis of rotation of bearing, is curved.

[0013] The said outer surface of railcar adapter is cylindrical or spherical.

[0014] The outer surface of railcar adapter is flat.

[0015] The lateral guiding surfaces of lateral channels are cylindrical.

[0016] The lateral guiding surfaces of lateral channels are spherical.

5 [0017] The railcar adapter is made from metal, for example, by casting. For example, the railcar adapter is made from cast steel or cast iron.

10 [0018] According to another aspect, the invention relates to a railcar adapter assembly comprising a railcar adapter according to any of the preceding embodiments, a bearing mounted inside the railcar adapter, a backing ring adapted to come into axial contact with the bearing at a first side, and an end cap assembly adapted to come into axial contact with the bearing at another side, opposite to the first side.

15 [0019] In one embodiment, the bearing comprises at least one inner ring and at least one outer ring mounted in radial contact with the inner surface of the railcar adapter.

[0020] In one embodiment, the bearing comprises at least one row of rolling elements, arranged between raceways provided on the inner and outer rings.

20 [0021] In one embodiment, the inner ring of the bearing is made in two parts, axially separated by an axial spacer.

25 [0022] According to another aspect, the invention relates to railcar axle comprising a railcar adapter assembly according to any of the preceding embodiments, a shaft being rotatably mounted about an axis of rotation relative to a railcar adapter, inside said bearing. The shaft comprises a first end mounted radially inside the backing ring and a second end, opposite to the first end, secured to the end cap assembly.

BRIEF DESCRIPTION OF THE DRAWINGS

30 [0023] Other advantages and features of the invention will emerge upon examining the detailed description of embodiments, which are in no way limiting, and the appended drawings wherein:

[0024] Figure 1 is a perspective view of a railcar axle according to the invention; and

[0025] Figure 2 is an axial cross-section of the railcar axle of Figure 1.

DETAILED DESCRIPTION

[0026] Referring to Figures 1 and 2, a railcar axle 10 is provided for binding the bogie frame of a railcar to the wheels (not shown). The railcar axle 10 comprises a shaft 12 (in dotted lines in Figure 2), being rotatably mounted about an axis of rotation X10 relative to a railcar adapter 14. The railcar adapter 14 is secured to the railcar bogie frame, the shaft 12 being secured to the wheels.

[0027] A bearing 16 is radially provided between the railcar adapter 14 and the shaft 12. As illustrated in Figure 2, the bearing 16 is of the rolling bearing type, and comprises an inner ring 18 mounted on the shaft 12, an outer ring 20 mounted inside the railcar adapter 14 and two rows of rolling elements 22a, 22b, for example rollers, arranged between raceways provided on the inner and outer rings 18, 20. The inner ring 18 is, for example, made in two parts, axially separated by an axial spacer 24. In this embodiment, the bearing 16 is a tapered rollers bearing.

[0028] The bearing 16 is further provided with sealing means 26, 28 on both axial ends. Sealing means 26, 28 close a radial space defined between the inner ring 18 and the outer ring 20. The rolling elements 22a, 22b are arranged in the said sealed radial space.

[0029] The railcar adapter 14 is secured to the outer ring 20 by its radially inward side or bearing seat side 30 and is mounted inside the bogie frame by its radially outward side or frame seat side 32.

[0030] The shaft 12 comprises a journal 12a and a dust guard having a cylindrical surface 12b whose diameter is bigger than the diameter of the journal 12a. A concave fillet 12c connects the cylindrical surface 12b on the journal 12a. The inner ring 18 of the bearing is mounted on the journal 12a.

[0031] As illustrated, the railcar axle 10 further comprises a backing ring 34 having an inner surface 34a adapted to radially come into contact with the outer surface of the shaft 12, at the fillet 12c side and

to axially come into contact with the inner ring 18 of the bearing 16. Accordingly, the inner surface 34a of backing ring 34 has a rounded shape, almost complementary to that of the fillet 12c.

5 [0032] The railcar axle 10 also comprises an end cap assembly 38. The end cap assembly 38 includes an end cap 38a provided for being a stop element in case of a leftward translation (relative to Figure 2) of the shaft 12 relative to the inner ring 18. Therefore, the end cap 38a is reliably secured to the journal 12 by means of three cap screws 38b and comes in axial contact with the inner ring 18 of the bearing 16.

10 [0033] As illustrated in detail on Figure 1, the railcar adapter 14 comprises an adapter body 40 provided with two lateral channels 42. In the Figure 1, only one channel 42 is illustrated, the adapter body 40 comprising another lateral channel on the opposite lateral side. Each of the lateral channels 42 is axially delimited by a pair of opposed 15 lugs 42b, 42c and a lateral guiding surface 42a perpendicular to the said lugs. Each lateral channel 42 has a U-shape and is adapted to engage with a lug of a jaw (not shown) of the bogie frame, so as to act as an insertion guide between the adapter and the bogie frame.

20 [0034] The body 40 of the railcar adapter 14 further comprises two frontal surfaces 46, 48, the inner surface 30 acting as a bearing seat in radial contact with the outer ring 20 of the bearing 16, and the outer surface 32 acting as a frame seat in radial contact with the bogie frame.

25 [0035] The inner surface 30 has a concave shape of constant radius so as to sit on the outer cylindrical surface of the outer ring 20 of the bearing 16.

30 [0036] The frontal surfaces 46, 48 are provided with a first and a second frontal flanges 50, 52, respectively, directed radially inwards. The flanges 50, 52 radially inwardly protrude with respect to the inner surface 30. The flanges 50, 52 are axially opposite one each other. The flanges 50, 52 delimit with the inner surface 30 a housing for the outer ring 20 of bearing 16. The outer ring 20 is axially arranged between said flanges 50, 52.

[0037] The adapter body 40 is made from metal by any suitable process, such as, for example, by casting. For example, the body 40 is made from steel or cast iron.

[0038] According to the invention, the lateral guiding surfaces 42a of lateral channels are curved, in cross-section through a perpendicular plane to the axis of rotation X10 of the bearing 16. In the illustrated embodiment, the lateral guiding surfaces 42a are cylindrical. Alternatively, the lateral guiding surfaces 42a may be spherical.

[0039] The bogie frame comprises lugs of jaws engaged within the lateral channels 42 of railcar adapter 14, and in abutment against the said lateral guiding surfaces 42a. In case of relative misalignment between the bogie frame and the bearing 16, the said bogie frame can swivel onto the curved lateral guiding surfaces 42a. The said misalignment is then compensated. The railcar adapter 14 is prevented from any displacement with respect to the bearing 16.

[0040] Advantageously, the outer surface 32 of railcar adapter 14 is also curved. In the illustrated embodiment, the outer surface 32, in cross-section through the axis of rotation X10 of bearing 16, is cylindrical. Alternatively, the outer surface 32 may be spherical.

[0041] The bogie frame comprises a lower surface in radial abutment against the said outer surface 32 of railcar adapter 14. In case of relative misalignment between the bogie frame and the bearing 16, the said bogie frame can also swivel onto the curved outer surface 32. The railcar adapter 14 comprises curved contact surfaces 42a, 32 with the bogie frame along two directions.

[0042] As an alternate (not illustrated), the inner surfaces of the opposed lugs 42b, 42c of lateral channels 42, in cross-section through a plane perpendicular to the axis of rotation X10 of bearing 16, are curved. For example, said surfaces may be cylindrical or spherical.

[0043] It should be noted that the embodiments, illustrated and described were given merely by way of non-limiting indicative examples and that modifications, combinations and variations are possible within the scope of the invention.

[0044] The invention has been illustrated on the basis of a rolling bearing provided with at least one row of rolling elements radially disposed between the inner and outer rings. Alternatively, the bearing may be a plain bearing or a sliding bearing comprising one or two rings.

Claims

1. A railcar adapter (14) for radially connecting a railcar body to a bearing (16), and comprising:
 - 5 two lateral channels (42) each delimited by a pair of opposed lugs (42b, 42c) and a lateral guiding surface (42a) perpendicular to said opposed lugs (42b, 42c), lateral channels (42) being adapted to cooperate with the railcar body,
 - 10 two frontal flanges (48, 50) that inwardly protrude with respect to an inner surface (30), and that delimit with the inner surface (30) a housing for said bearing (16),
 - 15 an inner surface (30) acting as a bearing seat for said bearing (16), and an outer surface (32) adapted to be in direct radial contact with the railcar body,
- 20 2. Railcar adapter according to the claim 1, wherein the lateral guiding surfaces (42a) of lateral channels (42) are cylindrical.
- 25 3. Railcar adapter according to the claim 1, wherein the lateral guiding surfaces (42a) of lateral channels (42) are spherical.
- 30 4. Railcar adapter according to any of the preceding claims, wherein the outer surface (32), in cross-section through the axis of rotation of bearing, is curved.
5. Railcar adapter according to the claim 4, wherein the outer surface of railcar adapter is cylindrical.
6. Railcar adapter according to the claim 4, wherein the outer surface of railcar adapter is spherical.

7. A railcar adapter assembly comprising a railcar adapter (14) according to any of the claims 1 to 6, a bearing (16) mounted inside the railcar adapter (14), a backing ring (34) adapted to come into axial contact with the bearing (16) at a first side, and an end cap assembly (38) adapted to come into axial contact with the bearing (16) at another side, opposite to the first side.
5
8. A railcar adapter assembly according to the claim 7, wherein the bearing (16) comprises at least one row of rolling elements (22a, 22b), arranged between raceways provided on an inner ring (18) and an outer ring (20).
10
9. A railcar adapter assembly according to the claim 8, wherein the inner ring (18) of the bearing (16) is made in two parts, axially separated by an axial spacer (24).
15
10. A railcar axle (10) comprising a railcar adapter assembly according to any of the claims 7 to 9, and a shaft (12) being rotatably mounted about an axis of rotation relative to a railcar adapter (14), inside said bearing (16), the shaft (12) comprising a first end (12c) mounted radially inside the backing ring (34) and a second end (12a), opposite to the first end (12c), secured to the end cap assembly (38).
20

2019201848 18 Mar 2019

FIG. 1

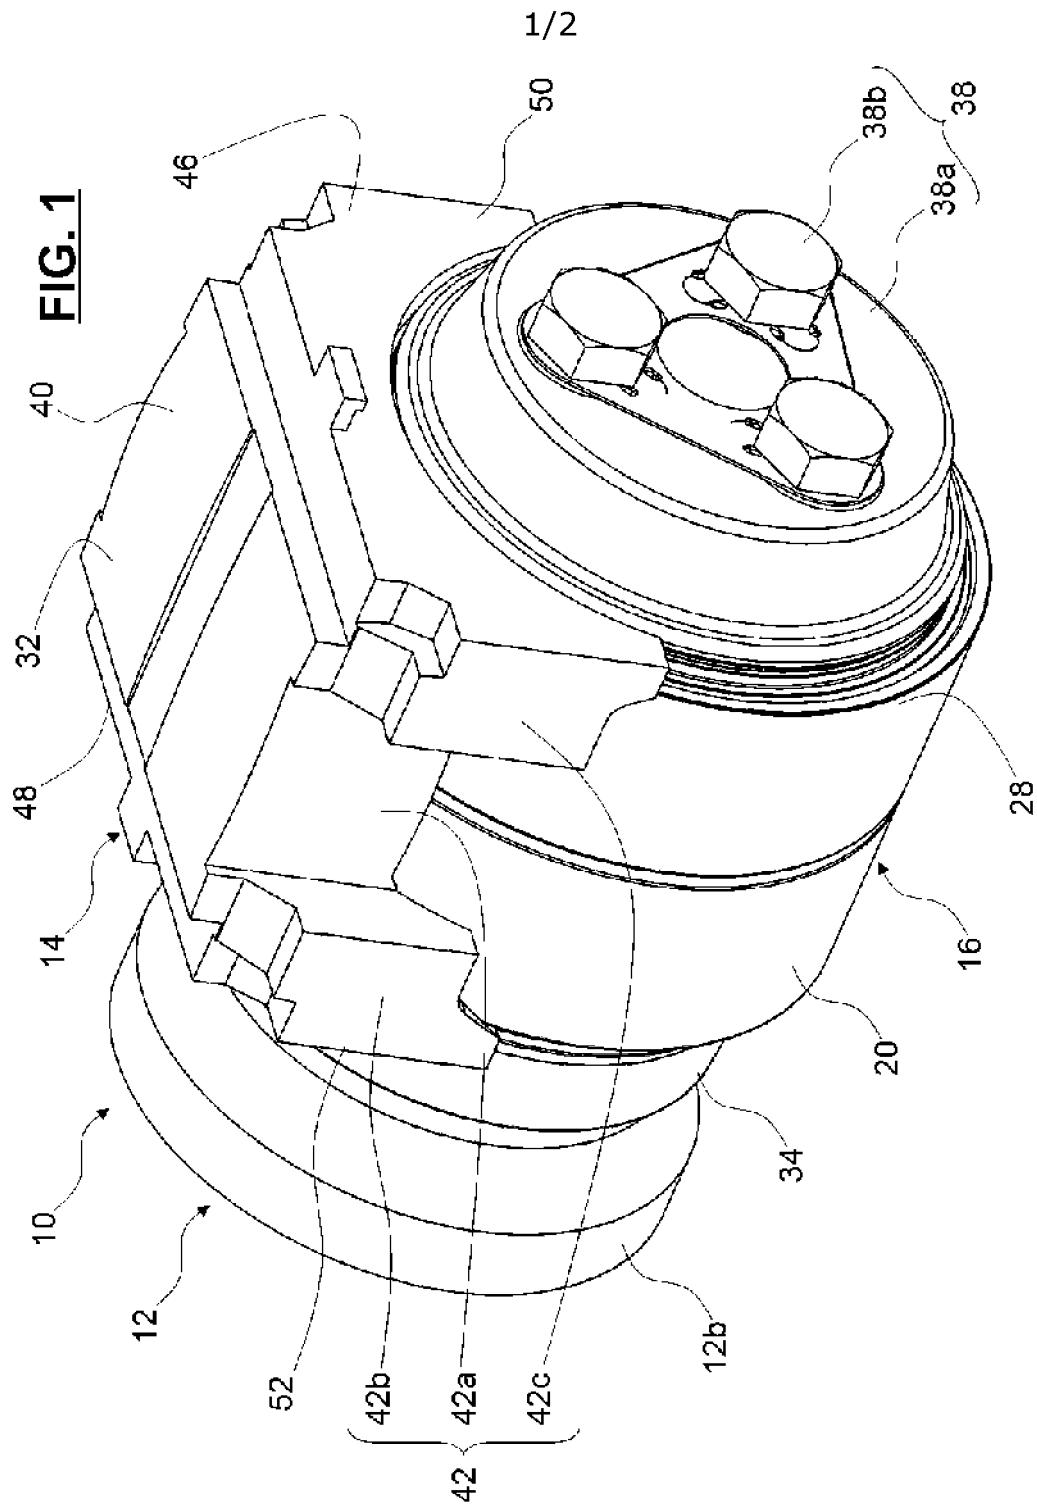


FIG. 2

