



(72) KUHLMAN, CLARE J., US


(71) INTERCONTINENTAL ENGINEERING-MANUFACTURING,
CORP., US

(51) Int.Cl.⁷ B63B 21/56

(30) 1999/04/30 (09/302,307) US

(54) **LIAISON D'ALLEGEMENT MOBILE ARTICULEE POUR
REMORQUEUR ET CHALAND**

(54) **ARTICULATED TUG AND BARGE MOBILE LIGHTERING
CONNECTION**

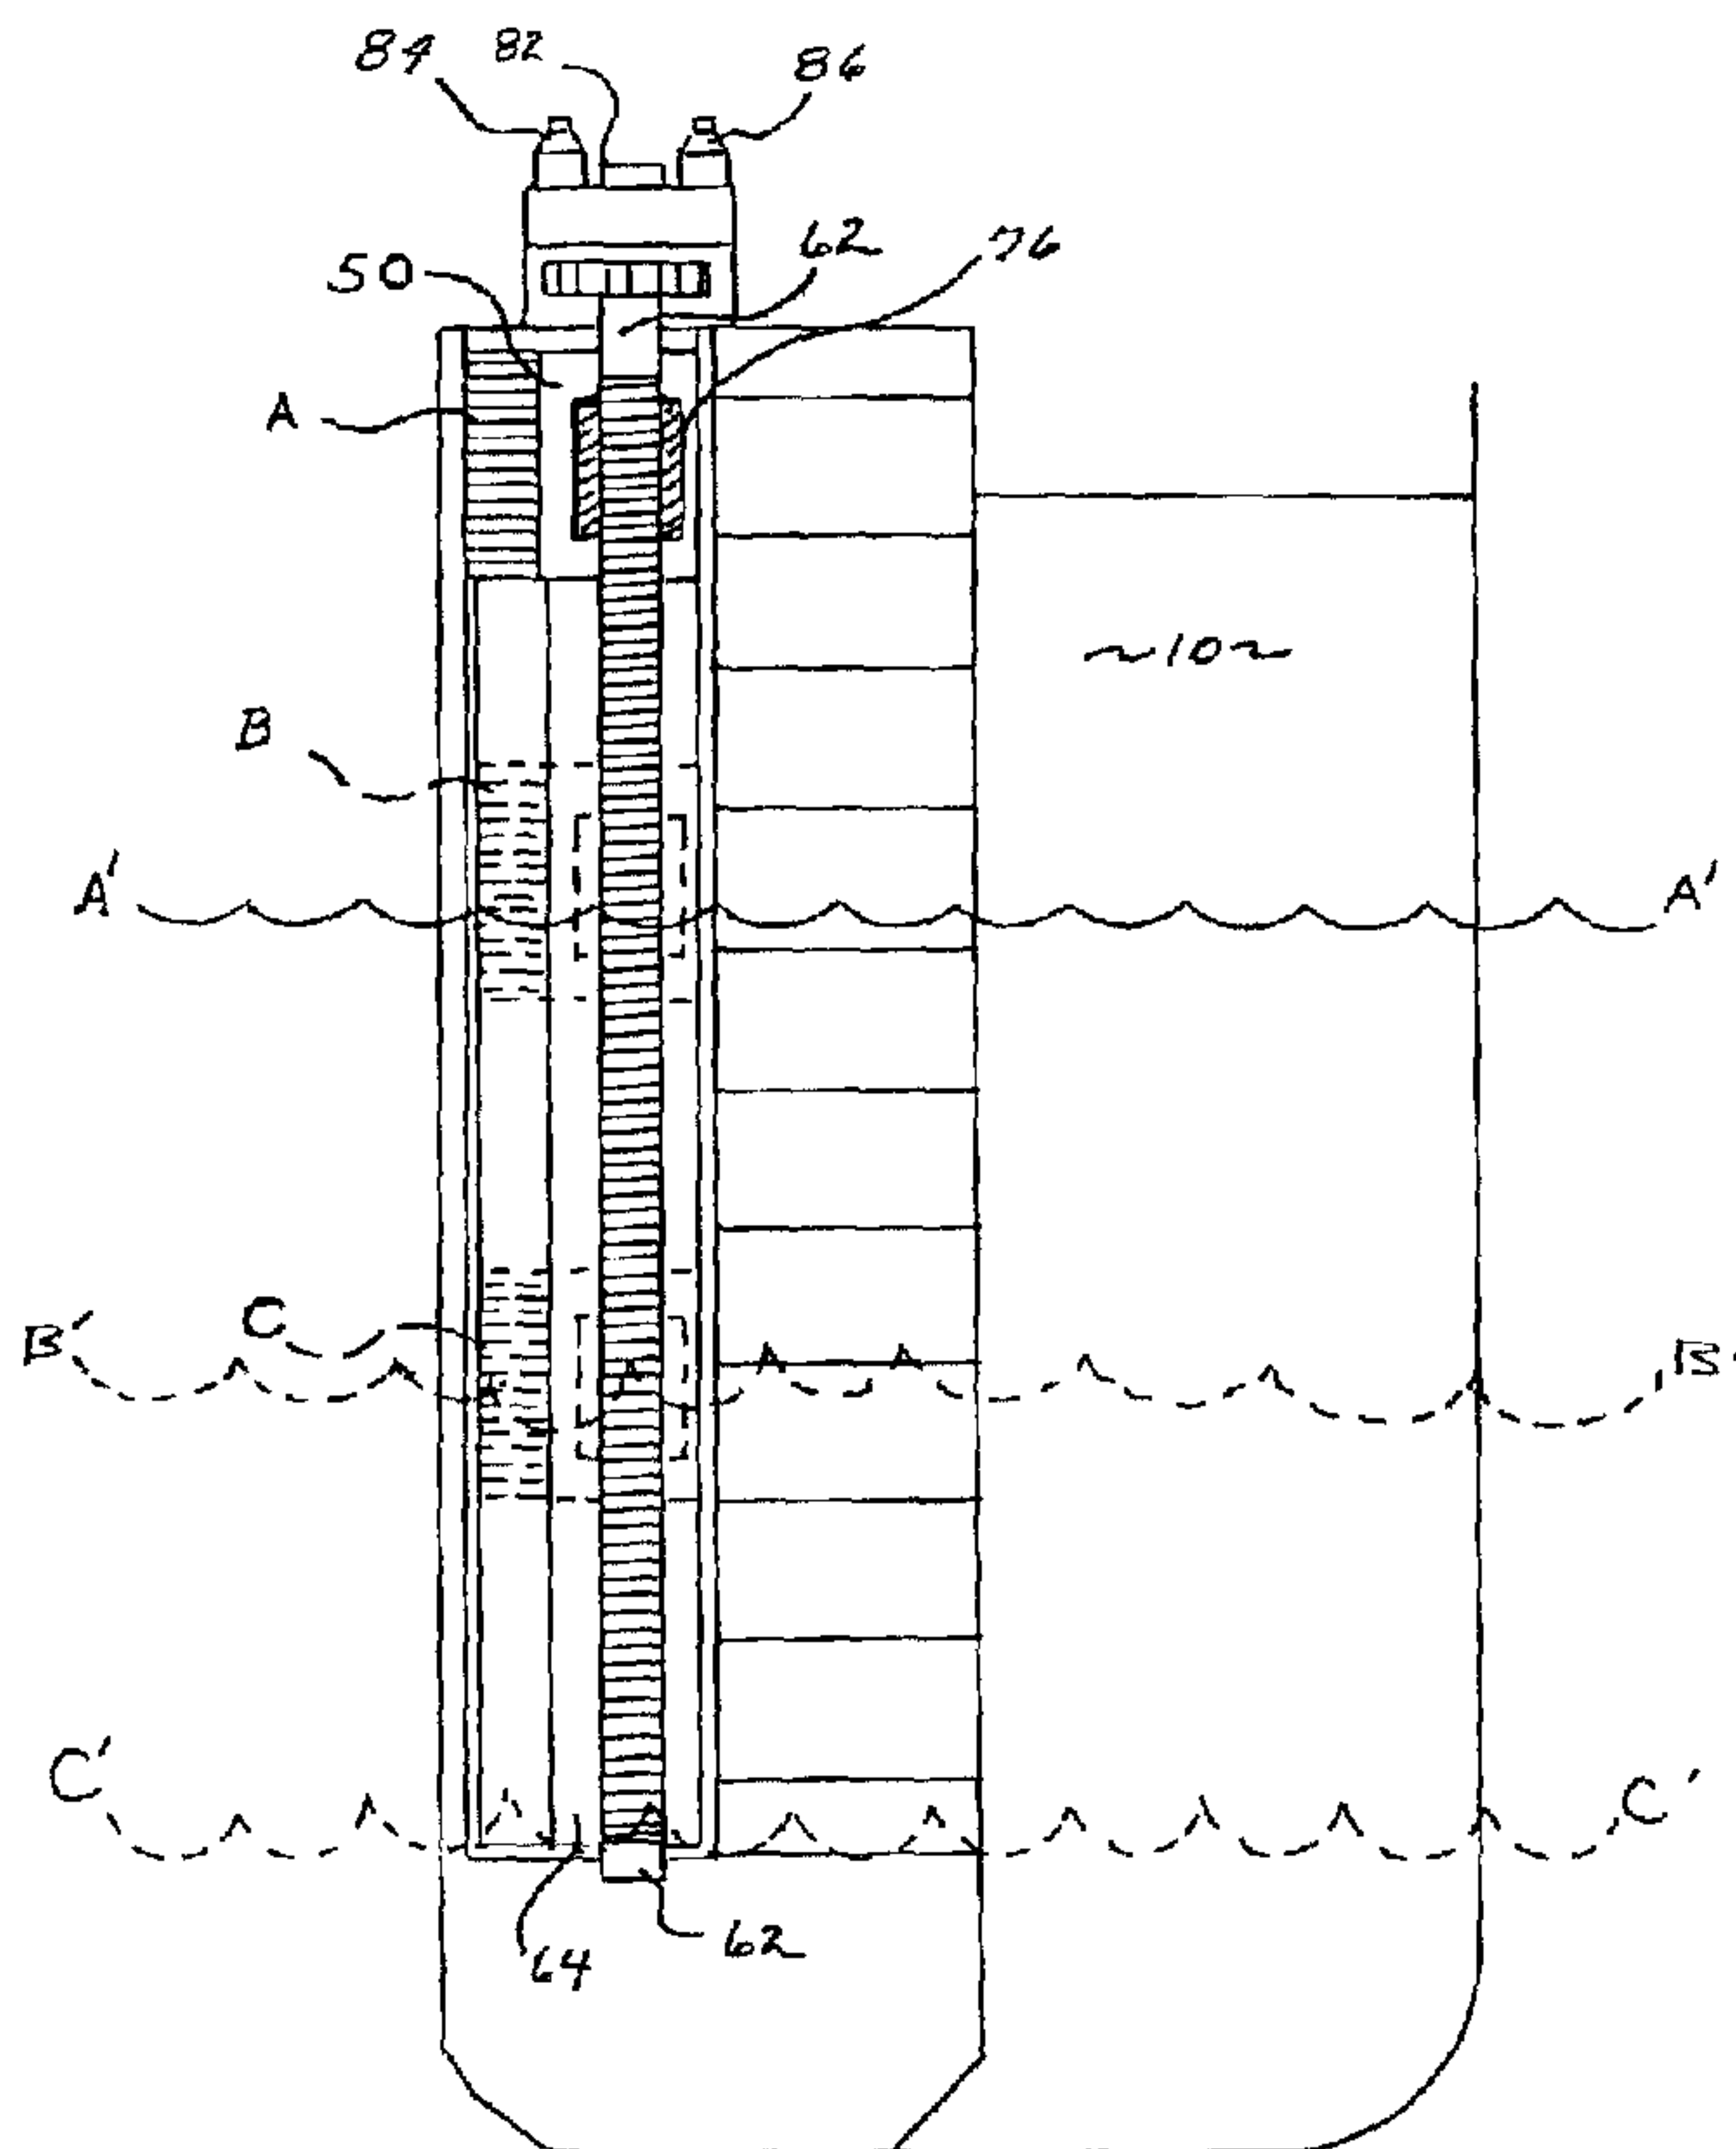

(57) A barge mounted, vertically adjustable receiver is provided which allows connection of a tug boat or pusher boat to a barge and which permits compensation to be made for changes in the draft of the barge by changing the vertical position of the receiver on the barge without disconnection the boat and barge.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

Abstract of the Disclosure

A barge mounted, vertically adjustable receiver is provided which allows connection of a tug boat or pusher boat to a barge and which permits compensation to be made for changes in the draft of the barge by changing the vertical position of the receiver on the barge without disconnection the boat and barge.

ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

Background of the Invention

This invention relates to the field of marine transport and more specifically to barge cargo transport. In particular, the present invention relates to connected or articulated tug and barge units, also known as articulated pusher boat and barge units used in the transport of petroleum products and other commodities.

Referring to Figs. 1 and 2, the operation of the prior art arrangements between articulated tug and barge vessels will be described. In Fig. 1, tugboat 14 is shown approaching the stern of barge 10. In the stern of barge 10 is notch or well 12 which is sized to receive the bow of tugboat 14. Tugboat or pusher boat 14 approaches the stern of barge 10 and positions itself within notch 12 such that coupling unit 16, 16' of tugboat 14 aligns with vertical channels 18, 18' on barge 10. Once tugboat or pusher boat 14 is properly seated within notch or well 12 of barge 10, alignment is achieved between coupling unit 16, 16' and vertical channels 18, 18' at which time coupling unit 16, 16' is extended by the pusher boat operator to engage with teeth 28 of vertical channel 18 and teeth 28' (not shown) of vertical channel 18'. The advantages of this interconnection between the pusher boat or tugboat 14 and barge 10 are that the boat and barge are securely connected, and boat 14 has far greater control over the acceleration and deceleration of barge 10 and greater control over the direction of travel than would be available to the tug if tow lines were being used to pull the barge through the water.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 One means for making the connection between boat 14 and barge 10 is
2 through the use of a coupling unit as shown in Fig. 3. Coupling unit 16 of Fig. 3
3 operates to secure boat 14 to barge 10 through use of screw drive 36 which extends
4 coupling unit helmet 30 outwardly from the side of boat 14 to connect with teeth 28 of
5 vertical channels 18, 18' (Fig. 1). The operation of the particular coupling unit shown in
6 Fig. 3 is fully discussed in U.S. Patent No. 4,688,507 to Kuhlman, et al., and that patent
7 specification is incorporated herein by reference.

8 Still referring to Fig. 3, the general operation of coupling unit 16 will be
9 discussed. Once the pilot has navigated boat 14 into notch or well 12 of barge 10, cast
10 component or helmet 30 of coupling unit 16 is extended toward vertical channels 18,
11 18' (Fig. 1). The extension of helmet 30 is initiated by operation of screw 36 which has
12 steel ball 32 attached to one end and on which helmet 30 can pivot. The extension and
13 retraction of screw 36 is operated by use of either low speed electric motor 46 or high
14 speed electric motor 44. In the case of high speed electric motor 44, the force from
15 motor 44 is communicated by shaft 42 to gear 38, the rotation of which causes rotation
16 of screw 36. Rotation of screw 36, depending on the direction selected, will either
17 extend or retract steel ball 32 and helmet 30 which are attached to screw 36. Referring
18 now to Figs. 4 and 5, the configuration of helmet or cast component 30 is shown.
19 Helmet 30 is designed such that teeth 48 of helmet 30 engage teeth 28 of vertical
20 channels 18, 18' of barge 10 (Fig. 1). It will be appreciated that upon extension of
21 screw 36 of coupling unit 16 (Fig. 3) to bring helmet 30 in contact with vertical channels

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 18, 18' that teeth 48 of helmet 30 will engage with four of teeth 28 on the fore and aft
2 sides of vertical channels 18, 18'. This design provides six faces of contact between
3 helmet 30 and vertical channels 18, 18' thereby providing a very secure interconnection
4 with a minimum of vertical play between the vertical channels 18, 18' and coupling units
5 16, 16'.

6 The manner of coupling tug and barge units just described provides a
7 secure, dependable interconnection between a tug or pusher boat 14 and barge 10 and
8 offers far greater control and maneuverability over barge 10 than the previously used
9 methods of attaching tow cables to barges and pulling them through the water. It will
10 be appreciated by examination of Figs. 1 and 2 that the connection procedure between
11 boat 14 and barge 10 of directing boat 14 into notch 12 and positioning boat 14 such
12 that coupling unit 16, 16' can be extended to fit into channels 18, 18', virtually requires
13 that this coupling and uncoupling to be conducted in reasonably calm water. Any
14 substantial movement between boat 14 and notch barge would prevent proper
15 alignment of the boat and barge thereby defeating connection of coupling unit 16, 16' to
16 vertical channels 18, 18'. In addition, attempting to engage or disengage boat 14 and
17 barge 10 in rough waters can lead to uncontrolled contact between boat 14 and barge
18 10 resulting in damage to both vessels. Therefore, it is necessary that the connection
19 between boat 14 and barge 10 be made in calm waters. Once the connection is
20 achieved and the arrangement of Fig. 2 is presented, the boat and barge unit can
21 tolerate very rough seas. One report on the device shown in U.S. Patent 4,688,507

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 indicated that a boat and barge unit coupled by such a device withstood and traveled
2 through a storm having waves in excess of 35 feet.

3 While this report to indicates the strength and durability of this type of
4 extended screw ram and channel connection between the boat and barge combination,
5 it will also be appreciated that uncoupling and re-coupling the boat 14 and barge 10 in
6 rough seas is dangerous and very unlikely to be successful. The lack of success in
7 coupling the boat and barge combination during rough seas is a result of the rapid
8 movement of both vessels in the rough waters and the difficulty in achieving sufficiently
9 satisfactory alignment between boat 14 and barge 10 to allow coupling unit 16, 16' to
10 be extended to interconnect with vertical channels 18, 18'.

11 Another drawback of the prior art just described is that once the boat 14 is
12 connected with barge 10, the draft of barge 10 -- the amount, or depth, of barge 10
13 which is below water -- cannot change appreciably. For example, if boat 14 connects
14 with barge 10 while barge 10 is loaded and sitting low in the water (a deep draft), boat
15 14 will connect near the upper portion of vertical channels 18, 18'. If the barge is then
16 unloaded without disconnecting boat 14, the barge will rise in the water and begin to lift
17 the bow of boat 14 out of the water as the draft of barge 10 becomes more shallow.
18 Conversely, if boat 14 connects with barge 10 while barge 10 is empty and barge 10 is
19 then subsequently filled, the draft of barge 10 will increase and barge 10 will sink
20 further down into the water. This could ultimately result in forcing boat 14 down into the
21 water, and could result in sinking boat 14.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 In many types of articulated boat and barge applications, the loading and
2 unloading of barge 10 is not an issue. In these cases, boat 14 approaches and
3 connects with barge 10 when it is already loaded. Boat 14 then pushes barge 10 to the
4 desired location where boat 14 disconnects from barge 10 before it is unloaded. In
5 these types of applications, the respective drafts of boat 14 and barge 10 do not
6 change. However, there are types of applications in which it is desirable to connect
7 boat 14 to an empty barge 10, then move the barge to a point where it can be loaded
8 with a commodity, followed by moving the loaded barge to a different location where
9 the commodity can be unloaded. If this sequence of events were to occur on a river or
10 other relatively calm or protected waterway, it would not be difficult for boat 14 to
11 disconnect from barge 10, wait for the barge to be loaded or unloaded, and the draft of
12 barge 10 to change and stabilize, and then to reconnect boat 14 to barge 10. However,
13 if this connection and reconnection between boat 14 and barge 10 is to take place on
14 the open sea or in rough seas, this sequence of events cannot be effected as boat 14
15 and barge 10 are, generally, incapable of successfully uncoupling and recoupling in
16 seas presenting even slight swells.

17 Therefore, a substantial need exists for a device and method of
18 interconnecting a tug or pusher boat to a barge which permits the draft of the barge to
19 change while allowing the connection between the pusher boat and the barge to
20 compensate for the vertical movement of barge while avoiding any connecting and
21 reconnecting of the boat and barge.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

Summary of the Invention

The present invention comprises a method and device for establishing engagement between a pusher boat and a barge which allows the boat and barge to remain engaged or connected while the position of the receiver is raised or lowered to compensate for changes in the draft of the barge during loading or unloading of the barge.

This is accomplished, generally, through a method of connecting the pusher boat and barge followed by adjusting the location of interconnection between the pusher boat and barge to compensate for changes in the draft of the barge while it is loaded or unloaded. The invention provides a vertically mobile engagement means or receiver device to which a coupling unit of a tug boat or pusher boat can connect. The engagement means or receiver is made vertically mobile by attaching it to a drive means which can vertically raise and lower the receiver or engagement means as needed. The drive means for the receiver can take the form of a screw drive, or a gear drive, or a hydraulic drive, or accomplished by use of a cable. The general object of the invention being to provide an engagement means which can move vertically in response to changes in the draft of the barge.

The foregoing and other objects are not meant in a limiting sense, and will be readily evident upon a study of the following specification and accompanying drawings comprising a part thereof. Other objects and advantages of this invention will

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 become apparent from the following description taken in connection with the
2 accompanying drawings, wherein is set forth by way of illustration and example, an
3 embodiment of this invention.

4 **Description of the Drawings**

5 Preferred embodiments of the invention, illustrative of the best modes in
6 which the applicant has contemplated applying the principles, are set forth in the
7 following description and are shown in the drawings and are particularly and distinctly
8 pointed out and set forth in the appended claims.

9 Fig. 1 shows, generally, a prior art connection in which a tug boat or
10 pusher boat is aligned with a barge having a stern well or notch for receiving the tug;

11 Fig. 2 shows the components in Fig. 1 in final alignment with the tug
12 seated in the barge notch and showing, in phantom lines, the alignment of the tug
13 coupling unit with the barge vertical channels;

14 Fig. 3 is a cross-sectional view of a prior art coupling unit for securing a
15 tugboat to a barge;

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 Fig. 4 shows the cast component or helmet of the coupling unit shown in
2 Fig. 3 and the steel ball on which it is mounted;

3 Fig. 5 is a front-elevational view of the cast component or helmet of Fig. 4;

4 Fig. 6 is a front-elevational view of the mobile receiver or engagement
5 means on the barge for receiving the coupling component of the tug;

6 Fig. 7 is a top-plan view of the receiver shown in Fig. 6;

7 Fig. 8 is a fragmentary cross-sectional view taken along line 8-8 of Fig. 6
8 and showing the arrangement of the teeth on the receiver or engagement means;

9 Fig. 9 is a cross-sectional view taken along line 10-10 of Fig. 11 and
10 showing, in full, a tug or pusher boat seated within the notch of a barge and having the
11 coupling means of the barge extended into the mobile ladder or engagement means of
12 the barge;

13 Fig. 10 is an enlarged view of the indicated area of Fig. 9 and showing the
14 insertion of the tug coupling means into the barge engagement means;

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 Fig. 11 is an enlarged elevational cross-sectional view of the indicated
2 area of Fig. 14 and showing the tug coupling means inserted into the barge
3 engagement means and showing a screw drive of a preferred embodiment for raising
4 and lowering the barge receiver or engagement means;

5 Fig. 12 is an elevational cross-sectional view of a barge equipped with the
6 present invention and showing in solid lines the position of a barge engagement means
7 raised to its uppermost position for use when the barge is fully loaded and also
8 showing in phantom lines a position "B" for the engagement means which could be
9 selected when the barge is partially loaded and the water line is at B prime and also
10 showing in phantom lines a position "C" of the engagement means which would be
11 used when the barge is empty and the water line is at a position represented by C';

12 Fig. 13 is the cross-sectional view of Fig. 12 showing a tug boat with its
13 coupling means inserted into the barge receiver, or engagement means, while the
14 barge is fully loaded;

15 Fig. 14 is the cross-sectional view of Fig. 12 showing a tug boat with its
16 coupling means inserted into the barge engagement means while the barge is fully
17 unloaded;

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 Fig. 15 shows a preferred embodiment in which the engagement means of
2 the tug is raised and lowered by use of a pinion and rack gear arrangement to
3 adjustment in the height of the receiver or engagement means; and

4 Fig. 16 shows a preferred embodiment in which a hydraulic cylinder is
5 used to raise and lower the receiver or engagement means.

6 Description of the Preferred Embodiments

7 The general functioning of the present invention will first be described by
8 reference to Figs. 12, 13 and 14. In Fig. 14 a barge 10 is shown which is fully
9 unloaded and which, therefore, is riding high in the water as represented by waterline
10 C'. This situation of barge 10 riding high in the water may also be described as barge
11 10 having a shallow draft. Referring now to Fig. 13, barge 10 is shown fully loaded and
12 the added weight causes barge 10 to have a substantial portion of its mass below
13 waterline A' and can be said to be "riding low in the water or having a deep draft. A
14 comparison of the amount of barge 10 which is residing above the waterline as
15 between Figs. 13 and 14 will immediately provide an appreciation of the complexity of
16 the problem faced by a tugboat or pusher boat 14 operator which is in connection with
17 barge 10 while the barge is being loaded or unloaded. In the case of an empty barge

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 which is being loaded with material, the barge will first ride high in the water as is
2 shown in Fig. 14 and then as it is loaded it will progressively sink into the water until it
3 reaches a fully loaded position as shown in Fig. 13.

4 In calm water this substantial change in the draft of barge 10 can be
5 compensated for by disengaging tug 14 from barge 10 during the loading or unloading
6 procedure to allow barge 10 to reach a new state of buoyancy according to the new
7 barge load weight followed by reconnecting tugboat 14 to barge 10 once the new draft
8 of barge 10 has become stabilized. Such connection and reconnection between boat
9 14 and barge 10 is limited to situations in which the vessels are located in calm water
10 and rough seas are not compounding the difficulties of connecting boat 14 to barge 10.
11 It will also be appreciated that the reverse situation of that just described is problematic
12 for a tug and barge combined vessel. Specifically, if a boat 14 is attached to a barge
13 10 which is fully loaded as shown in Fig. 13, the boat must disconnect from the barge if
14 the barge is being substantially unloaded. This is because the unloading of barge 10
15 will cause the draft of the barge to change and barge 10 will begin to ride higher in the
16 water as shown in Fig 14. If boat 14 does not disconnect from barge 10 and the
17 connection point between boat 14 and barge 10 is in a fixed location, boat 14 will be
18 pulled up out of the water as barge 10 rises in the water due to unloading. This will
19 result in substantial damage to both boat 14 and barge 10 and the mechanisms
20 connecting the two vessels. Again it will be appreciated that if barge 10 is being
21 loaded and unloaded in calm waters that boat 14 can disengage from barge 10 during

INVENTOR: CLARE J. KUHLMAN

TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 the loading or unloading procedure and reengage once the new level of buoyancy of
2 barge 10 is established. However, this connection and reconnection cannot be
3 accomplished in rough waters as the movement of both vessels caused by the wave
4 action in a rough sea prevents proper alignment of boat 14 with the connection points
5 on barge 10 and presents a situation in which substantial damage to the equipment
6 and substantial danger to the lives and safety of crew members is presented.

7 Presently the loading and unloading of barges, such as those shown in
8 Figs. 13 and 14, on the open sea has become a commercially desirable option for
9 dealing with transport of environmentally dangerous materials. In particular, in the
10 case of petroleum products, it is desirable that an empty barge be coupled to a boat
11 and moved out into the open ocean to the location of an off-shore petroleum products
12 terminal and loaded with a petroleum cargo. Alternatively, a similar situation is found
13 with ocean-going super tankers. In this case it is desirable to move an empty barge
14 into the open ocean or onto one of the Great Lakes and adjacent a larger tanker ship.
15 Once near the tanker the barge can take-on a portion of the larger ships cargo to make
16 the larger ship lighter. It is from this procedure that the term "lightering" is derived.
17 Once the tanker ship has lightened its load and is riding higher in the water, the tanker
18 itself can proceed to port for final unloading.

19 In both of these situations it is necessary that the barge be moved out into
20 rough waters before it is loaded with cargo for its return trip to port. This loading will
21 cause the draft of the barge to change dramatically after pusher boat 14 has become

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 attached to barge 10. Since the loading of barge 10 is taking place on open ocean or
2 rough waters, disconnection and reconnection of boat 14 to barge 10 is dangerous, if
3 not impossible. Thus, it is critical to provide a means by which the draft of barge 10 is
4 allowed to change while boat 14 remains connected to the barge and without boat 14
5 being pushed down into the water and sunk as the draft of barge 10 increases and
6 barge 10 rides lower and lower in the water.

7 The solution, generally, to this problem of compensating for changes in
8 the draft of a barge that is connected to a pusher boat or tug boat is shown in Fig. 12.
9 In the case in which barge 10 is fully unloaded it will ride very high in the water and the
10 waterline in such a case would be represented by phantom line C'. In this situation a
11 tugboat or pusher boat 14 (Fig. 1) as it approached barge 10 and entered barge notch
12 12 (Fig. 1) would present its coupling unit to barge 10 at a height generally
13 corresponding to Position C. Therefore, for boat 14 to couple with barge 10 it is
14 necessary that the means for engagement of the coupling unit 16 of tug 14 be at a
15 height corresponding to Position C. This is accomplished by raising or lowering
16 receiver or repositionable engagement means (REM) 50 through the rotation of vertical
17 screw drive 62 to which REM 50 is connected. Vertical screw drive 62 allows up-and-
18 down movement of REM 50 within REM containment shaft 64.

19 Alternative situations are illustrated in Fig. 12, by way of example, of the
20 case in which barge 10 is fully loaded and the draft has substantially increased thereby
21 placing the waterline on barge 10 at A'. REM 50 will be repositioned through the use of

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 vertical screw drive 62 to place REM 50 at location A. This location is at the upward
2 extent of REM containment shaft 64. In this instance REM 50 is positioned to provide
3 the same distance above the waterline A' as was achieved in the previous example in
4 which REM 50 was placed at Arrow C to provide proper distance above waterline C'. In
5 this manner tug 14 (Fig. 1) can approach and connect to barge 10 at whatever draft is
6 presented by barge 10. Further, the connection can be achieved without tug 14
7 needing to make adjustments in its ballast to allow tug 14 to ride higher or lower in the
8 water.

9 Another example of the repositionability of REM 50 is presented in Fig. 12
10 and which may be considered as the half-way position for a barge 10 which is only
11 partially loaded. In this case the draft of partially loaded barge 10 would place the
12 waterline at B' whereupon vertical screw drive 62 would be operated in order to place
13 REM 50 into position B.

14 Another example illustrated by Fig. 12 is the situation in which tug 14 (Fig.
15 1) is continuously interconnected with barge 10 during the loading of barge 10. In this
16 instance barge 10 would be completely unloaded and would be floating high in the
17 water with the waterline represented at C'. As can be seen in Fig. 12 nearly all of
18 barge 10 is above waterline C' in this empty state. In the procedure known as
19 "lightering" this situation would be represented at the start of a tug and barge voyage
20 where the tug is connected to an empty barge at a port. The tug would connect to the
21 barge by approaching the barge and lowering REM 50 into position C to allow the tug

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 or pusher boat 14 (Fig. 1) to connect securely to barge 10. With the boat connected to
2 barge 10, the coupled or articulated tug and barge unit would proceed to sea and dock
3 with an ocean terminal or a sea-anchored ocean tanker vessel. At this point the
4 process of lightering can proceed.

5 In the case of an ocean tanker, part of the tanker's cargo or petroleum is
6 off-loaded onto barge 10. As barge 10 receives the load from the tanker, it begins to
7 increase its draft -- or sink down in the water -- and as the barge moves lower into the
8 water, it becomes necessary to change the position of REM 50 in order to maintain
9 barge 10 and tug 14 in a safe relationship and to avoid sinking tug 14 by the increasing
10 draft of barge 10. To maintain this safe relationship, REM 50 is gradually moved from
11 position C into position B and finally into position A when barge 10 is fully loaded. In
12 this procedure tug 14 is able to remain in safe connection with barge 10 during the
13 loading process. A comparison of this inventive adjustable connection with the
14 connection between the vessels shown in Fig. 1 indicates the great benefits derived
15 from the present invention. If the tug and barge combination of FIG. 1 were subjected
16 to this lightering procedure, without disconnecting and reconnecting tug 14 to barge 10,
17 the increasing draft of barge 10 drive tug 14 underwater. The alternative, while out at
18 sea or in rough waters, would be for tug 14 to disconnect from barge 10 by retracting
19 coupling units 16, 16' from vertical channels 18, 18' and await barge 10 to
20 reestablished it draft in the water after being fully loaded. It would then be necessary
21 for tug 14 to attempt to reconnect to barge 10 by following the procedure of Figs. 1 and

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 2 by extending coupler unit 16, 16' into vertical channels 18, 18' to re-secure tug 14
2 with barge 10. This procedure is virtually impossible, and certainly dangerous, to
3 perform at sea or in any waters have any significant degree of wave action. This
4 disconnect and reconnect procedure is certainly dangerous in unprotected off-shore
5 waters such as would be experienced at an off-shore terminal or near a sea anchored
6 tanker ship.

7 It will now be useful to describe in detail the preferred embodiments which
8 particularly specify the manner in which the receiver or engagement means
9 incorporated on a barge is raised and lowered to accommodate connection with a tug
10 boat when the draft of the barge is changing. Referring now to Fig. 6 and 7, the
11 construction of one preferred embodiment of receiver or repositionable engagement
12 means (REM) 50 is shown. In Fig. 6 a front elevational view of REM 50 is shown. REM
13 of Fig. 6 is complimentary in shape to the fixed, toothed-ladder positioned in vertical
14 channels 18, 18' (Fig. 1) of the prior art. This similarity extends only to the use of teeth
15 58 on the fore and aft sides REM 50 to allow that connection to be made with a
16 particular type of coupling unit 16. In particular, this coupling unit is described in U.S.
17 Patent No. 4,688,507 to Kuhlman et al, and which is incorporated herein by reference.
18 It will be appreciated by those skilled in the art that alternative features maybe
19 substituted for teeth 58 of Fig. 6.

20 One such alternative construction can be observed in Figs. 3 and 4 of
21 U.S. Patent No. 5,050,522 to Yamaguchi et al. which also is incorporated herein by

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 reference. In Yamaguchi Figs. 3 and 4 a single tooth design is shown having the teeth
2 extending from the area corresponding to back wall 52 shown in Fig. 6 of the present
3 invention. Teeth 58 of REM 50 of the present invention would be eliminated in this
4 alternative. Such a variation in construction of REM 50 could be made to allow REM
5 50 to be used with a coupling unit having a configuration as described in U.S. Patent
6 No. 5,050,522 to Yamaguchi et al.

7 Another alternative shape for use in REM 50 is shown in U.S. Patent No.
8 5,050,522 to Yamaguchi et al at Fig. 4 wherein a slotted engagement means
9 incorporating securing pins 21, 22 might be substituted for teeth 58 of the present
10 embodiment to allow the present invention of be utilized with this alternative form of
11 coupling unit where it is already installed in a tug boat or pusher boat. It will be
12 appreciated that the shape or design of the coupler helmet and the surface of the REM
13 need to correspond to achieve engagement between a boat coupling unit 16, 16' (Fig.
14 1) and the repositionable engagement means of the present invention. Therefore,
15 variations in the shape of the interior surface of REM 50 are contemplated as being
16 well within the scope of the present invention and are mere design choices to be
17 interchanged as needed.

18 Referring again to Fig. 6 the embodiment of the present invention
19 illustrating the use of teeth 58 for capturing a coupling unit will be further described. As
20 shown in Fig. 6 repositionable engagement means REM 50 is a unit which is on the
21 order of 6 to 8 feet in height and having teeth 58 on the fore and aft sides of REM 50 to

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 receive teeth 48 of cast component or helmet 30 (Fig. 5). A comparison of a cross-
2 sectional view of teeth 58 of Fig. 8 with teeth 48 shown on either side of helmet 30 will
3 provide an appreciation of the close interlocking fit which occurs between teeth 58 of
4 REM 50 of Fig. 6 and teeth 48 on either side of helmet 30. The close fitting
5 engagement between these teeth provides a secure connection between the pusher
6 boat 14 and barge 10.

7 Referring now to Fig. 7 it will be further appreciated that teeth 58 are
8 angled inwardly toward back wall 52 of REM 50. This, generally, "V-shaped"
9 configuration of REM 50 provides a close mechanical fit between REM 50 and helmet
10 30 (Fig. 5) as helmet 30 is extended from tug 14 (Fig. 1) to connect with REM 50. The
11 close and secure mechanical fit which is derived from this arrangement can be better
12 appreciated in Fig. 9 in which a cross-sectional view of a joined tug 14 and barge 10 is
13 shown. When tug 14 is positioned within notch 12 of barge 10 that coupling units 16,
14 16' on the port and starboard of tug 14 can be extended into REMs 50 on the port and
15 starboard walls of notch 12 and pressed into the "V-shaped" opening 66 (Fig. 7)
16 presented by REM 50 to provide a secure fit and capture of barge 10 by tug 14.

17 Still referring to Fig. 7, REM body 51 has a central void through which
18 screw drive 62 passes. This relationship is also shown in vertical cross-sectional view
19 in Fig. 11. Body 51 is able to ride up and down on screw drive 62 to position REM 50
20 as required. Attached to sidewalls 54, 56 are non-sparking load facing 60. During
21 repositioning of REM 50 movement of body 51 adjacent barge load plate 78 (Fig. 11)

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 could produce sparks. To avoid this dangerous situation, sidewalls 54, 56 are provided
2 with a non-sparking facing or surface such as bronze.

3 This procedure of capturing barge 10 by tug 14 would occur most often
4 when barge 10 was empty and having a shallow draft. This initial capture of an empty
5 barge is shown in Fig. 14 in which barge 10 is unloaded and riding high in the water
6 with tug 14 connecting to REM 50 which has been positioned near waterline C' so REM
7 50 is aligned with coupling unit 16, 16' of tug 14 for receiving helmet 30 of coupling unit
8 16, 16'. Once this connection has been completed with the present invention, it will be
9 possible for barge 10 to then be fully loaded with a substance and sink down into the
10 water while allowing the point of connection between tug 14 and barge 10 to be
11 changed in its vertical position without disconnecting tug 14 from barge 10. This final
12 result is shown in Fig. 13 where REM 50 has been moved vertically through the use of
13 vertical screw drive 62 to ultimately position REM 50 near the top of vertical screw drive
14 62 once barge 10 has become fully loaded.

15 Reference is now made to Fig. 11 which is an enlarged view of the cross-
16 sectional area indicated in Fig. 14. In Fig. 11 coupling unit 16 is shown inserted into
17 REM 50 so teeth 48 (not shown) of helmet 30 engage with teeth 58 of REM 50. As
18 shown in Fig. 11, REM 50 and vertical drive screw 62 are connected and contained
19 within vertical drive containment 64. Vertical drive containment 64 is a vertical open
20 shaft on the inboard port and starboard sides of notch 12 (Fig. 9) and which is
21 designed to permit REM 50 to move upwardly and downwardly on the vertical drive

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 means which is selected for use with REM 50. As will be described hereinafter, vertical
2 drive means can be a screw drive, or a gear drive, or a hydraulic drive, or cables may
3 be used to hoist REM 50 up and down. Referring again to Fig. 11, additional
4 containment and load bearing for the operation of REM 50 is provided by load plate 78
5 which is closely spaced to REM 50 and which is equipped with a non-sparking load
6 facing 60 (Fig. 10) which contacts a second non-sparking load facing 60 (Fig. 10)
7 attached to REM 50. (Fig. 10).

8 Referring now to Fig. 10, it will be appreciated that as coupling unit 16 is
9 inserted into REM 50, pressure is exerted against REM 50 which tends to force REM
10 50 outwardly and away from tug 14 as it is seated in notch 12. It is desirable and
11 important that the pressure exerted by coupling unit 16, 16' not interfere with the
12 operation of the vertical drive means, in this case vertical screw drive 62. Such
13 interference is avoided by the close spacing of load plate 78 to either side of REM 50.
14 In operation, as coupling unit 16, 16' advances into REM 50, both coupling unit helmet
15 30 and REM 50 are forced outwardly in the direction of Arrow F. This outward force is
16 then received by load plate 78 which serves to resist the outward force prior to the
17 outward force affecting the operation of the vertical drive means, in this case in
18 particular, vertical screw drive 62. Once coupling unit 16 has advanced sufficiently to
19 securely couple with REM 50, movement of coupling unit 16, 16' (Fig. 9) is terminated
20 and it is locked into position for the voyage. Removal of coupling unit 16, 16' from REM
21 50 is a reverse of the above-described operation. The operator of tugboat 14 reverses

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 the direction of the drive used to advance and retract coupling unit 16, 16' and helmet
2 30 is pulled into tug 14. During the disengagement procedure, REM 50 is held into
3 place by retainer plate 72 on either side of REM 50 which is attached to barge 10 by
4 retainer bolt 74.

5 Referring again to Fig. 11, REM 50 is mounted on vertical screw drive 62
6 which passes through the rear half of REM 50. As seen in the cross-sectional view of
7 Fig. 11, REM 50 rides up and down on vertical screw drive 62 by the reception of screw
8 drive 62 into vertical control nut 76 which is contained within REM 50. In this manner
9 as screw drive 62 is rotated in a counter clockwise direction, REM 50 will travel
10 downwardly, and when screw drive 62 is rotated in a clockwise direction, REM 50 will
11 be raised vertically. In order to maintain vertical control nut 76 in centered alignment
12 with vertical screw drive 62, spherical alignment washers 80 are positioned at the top
13 and bottom of control nut 76.

14 Referring now to Fig. 13, vertical screw drive 62 is shown mounted in
15 vertical drive containment 64 with REM 50 raised to the top-most extent of the screw
16 drive 62 shaft. When it is desired to change the height of REM 50 with respect to its
17 position on barge 10, a crew member on tug 14 activates one of two motor drives to
18 rotate vertical screw drive 62 in the direction selected. In Fig. 13, 84 is a low-speed
19 motor which will rotate vertical screw drive 62 to raise or lower REM 50 at
20 approximately six inches per minute, and high-speed motor 86 will rotate vertical screw
21 drive 62 to raise or lower REM 50 at an approximate speed of 12 inches per minute. It

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 will be appreciated that, alternatively, a single multiple-speed drive motor could be
2 substituted for the use of a high-speed and a low-speed motor as shown in Fig. 13.
3 Upon activation of either motor 84 or motor 86, the force generated by the motor travels
4 through a gear train to reach gear 88 which is attached to, and rotates, screw drive 62.
5 The signaling by the crew member of tug 14 to activate REM 50 is accomplished by use
6 of an umbilical cord 90 which communicates operations signals and operational power
7 for motors 84, 84 from tug 14 across to barge 10. In this manner, dependable hard-
8 wire communication is accomplished between tug 14 and motors 84, 86. Once the
9 rotation of vertical screw drive 62 has moved REM 50 to the desired location, a brake
10 apparatus (not shown) attached to the drive train of motors 84, 86 is activated to stop
11 the rotation of vertical screw drive 62 and to maintain REM 50 in the selected location.
12 A wide variety of different types of brakes can be applied to the present invention. The
13 particular form of the brake can be selected by the user. By way of example, and not
14 limitation, a disc brake could be connected into the drive train or a shoe-type brake
15 design could be applied against the screw drive of the preferred embodiment of Fig. 13.

16 The control of the operation of screw drive 62 is accomplished by the use
17 of two measuring devices. The first, a load cell or strain gauge, allows determination of
18 the vertical forces on screw drive 62. The second device, an encoder on the gear train,
19 determines the quantity, and direction and speed of rotation of screw drive 62. The
20 load cell is mounted in housing 82 at the upper-most end of screw drive 62. As the
21 draft of barge 10 changes, the barge moves up or down in the water. This generates a

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 commensurate upward or downward pressure on REM 50 from tug 14 being pushed
2 down into the water due to the increasing weight of the loading barge, or by tug 14
3 being lifted up out of the water as barge 10 becomes lighter during unloading. This
4 received force is communicated by REM 50 to screw drive 62, and, in turn, to the load
5 cell in housing 82 where the pressure is measured. The pressure against the load cell
6 is communicated to tug 14 to allow the pilot to determine if the position of REM 50
7 should be raised or lowered to reduce the upward or downward force on screw drive
8 62.

9 The control of the amount of rotation, and the direction and speed of
10 rotation of screw drive 62 is tracked by use of an encoder which is coupled to the upper
11 end of the gear train which connects motor 44, 46 to screw drive 62. The encoder
12 operates to determine, or count, the number of rotations of one of the rotating shafts of
13 the gear train. This then permits the computing of the direction of rotation of screw
14 drive 62 and the total upward or downward distance traveled by REM 50. The encoder
15 reading can be set to zero by the pilot to permit determinations of relative distance of
16 movement by tug 14 from a starting point. In addition, by tracking the rotations over
17 time the encoder permits determinations of revolutions-per-minute of screw drive 62.

18 Referring now to Figs. 15 and 16, two other preferred embodiments of the
19 present invention are shown. In Fig. 15, an embodiment is shown utilizing a rack-and-
20 pinion gear system to raise and lower REM 50. In operation of the embodiment of Fig.
21 15, the tug operator transfers a signal through umbilical 90 to pennant 96 which

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 activates either low-speed motor 104 or high-speed motor 106 which rotates pinion 102
2 in the selected direction. The rotation of pinion 102 will move rack 100 either upwardly
3 or downwardly as is required to reposition REM 50 at the desired location.

4 Referring now to Fig. 16, a preferred embodiment is shown in which the
5 vertical drive means is a hydraulic cylinder. In the embodiment of Fig. 16, the rack-
6 and-pinion vertical drive means of Fig. 16 has been replaced by a hydraulic cylinder
7 109. In operation of this embodiment, a hydraulic ram 112 is attached to REM 50 and
8 in response to commands from tugboat 14 along umbilical 90 to pennant 92 hydraulic
9 ram 112 is retracted or extended from hydraulic cylinder 110 in order to raise and lower
10 REM 50 to the desired position with respect to barge 10.

11 A further preferred embodiment for the vertical drive means or vertical
12 repositioning means is the cable or hoist embodiment. In this embodiment REM 50 is
13 moved from vertical position to vertical position by the use of a cable which is attached
14 to REM 50. The cable can be attached to a device as simple as a capstan to
15 accomplish lengthening or shortening of the cable to place REM 50 in the desired
16 vertical. In practical application, however, a wench drive would be used to raise or
17 lower REM 50 as required.

18 In the foregoing description, certain terms have been used for brevity,
19 clearness and understanding but no unnecessary limitations are to be implied
20 therefrom beyond the requirements of the prior art, because such terms are used for
21 descriptive purposes and are intended to be broadly construed. Moreover, the

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 description and illustration of the inventions is by way of example, and the scope of the
2 inventions is not limited to the exact details shown or described.

3 Certain changes may be made in embodying the above invention, and in
4 the construction thereof, without departing from the spirit and scope of the invention. It
5 is intended that all matter contained in the above description and shown in the
6 accompanying drawings shall be interpreted as illustrative and not meant in a limiting
7 sense.

8 Having now described the features, discoveries and principles of the
9 invention, the manner in which the improved repositionable engaged means is
10 constructed and used, the characteristics of the construction, and advantageous, new
11 and useful results obtained; the new and useful structures, devices, elements,
12 arrangements, parts and combinations, are set forth in the appended claims.

13 It is also to be understood that the following claims are intended to cover
14 all of the generic and specific features of the invention herein described, and all
15 statements of the scope of the invention which, as a matter of language, might be said
16 to fall therebetween. Particularly, it is to be understood that in the claims, ingredients or
17 compounds recited are intended to include compatible mixtures of such ingredients.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

CLAIMS

Having thus described the invention what is claimed as new and desired to be secured by Letters Patent is as follows:

1. An apparatus for joining a barge with a pusher boat-mounted coupler comprising:
a receiver mounted on the barge, said receiver being adapted for connection with the pusher boat coupler, and
means for vertically repositioning said receiver to vary the vertical location of said receiver on the barge in response to changes in the draft of the barge.

2. The apparatus as claimed in Claim 1 wherein said means for vertically repositioning said receiver is a hydraulic piston attached to said receiver to raise and lower said receiver.

3. The apparatus as claimed in Claim 1 wherein said means for vertically repositioning said receiver is a cable attached to said receiver to raise and lower said receiver.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 4. The apparatus as claimed in Claim 1 wherein said means for vertically
2 repositioning said receiver is a gear drive attached to said receiver to raise and lower
3 said receiver.

4 5. The apparatus as claimed in Claim 1 wherein said means for vertically
5 repositioning said receiver is a screw drive attached to said receiver to raise and lower
6 said receiver.

7 6. The apparatus as claimed in Claim 3,4 or 5 further comprising a brake for
8 stopping said repositioning means upon said receiver reaching a desired vertical
9 position.

10 7. The apparatus as claimed in Claim 1 further comprising a guide to support said
11 receiver and to direct the vertical repositioning of said receiver.

12 8. The apparatus as claimed in Claim 1 further comprising at least one load
13 bearing plate for resisting the force of the coupling unit during engagement of the
14 coupling unit with said receiver.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 9. The apparatus as claimed in Claim 1 further comprising at least one non-
2 sparking facing plate for spacing said receiver from adjacent surfaces for reducing
3 spark generation as said receiver is repositioned.

4 10. An apparatus to maintain a joined relationship between a barge and a coupling
5 unit of a pusher boat during changes in the draft of the barge comprising:
6 a vertically repositionable receiver mounted on a guide on the barge, said
7 receiver being adapted for engagement with the pusher boat coupling unit
8 to form the joined relationship between the barge and the pusher boat,
9 means for adjusting the vertical position of said receiver with respect to the
10 barge in response to the draft of the barge changing from a first draft
11 position to a second draft position.

12 11. The apparatus as claimed in Claim 10 further comprising at least one non-
13 sparking facing plate to space said receiver from said guide to reduce spark generation
14 as said receiver is moved during repositioning.

15 12. The apparatus as claimed in Claim 10 wherein said means for adjusting the
16 vertical position of said receiver is a hydraulic piston attached to said receiver to raise
17 and lower said receiver.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 13. The apparatus as claimed in Claim 10 wherein said means for adjusting the
2 vertical position of said receiver is a cable attached to said receiver to raise and lower
3 said receiver.

4 14. The apparatus as claimed in Claim 10 wherein said means for adjusting the
5 vertical position of said receiver is a gear drive attached to said receiver to raise and
6 lower said receiver.

7 15. The apparatus as claimed in Claim 10 wherein said means for adjusting the
8 vertical position of said receiver is a screw drive attached to said receiver to raise and
9 lower said receiver.

10 16. The apparatus as claimed in Claim 13,14 or 15 further comprising a brake for
11 stopping said repositioning means upon said receiver reaching a desired vertical
12 position.

13 17. The apparatus as claimed in Claim 10 further comprising at least one load
14 bearing plate for resisting the force of the coupling unit during engagement of the
15 coupling unit with said receiver.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 18. A method of adjusting for changes in the draft of a barge by a pusher boat joined
2 to the barge with a pusher boat-mounted coupling unit the method comprising the steps
3 of:

4 connecting the pusher boat coupling unit to a barge-mounted vertically
5 repositionable receiver when the barge is at a first barge draft position,
6 and

7 operating a means for vertically repositioning said barge-mounted receiver to
8 reposition said receiver in response to the barge changing from said first
9 barge draft position to a second barge draft position such that a safe
10 pusher boat draft is at all times provided.

11 19. The apparatus as claimed in Claim 18 wherein said means for vertically
12 repositioning said receiver is a hydraulic piston attached to said receiver to raise and
13 lower said receiver.

14 20. The apparatus as claimed in Claim 18 wherein said means for vertically
15 repositioning said receiver is a cable attached to said receiver to raise and lower said
16 receiver.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

- 1 21. The apparatus as claimed in Claim 18 wherein said means for vertically
2 repositioning said receiver is a gear drive attached to said receiver to raise and lower
3 said receiver.
- 4 22. The apparatus as claimed in Claim 18 wherein said means for vertically
5 repositioning said receiver is a screw drive attached to said receiver to raise and lower
6 said receiver.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 23. A method of retaining connection between a barge and a coupling unit of a
2 pusher boat while compensating for changes in the draft of the barge, the method
3 comprising the steps of:

4 providing a receiver on the barge, said receiver being adapted to join with the
5 coupling unit of the pusher boat, and said receiver further being capable
6 of being repositioned vertically with respect to said barge,

7 connecting to said receiver a means for vertically repositioning said receiver,
8 joining the pusher boat coupling unit with said barge receiver at a first receiver
9 position while the barge is at a first barge draft position, and

10 moving said receiver from said first receiver position to a second receiver
11 position by operation of said means for vertically repositioning said
12 receiver to change the vertical position, with respect to the barge, of said
13 receiver and the joined coupling unit in response the barge draft changing
14 from said first barge draft position to a second barge draft position.

15 24. The apparatus as claimed in Claim 23 wherein said means for vertically
16 repositioning said receiver is a hydraulic piston attached to said receiver to raise and
17 lower said receiver.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 25. The apparatus as claimed in Claim 23 wherein said means for vertically
2 repositioning said receiver is a cable attached to said receiver to raise and lower said
3 receiver.

4 26. The apparatus as claimed in Claim 23 wherein said means for vertically
5 repositioning said receiver is a gear drive attached to said receiver to raise and lower
6 said receiver.

7 27. The apparatus as claimed in Claim 23 wherein said means for vertically
8 repositioning said receiver is a screw drive attached to said receiver to raise and lower
9 said receiver.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

1 28. A method of maintaining interconnection between a barge and a coupling unit of
2 a pusher boat while compensating for changes in the draft of the barge during loading
3 or unloading of the barge comprising the steps of:

4 joining the pusher boat to a receiver on the barge, said receiver being at a first
5 receiver position, to provide interconnection between the pusher boat and
6 the barge

7 modifying the load of the barge such that a change in the draft of the barge
8 results,

9 operating a means for vertically repositioning said receiver to move said receiver
10 from said first receiver position to a second receiver position to maintain
11 an operable pusher boat draft while allowing the barge draft to change in
12 response to said step of modifying the load of the barge.

13 29. The apparatus as claimed in Claim 28 wherein said means for vertically
14 repositioning said receiver is a hydraulic piston attached to said receiver to raise and
15 lower said receiver.

16 30. The apparatus as claimed in Claim 28 wherein said means for vertically
17 repositioning said receiver is a cable attached to said receiver to raise and lower said
18 receiver.

INVENTOR: CLARE J. KUHLMAN
TITLE: ARTICULATED TUG AND BARGE MOBILE LIGHTERING CONNECTION

- 1 31. The apparatus as claimed in Claim 28 wherein said means for vertically
2 repositioning said receiver is a gear drive attached to said receiver to raise and lower
3 said receiver.
- 4 32. The apparatus as claimed in Claim 28 wherein said means for vertically
5 repositioning said receiver is a screw drive attached to said receiver to raise and lower
6 said receiver.

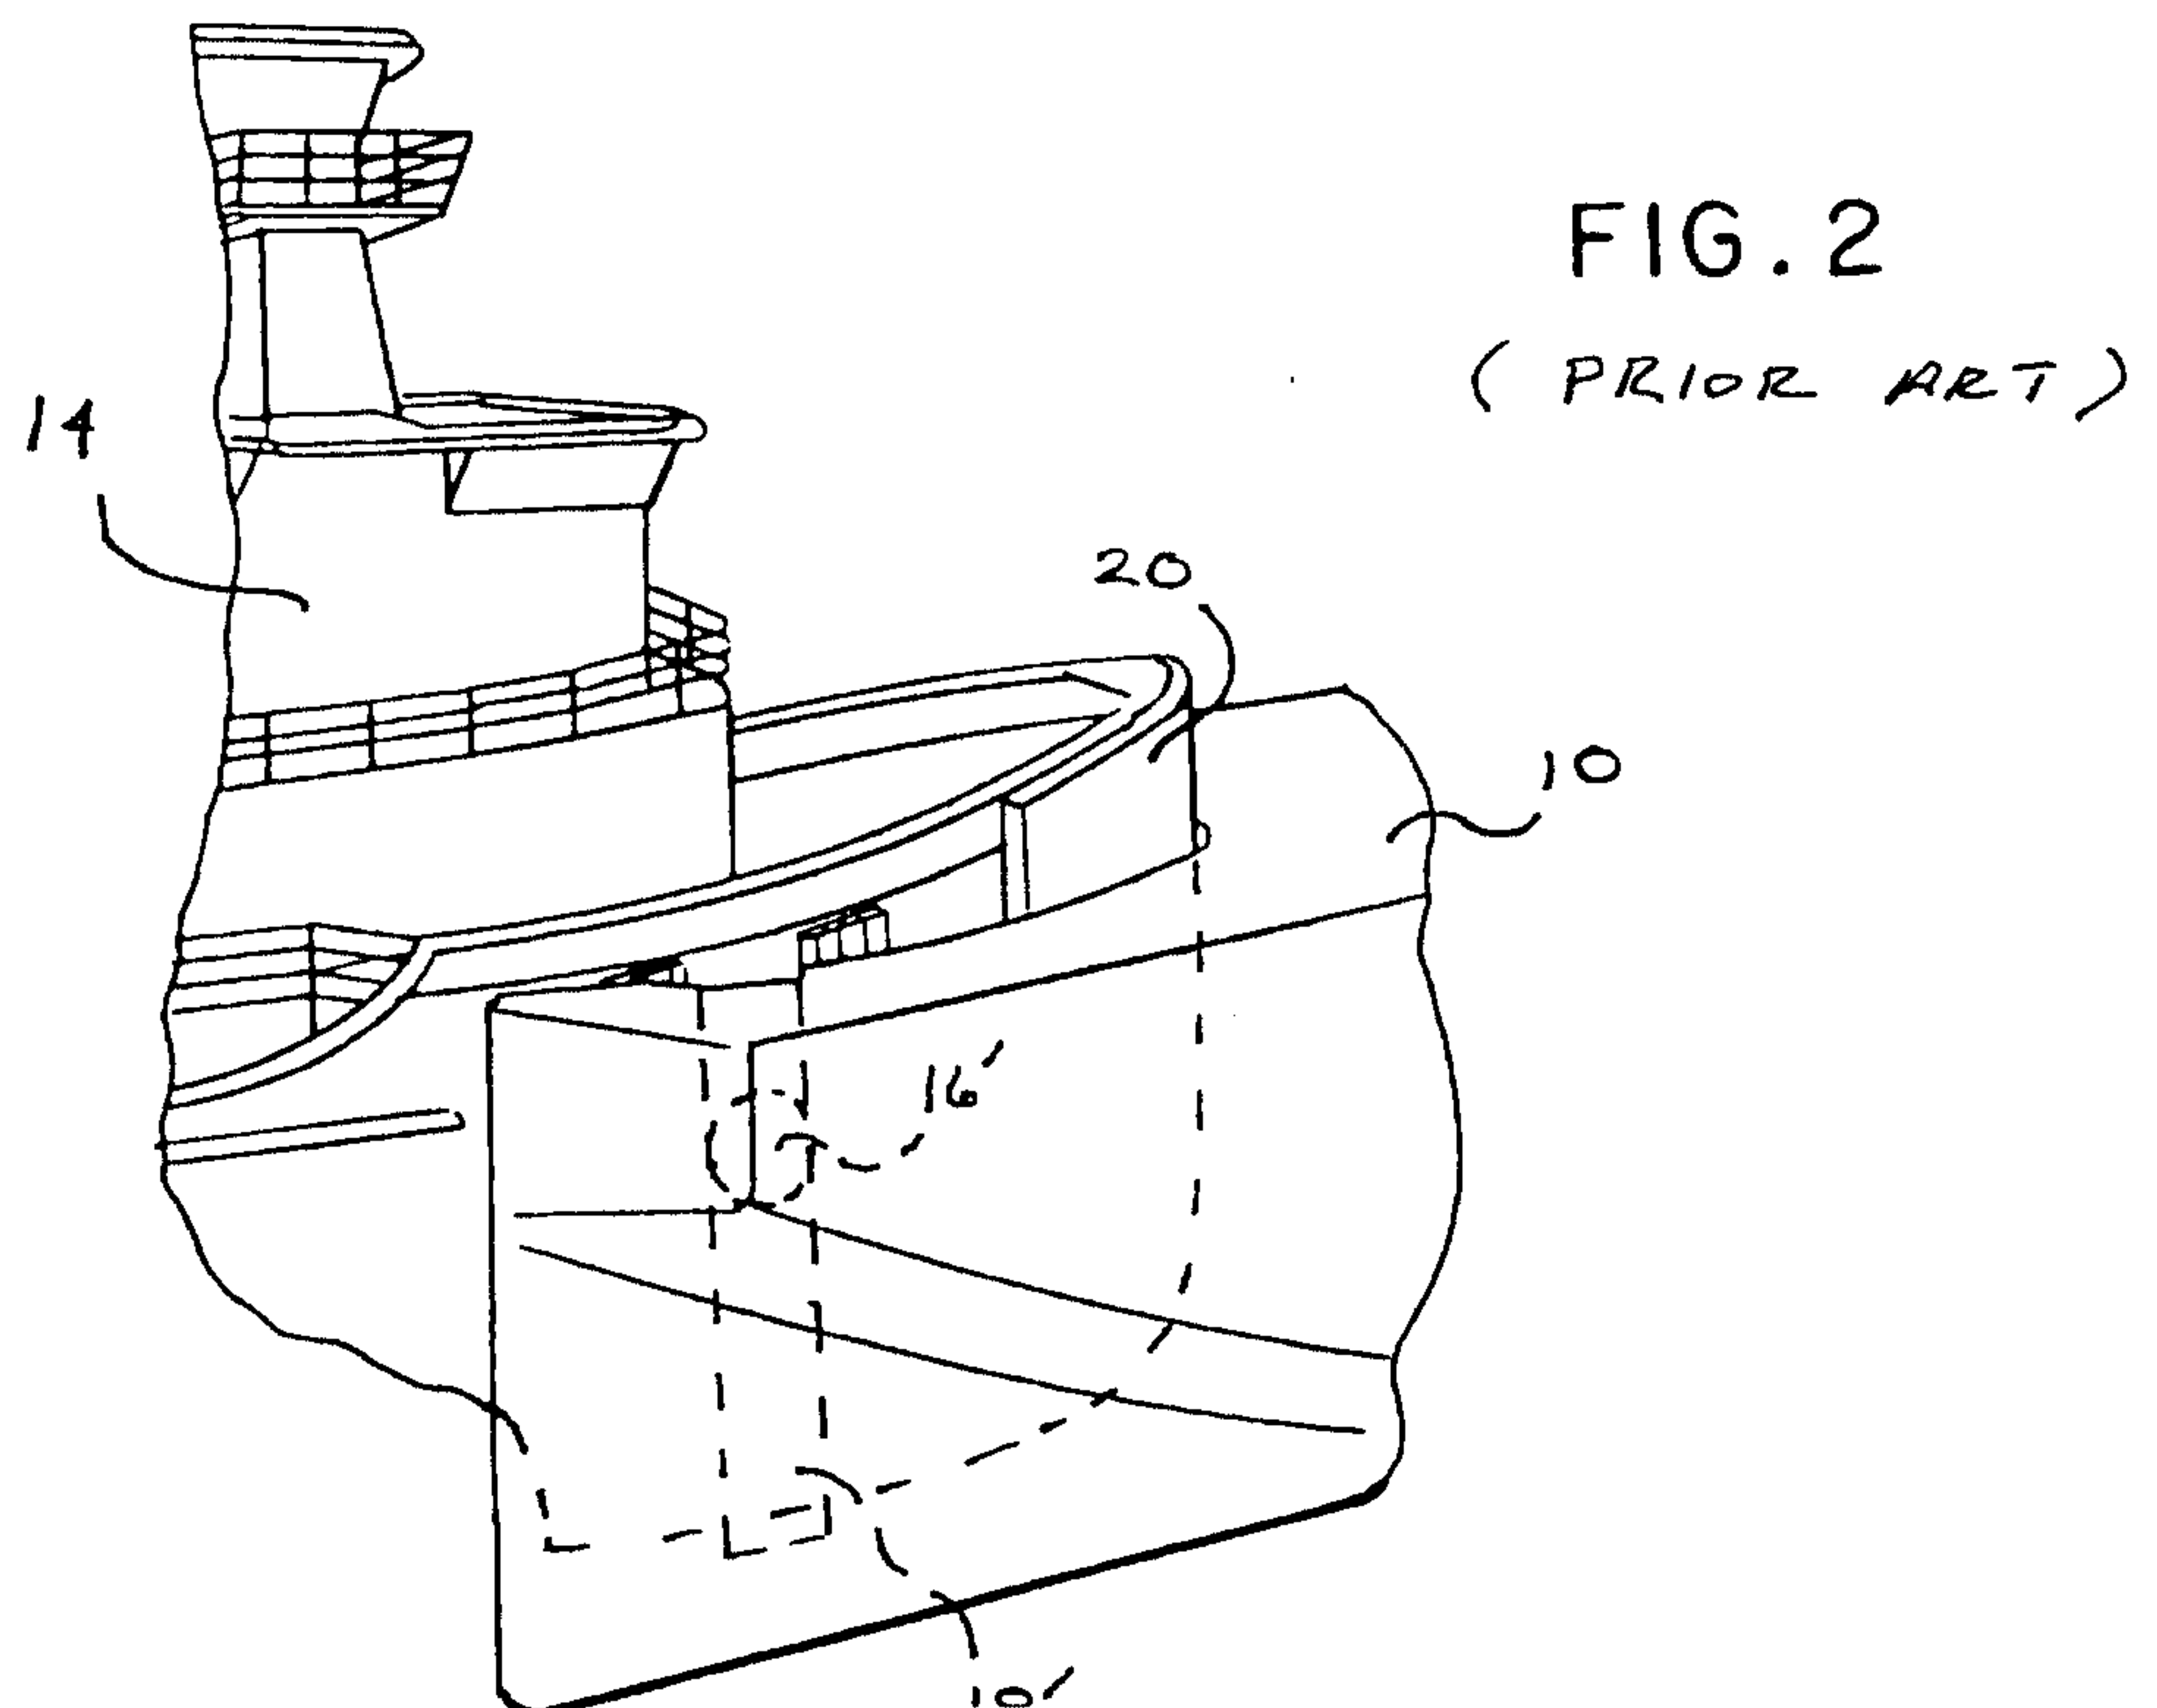
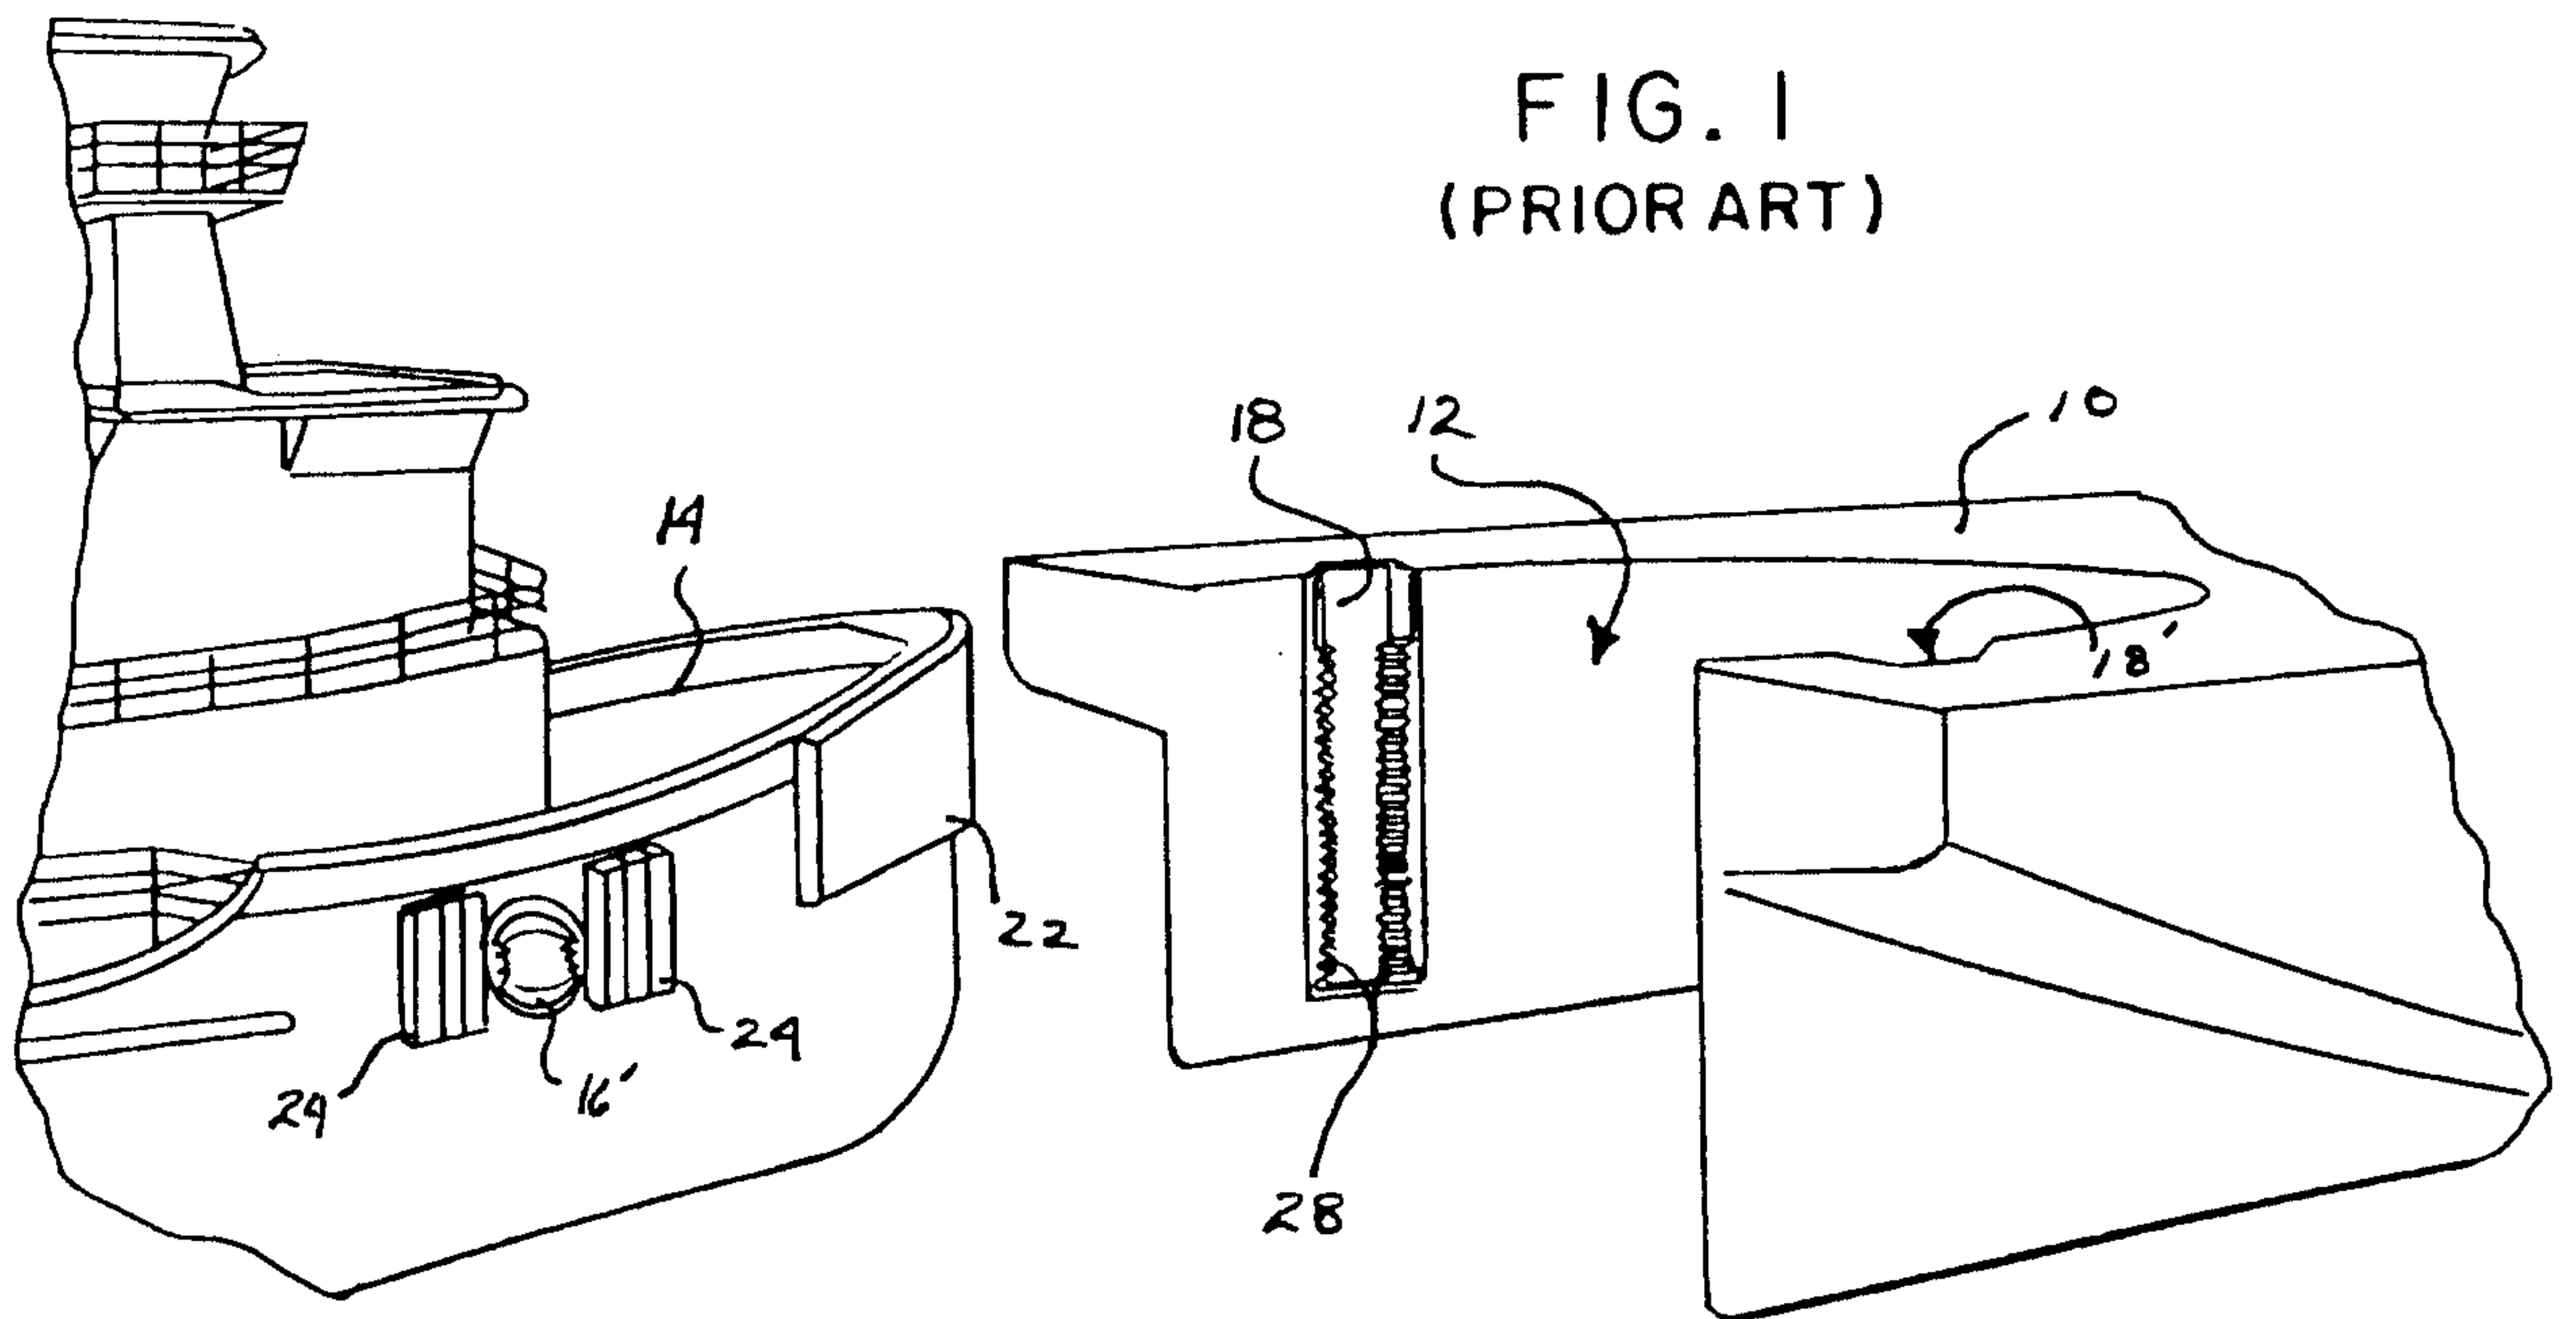


FIG. 3
(PRIOR ART)

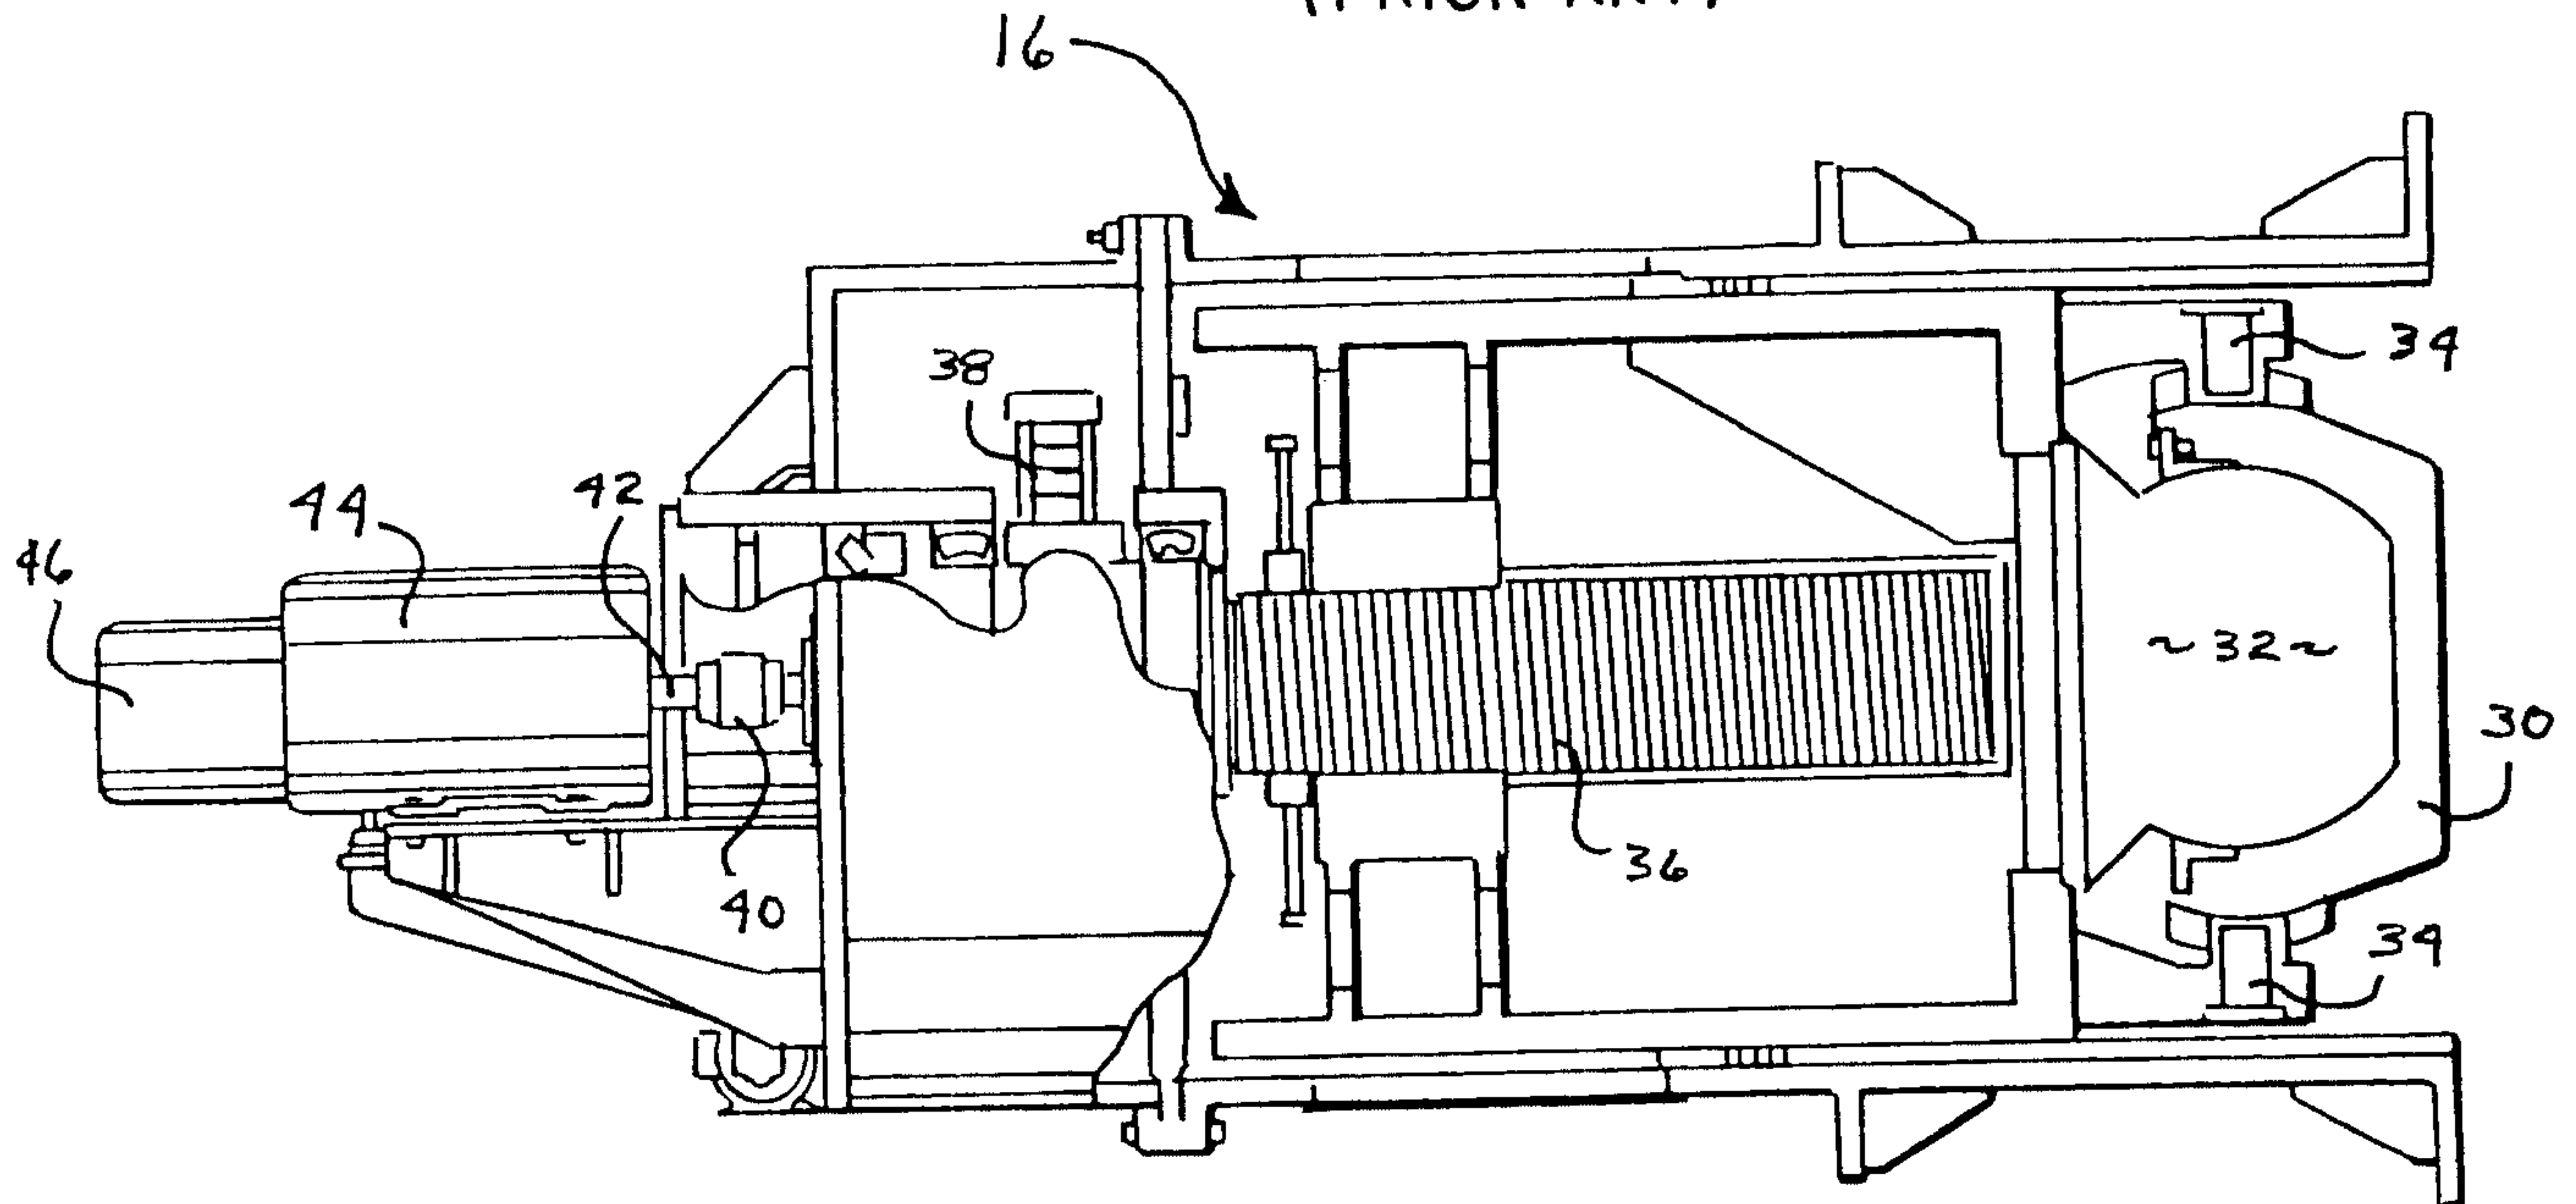


FIG. 4
(PRIOR ART)

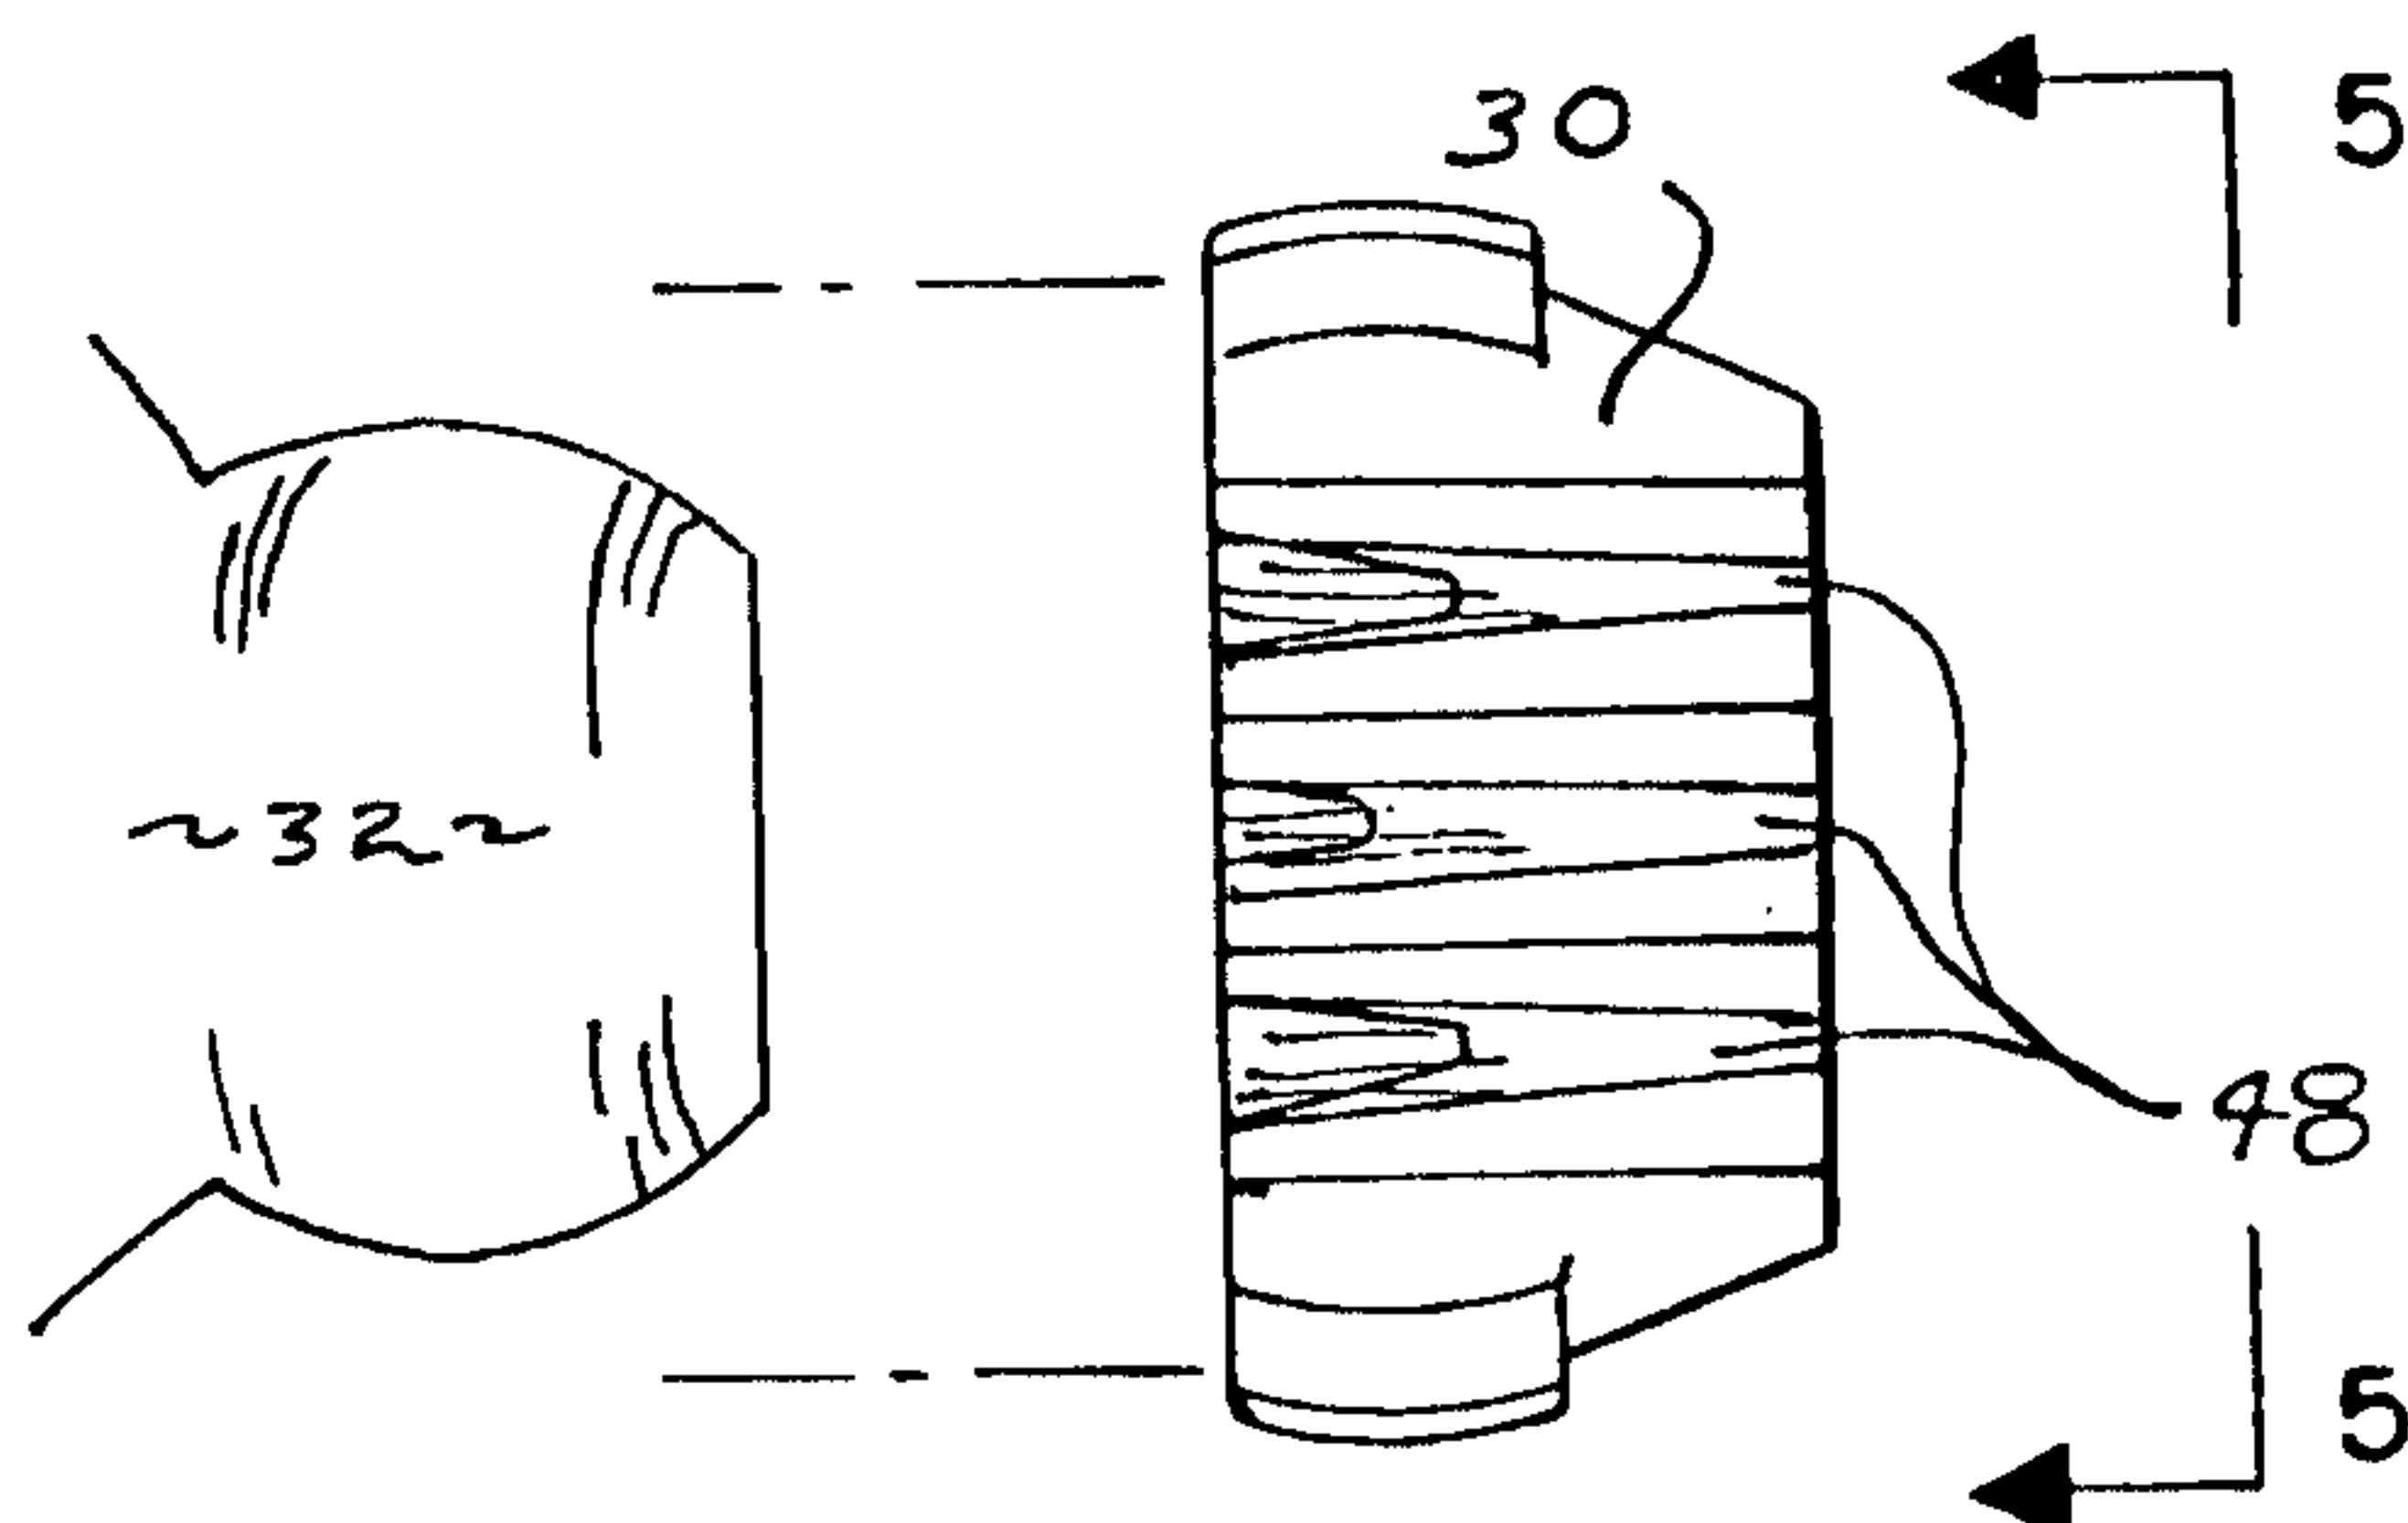
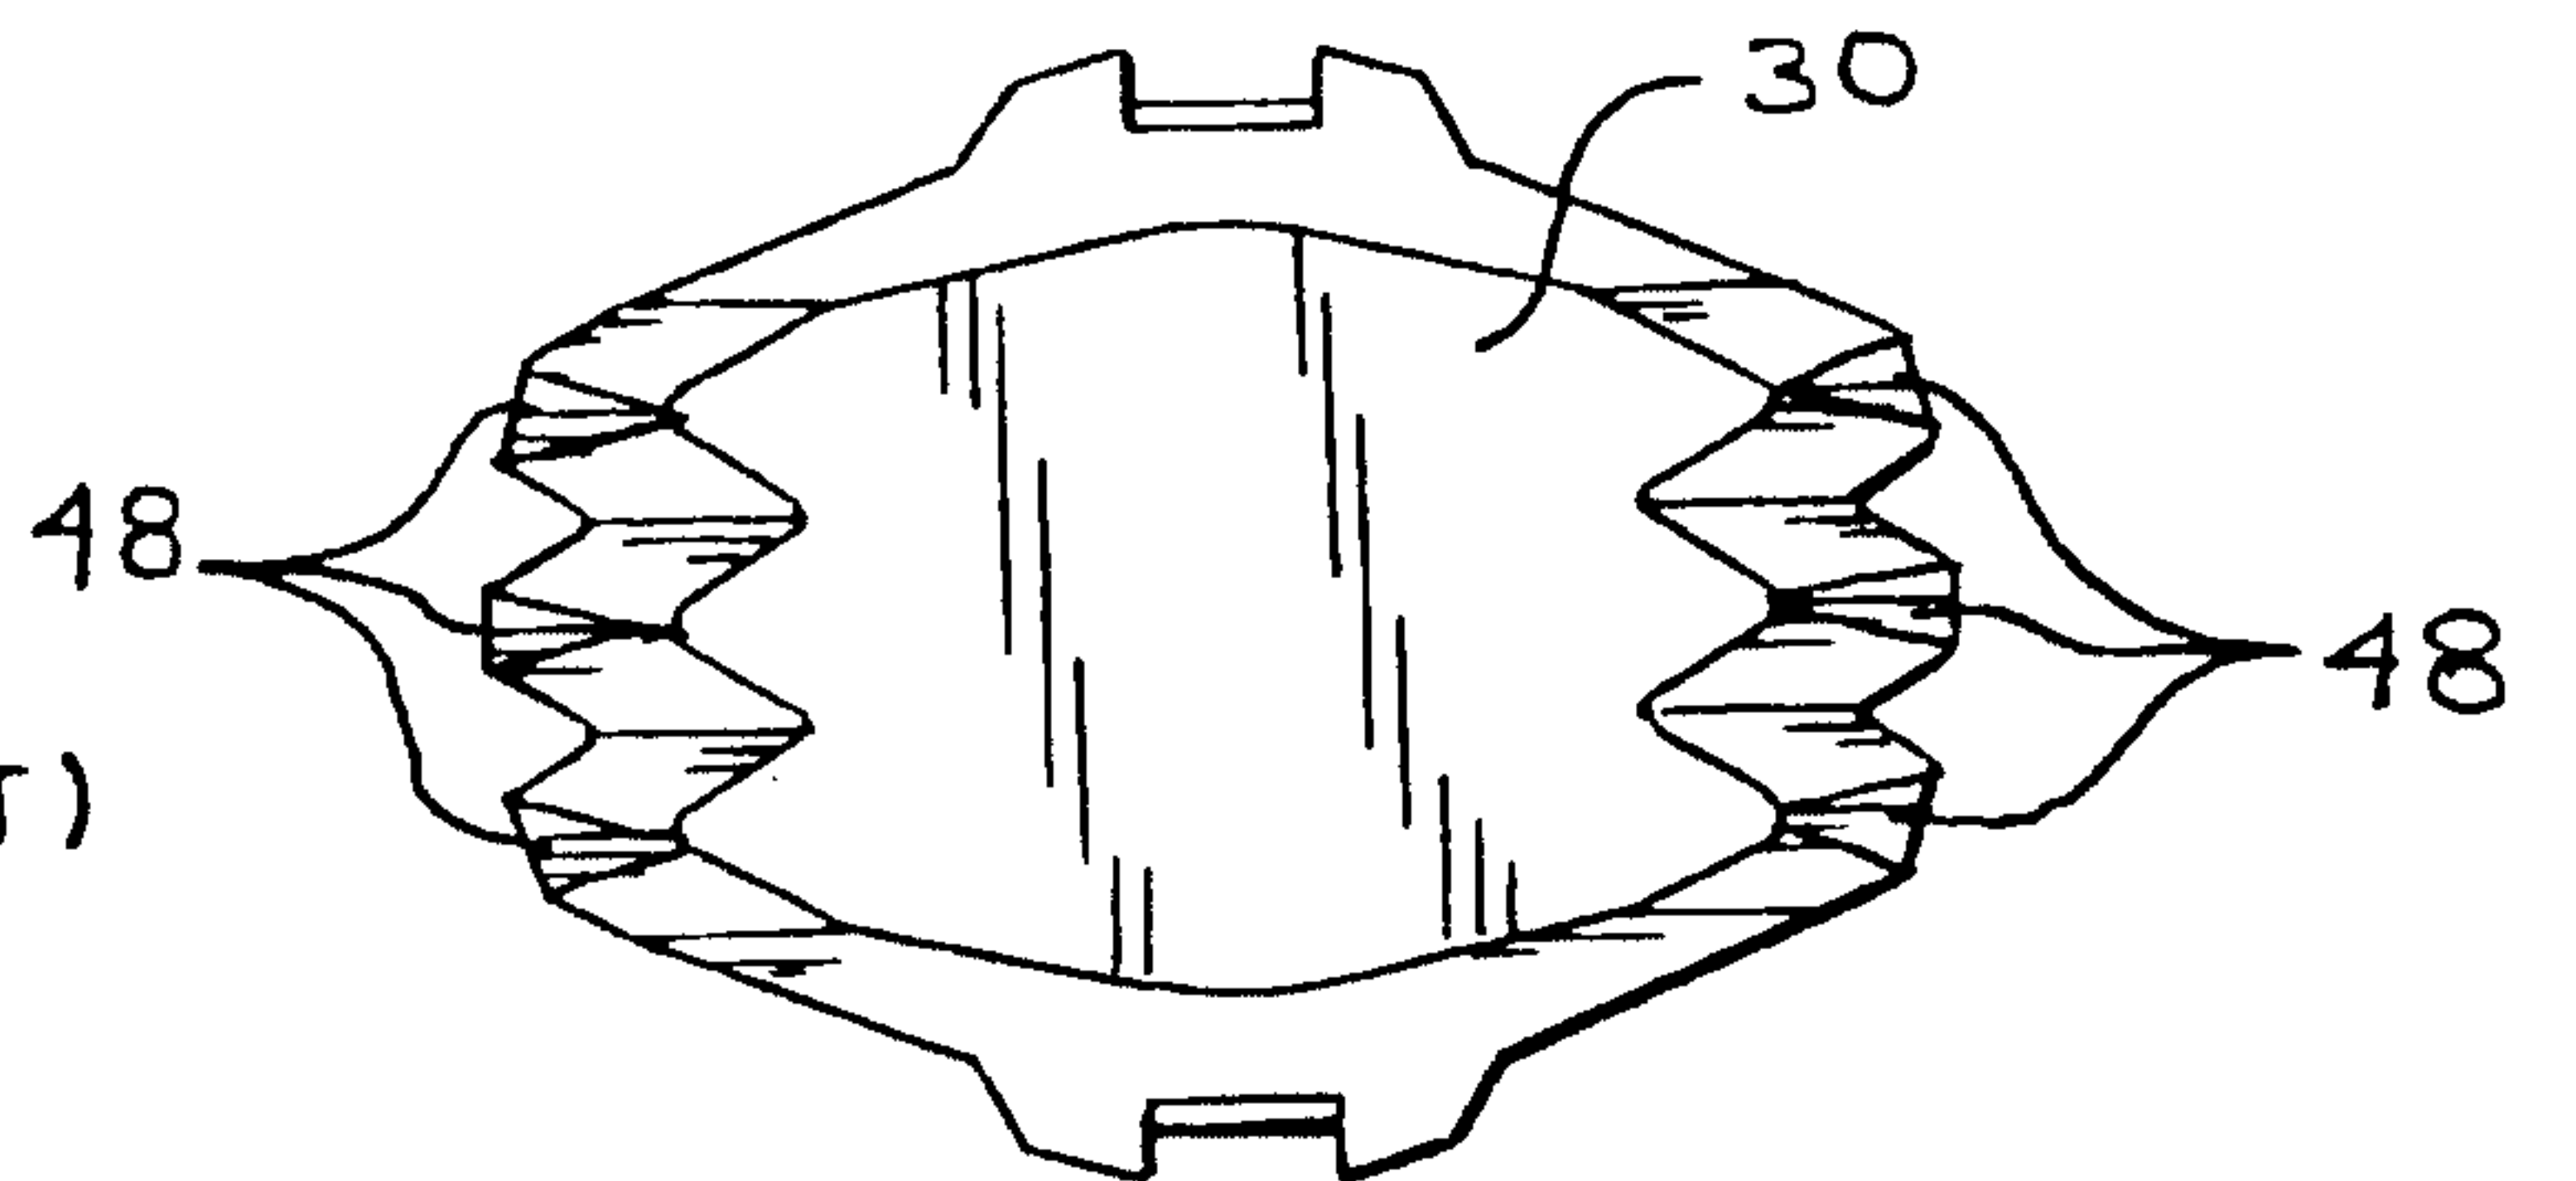


FIG. 5
(PRIOR ART)



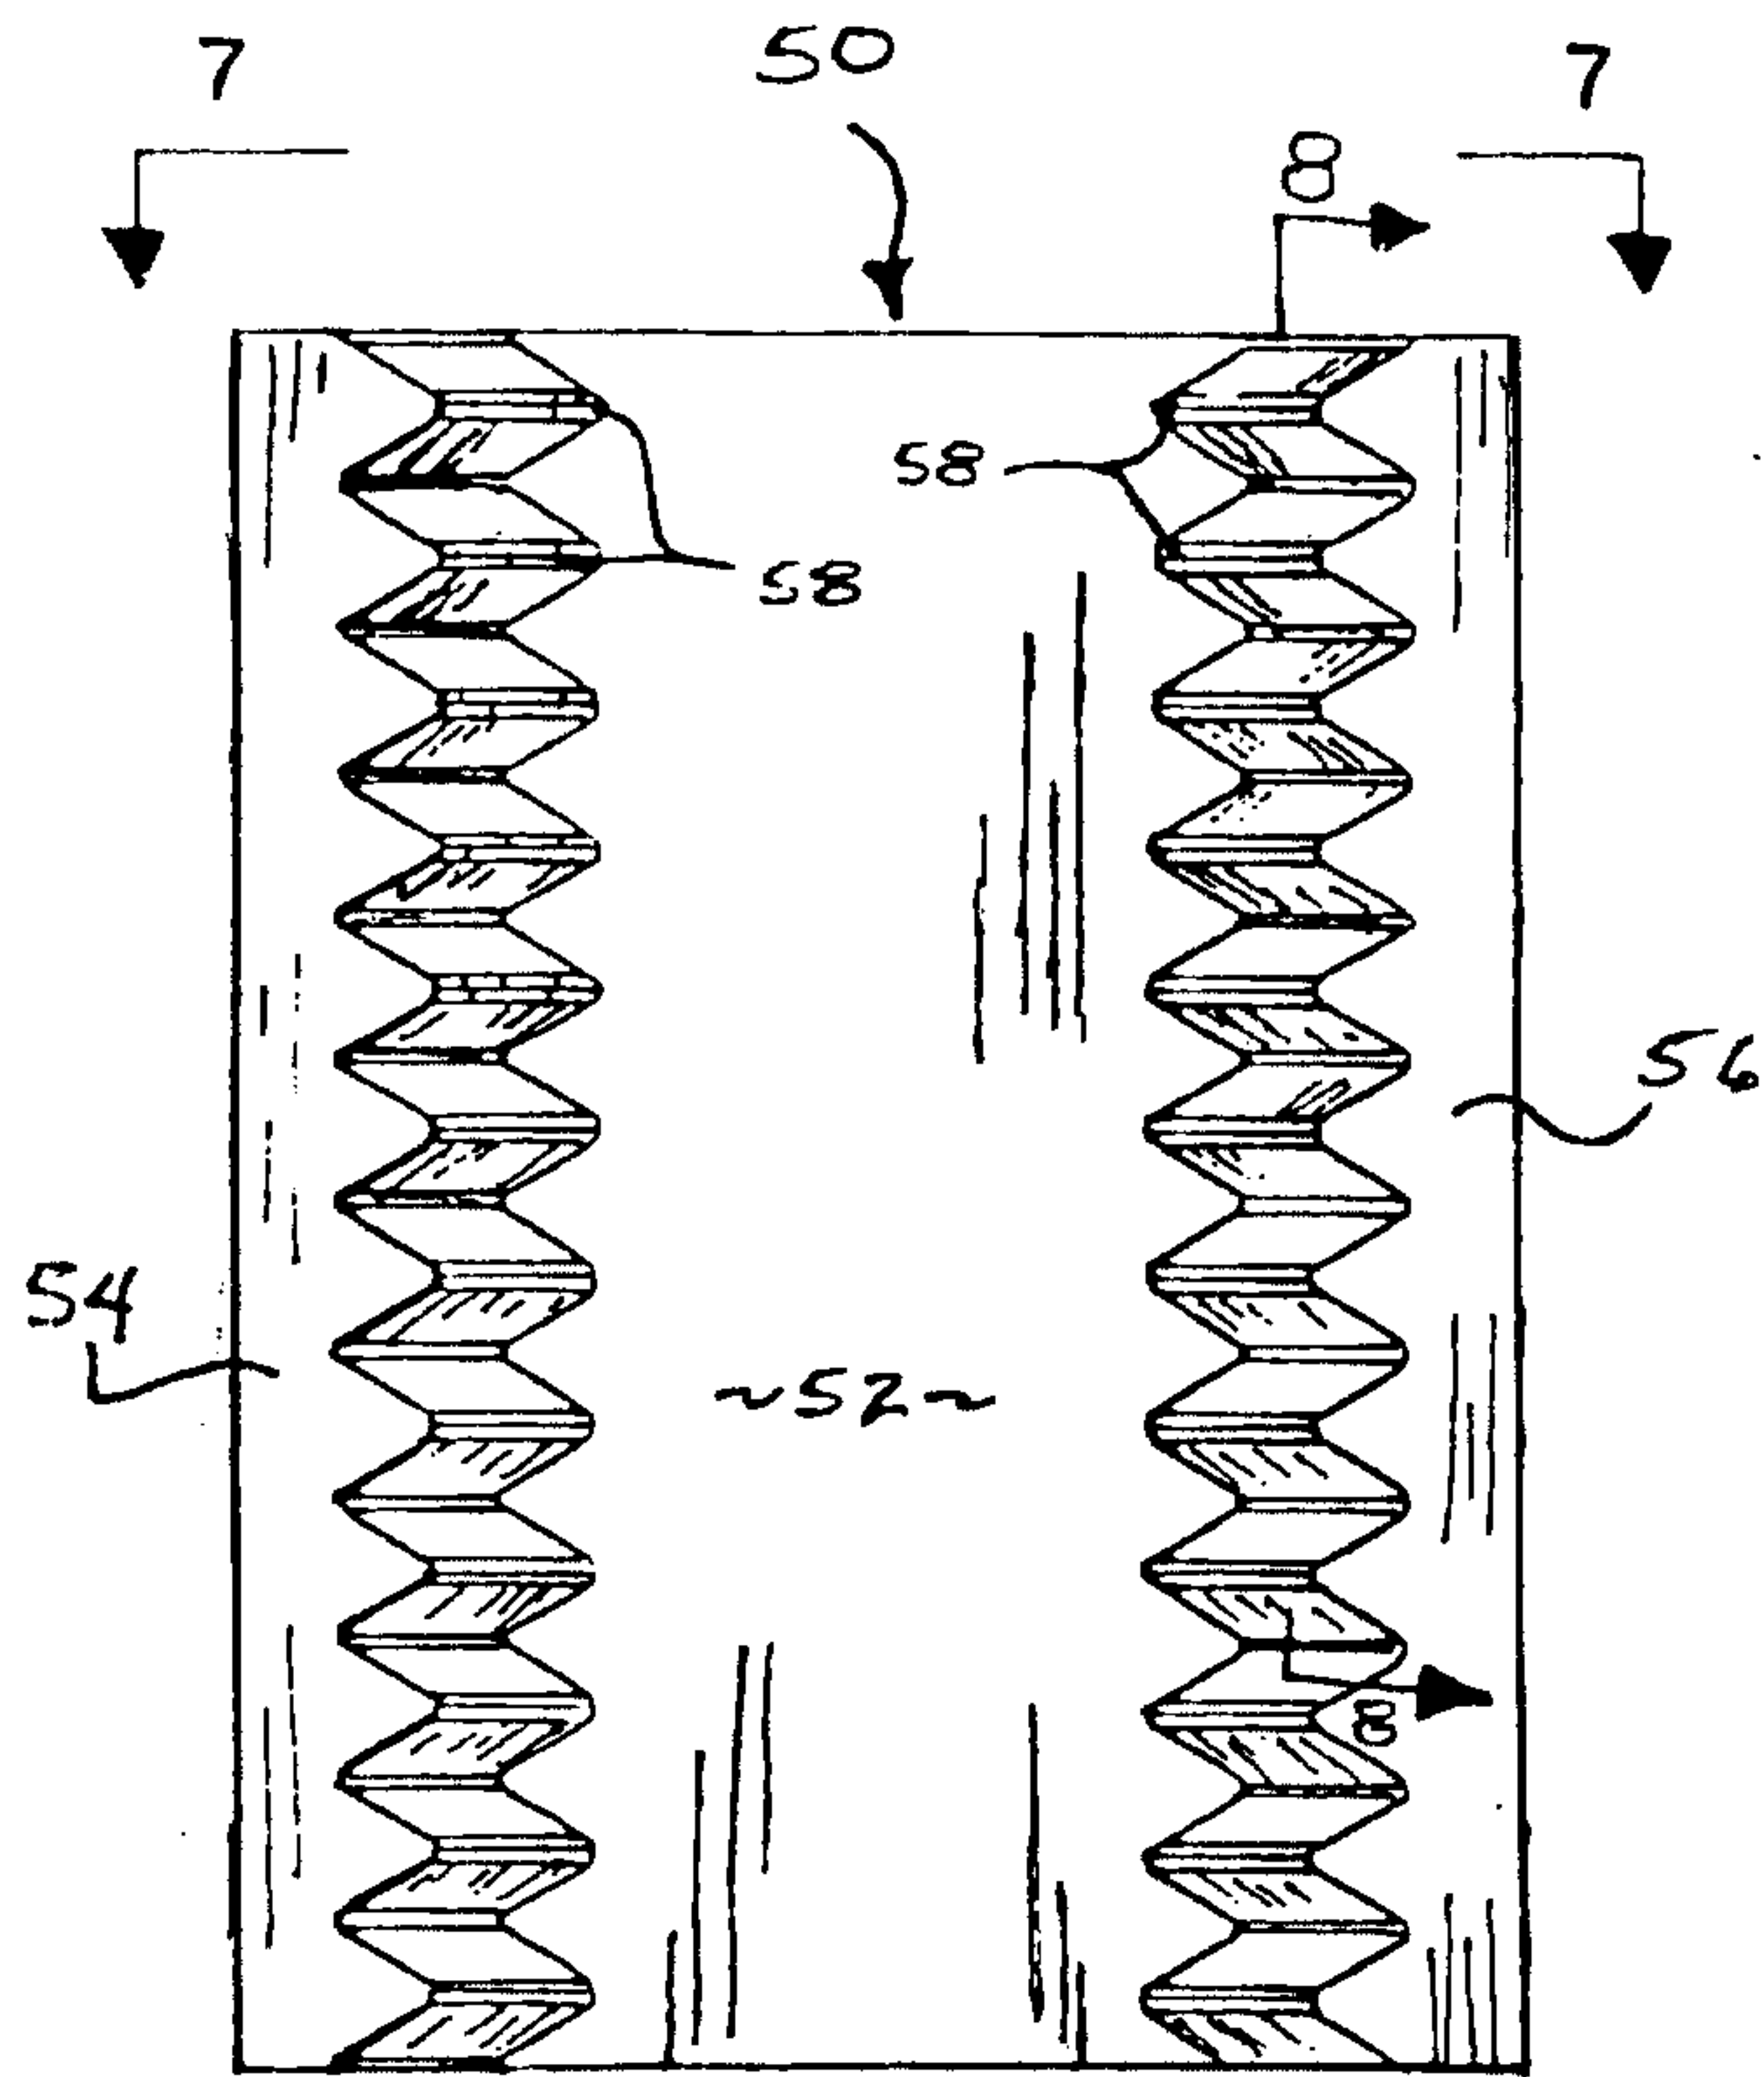


FIG. 6

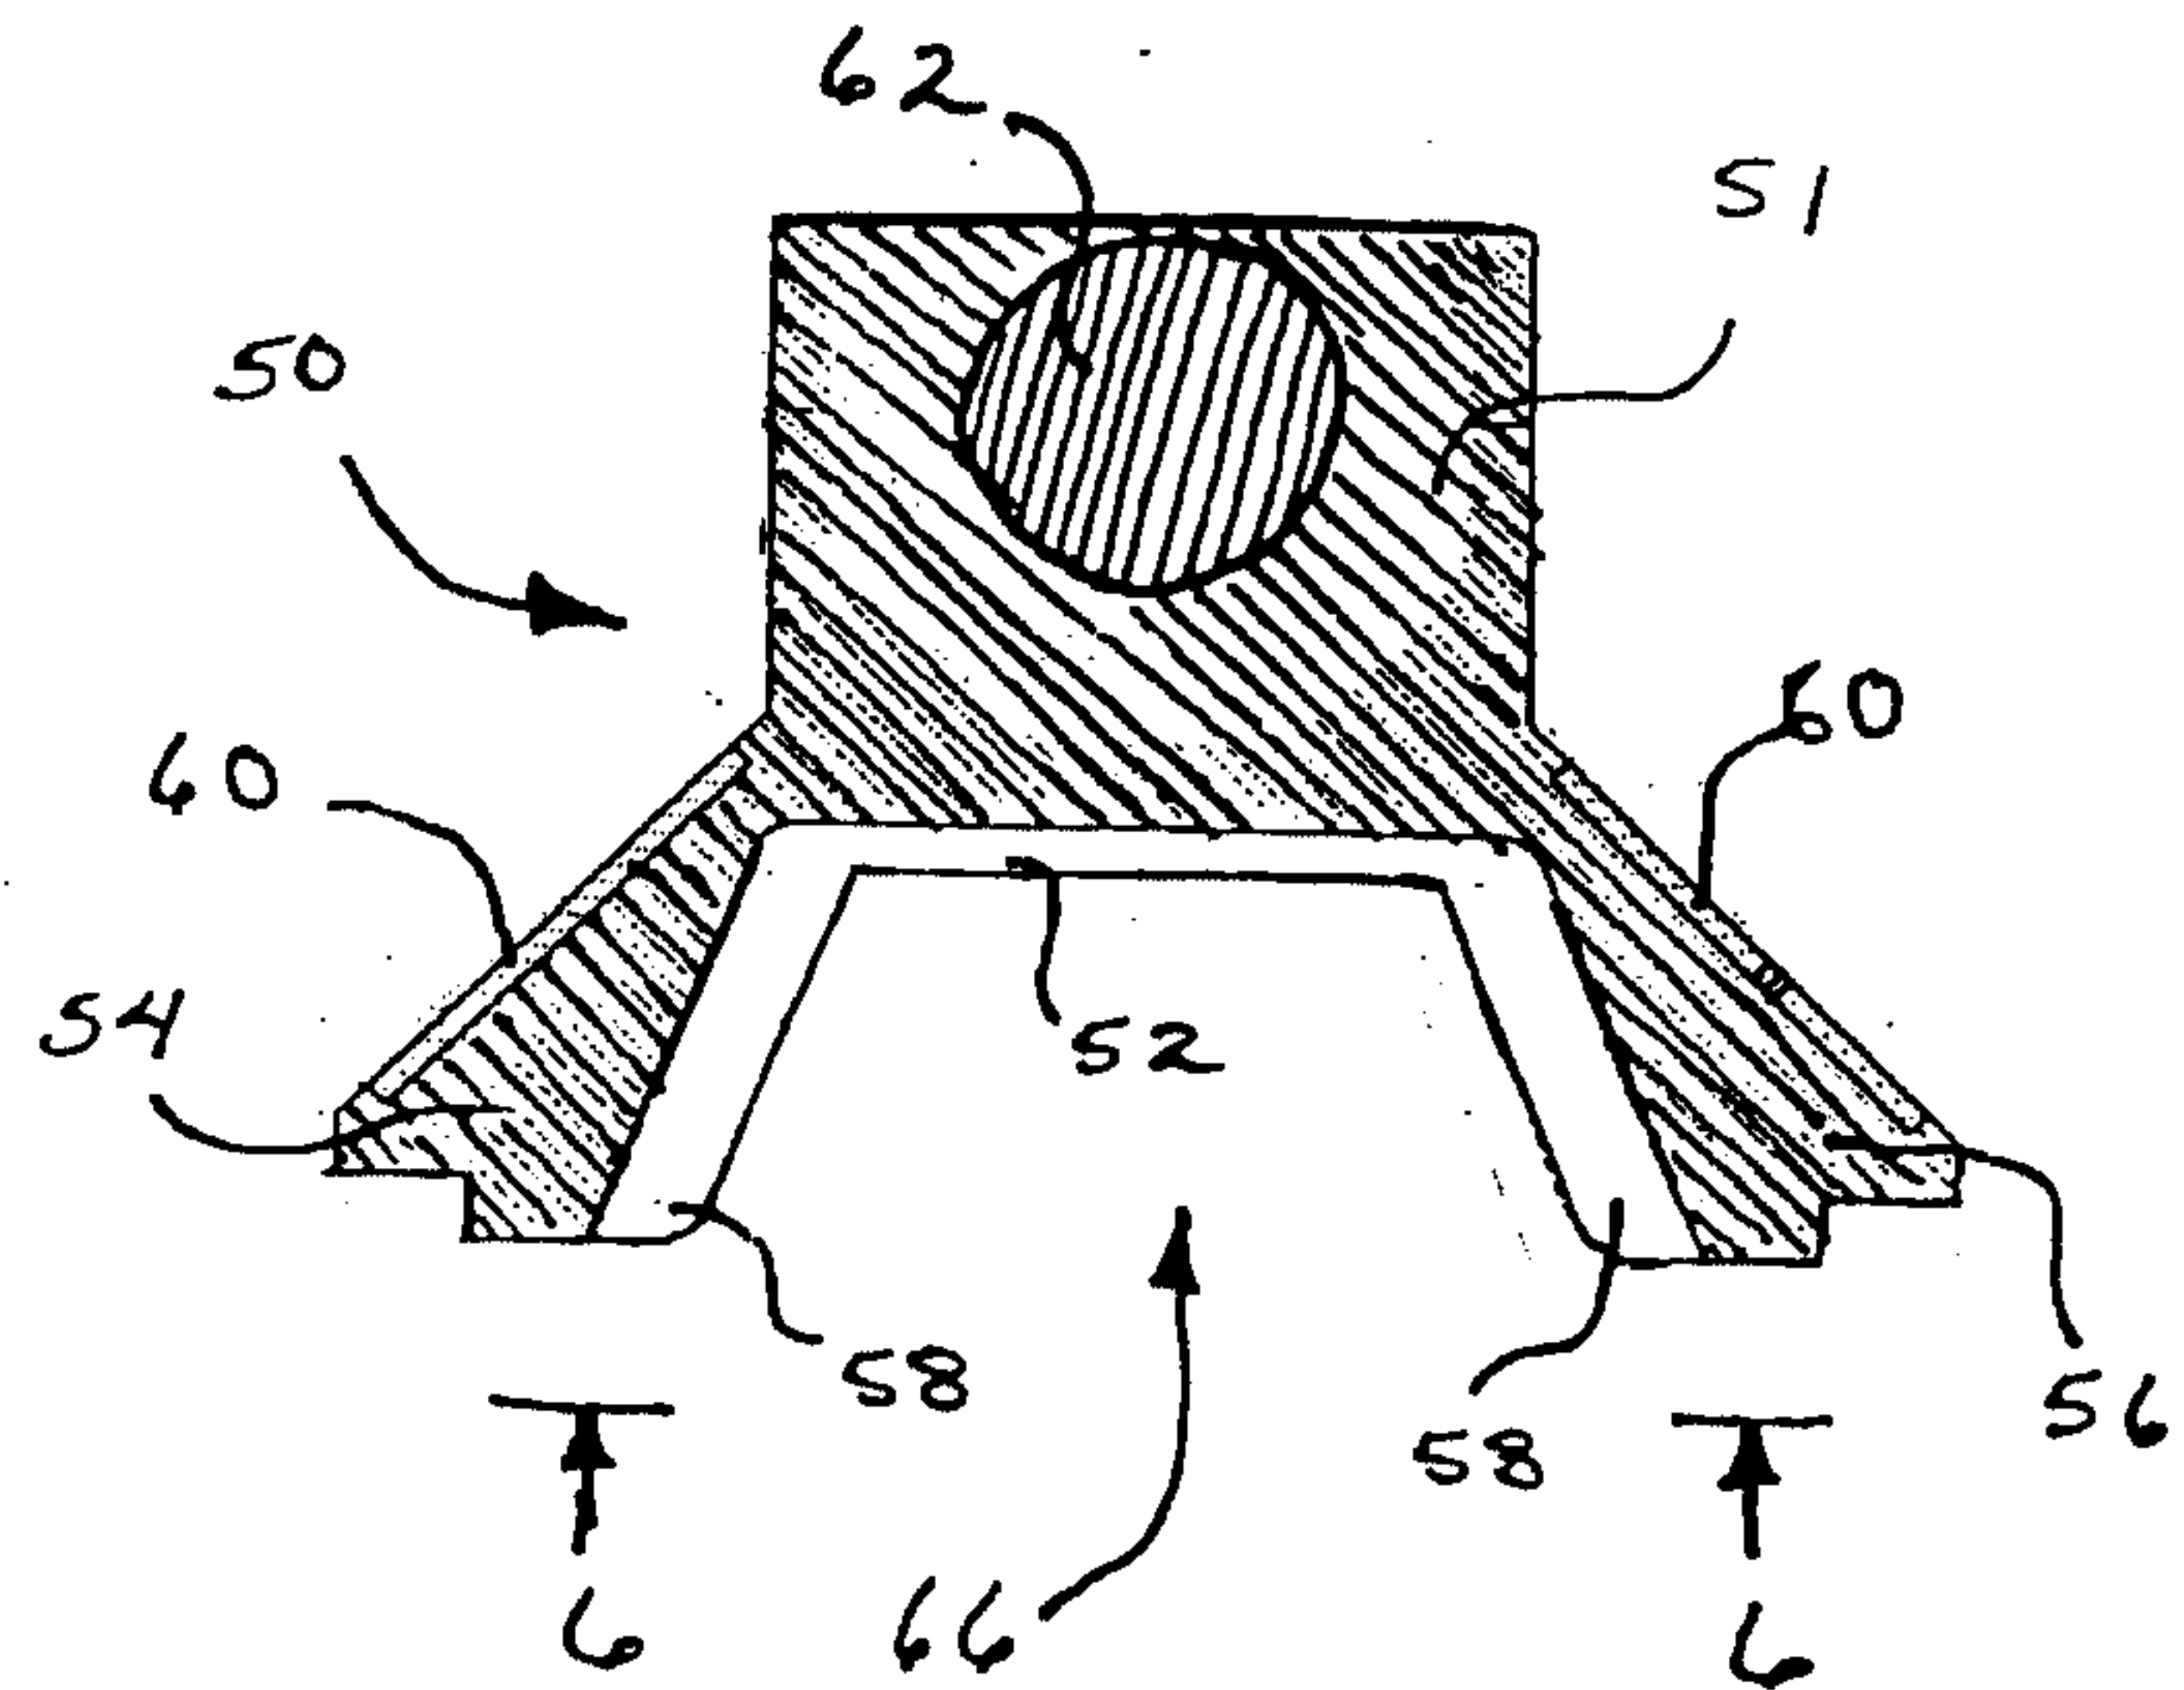


FIG. 7

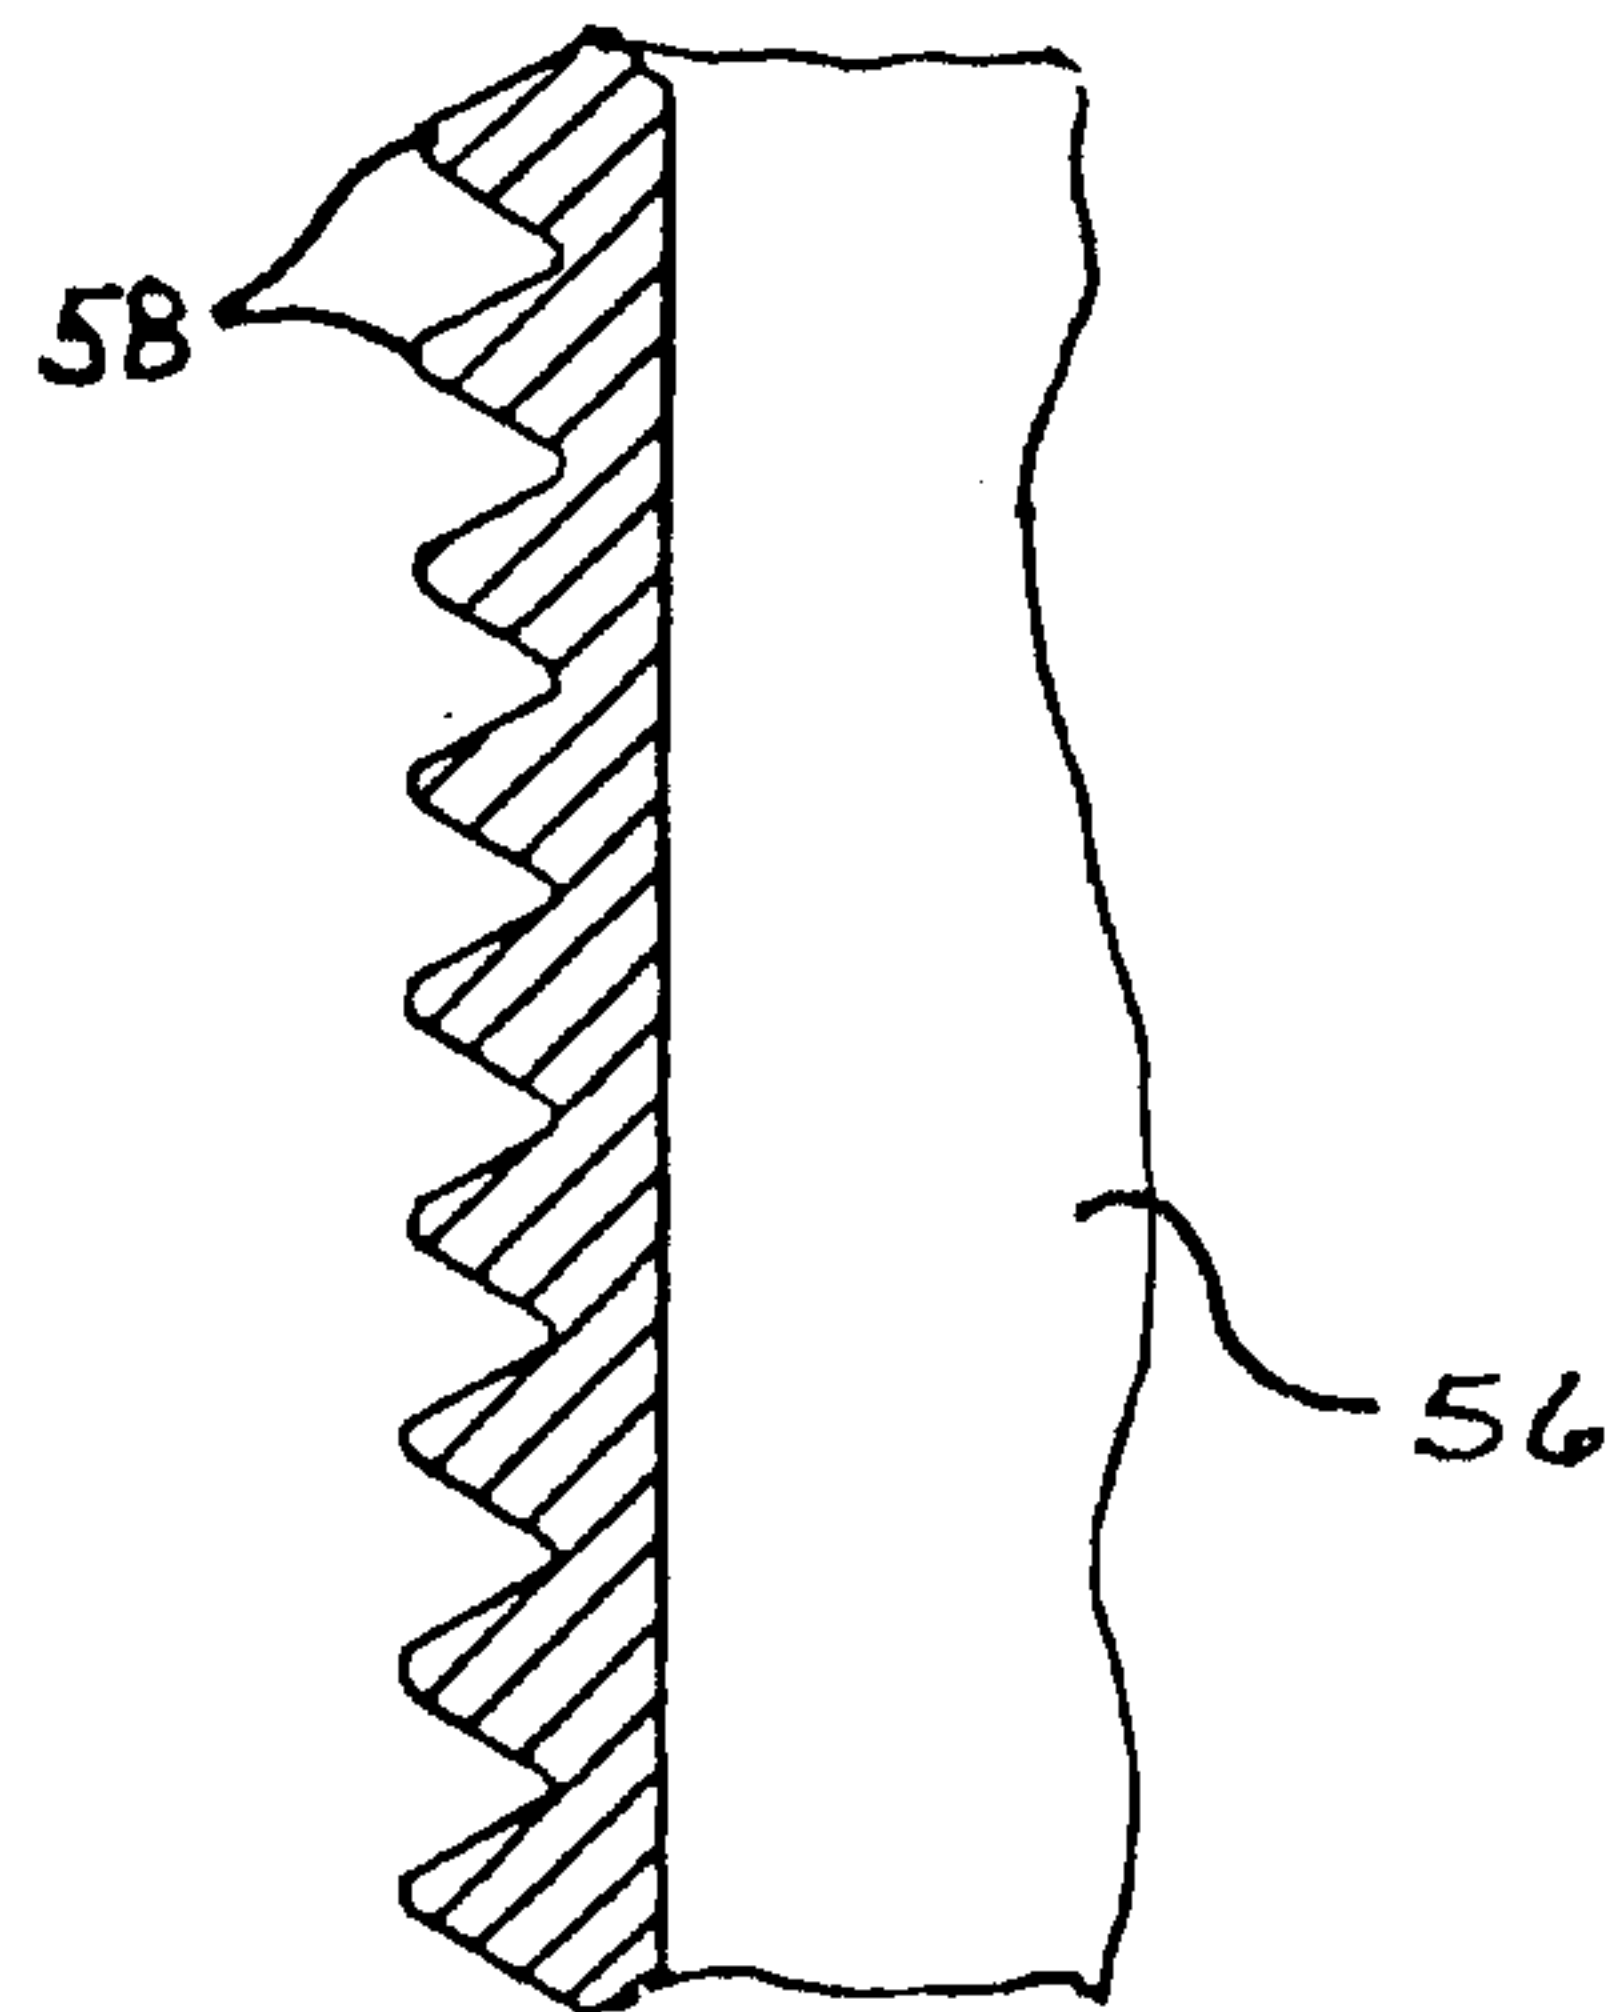
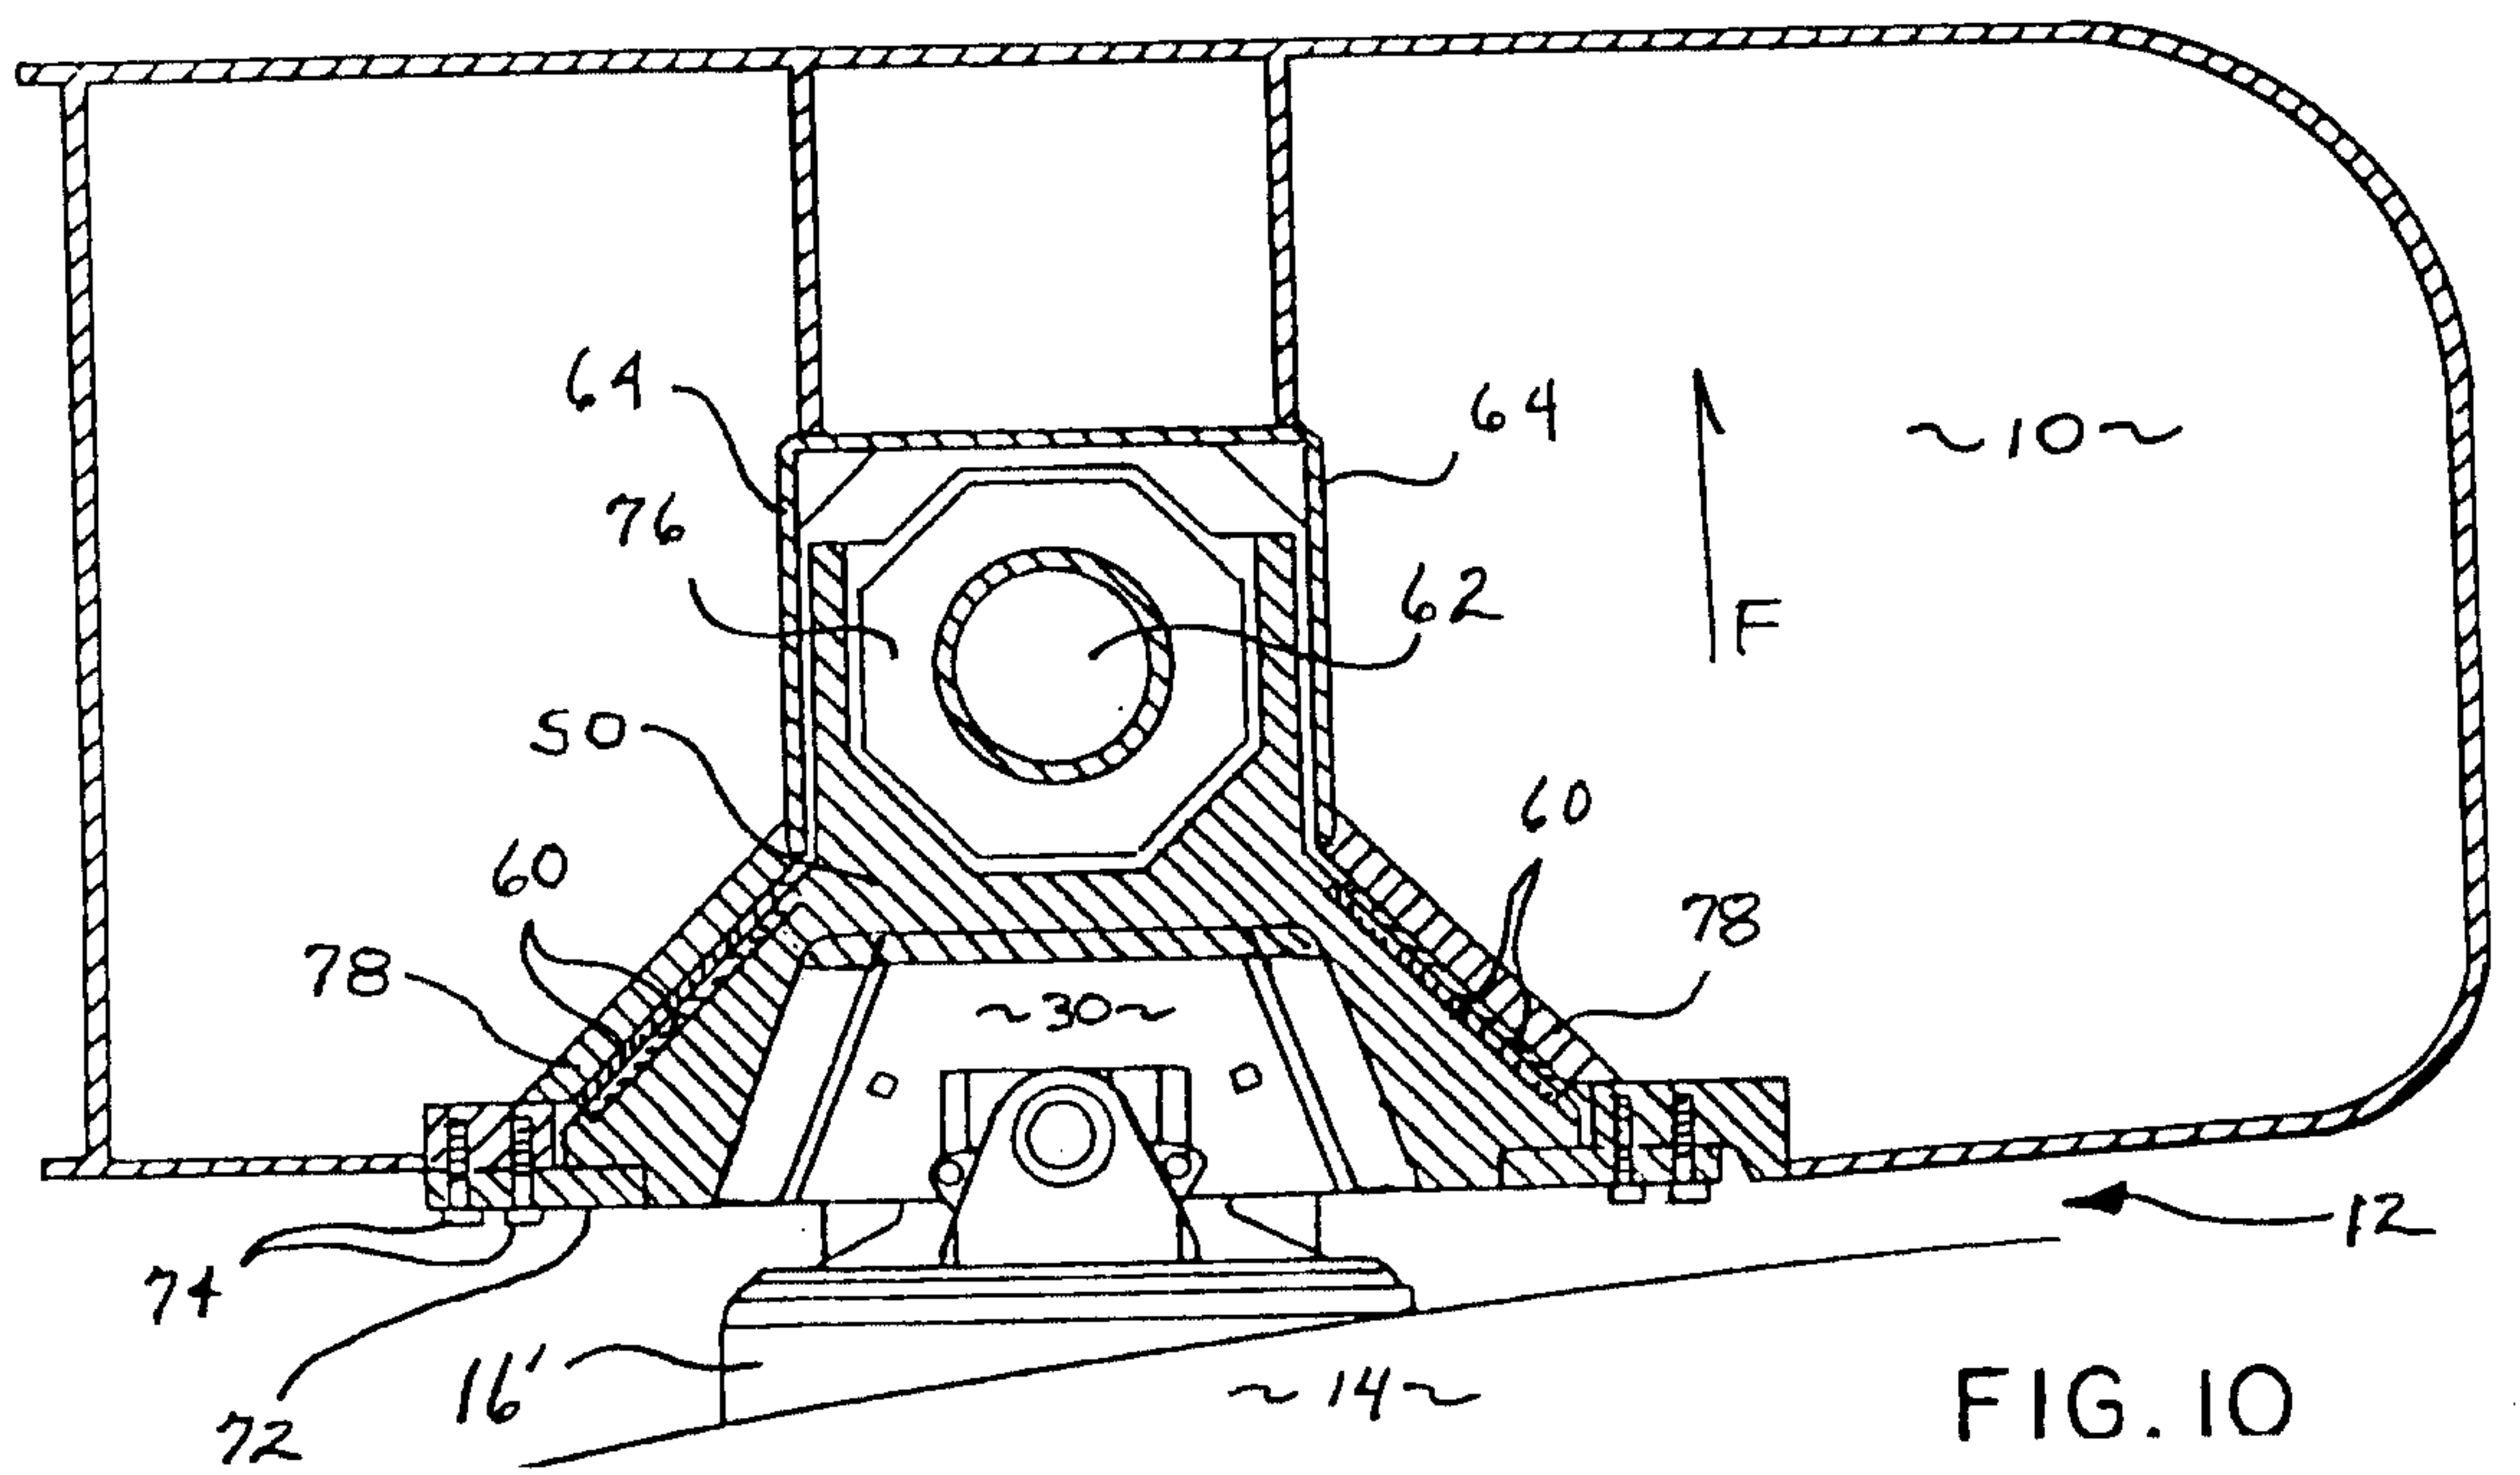
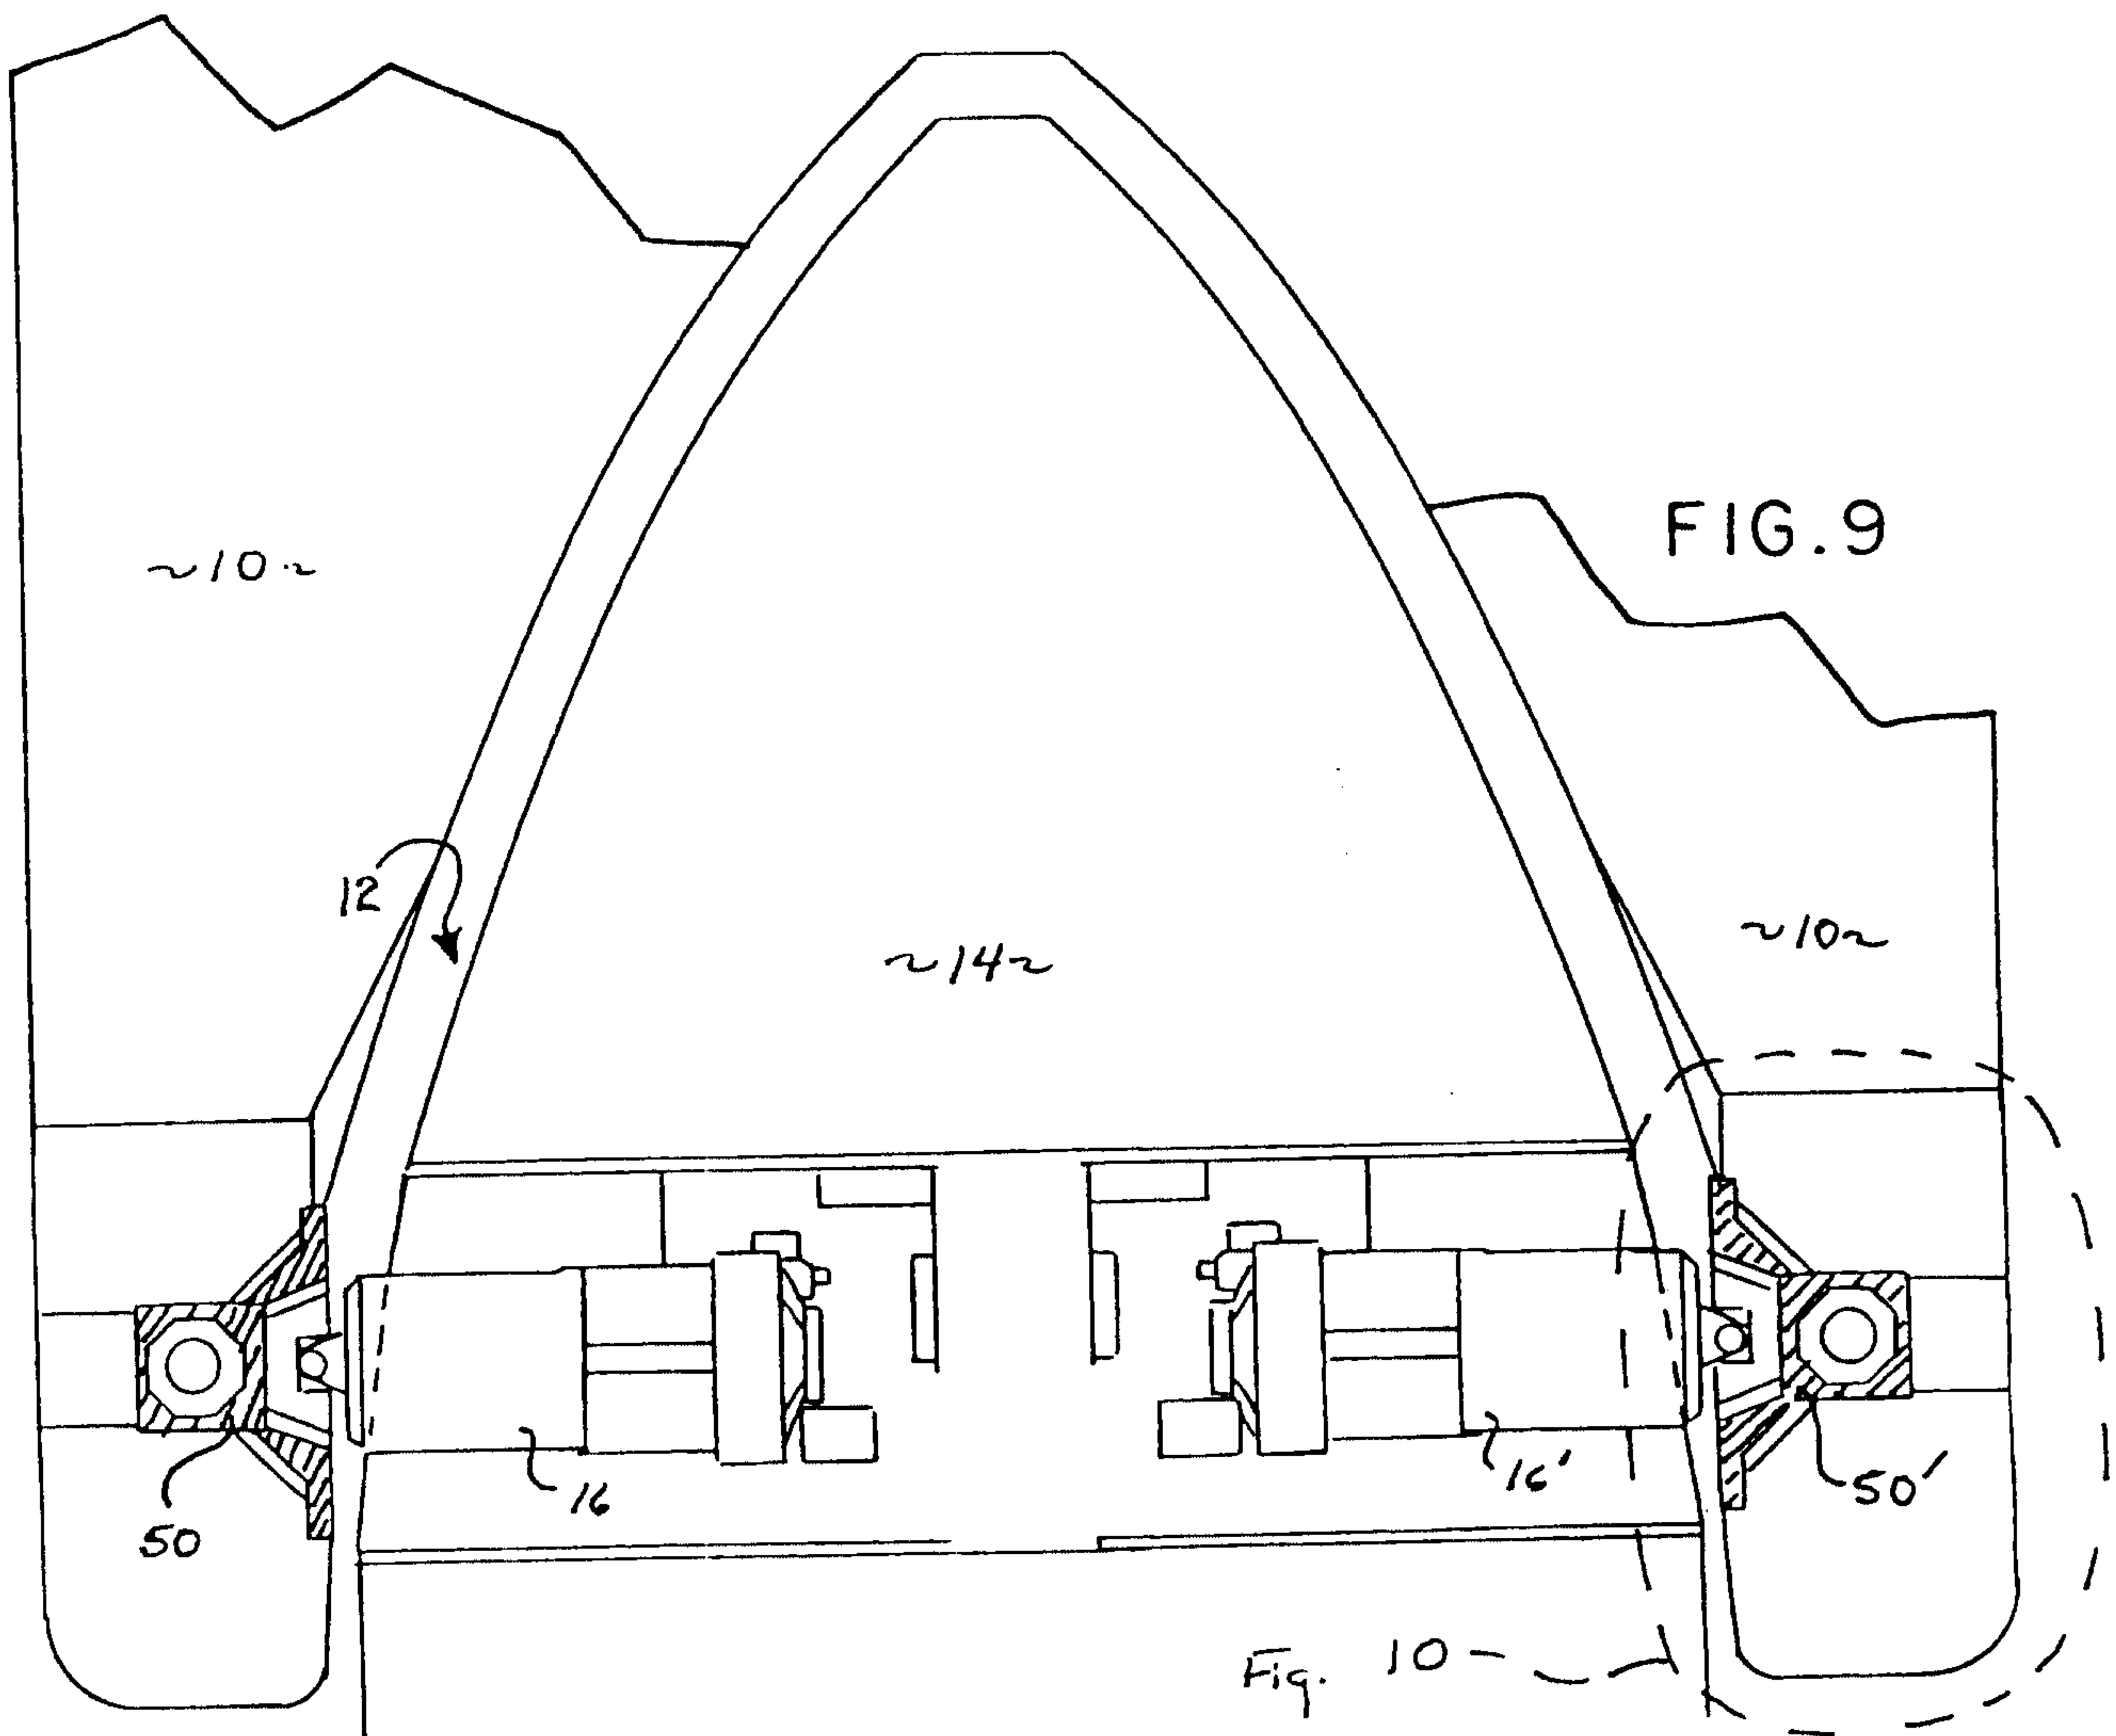


FIG. 8



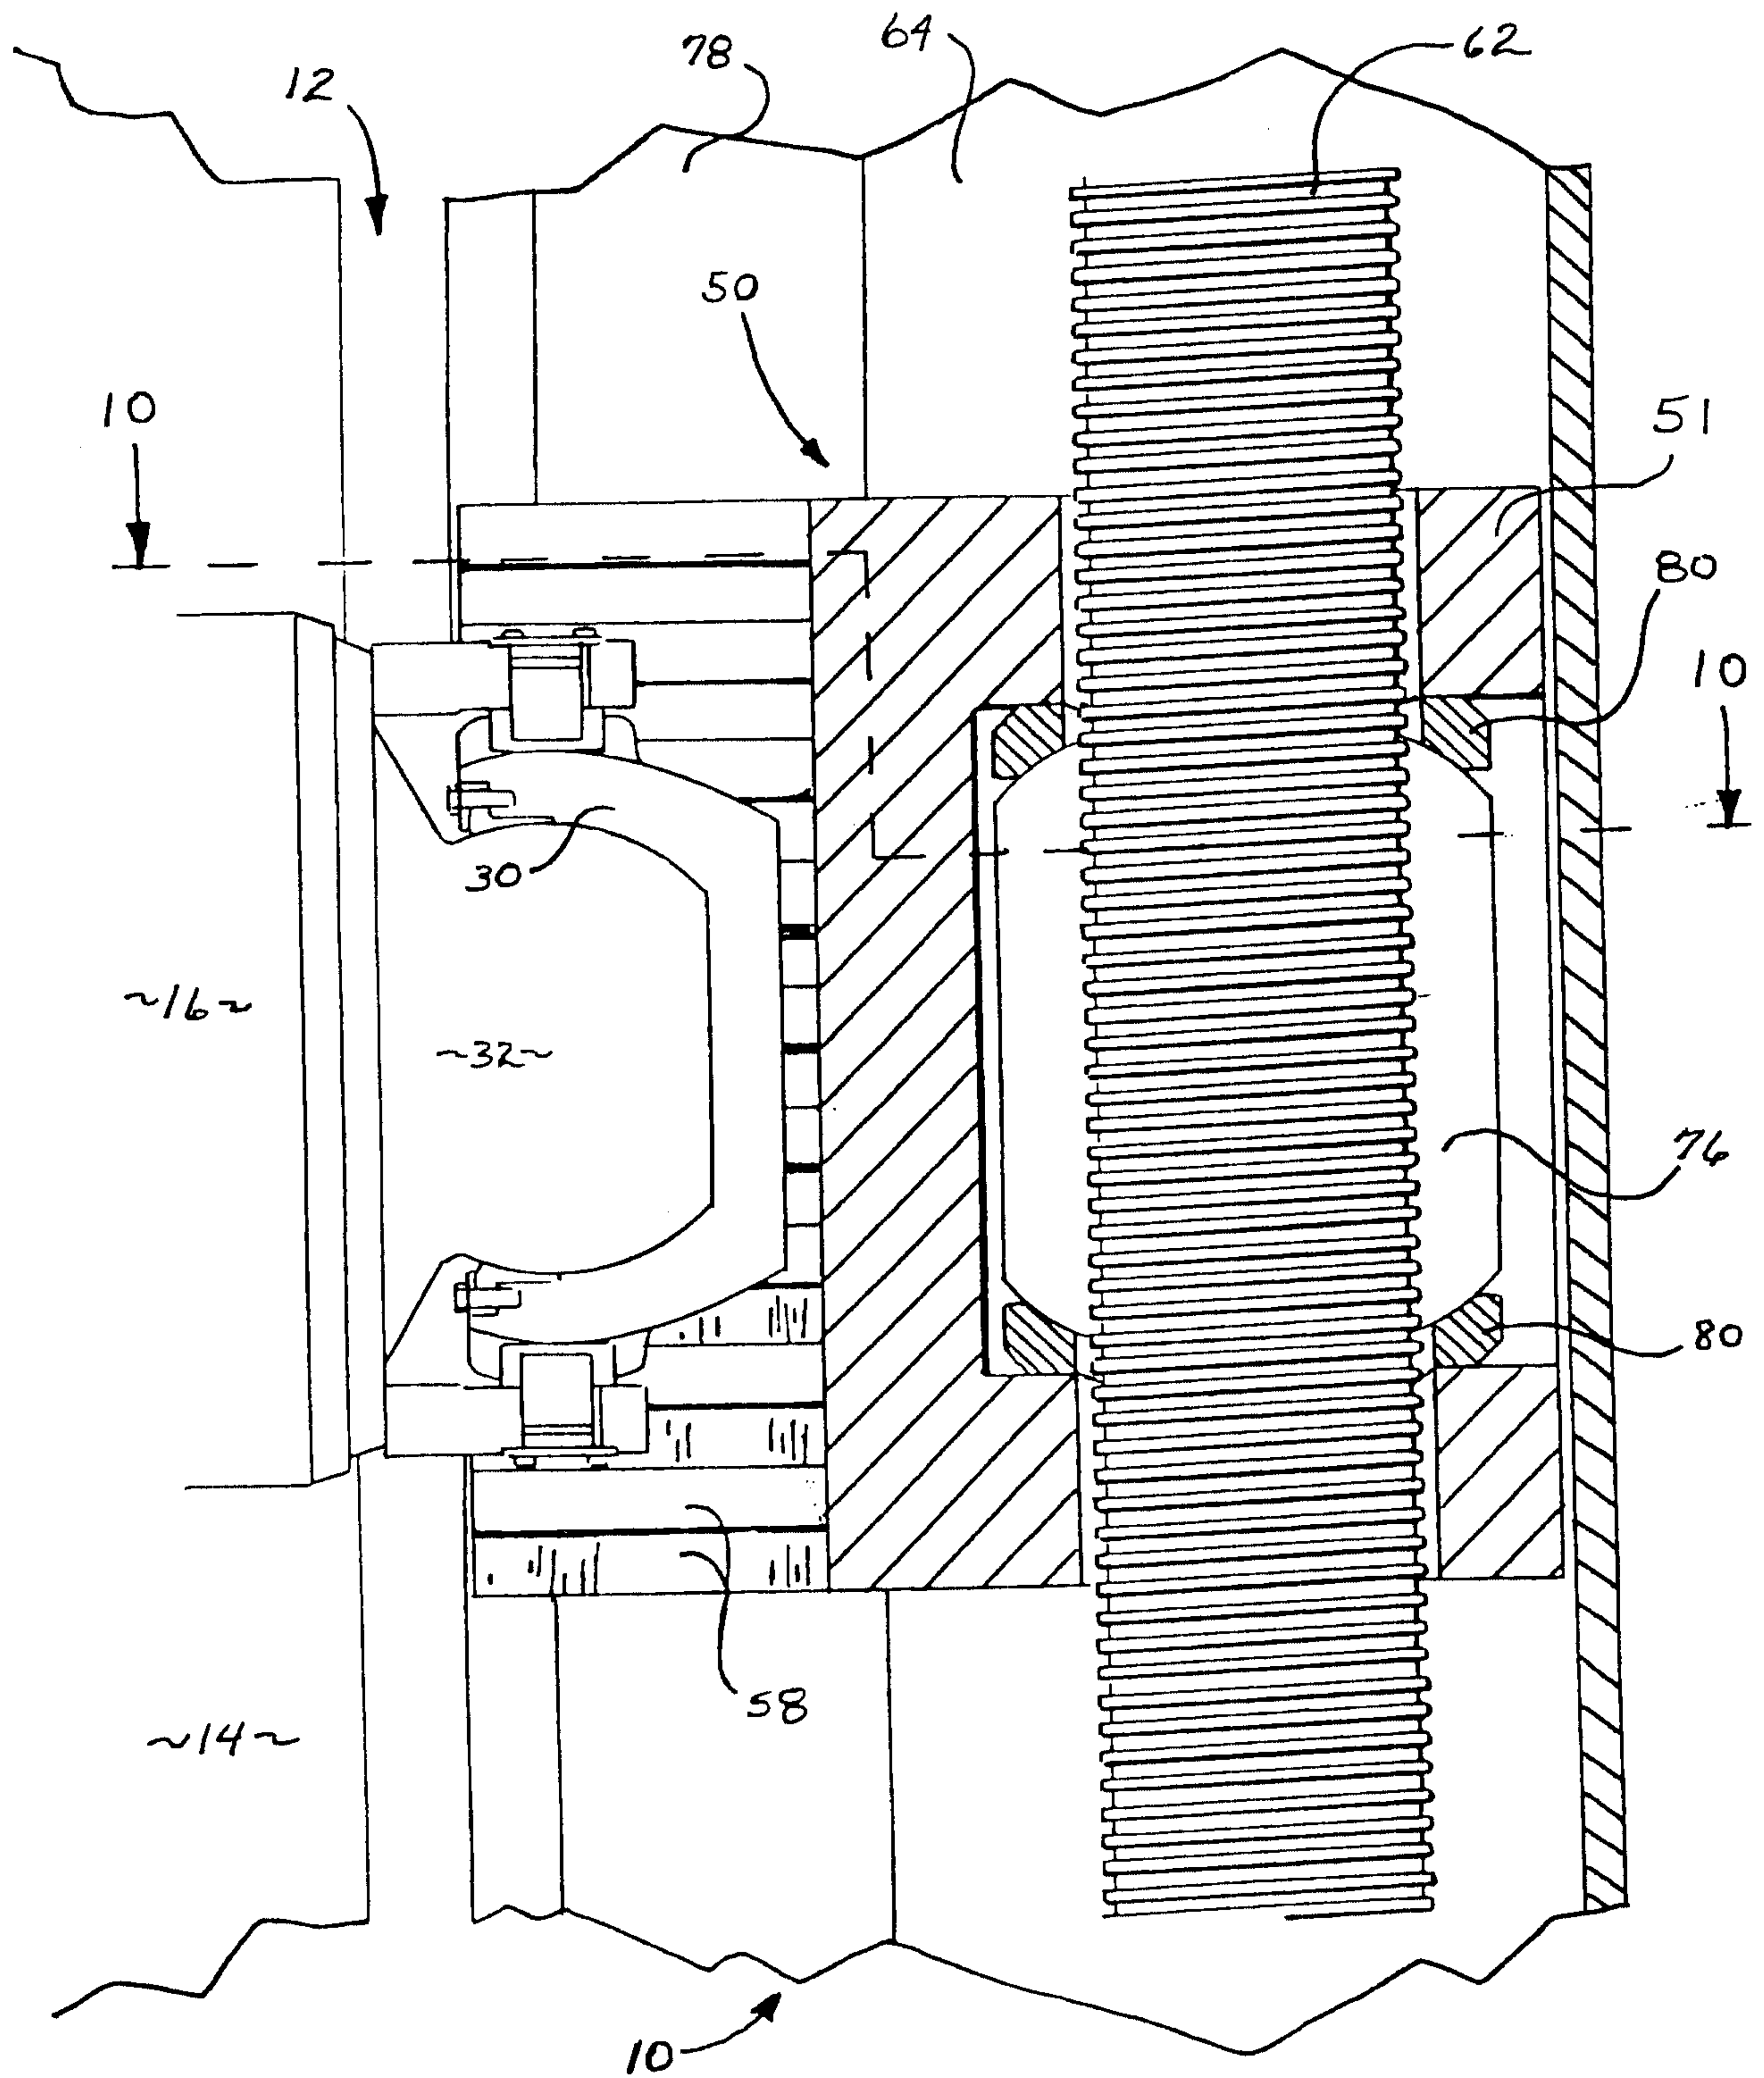


FIG. II

