




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | | | | | | | | | | | | | | | | | | | | | |
|---|------------------------------|---|----|------------|-------------------------|----|------------|--------------------------|----|------------|-----------------------------|----|------------|------------------------------|----|------------|------------------------------|----|------------|---------------------------|----|--|
| <p>(51) International Patent Classification ⁶ : A61B 17/32</p> | <p>A1</p> | <p>(11) International Publication Number: WO 97/43962 (43) International Publication Date: 27 November 1997 (27.11.97)</p> | | | | | | | | | | | | | | | | | | | | |
| <p>(21) International Application Number: PCT/US97/08380 (22) International Filing Date: 16 May 1997 (16.05.97)</p> <p>(30) Priority Data:</p> <table border="0"> <tr> <td>60/017,133</td> <td>17 May 1996 (17.05.96)</td> <td>US</td> </tr> <tr> <td>60/019,918</td> <td>14 June 1996 (14.06.96)</td> <td>US</td> </tr> <tr> <td>60/023,658</td> <td>1 August 1996 (01.08.96)</td> <td>US</td> </tr> <tr> <td>60/025,340</td> <td>3 September 1996 (03.09.96)</td> <td>US</td> </tr> <tr> <td>08/714,548</td> <td>16 September 1996 (16.09.96)</td> <td>US</td> </tr> <tr> <td>08/710,456</td> <td>17 September 1996 (17.09.96)</td> <td>US</td> </tr> <tr> <td>08/727,074</td> <td>8 October 1996 (08.10.96)</td> <td>US</td> </tr> </table> <p>(71) Applicant: MERCURY DIAGNOSTICS, INC. [US/US]; Suite D, 1137 San Antonio Road, Palo Alto, CA 94303 (US).</p> <p>(72) Inventors: DOUGLAS, Joel, S.; 2048 Calabazas Boulevard, Santa Clara, CA 95051 (US). ROE, Jeffrey, N.; 3212 Veracruz Drive, San Ramon, CA 94583 (US). GRAGE, Henry, M.; 175 Tenby Terrace, Danville, CA 94506 (US).</p> <p>(74) Agents: DILLAHUNTY, T., Gene et al.; Burns, Doane, Swecker & Mathis, L.L.P., P.O. Box 1404, Alexandria, VA 22313-1404 (US).</p> | 60/017,133 | 17 May 1996 (17.05.96) | US | 60/019,918 | 14 June 1996 (14.06.96) | US | 60/023,658 | 1 August 1996 (01.08.96) | US | 60/025,340 | 3 September 1996 (03.09.96) | US | 08/714,548 | 16 September 1996 (16.09.96) | US | 08/710,456 | 17 September 1996 (17.09.96) | US | 08/727,074 | 8 October 1996 (08.10.96) | US | <p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p> |
| 60/017,133 | 17 May 1996 (17.05.96) | US | | | | | | | | | | | | | | | | | | | | |
| 60/019,918 | 14 June 1996 (14.06.96) | US | | | | | | | | | | | | | | | | | | | | |
| 60/023,658 | 1 August 1996 (01.08.96) | US | | | | | | | | | | | | | | | | | | | | |
| 60/025,340 | 3 September 1996 (03.09.96) | US | | | | | | | | | | | | | | | | | | | | |
| 08/714,548 | 16 September 1996 (16.09.96) | US | | | | | | | | | | | | | | | | | | | | |
| 08/710,456 | 17 September 1996 (17.09.96) | US | | | | | | | | | | | | | | | | | | | | |
| 08/727,074 | 8 October 1996 (08.10.96) | US | | | | | | | | | | | | | | | | | | | | |

(54) Title: METHODS AND APPARATUS FOR EXPRESSING BODY FLUID FROM AN INCISION

(57) Abstract

A sample of a body fluid such as blood or interstitial fluid is obtained from a body by lancing a portion of a user's skin, preferably in an area other than a finger tip to form an incision. After the needle (42) has been removed from the incision, a force is applied to depress the skin in a manner forming a ring of depressed body tissue in surrounding relationship to the incision, causing the incision to bulge and the sides of the incision to open, whereby body fluid is forced out through the opening of the incision. A stimulator member (64) is mounted to an end of a lancet carrying housing (40) for applying the force. The stimulator member (64) can be movable relative to the housing, and can be either heated or vibrated to promote movement of the body fluid.

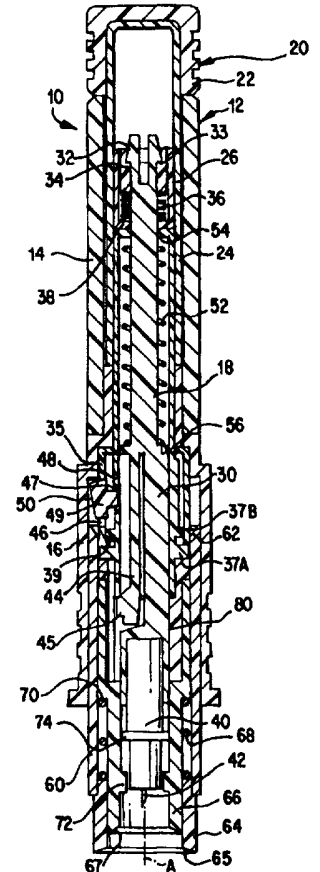

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|-----------|--------------------------|-----------|--|-----------|--|-----------|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | | | TR | Turkey |
| BG | Bulgaria | HU | Hungary | ML | Mali | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MN | Mongolia | UA | Ukraine |
| BR | Brazil | IL | Israel | MR | Mauritania | UG | Uganda |
| BY | Belarus | IS | Iceland | MW | Malawi | US | United States of America |
| CA | Canada | IT | Italy | MX | Mexico | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NE | Niger | VN | Viet Nam |
| CG | Congo | KE | Kenya | NL | Netherlands | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NO | Norway | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | NZ | New Zealand | | |
| CM | Cameroon | | Republic of Korea | PL | Poland | | |
| CN | China | KR | Republic of Korea | PT | Portugal | | |
| CU | Cuba | KZ | Kazakstan | RO | Romania | | |
| CZ | Czech Republic | LC | Saint Lucia | RU | Russian Federation | | |
| DE | Germany | LI | Liechtenstein | SD | Sudan | | |
| DK | Denmark | LK | Sri Lanka | SE | Sweden | | |
| EE | Estonia | LR | Liberia | SG | Singapore | | |

**METHODS AND APPARATUS FOR
EXPRESSING BODY FLUID FROM AN INCISION**

Field of the Invention

The present invention relates to lancing devices
5 and methods for obtaining samples of blood and other
fluids from the body for analysis or processing.

Background of the Invention

Many medical procedures in use today require
a relatively small sample of blood, in the range of
10 5-50 μ L. It is more cost effective and less traumatic to
the patient to obtain such a sample by lancing or piercing
the skin at a selected location, such as the finger, to
enable the collection of 1 or 2 drops of blood, than by
using a phlebotomist to draw a tube of venous blood. With
15 the advent of home use tests such as self monitoring of
blood glucose, there is a requirement for a simple
procedure which can be performed in any setting by a
person needing to test.

Lancets in conventional use generally have a
20 rigid body and a sterile needle which protrudes from one
end. The lancet may be used to pierce the skin, thereby
enabling the collection of a blood sample from the opening
created. The blood is transferred to a test device or
collection device. Blood is most commonly taken from the
25 fingertips, where the supply is generally excellent.
However, the nerve density in this region causes
significant pain in many patients. Sampling of alternate
site, such as earlobes and limbs, is sometimes practiced
to access sites which are less sensitive. These sites are
30 also less likely to provide excellent blood samples and
make blood transfer directly to test devices difficult.

Repeated lancing in limited surface areas (such
as fingertips) results in callous formation. This leads

to increased difficulty in drawing blood and increased pain.

To reduce the anxiety of piercing the skin and the associated pain, many spring loaded devices have been developed. The following two patents are representative of the devices which were developed in the 1980's for use with home diagnostic test products.

Cornell et al. U.S. Patent No. 4,503,856 describes a spring loaded lancet injector. The reusable device interfaces with a disposable lancet. The lancet holder may be latched in a retracted position. When the user contacts a release, a spring causes the lancet to pierce the skin at high speed and then retract. The speed is important to reduce the pain associated with the puncture.

Levin et al. U.S. Patent No. 4,517,978 describes a blood sampling instrument. This device, which is also spring loaded, uses a standard disposable lancet. The design enables easy and accurate positioning against a fingertip so the impact site can be readily determined. After the lancet pierces the skin, a bounce back spring retracts the lancet to a safe position within the device.

In institutional settings, it is often desirable to collect the sample from the patient and then introduce the sample to a test device in a controlled fashion. Some blood glucose monitoring systems, for example, require that the blood sample be applied to a test device which is in contact with a test instrument. In such situations, bringing the finger of a patient directly to the test device poses some risk of contamination from blood of a previous patient. With such systems, particularly in hospital settings, it is common to lance a patient, collect a sample in a micropipette via capillary action and then deliver the sample from the pipette to the test device.

Haynes U.S. Patent No. 4,920,977 describes a blood collection assembly with lancet and microcollection tube. This device incorporates a lancet and collection container in a single device. The lancing and collection are two separate activities, but the device is a convenient single disposable unit for situations when sample collection prior to use is desirable. Similar devices are disclosed in Sarrine U.S. Pat. No. 4,360,016, and O'Brien U.S. Pat. No. 4,924,879.

Jordan et al. U.S. Patents No. 4,850,973 and No. 4,858,607, disclose a combination device which may be alternatively used as a syringe-type injection device and a lancing device with disposable solid needle lancet, depending on configuration.

Lange et al. U.S. Patent No. 5,318,584 describes a blood lancet device for withdrawing blood for diagnostic purposes. This invention uses a rotary/sliding transmission system to reduce the pain of lancing. The puncture depth is easily and precisely adjustable by the user.

Suzuki et al. U.S. Patent No. 5,368,047, Dombrowski U.S. Patent No. 4,654,513 and Ishibashi et al. U.S. Patent No. 5,320,607 each describe suction-type blood samplers. These devices develop suction between the lancing site and the end of the device when the lancet holding mechanism withdraws after piercing the skin. A flexible gasket around the end of the device helps seal the end around the puncture site until adequate sample is drawn from the puncture site or the user pulls back on the device.

Garcia et al. U.S. Patent No. 4,637,403 and Haber et al. U.S. Patent No. 5,217,480, disclose combination lancing and blood collection devices which use a diaphragm to create a vacuum over the wound site.

Erickson et al. U.S. Patent No. 5,582,184, describes a means of collecting and measuring body fluids. This system uses a coaxial hollow lancet and capillary tube disposed within a spacer member. The spacer member
5 limits the depth of lancet penetration, and compresses body tissue around the lancet while the lancet is in the skin, for improving the flow of interstitial fluid to the incision. However, the incision may tend to close around the lancet, thereby limiting the amount of body fluid that
10 can be obtained.

Single use devices have also been developed for single use tests, i.e. home cholesterol testing, and for institutional use to eliminate cross-patient contamination multi-patient use. Crossman et al. U.S.
15 Patent No. 4,869,249, and Swierczek U.S. Patent No. 5,402,798, also disclose disposable, single use lancing devices.

U.S. Patent Nos. 5,421,816; 5,445,611 and 5,458,140 disclose, as a replacement for invasive
20 sampling, the use of ultrasound to act as a pump for expressing interstitial fluid directly through intact (i.e., non-lanced) skin. The amount of fluid which can be obtained by way of such non-invasive vibration is minimal, however.

25 The disclosures of the above patents are incorporated herein by reference.

Even with the many improvements which have been made, the pain associated with lancing remains a significant issue for many patients. The need for blood
30 sampling and the fear of the associated pain is also a major obstacle for the millions of diagnosed diabetics, who do not adequately monitor their blood glucose due to the pain involved. Moreover, lancing to obtain a blood sample for other diagnostic applications is becoming more
35 commonplace, and a less painful, minimally invasive device

is needed to enhance those applications and make those technologies more acceptable.

An object of the present invention therefore, is to provide a device and a method for obtaining a sample of
5 bodily fluid through the skin which is virtually pain free and minimally invasive, particularly by penetrating less sensitive areas of the skin.

Furthermore, known lancing devices include manually actuable buttons for triggering the lance-driving
10 mechanism once the user has placed the device against his/her skin. Because the user knows the precise instant when the lancet will be triggered and pain will be felt, there is a tendency for the user to jerk or raise the device at the instant of triggering, which can lead to
15 inconsistent skin penetration, or possibly no penetration. Therefore, a further object of the invention is to provide a lancing device which eliminates such a tendency on the part of the user.

Therefore, it is another object of the invention to provide a lancet carrier which eliminates the above-
20 mentioned shortcomings.

Another object of this invention is to provide a method which can result in a sample of either blood or interstitial fluid, depending on the sample site and the
25 penetration depth utilized. While there are no commercially available devices utilizing interstitial fluid (ISF) at this time, there are active efforts to establish the correlation of analytes, such as glucose, in ISF compared to whole blood. If ISF could be readily
30 obtained and correlation is established, ISF may be preferable as a sample since there is no interference of red blood cells or hematocrit adjustment required.

Another object of this invention is to provide a method which can draw a small but adjustable sample, i.e.

3 μL for one test device and 8 μL for another test device,
as appropriate.

Another object of this invention is to provide a
method by which the drawn sample is collected and may be
5 easily presented to a testing device, regardless of the
location of the sample site on the body. This approach
helps with infection control in that multiple patients are
not brought in contact with a single test instrument; only
the sampling device with a disposable patient-contact
10 portion is brought to the test instrument. Alternatively,
the disposable portion of a test device may be physically
coupled with the sampler so the sample can be brought
directly into the test device during sampling. The test
device may then be read in a test instrument if
15 appropriate or the testing system can be integrated into
the sampler and the test device can provide direct results
displayed for the patient.

It is a further object of the invention is to
provide a device for minimally invasive sampling
20 comprising a reusable sampler and disposable sample lancet
and collection device.

Summary of the Invention

The present invention involves a method of
obtaining a sample of fluid from a body. The method
25 comprises applying a skin-lancing medium against a skin
surface to form an incision therein, removing the skin-
lancing medium from the incision; and thereafter applying
a force to depress the skin in a manner forming a ring of
depressed body tissue in surrounding relationship to the
30 incision, causing the incision to bulge and the sides of
the incision to open, whereby body fluid is forced out
through the opening of the incision.

The invention also relates to a device for
sampling body fluid which comprises a housing having an
35 open end, and a skin lancing mechanism for applying a

skin-lancing medium against a skin surface to form an incision therein and then remove the skin-lancing medium from the incision. A stimulator member is mounted to the housing at the open end thereof for movement relative to the housing. The stimulator member extends about a longitudinal axis of the housing and is adapted to engage the skin surface to bulge and open the incision in response to a pressing of the end face against the skin surface.

10 The invention also relates to a device for expressing body fluid from a lanced skin surface, which comprises a housing, and a stimulator mechanism mounted to the housing at an end thereof. The stimulator mechanism includes a generally circular array of stimulator elements each mounted to the housing for movement toward and away from a longitudinal axis of the housing. An actuator is mounted to the housing for displacing the stimulator elements toward the axis.

20 The invention also relates to a device for expressing body fluid from a lanced skin surface, which comprises a housing and a stimulator member mounted on the housing at an end thereof. The stimulator member comprises a coil spring which is compressible toward the housing in response to being pushed against a user's skin in surrounding relationship to a lanced portion thereof.

25 Another aspect of the invention relates to a device for expressing body fluid from a lanced skin surface which comprises a housing and a hollow stimulator member mounted at an end of the housing and adapted to engage a user's skin surface in surrounding relationship to a lanced portion thereof. In order to promote the flow of body fluid, the stimulator member can be heated, or vibrated. If vibrated, the stimulator member applies an ultrasonic frequency to the skin surface.

30

The invention also relates to a device for expressing body fluid from a lanced skin surface which comprises a housing and a hollow stimulator member mounted at an end of the housing for longitudinal movement relative to the housing and adapted to contact a user's skin surface in surrounding relationship to a lanced portion thereof. A motor is mounted in the housing and a reciprocatory mechanism is connected to the motor to be driven thereby, and is operably connected to the stimulator member for reciprocating the stimulator member along a longitudinal axis of the stimulator member.

Brief Description of the Drawing

The objects and advantages of the invention will become apparent from the following detailed description of preferred embodiments thereof in connection with the accompanying drawing in which like numerals designate like elements and in which:

Fig. 1 is a longitudinal sectional view through a blood sampling device according to a first embodiment of the invention, with the lancet carrier in an unarmed condition;

Fig. 2 is a view similar to Fig. 1, with the lancet carrier in an armed condition;

Fig. 3 is a view similar to Fig. 2 after the lancet carrier has been triggered and a lancet is penetrating the skin;

Fig. 4 is a fragmentary view similar to Fig. 1 after an incision has been formed;

Fig. 5 is a view similar to Fig. 4 showing a stimulator member of the device being depressed to cause the incision to bulge and open;

Fig. 6 is a view similar to Fig. 5 after a stimulating action has been performed to form a drop of blood at the open end of the incision;

Fig. 7 is a fragmentary longitudinal sectional view through a second embodiment of the invention;

Fig. 8 is a fragmentary longitudinal sectional view taken through a third embodiment of the invention;

5 Fig. 9 is a side elevational view of a fourth embodiment of the invention pressed against a skin surface;

Fig. 10 is an end view of the device depicted in Fig. 9;

10 Fig. 11 is a view similar to Fig. 9 after the device has been compressed against the skin surface to bulge and open an incision;

Fig. 12 is an end view of the device in the condition depicted in Fig. 11;

15 Fig. 13 is a fragmentary longitudinal sectional view taken through a fifth embodiment of the invention while in a first state of operation;

Fig. 14 is a view similar to Fig. 13 with the device in a second condition of operation;

20 Fig. 15 is a fragmentary longitudinal sectional view taken through a sixth embodiment of the invention in a first condition of operation thereof;

Fig. 16 is a view similar to Fig. 15 with the device in another condition of operation;

25 Fig. 17 is a view similar to Fig. 16 of yet a further condition of operation of the device;

Fig. 18 is a side elevational view, partly in longitudinal section of yet another embodiment of the invention; and

30 Fig. 19 is a longitudinal sectional view taken through still a further embodiment of the invention.

Detailed Description of a
Preferred Embodiment of the Invention

A lancing device 10 (see Fig. 1) according to one preferred embodiment of the invention comprises an outer housing 12 having upper and lower portions 14, 16
5 connected together, and an inner housing 18 fixed to the outer housing.

Mounted for vertical reciprocation in the upper portion 14 of the outer housing 12 is a cocking mechanism
10 20 comprising a pull handle 22 to which is fixedly secured a hollow draw tube 24. Fixed to an inner wall of the draw tube 24 is a draw ring 26.

Situated within the draw tube 24 is a draw bar 30 having a pair of flexible hooks 32 at its upper end. The
15 hooks are releasably latched to a sleeve 34 which is movably disposed within the draw ring 26. A coil compression spring 36 acts between a flange 33 of the sleeve 34 and an inner flange 38 of the draw ring 26.

A trigger sleeve 35 is mounted within the lower portion 16 of the outer housing 12. A lower end of the
20 trigger sleeve rests upon a first outer flange 37A of the inner housing, and a second outer flange 37B of the inner housing rests upon an inner projection 39 of the trigger sleeve.

At its lower end the draw bar 30 frictionally
25 holds a skin-lancing medium in the form of a disposable lancet 40 in which a needle 42 is disposed. The draw bar 30 includes a flexible latch finger 44 that has a projection 45 adapted to be received in a hole 46 of the
30 inner housing 18 (see Fig. 2) when the device is armed. A trigger member 49 is mounted in a hole 47 of the trigger sleeve 35 and includes an arm 48 extending partially into the hole 46. The trigger 46 includes an inclined cam follower surface 50.

A coil compression spring 52 acts between a top wall 54 of the inner housing 18 and a shoulder 56 of the draw bar.

Slidably disposed within a lower end of the lower portion of the outer housing is a firing tube 60 which includes an upper cam surface 62. Fixed to a lower end of the firing tube 60 is an outer hollow stimulator member in the form of a cylindrical ring 64, having an end surface 65 of generally frusto-conical shape so as to be oriented at a downward and inward inclination to generally face a longitudinal axis A of the device.

Disposed coaxially within the firing tube 60 and outer stimulator ring 64 is an inner hollow stimulator member also in the form of a cylindrical ring 66 having a frusto-conical end surface 67 also oriented at a downward and inward inclination.

The end surfaces 65 and 67 are of circular configuration when viewed along the axis A, other configurations, such as polygonal, oval, etc., are possible.

A coil compression spring 68 acts between an upper end of the outer stimulator ring 64 and a downwardly facing shoulder 70 of the inner stimulator ring 66.

The inner stimulator ring 66 includes a lance stop flange 72 adapted to be engaged by a lance ring 74 of the lancet 40 as will be explained.

The first flange 37A of the inner housing rests upon a support sleeve 80 which, in turn, rests upon an upper end of the inner stimulator ring 66.

In practice, when a fluid sample, such as blood or interstitial fluid, is to be taken from a user's body, a lancing device according to the present invention can be used to minimize pain. To do so, a region of the user's body having less sensitivity than, for example, a fingertip, is selected. Such a low-sensitivity region

could be the user's forearm for example. Initially, the handle 22 is pulled up to raise the drawbar 30 until the projection 45 of the latch finger 44 snaps into the hole 44 of the inner housing 18, as shown in Fig. 2.

5 Simultaneously, the spring 52 is compressed.

If the outer stimulator ring 64 is pressed against the user's skin S, e.g., on the selected forearm region FA, the ring 64 and its cam surface 62 are moved upwardly to displace the trigger radially inwardly, 10 whereupon the projection 45 of the latch finger 44 is disengaged from the hole 46. Accordingly, the spring 52 expands to displace the drawbar 30 downwardly so that the needle 42 punctures the skin sufficiently deep to cut capillaries in the superficial vascular plexus, as shown 15 in Fig. 3. Simultaneously, the spring 68 is compressed. The extent of displacement of the drawbar 30 is limited by engagement between the lance ring 74 with the lance stop 72.

Once lancing has occurred, the compressed spring 20 68 expands to raise the drawbar, as well as the needle 42 and inner stimulator ring 66 from the skin (see Fig. 4).

The user then alternately applies and releases a downward force on the outer housing 12. Each time that a downward force is applied, the end face 65 of the outer 25 stimulator ring 64 exerts a downward force F which depresses a ring-shaped portion of the skin and body tissue which is disposed in surrounding relationship to the wound or incision I, causing the wounded area to bulge while pulling apart the sides of the wound (see Fig. 5). 30 Hence, fluid such as blood or interstitial fluid is trapped and pressurized so that it travels upwardly through the pulled-open end of the wound since the surrounding ring of depressed skin and body tissue restricts the outward flow of fluid. That action is 35 enhanced by the fact that the force F is inclined inwardly

toward the axis A to force the fluid toward the bulged area.

When the downward force is released, the sides of the wound close, and fresh fluid flows toward the area of the wound to replace fluid which had been forced upwardly through the wound. As the downward force is reapplied, the above-described action is repeated and additional fluid is forced through the wound. Eventually, this "pumping" action results in the formation of a suitably large drop D of fluid (Fig. 6).

It will thus be appreciated that the present invention enables an ample supply of blood, interstitial fluid or other body fluid to be obtained relatively painlessly from areas of the body which typically possess lesser amounts of such fluid as compared with the highly sensitive fingertip region.

Note that each time that the downward force is applied to the outer housing, the outer stimulator ring 64 moves upwardly relative to the inner stimulator ring 66 so that the end surface 67 of the inner ring 66 also contacts the skin surface S at a location inwardly of the outer face 65, thereby promoting the displacement of fluid inwardly toward the wound. However, the present invention can be practiced by a single stimulator ring arrangement 64A as shown in Fig. 8.

While the surfaces 65, 67 are continuous, i.e., non-interrupted, it may be desirable to provide either or both of those surfaces with circumferentially spaced recesses 80 as shown in Fig. 7. The surface(s) 65A, 67A will still depress a ring of body tissue surrounding the wound, but the areas of the ring corresponding to the location of the recesses will be depressed to a lesser extent than the other areas. Those lesser depressed areas will provide less resistance to fluid flow and will thus enable some fluid to leak past the ring, which would be

beneficial in the event that the user neglects to release the downward pressure on the device.

The stimulator member need not be in the form of a ring. As depicted in Figs. 9-12, the stimulator member can be in the form of a helical spring 90 formed by a flat strip 92. Such a spring would function in somewhat similar fashion to the double-ring arrangement of Figs. 1-7 in that a stimulator surface gradually comes into contact with the skin in a radially inward direction to aid in propelling blood or interstitial fluid toward the center axis. In that regard, Figs. 9 and 10 depict a condition when the spring 90 is uncompressed. In contrast, Figs. 11 and 12 depict a condition wherein the spring is fully compressed. Shaded regions in Figs. 10 and 12 represent contact between the spring and the skin. It will be appreciated that during compression of the spring, the contact region of the spring progresses gradually radially inwardly, causing blood or interstitial fluid to be pushed toward the axis A and thus toward the bulged area of the skin.

Depicted in Figs. 13 and 14 is yet another alternative embodiment wherein the outer stimulator ring 64B is interconnected to the inner stimulator ring 66B by levers 100 which are pivoted to the firing tube 60B. Thus, upward sliding movement of the outer ring 64B is transmitted as a downward force to the inner ring 66B to slide the latter downwardly and intensify the pumping action.

A further embodiment is depicted in Figs. 15-17 wherein the firing tube 60C has a carrier tube 102 affixed at a lower end thereof. Pivotably mounted on the carrier tube 102 is a circular array of levers 104 each having an upper and lower end, each lower end carrying a stimulator element in the form of a roller 106. Each lever 104 is

rotatable about an axis extending orthogonally relative to the axis of the housing.

An inner ring 110 is slidable up and down, either by manual force, or by a motor-driven cam (e.g., of the type disclosed later in connection with Fig. 19). That ring 110 has a beveled cam face 112 formed on its lower end. When the device is pressed against the skin, following a lancing procedure, the ring 110 is moved downwardly so that the cam face 112 engages rollers 108 mounted on upper ends of the levers. Hence, the levers 104 are rotated such that the lower rollers 106 are displaced inwardly and upwardly at a location disposed below the open end of the bulged wound to open the wound and force blood or interstitial fluid toward the wound to form a drop D. When the levers are not contacted by the cam face 112, the rollers 106 gravitate to a rest position shown in fig. 15. Repeated applications of the downward force cause the drop to become gradually enlarged as explained earlier.

Depicted in Fig. 18 is an alternative embodiment similar to that depicted in Figs. 1-6, except that the lower end surface of the outer stimulator ring 64D is provided with a hollow stimulator element 114 which is electrically connected to a battery 116 mounted in an upper end of the device. The element can be either an electrical resistance element (i.e., a heater) or a vibrator such as a piezoelectric transducer, intended to stimulate fluid flow. A heater will expand the capillaries and make the blood or interstitial fluid less viscous and thus more flowable, in order to increase the amount of the body fluid sample.

On the other hand, if the element 114 is a vibrator, such as a piezoelectric transducer, vibrations can be created which stimulate the flow of body fluid. This could be achieved by operating the transducer to

produce frequencies below 28,000 cycles per second. Alternatively, ultrasonic frequencies, i.e., frequencies above 20,000 cycles per second, will create interferometric wave patterns inside the skin that cause contractions forcing fluid upwardly from the wound. The frusto-conical shape 114A of the end face of the element will optimize the creation of such wave patterns. It may be further beneficial to employ a heater, such as an infrared emitter, mounted in the housing which vasodilates the capillaries to increase blood flow. Another advantage of the use of such frequencies is that only minimal downward force to the device may be necessary since the wave patterns may produce an ample pumping action.

Fig. 19 depicts a device which is not automatically fired, but rather requires manual actuation of lever 130 against a bias of a spring 132 to force a trigger 134 to push a projection 136 out of a hole 138 (when the projection extends into that hole).

Mounted in a housing 140 of the device are a battery 142 and electric motor 144 connected to the battery to be actuated thereby. The motor 144 rotates a sleeve 146 about the axis A. The sleeve includes a cam surface 148 which engages a follower roller 150 mounted on a tube 152.

As the sleeve 146 rotates, the cam surface pushes the tube 152 downwardly against the bias of a coil compression spring 154, to push an inner stimulator ring 156 repeatedly against a skin surface, thereby pumping blood to the top of an incision in the same manner described earlier herein. The inner stimulator ring 156 reciprocates along the axis A within an outer stimulator ring 155. This embodiment eliminates the need for the user to pulsate the device up and down; the pumping operation is achieved automatically in response to actuation of the lever 130.

The cam mechanism 146 can be used in an automatically firing device, such as that disclosed in connection with Fig. 1.

5 It will be appreciated that the present invention enables a sampling of blood or interstitial fluid to be taken from areas of the body, such as a forearm, that are less insensitive to pain, despite the fact that those areas typically have relatively less fluid as compared, for example, to fingertips (which are highly sensitive to
10 pain).

Therefore, there will be less reluctance on the part of users to have a sampling procedure performed. For example, diabetics who experience a relatively high fear of pain will be less likely to neglect monitoring their
15 blood glucose levels.

Another suitable skin lancing device that can be used to practice the present invention is that disclosed in concurrently filed Application Serial No. _____ (Attorney Docket 018176-039), the disclosure of which is
20 incorporated herein by reference.

In lieu of using a lancet as a skin-lancing medium, other skin-lancing media can be used, such as a laser, or known pneumatic or hydraulic injectors of the type which inject pressurized gas or liquid against the
25 skin. Such auto injectors are sold by Becton-Dickinson, for example, to inject insulin. By eliminating the insulin and merely injecting the gas (e.g., air or nitrogen) or liquid (e.g., water) at pressures above 30 psi. an incision could be formed in the skin for taking
30 samples of body fluid. Advantageously, small particles could be mixed with the gas to promote the tissue-cutting action. The particles could comprise carbon particles of from 1 micron to 0.010 inches in diameter.

Although the present invention has been described
35 in connection with preferred embodiments thereof, it will

be appreciated by those skilled in the art that additions, deletions, modifications, and substitutions not specifically described may be made without departing from the spirit and scope of the invention as defined in the
5 ppende claims.

WHAT IS CLAIMED:

1. A method of obtaining a sample of body fluid from a body, comprising the steps of:
 - 5 A) applying a skin-lancing medium against the skin of a user to form an incision in the skin;
 - B) removing the skin-lancing medium from the incision; and thereafter
 - 10 C) applying a force to depress the skin in a manner forming a ring of depressed body tissue in surrounding relationship to the incision, causing the incision to bulge and the sides of the incision to open, whereby body fluid is forced out through the opening of the incision.
- 15 2. The method according to claim 1, further including the step D of releasing the force of step C and then repeating steps C and D.
3. The method according to claim 1 wherein step C includes applying the force in a direction inclined generally toward the bulged incision.
- 20 4. The method according to claim 1 wherein step C comprises applying the force progressively closer to the incision.
- 25 5. The method according to claim 1 wherein step C includes applying heat in the region of the incision.

6. The method according to claim 1 wherein step C includes applying ultrasonic frequency to the region of the incision.

5 7. The method according to claim 1 wherein step A comprises lancing a region of the user's body other than a finger tip.

8. The method according to claim 1 wherein step A comprises applying a lancet against the skin.

9. A device for sampling body fluid comprising:

10 a housing having an open end;

a skin-lancing mechanism mounted in the housing for applying a skin-lancing medium against a skin surface to form an incision therein, and then remove the skin-lancing medium from the incision;
15 and

a stimulator member mounted to the housing at the open end thereof for movement relative to the housing, the stimulator member extending about a longitudinal axis of the housing the axis and adapted to engage the skin surface to bulge and
20 open the incision in response to a pressing of the end face against the skin surface.

10. The device according to claim 9 wherein the end face is inclined to generally face the axis.

25 11. The device according to claim 9 wherein the end face extends continuously about the axis.

12. The device according to claim 9 wherein the end face includes circumferentially spaced interruptions.

13. The device according to claim 9 wherein the stimulator member is movable relative to the housing along the axis.

14. The device according to claim 9 wherein the stimulator member comprises a first stimulator member, and further including at least one additional stimulator member arranged in telescoping relationship to the first stimulator member, the stimulator members being relatively movable along the axis.

15. The device according to claim 14 wherein the stimulator members include first and second stimulator members which are movable relative to the housing and are interconnected to move axially in mutually opposite directions.

16. The device according to claim 15 wherein the first and second stimulator members are interconnected by levers, each lever being pivoted intermediate its ends for rotation about an axis extending orthogonally relative to the longitudinal axis of the housing.

17. The device according to claim 9 wherein the stimulator member comprises a cylindrical ring.

18. The device according to claim 9 wherein the stimulator member comprises a helical spring.

19. The device according to claim 9 further including a heating mechanism for heating the stimulator member.

5 20. The device according to claim 9 wherein the heating mechanism comprises a battery mounted in the housing and electrically connected to the stimulator member.

10 21. The device according to claim 9 further including a vibrator mechanism for vibrating the stimulator member.

22. The device according to claim 21 wherein the vibrator mechanism applies an ultrasonic vibration to the stimulator member.

15 23. The device according to claim 21 wherein the stimulator member is a piezoelectric transducer.

24. The device according to claim 9 including a reciprocation mechanism for reciprocating the stimulator member along the axis.

20 25. The device according to claim 24 wherein the reciprocation mechanism comprises a motor, a cam sleeve connected to the motor to be driven thereby about the axis and including a cam surface, the stimulator member being operably connected to the cam surface to be displaced axially thereby against a spring bias.

26. The device according to claim 9 wherein the skin-lancing mechanism comprises a lancet.

27. A device for expressing body fluid from a lanced skin surface, comprising:

5 a housing;

a stimulator mechanism mounted to the housing at an end thereof, the stimulator mechanism including a generally circular array of stimulator elements each mounted to the housing for movement toward and away from a longitudinal axis of the housing; and

10

an actuator mounted to the housing for displacing the stimulator elements toward the axis.

28. The device according to claim 26 wherein the stimulator elements comprise rollers mounted to the housing by pivoted levers.

15

29. The device according to claim 26 further including a lancet carrier mounted in the housing and adapted to support a disposable lancet; and a drive mechanism in the housing for driving the lancet carrier along a longitudinal axis of the housing toward the open end thereof to lance a skin surface and form an incision therein.

20

30. A device for expressing body fluid from a lanced skin surface comprising:

a housing;

5 a stimulator member mounted on the housing at an end thereof, the stimulator member comprising a coil spring compressible toward the housing in response to being pushed against a user's skin in surrounding relationship to a lanced portion thereof.

10 31. A device for expressing body fluid from a lanced skin surface comprising:

a housing;

15 a hollow stimulator member mounted at an end of the housing and adapted to engage a user's skin surface in surrounding relationship to a lanced portion thereof; and

heating means for heating the stimulator member.

20 32. The device according to claim 31 wherein the heating means comprises a battery mounted in the housing and electrically connected to the stimulator member.

33. A device for expressing blood or interstitial fluid from a lanced skin surface, comprising:

a housing;

5 a hollow stimulator member mounted on the housing at an end thereof and adapted to engage a user's skin surface in surrounding relationship to a lanced portion thereof, the stimulator member operable to apply an ultrasonic frequency to the skin surface.

34. The device according to claim 33 wherein the stimulator member comprises a piezoelectric transducer.

10 35. The device according to claim 33 wherein the transducer is ring-shaped and includes a frusto-conical inner surface.

36. A device for expressing body fluid from a lanced skin surface comprising:

a housing;

15 a hollow stimulator member mounted at an end of housing for longitudinal movement relative to the housing and adapted to contact a user's skin surface in surrounding relationship to a lanced portion thereof;

20 a motor mounted in the housing; and

a reciprocatory mechanism connected to the motor to be driven thereby and operably connected to the stimulator member for reciprocating the stimulator member along a longitudinal axis of the stimulator member.

25

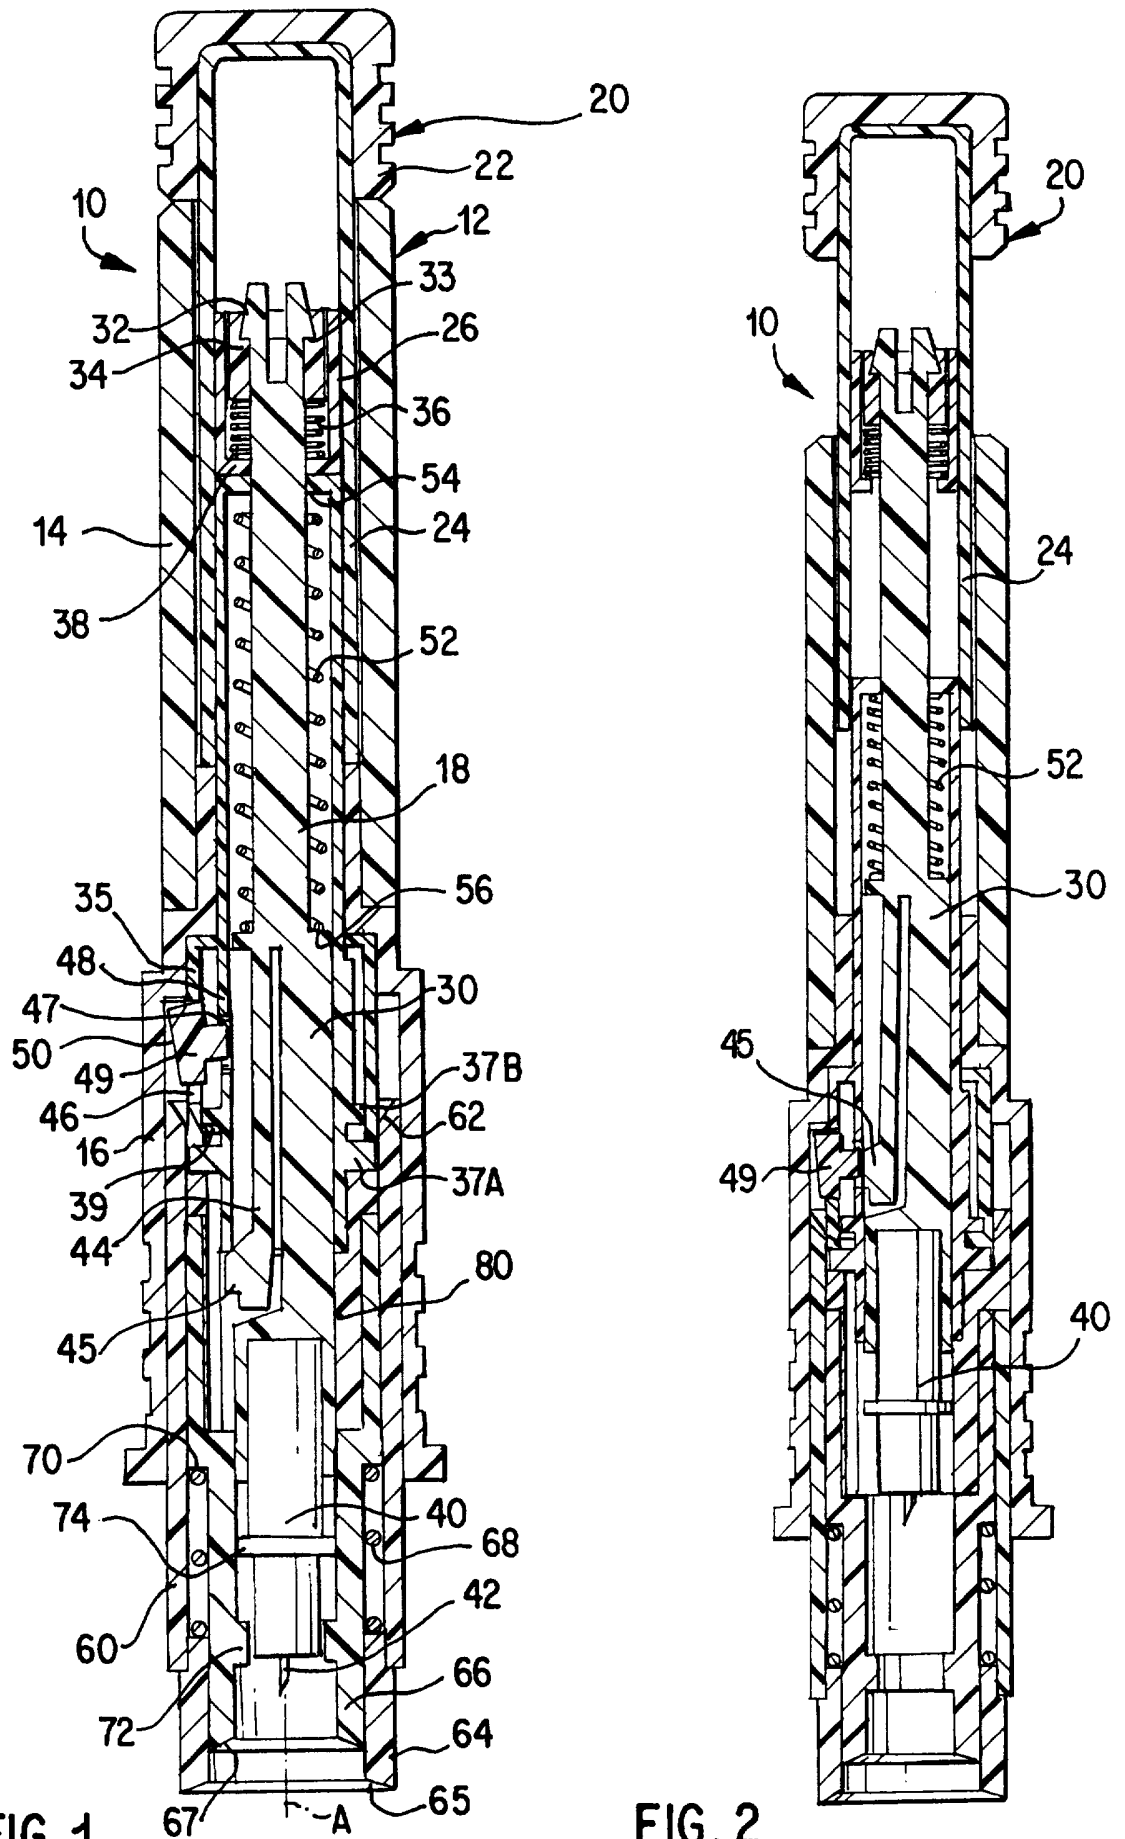


FIG. 1

FIG. 2

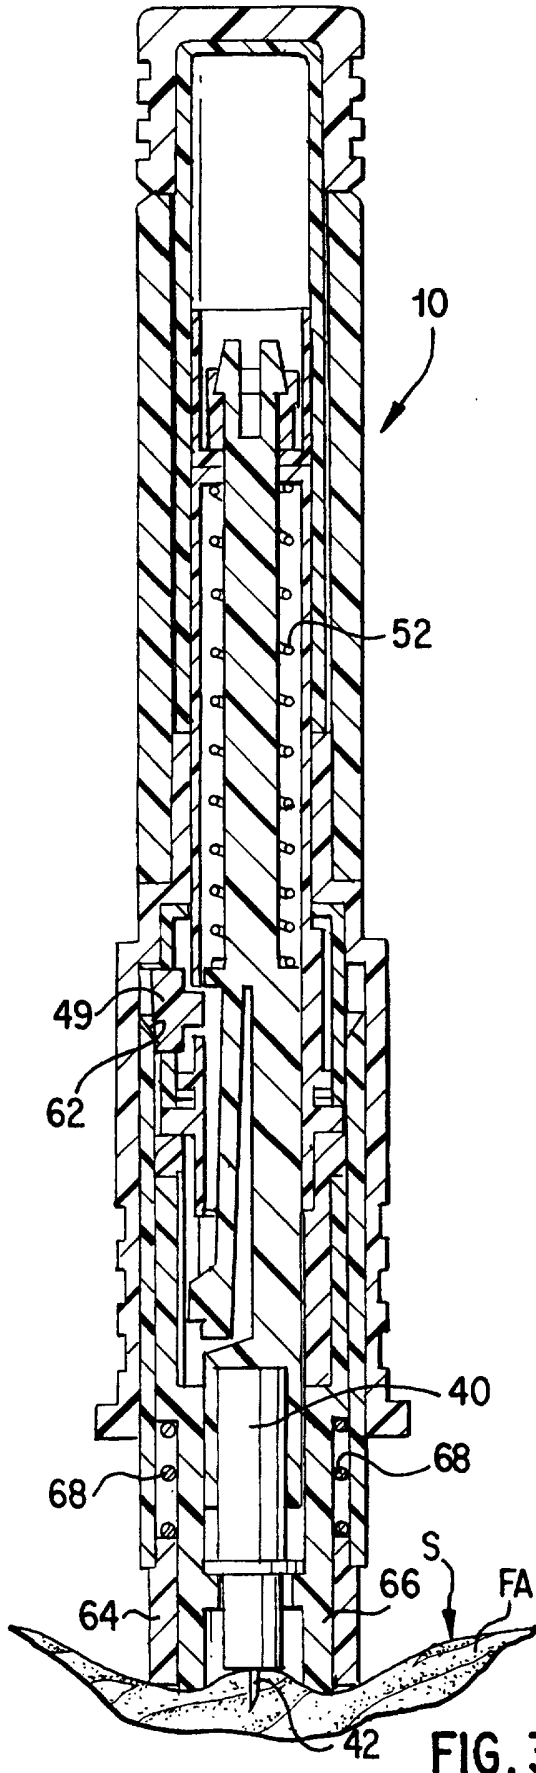


FIG. 3

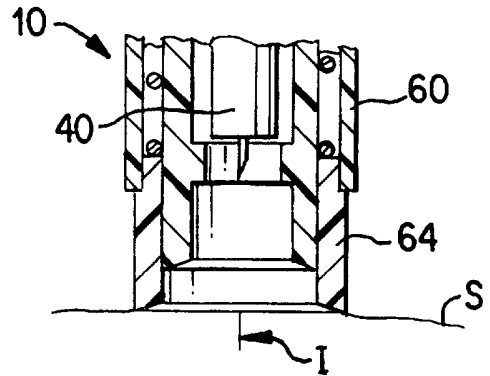


FIG. 4

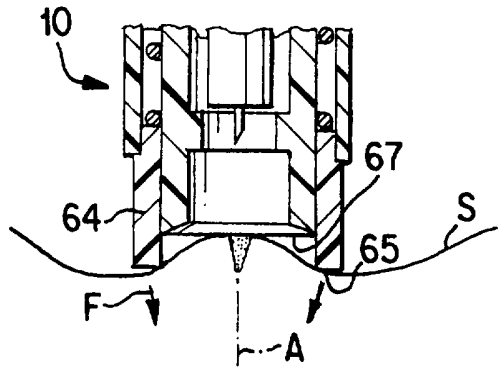


FIG. 5

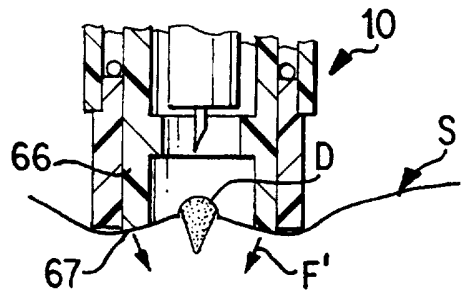


FIG. 6

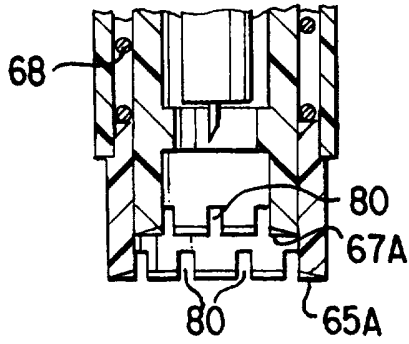


FIG. 7




FIG. 8

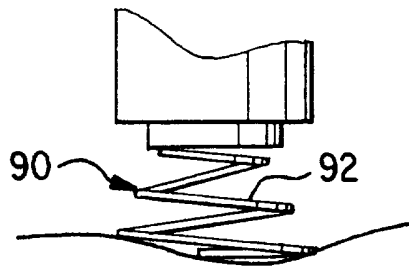


FIG. 9

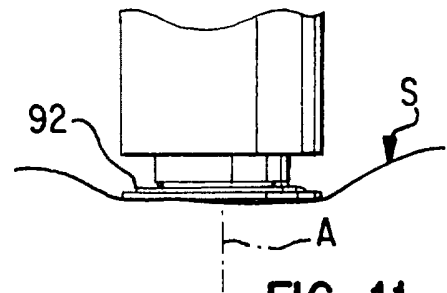


FIG. 11




FIG. 10




FIG. 12

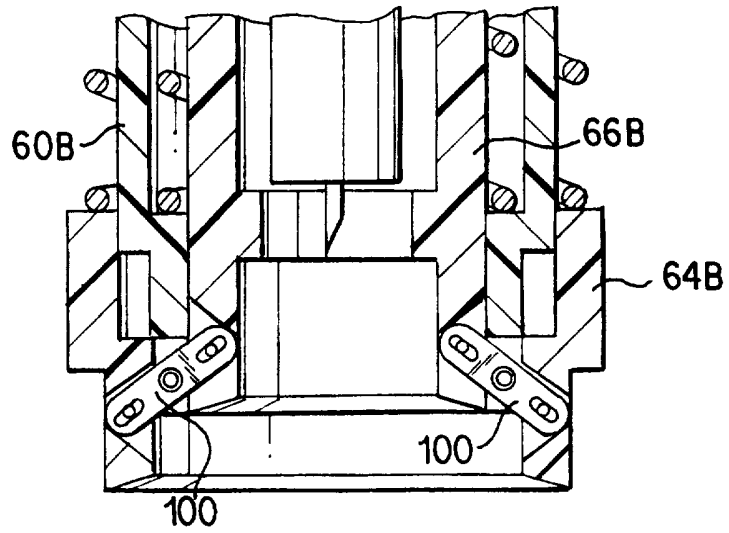


FIG. 13

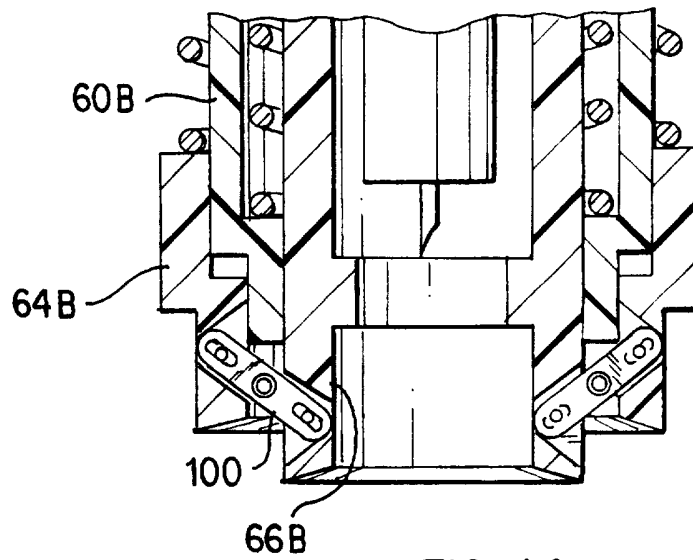


FIG. 14

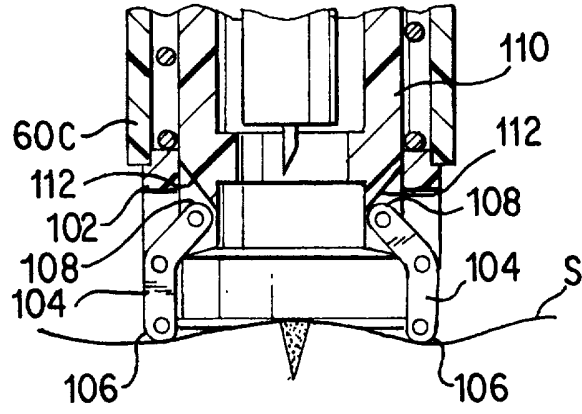


FIG. 15

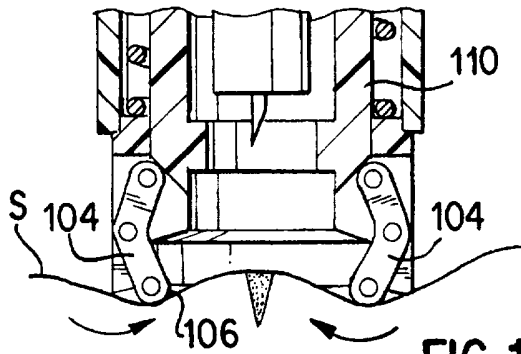


FIG. 16

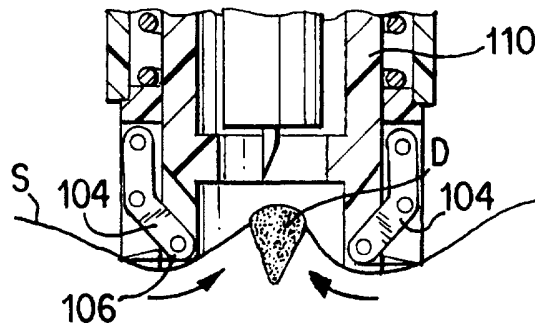


FIG. 17

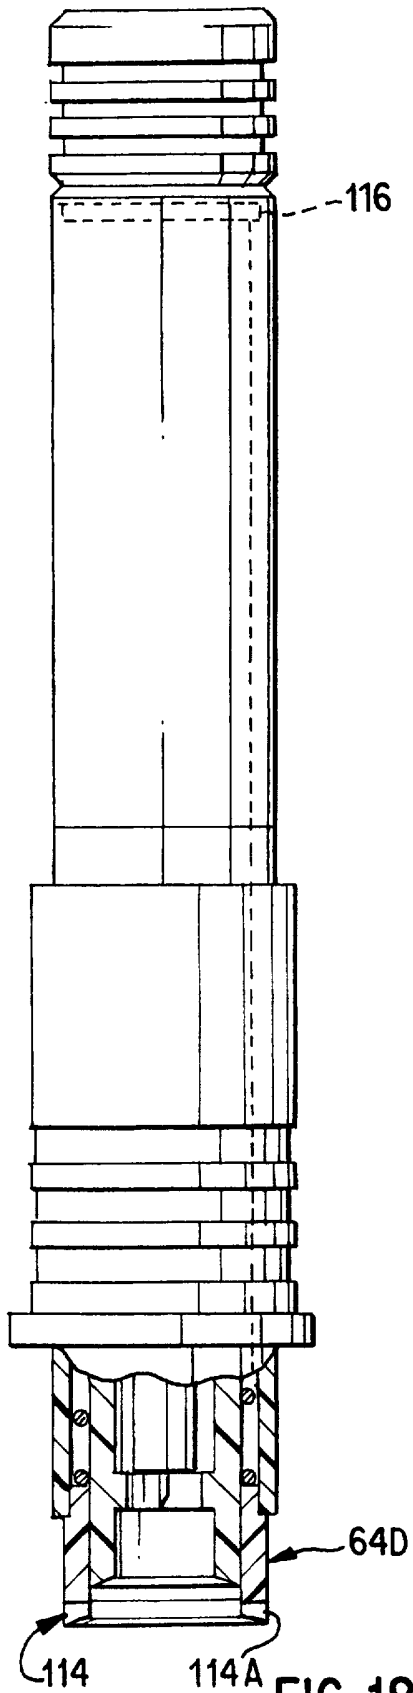


FIG. 18

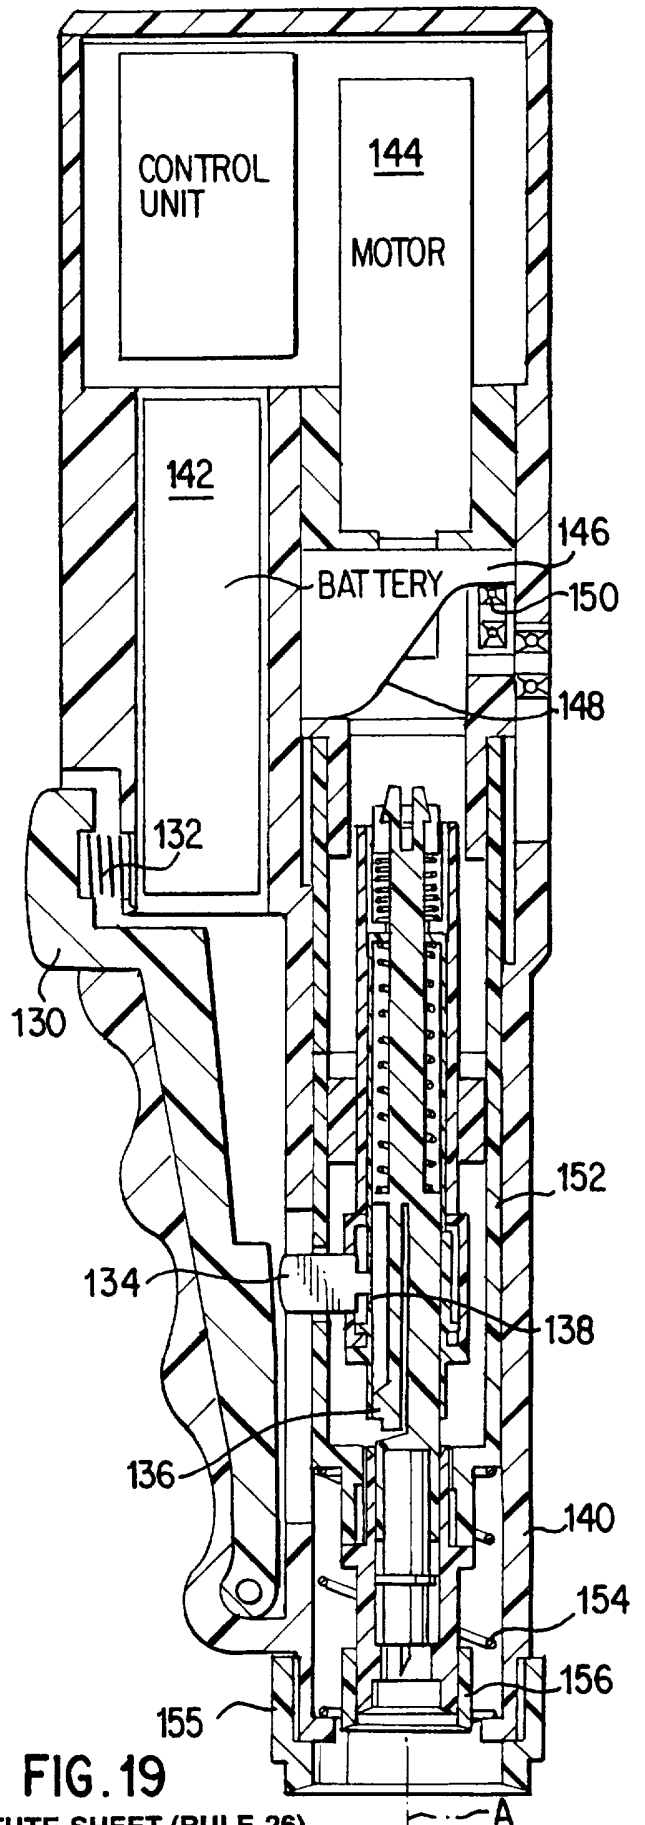


FIG. 19

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/08380

| A. CLASSIFICATION OF SUBJECT MATTER | | |
|---|--|---|
| IPC(6) :A61B 17/32 US CL :606/181 According to International Patent Classification (IPC) or to both national classification and IPC | | |
| B. FIELDS SEARCHED | | |
| Minimum documentation searched (classification system followed by classification symbols) U.S. : 128/760, 765, 766, 770; 606/181, 182 | | |
| Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched | | |
| Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) | | |
| C. DOCUMENTS CONSIDERED TO BE RELEVANT | | |
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| X | US 3,741,197 A (SANZ et al) 26 June 1973, col. 4, lines 12-19. | 1, 3, 4, 7, 8 |
| X | US 3,626,929 A (SANZ et al) 14 December 1971, col. 6, lines 35-55. | 9-13, 24, 26-30, 36. |
| X | US 5,445,611 A (EPPSTEIN et al) 29 August 1995, col. 5, lines 3-16. | 9, 21, 22, 33 |
| X | US 5,421,816 A (LIPKOVKER) 06 June 1995, col. 4, lines 47-67; col. 5, lines 61-68; and col. 6, lines 1-30. | 31-33 |
| <input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex. | | |
| * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family | |
| Date of the actual completion of the international search 01 AUGUST 1997 | | Date of mailing of the international search report 29 AUG 1997 |
| Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230 | | Authorized officer <i>Diane Smith for</i> TINA T. D. PHAM Telephone No. (703) 308-0824 |