United States Patent [19]

Witkin

[11] **3,869,233**

[45] **Mar. 4, 1975**

[54] **APPARATUS FOR RAPID ISOSTATIC PRESSING**

[75] Inventor: **Donald E. Witkin,** Warren, Pa.

[73] Assignee: **National Forge Company,** Irvine, Pa.

[22] Filed: **May 28, 1974**

[21] Appl. No.: **474,017**

Related U.S. Application Data

[62] Division of Ser. No. 359,224, May 11, 1973.

[52] **U.S. Cl.** ..... **425/78,** 425/405 H

[51] **Int. Cl.** **B30b 5/02,** B30b 11/02, B30b 3/00

[58] **Field of Search** ..... 425/405 H, 78

[56] **References Cited**

UNITED STATES PATENTS

3,543,345	12/1970	Boyer	425/405 H X
3,551,946	1/1971	Backer et al.	425/405 H X
3,562,371	2/1971	Bush	425/405 H X
3,677,674	7/1972	Bowles	425/405 H X
3,730,666	5/1973	Bowles	425/405 H

Primary Examiner—J. Howard Flint, Jr.
Attorney, Agent, or Firm—Ronald F. Ball

[57] **ABSTRACT**

Apparatus for compacting preheated powder bodies in a high pressure isostatic pressure vessel in which a liquid such as water is used as the pressurizing medium. A preheated workpiece is inserted into the vessel which is closed and sealed. The vessel is then rapidly filled with the liquid pressurizing medium while avoiding contact of the medium with the preheated workpiece until the vessel is substantially completely full. The pressure within the vessel is then increased rapidly to a preselected compacting level by continually pumping the liquid pressurizing medium into the vessel. The preselected compacting pressure is in excess of the critical pressure of the liquid pressurizing medium. The rapid increase of pressure within the vessel to a level exceeding the critical pressure minimizes the amount of vapor that is formed in the vessel and reduces heat transfer from the preheated body to the pressurizing system.

In a preferred embodiment, avoidance of contact of the pressurizing medium with the preheated workpiece until the vessel is substantially completely filled is accomplished by the use of a shielding container. Alternative means are disclosed. Means for increasing the temperature of the workpiece after it is inserted into the pressure vessel are disclosed. Means for rapidly reducing the pressure within the vessel and for withdrawing the pressurizing medium are also disclosed.

11 Claims, 19 Drawing Figures

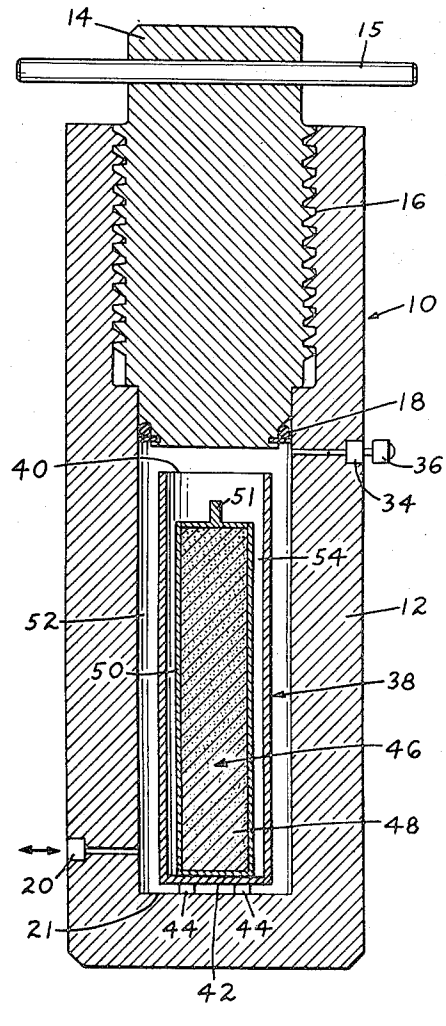

FIG.1.

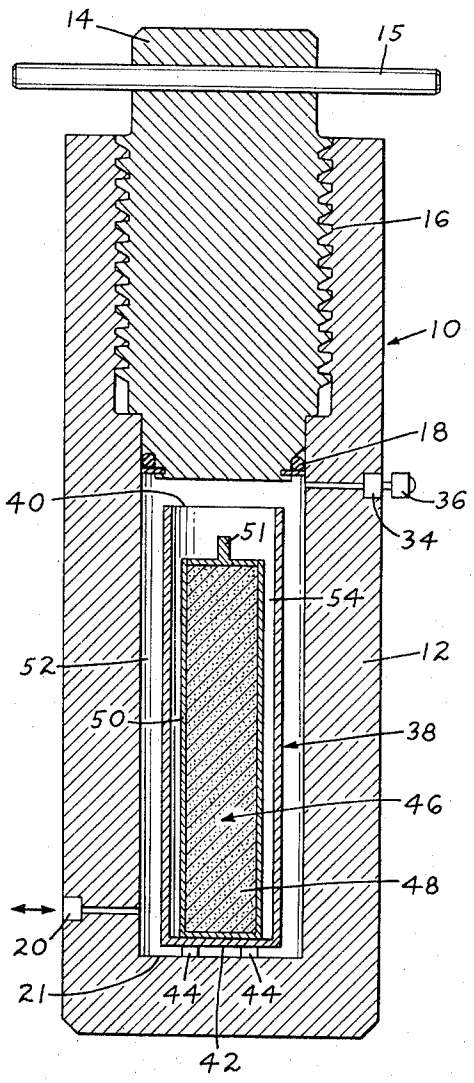
14
15
16
10
18
40
36
34
51
54
52
12
50
38
46
48
20
21
44
44
42

FIG.5.

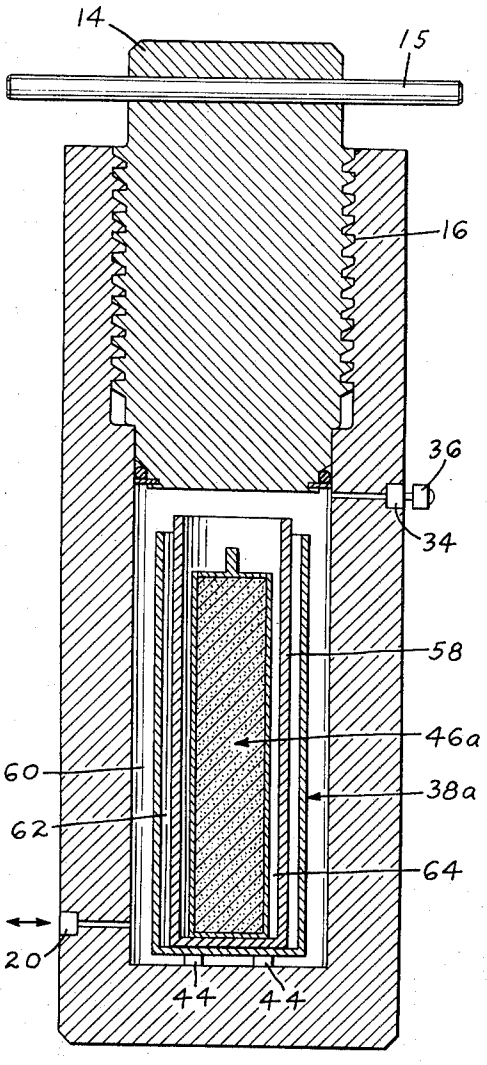
14
15
16
36
34
58
46a
60
38a
62
64
20
44
44

FIG.2A.

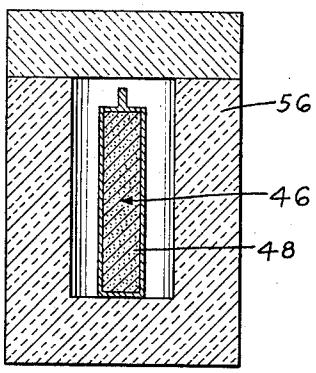

FIG.2B.

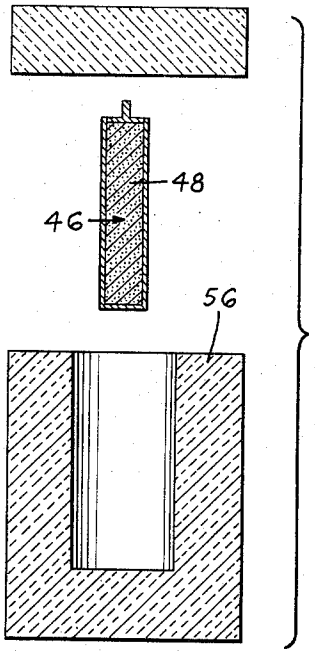

FIG.2C.

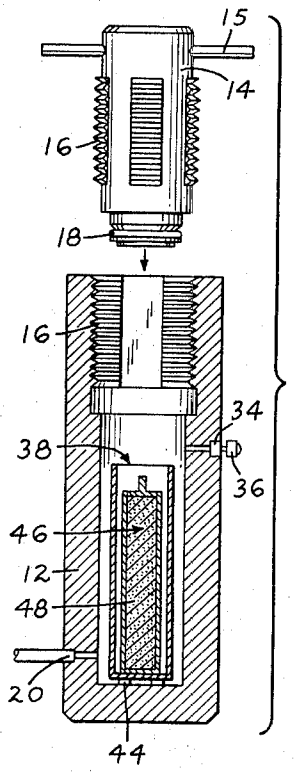

FIG.2D.

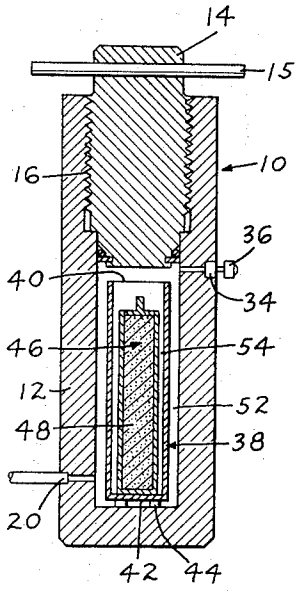

FIG.2E.

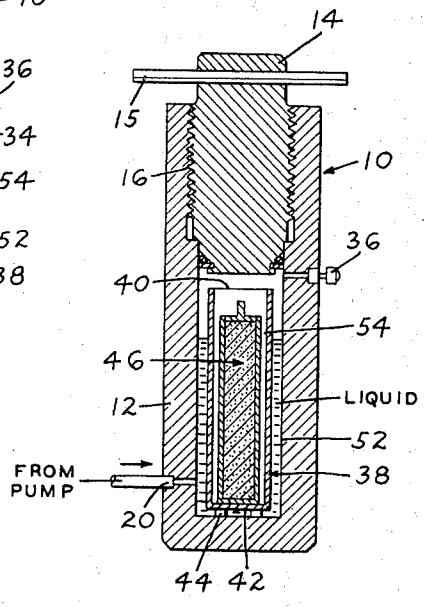

FIG.2F.

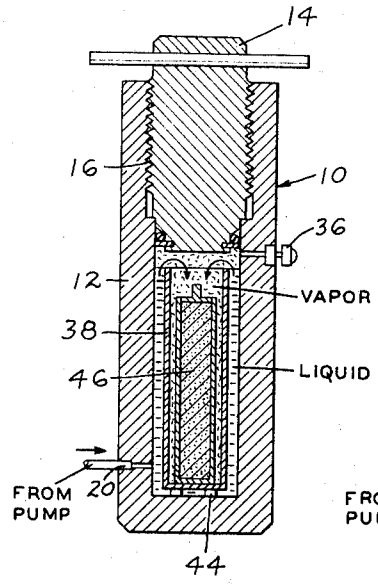

FIG.2G.

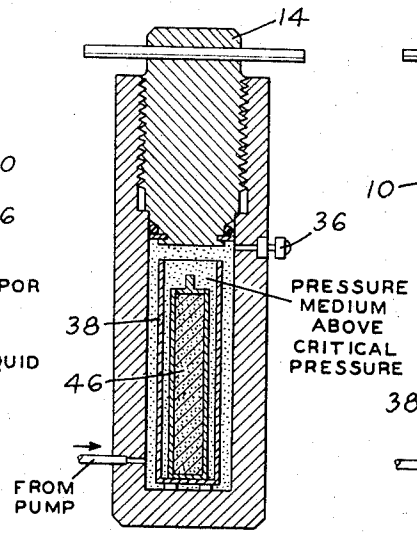

FIG.2H.

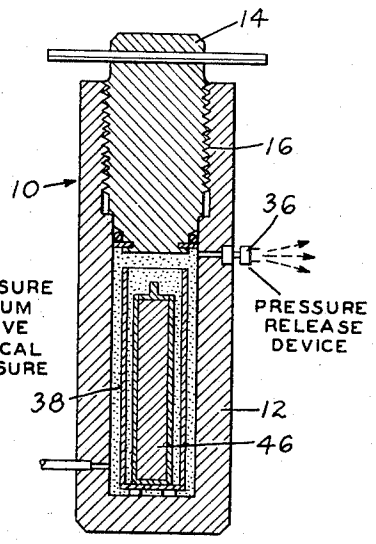

FIG.2L.



FIG.2J.

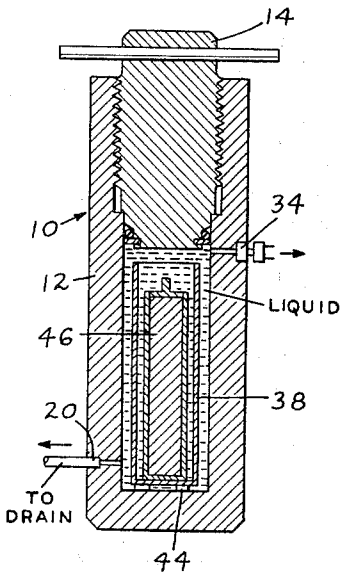

FIG.2K.

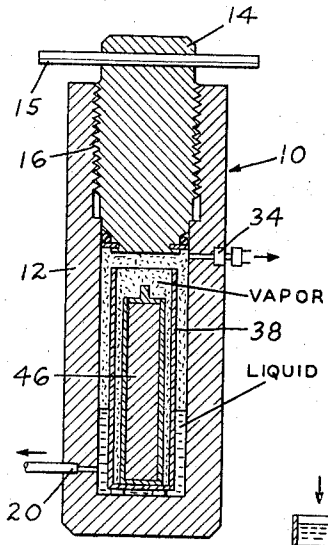

FIG.3.

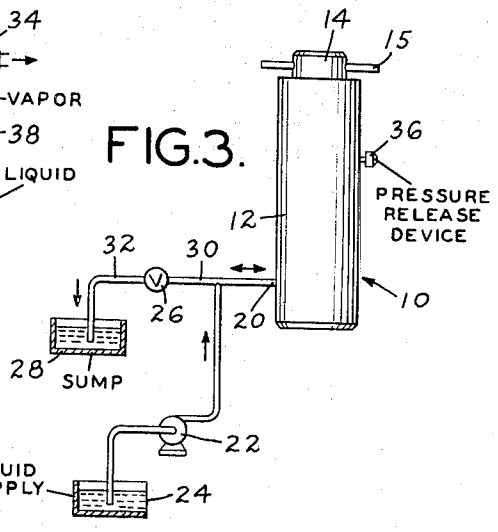

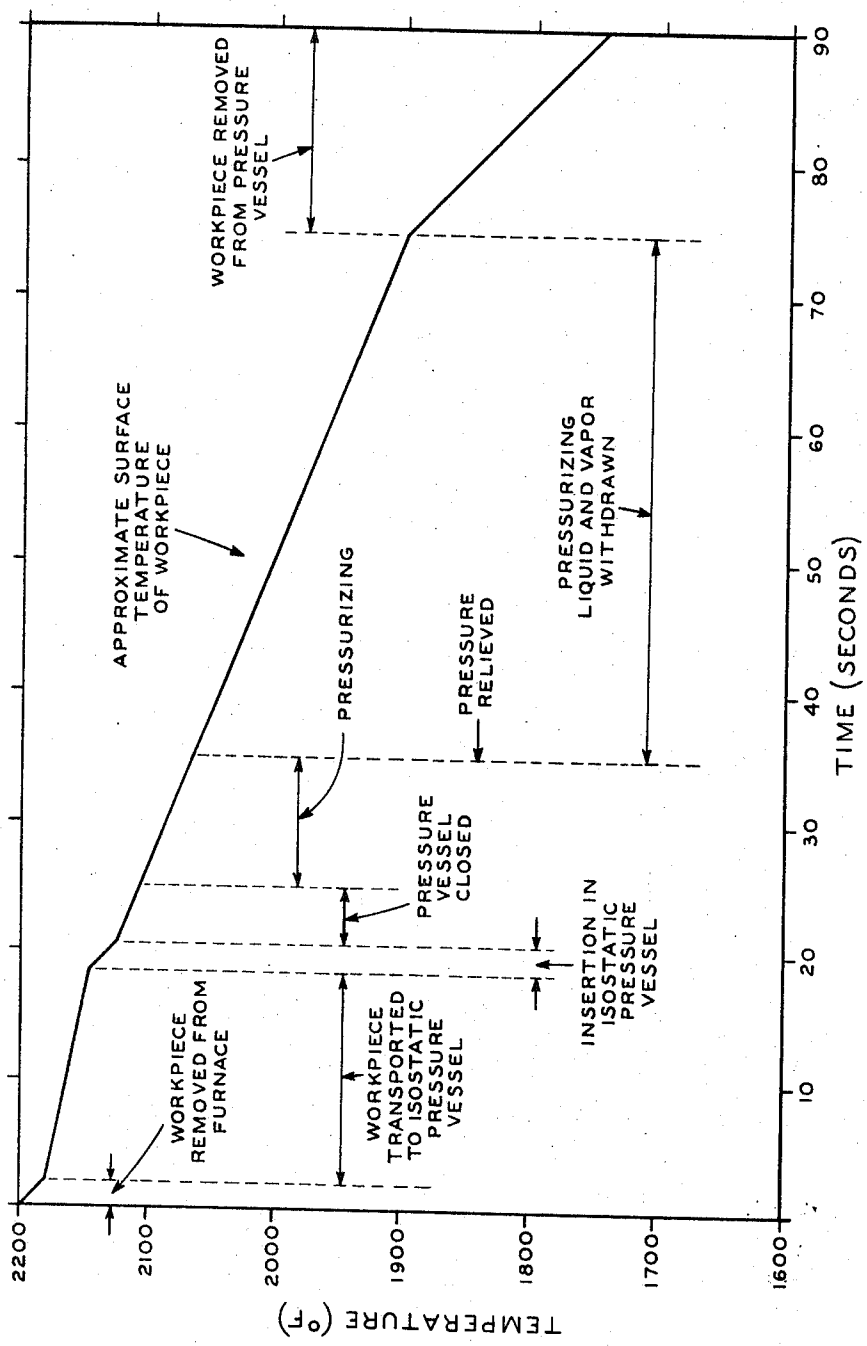
TEMPERATURE (°F)
2200
2100
2000
1900
1800
1700
1600
TIME (SECONDS)
10
20
30
40
50
60
70
80
90
WORKPIECE REMOVED FROM PRESSURE VESSEL
APPROXIMATE SURFACE TEMPERATURE OF WORKPIECE
PRESSURIZING
PRESSURE RELIEVED
PRESSURIZING LIQUID AND VAPOR WITHDRAWN
PRESSURE VESSEL CLOSED
INSERTION IN ISOSTATIC PRESSURE VESSEL
WORKPIECE REMOVED FROM FURNACE
WORKPIECE TRANSPORTED TO ISOSTATIC PRESSURE VESSEL

FIG.4.

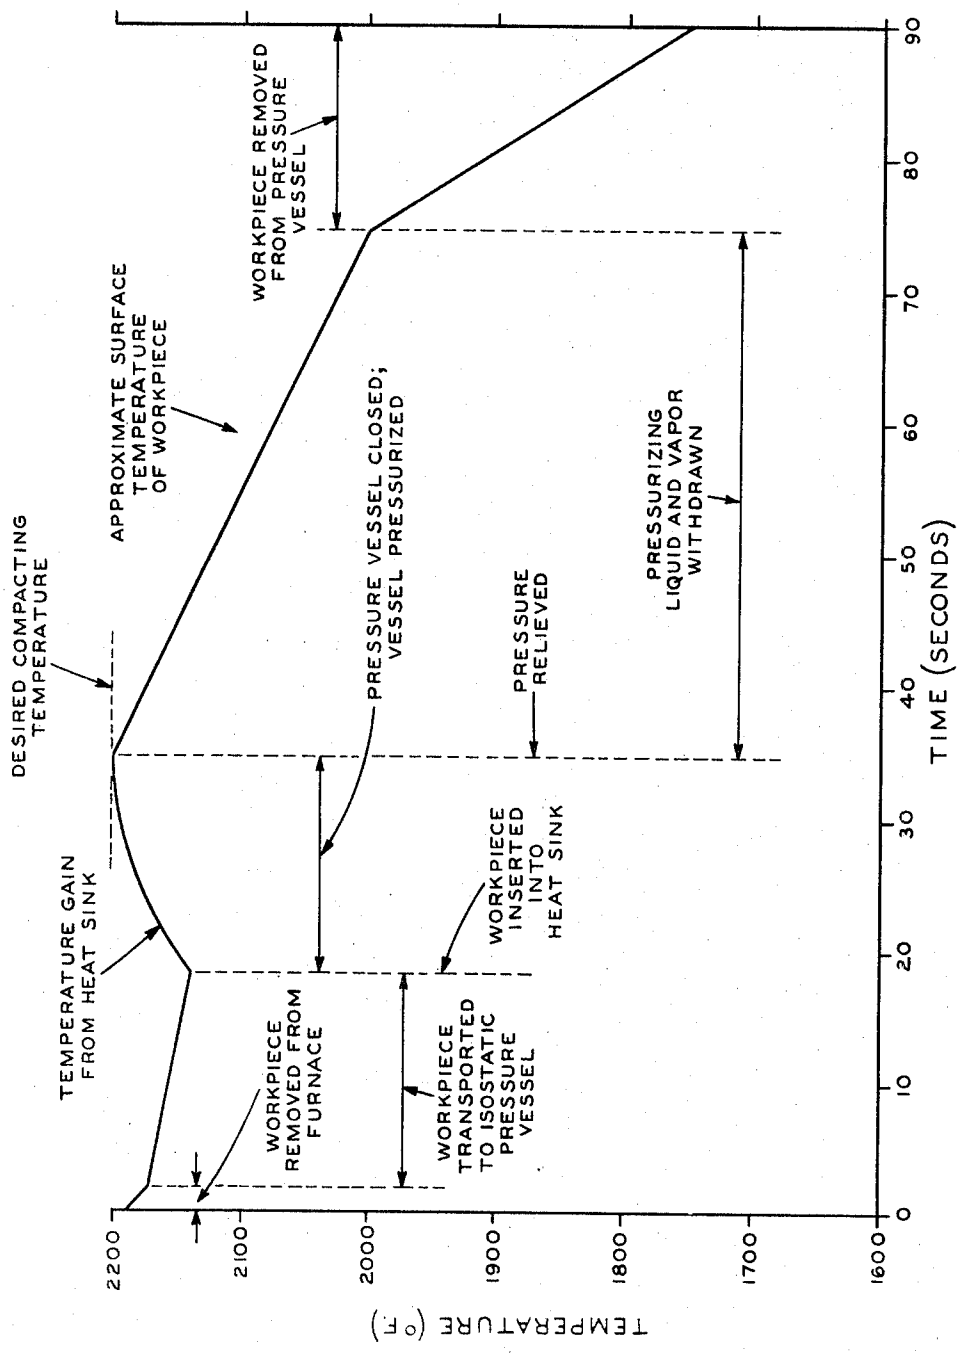
TEMPERATURE (°F)
2200
2100
2000
1900
1800
1700
1600
TIME (SECONDS)
0
10
20
30
40
50
60
70
80
90
DESIRED COMPACTING TEMPERATURE
APPROXIMATE SURFACE TEMPERATURE OF WORKPIECE
TEMPERATURE GAIN FROM HEAT SINK
WORKPIECE REMOVED FROM FURNACE
WORKPIECE TRANSPORTED TO ISOSTATIC PRESSURE VESSEL
WORKPIECE INSERTED INTO HEAT SINK
PRESSURE VESSEL CLOSED; VESSEL PRESSURIZED
PRESSURE RELIEVED
PRESSURIZING LIQUID AND VAPOR WITHDRAWN
WORKPIECE REMOVED FROM PRESSURE VESSEL

FIG.6.

FIG.7.

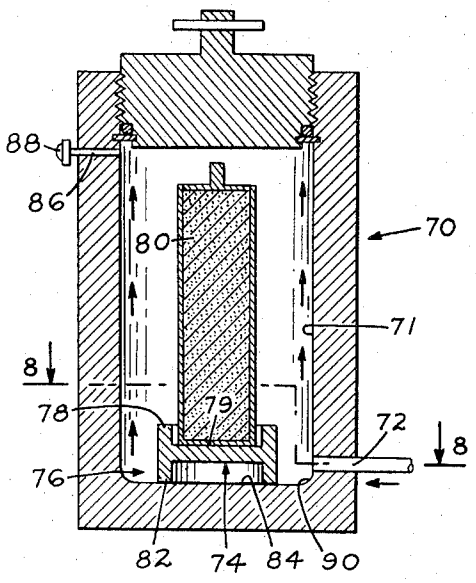

FIG.8.

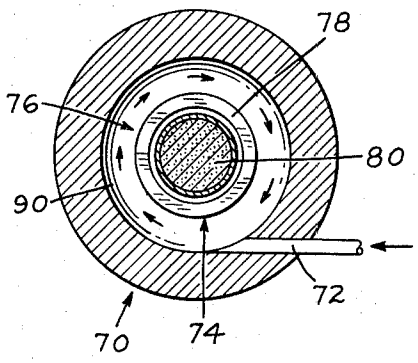

FIG.9.

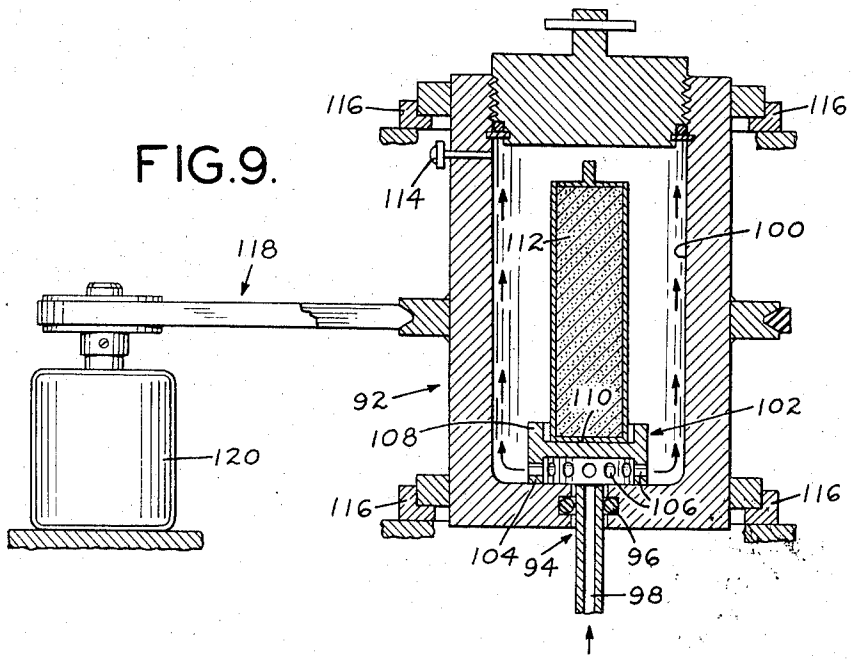

APPARATUS FOR RAPID ISOSTATIC PRESSING

This is a division, of application Ser. No. 359,224 filed May 1, 1973.

BACKGROUND OF THE INVENTION

The present invention relates to the formation of products by hot isostatic pressing, and more particularly to an apparatus for the rapid hot isostatic pressing of materials by the use of a liquid pressure medium.

Heretofore in the hot isostatic pressing of powder particles the pressure medium used has most commonly been an inert gas such as nitrogen, helium or argon. It is know, for example, that finely divided metal powders may be compacted into articles approaching 100 percent of theoretical density by placing a charge of powdered metal in a container, sealing, heating and evacuating the container, transferring the container to a pressure vessel or autoclave and subjecting the container and its contents to the application of high gas pressure. See, for example, U.S. Pat. No. to Thompson 3,450,528.

It is also known that cold isostatic pressing may be accomplished by subjecting powder particles contained in a flexible mold to either gas or liquid pressure. See, for example, the description of prior art practices in U.S. Pat. No. to Bush 3,562,371.

U.S. Pat. No. to Bergman et al. 3,577,635 discloses the isostatic compaction of powder bodies wherein the pressurizing medium is a liquid. That patent states that the container in which the powder particles are enclosed "may possibly also be heated to a certain extent," but there is no description given as to how powdered material heated, for example, to compacting temperature of 2,200°F. may be isostatically pressurized.

Other examples of known methods and apparatus for the hot isostatic pressing of powder particles are disclosed in U.S. Pat. No. to Boyer et al. 3,427,011. The Boyer et al. patent refers repeatedly to the use of gas pressure as the pressurizing medium but also states that "liquids may be acceptable for particular operations" (col. 9, lines 17–18). However, no description is given as to how a liquid may be used for hot isostatic compaction. A detailed description of a typical gas pressure autoclave for the hot isostatic compaction of powder particles is given in the article entitled "Operation of High-Gas-Pressure Autoclaves at High Internal Temperatures" by Boyer et al., published Aug. 17, 1965 by Battelle Memorial Institute of Columbus, Ohio.

One of the problems encountered in the use of gas as the pressurizing medium in hot isostatic pressing is the time consumed in carrying out the process. A relatively long period of time is required adequately to heat the part to be compacted and to raise the pressure of the gaseous pressure medium to the desired level. Various techniques have been suggested for reducing the time it takes to hot isostatically press a powder part by means of a gaseous pressure medium. For example, U.S. Pat. No. to Thompson 3,450,528 discloses a process in which the powder metal charge is preheated before introducing it into the pressure vessel and subjecting it to high fluid pressure. However, Thompson states that in fluid-pressure vessels or "autoclaves" of the type used to practice his invention "high pressures are developed by the use of a gas such as helium."

U.S. Pat. No. to Boyer 3,543,345 discloses an apparatus for rapidly compacting articles from fully preheated powder metal charges by the use of a "high-pressure fluid such as helium gas" wherein a first pressure vessel used for compacting the part is pressurized by interconnecting it to a second or storage pressure vessel previously pressurized to a sufficiently high pressure so that when the interconnecting valve is opened the equilibrium pressure achieved in the system is sufficient for compaction of the powdered material. Boyer's system can function only if a gaseous pressure medium is used because it is dependent upon the expansion of the gas from the second or storage vessel to effect rapid pressurization of the first vessel. Boyer's system would not function if the pressurizing fluid were liquid because liquids are insufficiently compressible to pressurize a vessel using the technique described, i.e., the change in volume corresponding to the pressure difference involved would be too small to fill the first pressure vessel containing the powder metal charge.

In addition, while Thompson's and Boyer's improvements may reduce the time period in which the part to be compacted remains in the pressure vessel, they still entail the use of expensive gas compressors, and in the case of Boyer's interconnected pressure vessels, a second pressure vessel to store the compressed gas is essential.

Where gas is used as the pressurizing fluid, large, expensive multistage gas compressors may be required in order to achieve reasonable efficiency in reaching the desired pressure level because of the compressible nature of the fluid being handled. In addition, where gaseous pressure mediums are used, it is frequently necessary to include electrical heating elements within the pressure vessel in order either to raise the temperature of the part to be compacted to the desired level, or to maintain it at that level if the part is heated prior to being introduced into the pressure vessel. In such case, the fluid used as the pressure transmitting fluid will be in intimate contact with the electrical furnace elements and for this reason the fluid itself must be an electrical insulator.

Another problem encountered in connection with the use of a gaseous pressurizing medium is that of maintaining seals to prevent gas leakage. Control of leakage in gas pressurizing systems is difficult and costly. Also where gas is used as the pressurizing medium, high safety factors for the pressure vessels utilized are necessary because of the high compression required.

SUMMARY AND ADVANTAGES OF THE INVENTION

My invention is for an apparatus for rapidly producing hot isostatically pressed parts in which a liquid such as water is used as the pressurizing medium. The method for using the apparatus of my invention comprises (1) preheating a porous body to be compacted to a temperature sufficiently high for adequate bonding and compacting of the body but below the melting point of the powder material, (2) inserting the preheated part in a dry isostatic pressure vessel which is then sealed, (3) rapidly filling the pressure chamber with liquid while avoiding direct contact of the liquid with the heated body until the pressure vessel is substantially completely full, (4) rapidly increasing the pressure within the vessel to a preselected level sufficient to compact the body by continuing to pump the liquid into the vessel, said preselected pressure level

being in excess of the critical pressure of the pressurizing liquid, (5) decreasing the pressure and withdrawing the liquid from the pressure vessel, and (6) opening the pressure vessel and removing the compacted part therefrom.

As will be described more fully hereinafter, a modification of my invention contemplates the use of a heat sink placed within the vessel either shortly before or simultaneously with the insertion of the body in order to raise the temperature of the body to the desired compacting level following its insertion into the pressure vessel.

In using the term "dry" isostatic pressure vessel I mean one in which there is no liquid within the vessel that will come in contact with the preheated body at the time the latter is inserted into the vessel. Contact of the liquid with the preheated body at this time would cause the liquid to vaporize and result in an undesirable loss of heat from the body due to the heat of vaporization.

My invention also relates to apparatus for rapidly isostatically compacting preheated powder parts by means of a liquid pressurizing medium and in the preferred embodiment comprises (1) a conventional dry high pressure vessel with a quick opening closure, (2) a pumping system capable of rapidly filling the pressure vessel with liquid and of rapidly increasing the pressure of the liquid within the vessel to the desired preselected compacting level, (3) an inner or shielding container within the pressure vessel which is capable of substantially enclosing the preheated powder body to be compacted and of avoiding contact of the liquid introduced into the pressure vessel with the body until the vessel is substantially completely full, (4) a pressure release device for automatically releasing the pressure within the vessel when the preselected compacting pressure has been reached, and (5) a drainage and venting system for withdrawing liquid and vapor from the vessel. In a modified embodiment of my invention the apparatus also includes a heat sink positioned within the furnace for raising the temperature of the workpiece to the desired level.

Heretofore it was thought that the use of a liquid pressurizing medium in hot isostatic pressing was either impossible or impracticable because of the generation of large quantities of vapor when the heated workpiece was brought into contact with the liquid. However, my invention makes possible the use of a liquid such as water as the pressurizing medium even though the workpiece is heated to a temperature well above the boiling point of water, as, for example, to a temperature of 2,200°F.

The use of a liquid pressure medium results in several advantages over existing hot isostatic pressing techniques. For example, extremely short cycle times can be achieved thus permitting a substantial saving in operating costs. In using my invention cycle times (from the introduction of the preheated powder part into the pressure vessel to its removal therefrom in completely compacted condition) on the order of one to two minutes may be realized compared to hours required in conventional gas pressurizing. This makes processing of expensive powder parts such as those made from "exotic" metals, super alloys, and tool steels substantially less costly, making their more general application feasible. Moreover, these short cycle times and reduced costs justify the use of hot isostatic pressing techniques with less expensive powder materials.

The use of a liquid instead of a gas pressurizing medium results in substantial savings in capital costs. While the total energy required to raise the pressure of a liquid within a pressure vessel to a given level is approximately equal to that required to raise the pressure of a gas to the same level, the cost of a gas compressor capable of doing the job is substantially higher than the cost of a liquid pump. This is because of the differences in the volume of fluid that the respective devices must handle. For the same mass at atmospheric pressure conditions the volume ratio of a gas such as argon compared to a liquid such as water is approximately 500 to 1. Thus if an equal mass of each medium is to be pressurized to the same level in the same time period, a gas compressor 500 times larger than a liquid pump is required. The attendant expense of such equipment is obvious, and the space required to house a massive gas compressor is substantial. In addition, as pointed out above, because of the compressible nature of the fluid being handled, gas compressors require multiple stages in order to achieve reasonable efficiency. This makes a gas compressor more complex than a liquid pump with a great multiplicity of parts having a deleterious effect upon reliability. In sum, the use of a simple liquid pump rather than a complex gas compressor is of major significance in the successful operation of a production process because of greatly reduced initial costs and greatly enhanced reliability.

In an isostatic pressure system the use of a liquid such as water instead of an inert gas such as argon as the pressurizing medium also represents a significant increase in the safety factor. In all high pressure systems the amount of stored energy is of great concern since this represents the degree of potential hazard involved. Because of its high compressibility a gaseous medium represents a much higher level of stored energy than a liquid. Thus, in the event of a system failure a highly pressurized gaseous medium is capable of transferring more energy (i.e., higher velocities) to broken system fragments than is a liquid under pressure, increasing the risk of serious personal injury or property damage. This increased danger is recognized by boiler and pressure vessel control groups whose regulations require higher safety factors and more stringent inspection criteria for gas filled pressure vessels than for liquid filled vessels.

A still further advantage of using a liquid rather than a gaseous pressurizing medium is that with a liquid, control of the process can be accomplished more easily and with simpler equipment. When using a liquid pressurizing medium the pressure/temperature combination required for compaction is achieved by limiting the pressure that can be reached by the use of an automatic pressure release device of a type well known in the art. The pumping rate of the liquid can be timed to be compatible with the rate of temperature decrease of the workpiece so that maximum pressure is achieved at the moment the workpiece is at the optimum compacting temperature.

A still further advantage in using a liquid rather than a gaseous pressure medium is the savings realized in the cost of the medium. When the pressure medium is water, the cost is practically nil, whereas the cost of using an inert gas such as argon, nitrogen or helium may be considerable.

Reference has also been made to the difficulties that were believed inherent in bringing a liquid into contact with a workpiece heated to high temperature.

The transformation from a liquid to a vapor requires a significant quantity of heat, which causes an excessive cooling or quenching of the workpiece. As will be more fully described hereinafter, my invention limits the amount of liquid that comes into contact with the heated workpiece while the system is at low pressure and in addition reduces the loss of heat due to phase change by rapidly pressurizing the system to raise the pressure above the critical pressure.

With these advantages in mind it is an object of the present invention to provide a method and apparatus for the hot isostatic pressing of powder particles using a liquid pressurizing medium wherein the change from atmospheric pressure to compacting pressure within the vessel takes place over the shortest possible period of time.

It is a further object of the invention to provide an apparatus for the hot isostatic compaction of powder particles using a liquid pressurizing medium in which the length of time the pressure within the vessel is below the critical pressure of the pressurizing medium is kept to a minimum.

It is a still further object of my invention to provide an apparatus for hot isostatically pressing powder particles in which the loss of heat from the workpiece to the system is reduced to a minimum and in which the period of time that heat transfer from the workpiece to the system takes place prior to reaching the desired compacting temperature is minimized.

It is still another object of my invention to provide an apparatus for hot isostatically pressing powder parts to a density approaching theoretical in a relatively short period thus resulting in faster cycle times for the production of such powder parts.

It is another object of my invention to produce hot isostatically pressed powder parts using lower compacting temperatures as a result of the increased pressures that may be economically realized when using a liquid pressurizing medium.

Further advantages of my invention as well as a complete understanding thereof may be obtained from the following description. BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic sectional view of a high pressure vessel and shielding container used in practicing my invention. The workpiece is shown in place within the shielding container used in the preferred embodiment of my invention.

FIGS. 2A through 2K schematically represent the several steps followed in practicing my invention, and FIG. 2L represents the compacted workpiece removed from the vessel.

FIG. 3 is a schematic representation of the liquid pressure system used in practicing the invention.

FIG. 4 is a time-temperature chart showing schematically the time period required for carrying out the preferred form of my invention, and the approximate surface temperature of the workpiece during the processing cycle.

FIG. 5 is a schematic sectional view of a high pressure vessel, shielding container and heat sink used in practicing a modification of my invention. The workpiece is shown in place within the heat sink and shielding container.

FIG. 6 is a chart similar to FIG. 4, setting forth the approximate time-temperature relationships when using the apparatus illustrated in FIG. 5.

FIG. 7 is a schematic vertical sectional view of a modified form of inlet means for a pressure vessel used in practicing my invention.

FIG. 8 is a plan sectional view taken generally along the lines 8—8 of FIG. 7.

FIG. 9 is a schematic vertical sectional view of a further modification of a pressure vessel used in practicing my invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 shows a high pressure vessel assembly generally designated **10** having an insulated hollow cylindrical body **12** open at the top to receive a quick opening closure plug **14** that may be turned through handle **15.** The vessel may be a standard cold isostatic press with breech type interrupted threads **16.** A closure of this type may be inserted rapidly into the vessel and given a one-eighth turn to close, seal and lock the vessel. A conventional seal ring **18** may be employed. While a top opening vessel is shown in the drawings, it will be understood by those skilled in the art that a pressure vessel having a bottom opening may be utilized in practicing my invention.

The pressure vessel is connected at port **20** to a pumping system, shown schematically in FIG. **3,** capable of pumping a liquid such as water at a very high volume into the pressure vessel and to rapidly raise the pressure of the liquid within the vessel to the compacting level desired. In the embodiment shown schematically in FIG. **3,** a single pump **22** is illustrated. It will be understood by those skilled in the art that the pumping system may comprise a very high volume, low pressure (i.e., less than 100 atmospheres) stage to fill the pressure vessel very rapidly and a suitable capacity high pressure stage to then pressurize the liquid within the pressure vessel to the desired high compacting level within a short time interval. The pump **22** is connected to a source of liquid **24.**

The port **20** is placed in or near the bottom **21** of the vessel **12** and is also connected to a quick opening drain valve **26** (FIG. **3**). The drain valve is of a size sufficient rapidly to vent the liquid contained within the vessel to sump **28.** Valve **26,** when closed, permits liquid from source **24** to be pumped into the pressure vessel **12** through high pressure piping **30** and port **20.** When the pumping action of pump **22** is terminated and valve **26** is opened, liquid is withdrawn from the pressure vessel **12** through port **20,** high pressure pipe **30,** valve **26** and pipe **32** into sump **28.**

While only one inlet-outlet port **20** is shown, it will be understood that the pump could be connected to the interior of the vessel through one port and the drain valve could be connected through a separate port.

The interior of pressure vessel **12** is also connected through port **34** near the top of the vessel to a pressure release device **36.** Pressure release device **36** may be a frangible disc assembly of a construction known to those skilled in the art or, alternatively, may be a quick release valve or the like. In my preferred embodiment, I use a frangible or so-called "rupture disc assembly" having a preselected burst pressure. In this type of assembly the rupture disc will burst when the pressure within the vessel reaches a preselected pressure, for ex-

ample 29,000 psi. Higher or lower pressures could, of course, be selected. The port **34** and pressure release device should be of a size (i.e., diameter) sufficient to rapidly vent any vapor formed within the vessel as will be more fully described hereinafter.

While only one pressure release device **36** is shown, additional frangible disc assemblies set to pressures above the setting on pressure release device **36** but below a safe limiting pressure rating of the vessel may be installed. These additional assemblies may be selected to rupture at increasing pressures to increase sequentially the vent openings in the event of an inadvertent pressure rise.

A dynamic pressure sensing device (not shown), such as a strain gauge type transducer, may be connected to the pressure vessel and to a suitable recording instrument, if desired, to produce permanent records of the pressures within the vessel.

Within the pressure vessel there is positioned an inner or shielding container **38** of cylindrical shape fabricated of a relatively thin metal. Container **38** is open at the top **40** and liquid tight at the bottom **42** and is spaced from the bottom **21** of pressure vessel **12** by supporting legs **44.** The cylindrical side wall of shielding container **38** is spaced radially from the inside wall of pressure vessel body **12.**

Within the inner or shielding container **38** and supported by the liquid tight bottom **42** there is shown a workpiece generally indicated at **46.** In the embodiment shown the workpiece is cylindrical and comprises powder particles **48** contained in can **50** evacuated through sealed evacuation tube **51.** Alternatively, the workpiece may be uncanned, i.e., it may be a self-supporting, partially compacted and sintered body of powder particles with no surrounding or protective covering. it need not be cylindrical but may be of any shape that will fit within container **38** as described below. Where a can is used it should be of a material compatible with the temperature required to achieve a high density compact at the selected pressure, i.e., the material of the can should not melt, but should be adequately plastic to permit the desired compaction of the particles within the container. In addition, the can material should be chemically compatible with the powdered particles in order to avoid contamination of the powder particles or the formation of eutectic compositions with undesirably low melting points.

The inner or shielding container **38** and the workpiece **46** should be dimensioned to provide a relatively close fit therebetween. However, there should be sufficient clearance between the walls of the container and the workpiece to permit easy and rapid insertion of the workpiece into the container. As shown in the drawings, the cylindrical wall of shielding container **38** extends above the top of the workpiece and is spaced from the pressure vessel wall and from the pressure vessel bottom by the supporting legs **44** by an amount that will prevent excessive heat transfer from the workpiece to the pressure vessel. For most cases a spacing of one-half inch to 1 inch is sufficient.

The shielding container **38** is spaced both from the internal wall of the pressure vessel **12** and from the external surface of the workpiece to provide a first annular space **52** within the pressure vessel between the pressure vessel and the container and a second space **54** within the pressure vessel between the container and the workpiece. Where the workpiece is cylindrical, as shown in FIG. **1,** the second space will also, of course, be annular.

In the preferred embodiment of my invention the volume of the annular space **52** between the cylindrical wall of the pressure vessel **12** and the shielding container **38** is approximately 10 times the volume of the annular space **54** between the work piece **46** and the shielding container **38.**

The shielding container is placed within the pressure vessel and relative to the workpiece in such a manner that liquid entering the pressure vessel through port **20** will substantially completely fill the annular space **52** between the shielding container and the pressure vessel wall before the liquid spills over the open top **40** of the container **38** to come in contact with the workpiece **46.**

FIGS. **2A** through **2K** illustrate schematically the several steps followed in practicing the method of my invention. In FIG. **2A** the workpiece (either a can filled with powdered material which is thereafter evacuated and sealed, or a partially compacted and sintered powder body) is placed within a conventional heating furnace for a period of time sufficient to achieve isothermal conditions within the can and to heat the contents thereof to a temperature above the desired compacting temperature but below the fusion temperature of the powder particles. Preheating the workpiece to a temperature above the compacting temperature permits of some heat loss from the workpiece as it is transferred to, inserted into and pressurized within the pressure vessel. The preheating temperature should be sufficiently high so that the temperature of the workpiece will be at the desired compacting temperature when the preselected compacting pressure is achieved, as will be hereinafter described.

In compacting either iron base powder particles or nickel base powder particles I have found that preheating the workpiece to about 2,200°F. is satisfactory.

The preheated workpiece is removed from the furnace (FIG. **2B**) and placed within the inner or shielding container **38** of isostatic pressure vessel **12** (FIG. **2C**).

The pressure vessel is then closed, locked and sealed (FIG. **2D**). Pump **22** (FIG. **3**) is then actuated to pump liquid (shown by the dash lines in FIG. **2E**) rapidly into the annular space **52** between shielding container **38** and the wall of the pressure vessel. It is essential in this step that the pressure vessel be substantially completely filled with liquid before the liquid is permitted to come into contact with the heated workpiece **46.**

In my preferred embodiment water is used as the liquid pumped into the vessel, although it will be understood that other liquids such as natural and synthetic hydrocarbons, synthetic hydraulic fluids such as phosphate esters, various glycerines and glycols may be used as the pressure medium. The criteria for selecting a pressure medium when practicing my invention include that the pressure medium be liquid at room temperature and that it be compatible, at the temperature and pressure encountered, with the workpiece and with the material constituting the inner or shielding container **38.**

It will be recognized that where a liquid comes into contact with a workpiece heated to a temperature approaching 2,200°F., large quantities of vapor will be generated. It is for this reason that contact of the liquid with the heated workpiece must be avoided until the vessel is substantially completely full. I have found that when the ratio of the annular space **52** to the annular

space **54** is greater than about 10 to 1, the danger of creating excessive quantities of vapor is avoided. It will be understood, of course, that the quantity of vapor produced is also a function of the speed with which the pressure vessel is completely filled as well as the length of time it takes for the pressure within the vessel to be raised above the critical pressure of the liquid pressure medium being utilized. Therefore the rate at which liquid is pumped into the vessel is of significance.

As shown in FIG. 2F, as soon as the level of the liquid pressure medium in the vessel reaches the open end of shielding container **38,** the liquid will begin to cascade down upon the workpiece **46** and at the temperatures involved in hot isostatic compaction the liquid that comes into contact with the workpiece will undergo a phase change to vapor. This phase change requires a substantial quantity of heat which causes excessive cooling (quenching) of the workpiece. It is therefore desirable to either prevent, or at least minimize, this quench effect. To accomplish this the rapid pumping of the liquid into the vessel is continued until the desired compacting pressure is reached. In the embodiment shown the selected compacting pressure is 29,000 psi. This pressure is well above the critical pressure of water (3,206 psi). It is known that the critical pressure of a substance is that point at which the liquid phase and the vapor phase become identical and above which there can be no phase change from liquid to vapor. Thus, the rapid pressurization of the pressure medium in the vessel will cause the medium to exceed the critical pressure and eliminate heat loss of the workpiece caused by the change of phase from liquid to vapor. The rate of pressure increase within the vessel should be high enough to prevent the formation of vapor within the vessel sufficient to lower substantially the temperature of the heated workpiece prior to the desired compaction of the workpiece.

FIG. 2G represents that period in the process where liquid is being continuously pumped into the vessel. Because the pressure of the medium in the vessel exceeds the critical point, no phase change is taking place.

FIG. 2H represents the point in the cycle where the desired preselected compacting pressure has been reached and the pressure releasing device (in the preferred embodiment a frangible disc set to rupture at 29,000 psi) has been activated or blown out.

The workpiece is now fully compacted to a density approaching 100 percent of theoretical. At this point pumping of the liquid into the vessel is discontinued, the valve **26** (FIG. 3) is opened, and pressure is rapidly released. The pressurizing medium is then drained from the pressure vessel (FIG. 2J), with liquid being discharged through the upper port **34** as well as the lower port **20.** When the liquid level within the vessel has dropped below the open top **40** of the shielding container the liquid will continue draining through lower port **20** (FIG. 2K). The pressure medium surrounding the workpiece **46** within the shielding container **38** will flash to vapor (the pressure within the system having dropped well below the critical pressure substantially simultaneously with actuation of the pressure release device) and the vapor will continue to vent through upper port **34** and eventually will also escape through lower port **20.**

The pressure vessel is then opened by removing the threaded plug **14** and the compacted workpiece **46** is withdrawn from the vessel.

Rapid release of the pressure and draining of the liquid from the pressure vessel is desirable in order to withdraw the compacted workpiece from the vessel before substantial cooling thereof. Many materials commonly processed by hot isostatic compaction, for example, nickel base alloys, are susceptible to cracking if cooling below about 1,200°–1,600°F. takes place too rapidly. Therefore where the workpiece is removed from the pressure vessel as a temperature above 1,700°F. it may be transferred immediately to a controlled furnace atmosphere for further cooling to room temperature.

Once the workpiece **46** has been removed from the vessel, another preheated workpiece may be introduced and the cycle described in connection with FIGS. 2D through 2L repeated.

FIG. **4** is a time-temperature chart showing schematically the time required to hot isostatically press a can filled with powder particles in accordance with the preferred form of my invention as shown in FIGS. **2A** through **2L.** It also sets forth the approximate surface temperature of the workpiece during the processing cycle. It is known that the surface temperature of the workpiece as it is withdrawn from the furnace **56** is 2,200°F. and that its surface temperature on being withdrawn from the pressure vessel in its fully compacted state approximately 90 seconds later is about 1,750°F. The surface temperatures shown at intermediate points in FIG. **4** are approximate. As shown in the chart, the surface temperature of the workpiece at the time the preselected compacting pressure is reached—at about 35 seconds after the workpiece is removed from the furnace—is between 2,000° and 2,100°f.

My invention is further illustrated by the following specific examples:

Two canned powder metal samples 2 inches in diameter by 7½ inches long and having a volume (V_1) of 23.6 cubic inches were isostatically hot pressed in two separate runs using water as the pressure medium. Sample No. 1 was an iron base powder and sample No. 2 was a nickel base powder. A standard cold isostatic pressure vessel having an interior cylindrical cavity when closed and sealed of 9 inches in length (height) and 3 inches in diameter was used. The pressure vessel was connected through high pressure piping to a Kobe Company Size No. 3 high pressure pump having a capacity of 30,000 psi and delivering 2.9 gallons per minute. A dry cylindrical inner or shielding container made of low carbon steel and having an outside diameter of 2⅝ inches, an inside diameter of 2⅛ inches and an overall height of 8 inches was placed within the pressure vessel. The shielding container was open at the top and water tight at the bottom.

In each run the canned sample was preheated to 2,200°F. in a separate electric furnace and quickly transferred in an insulated bucket from the furnace to the pressure vessel where the sample was placed within the shielding container, as shown in FIGS. **1** and **2C.** The vessel was closed, sealed and locked. Water was rapidly pumped into the vessel through the lower port **20,** as previously described, until a pressue release device (a frangible disc), preset to rupture at 29,000 psi, was ruptured. The pump was immediately stopped and the valve **26** was opened to drain the vessel rapidly. The vessel was then opened and the completely compacted sample was immediately removed from the vessel.

Following is a record of the times recorded during the two runs:

	Time-Seconds from Start	
	Sample No. 1	Sample No. 2
Remove sample from furnace	0	0
Sample in insulated bucket	3	2
Sample in pressure vessel	23	21
Vessel closed	30	25
Rupture disc ruptured	41	35
Sample removed from vessel	Not Recorded	75
Temperature of sample 1750 F	Not Recorded	90

The pressurization time was about 6 seconds from the time the pump was loaded.

Upon removal of the workpiece from the vessel it was remeasured and the compaction ratio was determined as follows:

	Sample No. 1	Sample No. 2
Mean diameter	1.804"	1.832"
Length	6.75"	7.0"
Volume (V_2)	17.25 in^3	18.45 in^3
Compaction Ratio (V_1/V_2)	1.37	1.28

While my invention is especially useful with a "cold" isostatic pressure vessel, i.e., one in which there is no externally controlled heating means such as resistance heaters, it is also useful with a pressure vessel having heating devices within the vessel.

An alternative embodiment of my invention is illustrated in FIGS. **5** and **6**. The apparatus illustrated in FIG. **5** is essentially the same as shown in FIG. **1**, with one significant difference. In FIG. **5**, a cylindrical heat sink **58** is placed between the workpiece **46***a* and the shielding container **38***a*.

The purpose of the heat sink is to transfer a predetermined quantity of heat to a partially preheated workpiece after the workpiece has been placed within the pressure vessel. When a heat sink is used the workpiece need not be preheated to as high an initial temperature as in the preferred embodiment described above, and, in fact, may be preheated to a temperature below the desired compacting temperature. On exposure of the workpiece to the heat sink, heat transfer from the heat sink to the workpiece will raise the temperature of the workpiece to the desired compacting temperature. This allows many sensitive materials to be compacted without running the risk of overheating and possibly damaging the workpiece prior to its insertion into the isostatic pressure vessel. It also makes less critical the handling procedures of the workpiece between the preheating furnace and the pressure vessel.

The amount of heat transmitted from the heat sink to the workpiece can be predetermined and will depend on the respective temperatures of the heat sink and workpiece, their relative masses and the time allowed for heat transfer.

The heat sink should have sufficient mass to be able to raise the temperature of the workpiece by heat transfer to the required compaction temperature when the workpiece is inserted into the heat sink. The inner bore of the heat sink has a diameter that is slightly larger than that of the workpiece, providing rapid heat transfer but having sufficient clearance to permit easy and rapid insertion of the workpiece.

Referring again to FIG. **5**, the shielding container **38***a* is placed within the pressure vessel and forms an annular space **60** with the wall of the pressure vessel. The heat sink **58** is in turn placed within the container **38***a* and defines annular space **62** therewith. The workpiece **46***a* is placed within the heat sink **58** and defines a third annular space **64** therewith. The cylindrical wall of the heat sink extends above the top of the workpiece and, to a lesser extent, above the cylindrical wall of the shielding container.

The shielding container **38***a* is made of relatively thin metal. The inside diameter of container **38***a* is slightly larger than the outside diameter of heat sink **58**, permitting easy and rapid insertion of the heat sink into the container. Container **38***a* is open at the top and liquid tight at the bottom. Container **38***a* is supported on legs **44** in the pressure vessel and is spaced from the bottom and cylindrical wall of the pressure vessel **12** sufficiently to insure that excessive heat transfer does not take place between the container and the pressure vessel. For most cases a spacing of one-half inch to 1 inch is sufficient.

The volume of the annular space **60** between the pressure vessel wall and shielding container **38***a* is approximately 10 or more times greater than the combined volume of annular spaces **62** and **64**.

The heat sink is preferably made of metal compatible with the temperature at which the system will be operating. For example, for operating temperatures below 2,200°F. the heat sink may be of copper or steel, whereas above 2,200°F. steel, stainless steel, molybdenum, tungsten or metals or alloys having high strength at elevated temperatures may be utilized. The heat sink is open at the top and liquid tight at the bottom and is supported by the liquid tight bottom of the shielding container **38***a*.

In practicing my invention with the apparatus as shown in FIGS. **5** and **6**, the workpiece is heated in a conventional heating furnace to a preselected temperature. In a separate furnace (not shown) the heat sink is heated to a preselected temperature higher than that to which the workpiece is heated. The heat sink is then placed with the pressure vessel in the manner described above and the workpiece is inserted into the heat sink. Alternatively, the workpiece may be inserted into the heat sink outside of the pressure vessel and the assembled heat sink and workpiece then placed in the pressure vessel within shielding container **38***a*. The pressure vessel is then closed and a liquid pressure medium such as water is rapidly pumped into the vessel in a manner such that direct contact of the liquid with the workpiece is avoided until the pressure vessel is substantially completely full. Pumping of the liquid pressure medium is continued at a high rate until the preselected compacting pressure is reached, at which time a pressure release device of the type described above is actuated, pumping is discontinued, and the pressure medium is withdrawn from the pressure vessel.

As shown in FIG. **6**, the surface temperature of the workpiece will decrease during the time period that it is being removed from the heating furnace and inserted into the pressure vessel. On exposure to the heat sink the temperature of the workpiece will begin to increase and continue to increase until the desired preselected

compacting pressure is reached, at which point pressure within the pressure vessel is relieved. Because the pressure within the vessel is rapidly increased to a point above the critical pressure of the pressure medium, there will be little or no neat loss due to phase transformation from liquid to vapor.

As shown in FIG. 6, the surface temperature of the workpiece at the time it is removed from the furnace is slightly less than 2,200°F. By the time the workpiece has been transported to the isostatic pressure vessel that temperature has dropped to approximately 2,150°F. Insertion of the workpiece into the heat sink increases the temperature of the workpiece to about 2,200°F. which, in the case illustrated, is the desired compacting temperature. On relief of the pressure the temperature of the compacted part begins to decrease.

It will be apparent to those skilled in the art that when practicing the method using the apparatus of my invention it is important that the pressure vessel be substantially full before the liquid pressurizing medium is allowed to come into contact with the workpiece or the heat sink. I have illustrated one means to accomplish this end, namely to substantially completely fill the annular space between the pressure vessel wall and the inner or shielding container before allowing the liquid to spill over the open end of the shielding container to come in contact with either the heat sink or workpiece. Other means of accomplishing this objective are, of course, possible.

FIGS. 7 and 8 show a modified form of apparatus that may be used in practicing my invention. In this embodiment, which I refer to as a "vortex fill," the preheated workpiece is separated from the internal surfaces of the pressure vessel by a generally annular space and the liquid pressurizing medium is pumped at high velocity into the space tangentially to the internal surfaces of the pressure vessel to form a surface vortex while filling the vessel, thereby avoiding direct contact between the pressure medium and the heated workpiece until the vessel is substantially completely filled with the pressure medium.

Referring to FIGS. 7 and 8, pressure vessel **70** has a cover at one end and a cylindrical inner wall **71** with a liquid inlet or port **72** in the lower portion thereof. Inlet **72** is connected to a high volume liquid pump (not shown) and is arranged with respect to the pressure vessel wall to deliver liquid to the interior of the vessel tangentially along the inner wall thereof.

A liquid deflector and work support, generally designated **74**, is fitted to the bottom **84** of the pressure vessel. The outer surface of member **74** is generally cylindrical and forms an annular space **76** with the inner cylindricall wall **71** of the pressure vessel in the region of liquid inlet **72.** The intersection of the inner cylindrical wall **71** and the bottom **84** of the pressure vessel is rounded as at **90** to provide a smooth surface. Member **74** has an upwardly extending flange **78** to receive and support the workpiece **80** in a central position in the pressure chamber coincident with the center line of the pressure vessel. When inserted in the pressure vessel the workpiece is separated from the inner cylindrical wall of the pressure vessel by a generally annular space. The annular space **76** is smaller than the annular space between the workpiece **80** and the pressure vessel wall **71.**

The bottom of member **74** is counterbored to form a downwardly extending annular flange **82** which contacts the bottom **84** of the pressure vessel. The area of contact of the member **74** with the bottom **84** of the vessel is thus minimized, which in turn reduces heat transfer from the workpiece **80** through the member **74** to the pressure vessel **70.**

A radially disposed outlet port or opening **86** is provided near the top of the pressure vessel **70.** A pressure release device **88** of the type previously described is connected to port **86.**

Port **72** is connected by valve means (not shown) to a discharge pipe to drain the vessel as described in connection with my preferred embodiment and as shown in FIG. 3.

In operation, the preheated workpiece is inserted into the pressure vessel and the latter is closed, sealed and locked. A liquid pressurizing medium is introduced into annular space **76** of the pressure vessel at high velocity through inlet **72.** The liquid is forced into a vortex by its reaction against the pressure vessel wall and the member **74,** thus forming a film or layer of liquid that moves upwardly along wall **71** of the pressure vessel. As the workpiece is positioned in the center of the vortex and spaced from the wall of the vessel it is not contacted by any substantial amount of liquid until the vessel is substantially completely full. As pumping of the liquid into the vessel continues, the thickness of the liquid layer progressively increases and only when the vessel is substantially full with liquid is there any substantial contact between the liquid and the workpiece. When the vessel has been completely filled, rapid pressurization of the liquid to the desired preselected compacting pressure is accomplished, as previously described.

As in my preferred embodiment, when the preselected compacting pressure is reached, the pressure release device is actuated, the pumping of liquid into the vessel is discontinued, and the liquid is withdrawn from the pressure vessel. The fully compacted part is then removed from the vessel.

FIG. 9 shows a further embodiment of apparatus that may be used in practicing my invention. In this arrangement the preheated workpiece is also separated from the internal surfaces of the pressure vessel by a generally annular space. A liquid pressurizing medium is pumped into the vessel to fill the space and the pressure vessel is rotated rapidly about its vertical axis during the filling operation. The centrifugal forces created impel the liquid pressurizing medium outwardly from the center of rotation thereby avoiding contact between the pressurizing medium and the workpiece until the vessel is substantially completely filled with the medium.

As shown, cylindrical pressure vessel **92** having a cover at one end is fitted at its opposite end with a rotary joint **94** having appropriate liquid tight sealing means **96.** Rotary joint **94** contains a liquid inlet or port **98** coincident with the axis of symmetry of the vessel. Port **98** is connected to a high volume liquid pump (not shown) and is arranged to deliver liquid to the interior of the vessel.

The inner wall **100** of the pressure vessel is cylindrical. A cylindrical work support and deflector member, generally designated **102,** is fitted to the bottom of the pressure vessel by downwardly extending flange **104.** Flange **104** has ports **106** therein to permit passage of liquid between port **98** and the annular space formed between the inner wall **100** of the pressure vessel and

member **102.** Member **102** is disposed to deflect incoming liquid from an axial direction as it passes through port **98** to a generally radially outward direction through ports **106,** thus causing liquid to flow radially to the pressure vessel wall **100** and there have a rotational velocity imposed on it.

Member **102** has an upwardly extending flange **108** that defines a supporting surface **110** for the workpiece **112.** When inserted into the vessel the axis of symmetry of the workpiece is substantially coincident with the axis of symmetry of the vessel, and there is a generally annular space between the workpiece and the inner wall **100** of the vessel.

The vessel is equipped with a pressure release device **114** and a means (not shown) through port **98** for draining the vessel when the pressure release device has been actuated, substantially as described in connection with my preferred embodiment.

The pressure vessel **92** is mounted in bearings **116** to permit rotation of the vessel about its axis of symmetry. The pressure vessel is equipped with a rotary drive, generally designated **118,** such as a Vee belt, chain gears, or other device suitable to permit motor **120** to spin the pressure vessel about its axis.

In the operation of the apparatus shown in FIG. **9** the preheated workpiece **112** is placed in the vessel **92** and the vessel is closed, sealed and locked. The vessel is spun by means of the motor **120** and rotary drive **118** at a rate sufficiently high to cause the centrifugal forces created to act upon the pressurizing liquid and impel it outwardly from the center of rotation of the vessel. Liquid is introduced into the vessel through inlet **98** and through ports **106** into the annular space between the wall **100** and member **102.** The centrifugal force created by the spinning vessel will cause the liquid to form a layer or film against the wall of the spinning vessel. As pumping of the liquid into the vessel is continued, the thickness of this layer will increase. Because the workpiece is centered in the spinning vessel, there will be minimal contact between the liquid and the workpiece until the pressure vessel is substantially completely filled with liquid. When the vessel is completely filled pumping is continued at a high rate until the preselected compacting pressure is reached, at which point the pressure is released, the pressurizing liquid is drained from the vessel, and the fully compacted part is removed from the vessel as previously described.

Although specific embodiments of the invention have been shown and described herein, it is obvious that other adaptations and modifications may be made by those skilled in the art without departing from the scope and spirit of the appended claims.

I claim:

1. Apparatus for compacting a preheated porous body by isostatically hot pressing the same comprising

a pressure vessel,

means for rapidly filling said pressure vessel with a liquid pressurizing medium and for rapidly increasing the pressure of said medium within said pressure vessel to a preselected compacting pressure,

means for releasing the pressure within said pressure vessel at said preselected pressure,

means for emptying said pressurizing medium from said pressure vessel, and

means for avoiding contact of said pressurizing medium with said body until said pressure vessel is substantially completely filled with said pressurizing medium.

2. The apparatus of claim **1** wherein the pressure vessel is a cold, dry pressure vessel.

3. The apparatus of claim **1** wherein said filling and pressure increasing means comprises a pump.

4. The apparatus of claim **3** wherein the pressure releasing means comprises a rupture disc assembly having a pre-selected burst pressure.

5. The apparatus of claim **3** wherein said contact avoiding means comprises a shielding container surrounding said body and spaced from both the internal wall of said pressure vessel and the external surface of said body to provide a first space within said pressure vessel between said pressure vessel and said container and a second space within said pressure vessel between said container and said body, said container having a side wall and an open top, said side wall extending above said body whereby when said liquid pressurizing medium is introduced into said first space it will substantially fill the same before entering said second space and coming in contact with said body.

6. The apparatus of claim **5** wherein the volume of said first space is at least about **10** times the volume of said second space.

7. The apparatus of claim **1** further comprising means within said vessel for supplying heat to said body.

8. The apparatus of claim **7** in which the heat supplying means is a heat sink.

9. Apparatus for compacting a preheated porous body by isostatically hot pressing the same comprising

a pressure vessel the internal wall of which is cylindrical,

means for rapidly filling said pressure vessel with a liquid pressurizing medium and for rapidly increasing the pressure of said medium within said pressure vessel to a preselected compacting temperature,

means for releasing the pressure within said pressure vessel at said preselected pressure,

means for emptying said pressurizing medium from said pressure vessel, and

means for avoiding contact of said pressurizing medium with said body until said pressure vessel is substantially completely filled with said pressurizing fluid,

said last mentioned means comprising a shielding container having a cylindrical wall, a liquid tight bottom and an open top, said container surrounding said body and being spaced both from the internal wall of said pressure vessel and from the external surface of said body to provide a first annular space within said pressure vessel between said pressure vessel and said container and a second space within said pressure vessel between said container and said second body, said body being supported within said container by said liquid tight bottom, the bottom of said container being spaced from the bottom of said pressure vessel by supporting means thereby reducing the transfer of heat from said body to said pressure vessel, and said cylindrical wall of said container extending above said body whereby when liquid is introduced into said first annular space it will substantially fill the same before entering said second space and coming in contact with said body.

10. The apparatus of claim 3 in which said contact avoiding means comprises
a cylindrical inner wall within said pressure vessel,
a cylindrical liquid deflector within said pressure vessel forming an annular space with said wall,
a liquid inlet arranged to deliver said liquid pressurizing medium into said space tangentially to said wall at high velocity
and wherein said deflector is disposed in the path of said pressurizing medium to cause the latter to form a liquid vortex within said vessel while filling the same.

11. The apparatus of claim 3 in which said contact avoiding means comprises
a pressure vessel having an axis of symmetry,
means to rotate said pressure vessel about said axis,
a cylindrical inner wall within said pressure vessel,
a cylindrical liquid deflector within said pressure vessel forming an annular space with said wall, and
a liquid inlet arranged with said deflector to deliver said liquid pressurizing medium into said space whereby when liquid is introduced into said vessel while rotating the same centrifugal forces imposed upon said liquid will cause the same to form a layer of liquid against said wall.

* * * * *