

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 February 2007 (15.02.2007)

PCT

(10) International Publication Number  
**WO 2007/019014 A2**

(51) International Patent Classification:  
*B32B 27/04* (2006.01) *B32B 27/02* (2006.01)  
*B32B 27/12* (2006.01)

(21) International Application Number:  
PCT/US2006/028330

(22) International Filing Date: 21 July 2006 (21.07.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/195,911 2 August 2005 (02.08.2005) US

(71) Applicant (for all designated States except US): **GORE ENTERPRISE HOLDINGS, INC.** [US/US]; 551 Paper Mill Road, P.O. Box 9206, Newark, DE 19714-9206 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KELMARTIN, Thomas** [US/US]; 430 Sharpless Street, West Chester, PA 19382 (US). **WALLACE, Thomas** [US/US]; 857 Ebenezer Church Road, Rising Sun, MD 21911 (US). **GREENE, William** [US/US]; 2316 St. Francis Street, Wilmington, DE 19808 (US). **WILLMANN, Robert** [US/US]; 26 Granite Drive, Port Deposit, MD 21911 (US).

(74) Agents: **BOLAND, Kevin, J.** et al.; W. L. GORE & ASSOCIATES, INC., 551 Paper Mill Road, P.O. Box 9206, Newark, DE 19714-9206 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ARCHITECTURAL FABRIC

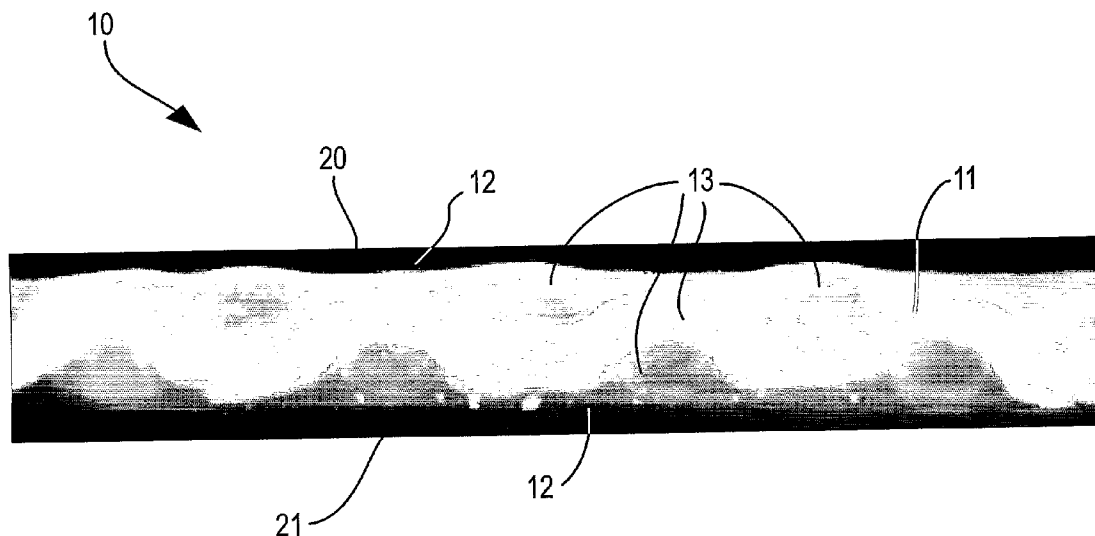

(57) Abstract: An article useful as an architectural fabric consisting of (a) a layer of fabric having a first surface and a second surface made of polytetrafluoroethylene fibers; and (b) a fluoropolymer coating disposed on at least the first surface of the fabric.

WO 2007/019014 A2

**TITLE OF INVENTION****Architectural Fabric**

5

**FIELD OF INVENTION**

The present invention relates to fabric and, more particularly, to architectural fabric that is waterproof, fire retardant, flexible, durable, and aesthetically pleasing.

10

**BACKGROUND OF INVENTION**

Architectural fabric is fabric used as a building structure or part of a building structure. It typically provides protection for humans from elements such as wind, sun, and rain. It may be a permanent structure or a temporary one. If temporary, it may be retractable or removable, for example by folding, rolling, or otherwise storing.

There are several requirements for architectural fabric. It must be strong enough to withstand wind and other stresses during assembly and use. It must be flexible and durable, so that it can be folded or rolled and its strength and integrity are maintained over time. It must be UV light resistant. UV light tends to degrade and weaken fabric over time. A fabric that is UV resistant will stand up under this exposure. It should generally be fire retardant and waterproof. It should be easily seamed (or "welded"). It must also be aesthetically pleasing.

A known architectural fabric is a composite consisting of fiberglass fabric coated with PTFE. Although this product has certain desirable qualities, it is not suitably flexible. The fabric thus cannot be used efficiently in applications where convenient removal of the fabric is needed.

Another known architectural fabric has a coating of PVC or acrylic on polyester fabric. These products have flexibility but only limited durability. Unless specially treated, these fabrics are flammable and tend to degrade under UV light. After a certain amount of flexing and UV exposure, these products develop cracks or other imperfections that allow water to penetrate the fabric at the point where it has been compromised.

Another known architectural fabric is that disclosed in US Patent No. 6,770,577B2 to Kelmartin et al. The article disclosed therein comprises a polytetrafluoroethylene fabric attached to at least one composite membrane of a porous polytetrafluoroethylene film having a fluoropolymer adhesive (such as THV) contained in its pores. The porous polytetrafluoroethylene film is provided to make the article durable and aesthetically pleasing. Addition of the film requires additional processing, however. The film also tends to mute any pigments or colors in the fabric or the THV.

An economical, weldable, waterproof, fire retardant architectural fabric is needed in the industry.

### SUMMARY OF INVENTION

The present invention provides an article consisting of (a) a layer of fabric having a first surface and a second surface made of polytetrafluoroethylene fibers; and (b) a fluoropolymer coating disposed on said first surface of said fabric. In another embodiment, the invention further includes a fluoropolymer coating disposed on the second surface of the fabric. The fluoropolymer coating is preferably THV. The article of the present invention is preferably waterproof, fire retardant, and has high seam strength. It is also preferably an architectural fabric for retractable, temporary, or permanent structures, such as tensile structures, and is adapted to be joined to itself by welding.

In another aspect, the present invention provides a method of making an architectural fabric for a retractable, temporary, or permanent structure by:

- (a) providing a layer of fabric having a first surface and a second surface and comprising polytetrafluoroethylene fibers;
- (b) disposing THV on the first surface of said fabric; and
- (c) optionally disposing THV on the second surface of said fabric.

In another aspect, the invention provides a method of making an architectural fabric comprising the steps of

- (a) providing a fluoropolymer fabric

- (b) extrusion coating the fluoropolymer fabric with THV by simultaneously extruding the THV onto the fabric and nipping the fabric and extruded THV between a first roll and a second roll.

5

### **BRIEF DESCRIPTION OF INVENTION**

Figure 1 is an optical micrograph of a cross-section of an article in accordance with an exemplary embodiment of the present invention.

10

Figure 2 is a schematic illustration of an exemplary process for making an article according to the present invention.

### **DETAILED DESCRIPTION OF INVENTION**

15

The present invention will now be described with reference to the figures in the drawing. Figure 1 is an optical micrograph of a cross-section of an article 10 according to an exemplary embodiment of the present invention. In this exemplary embodiment, article 10 is an architectural fabric. Article 10 includes a fabric 11 made of fibers 13 of a fluoropolymer material, preferably PTFE fibers that have sufficient strength for a particular application, and most preferably expanded PTFE fibers. Fabric 11 has a warp and a weft direction, accounting for the cross-sectional views perpendicular to and parallel to the axes of the individual fibers of fabric 11 shown in Figure 1.

20

25

Fabric 11 has a first surface 20 and a second surface 21. Disposed adjacent to first surface 20, which extends along fibers 13 in both the warp and weft direction, and extending in between and among fibers 13 is a fluoropolymer coating 12, preferably a terpolymer of tetrafluoroethylene, hexafluoropropylene, and vinylidene fluoride (THV).

30

Article 10 is useful as an architectural fabric with only first surface 20 covered by fluoropolymer coating 12. A preferable embodiment, however, also has fluoropolymer coating 12 disposed on second surface 21 (and extending between and among fibers 13 from such second surface 21).

35

Fabric 11 is any material that is UV light resistant and fire retardant. It must also be strong, flexible and durable. PTFE fiber is preferred. Fabric made from expanded polytetrafluoroethylene fibers is most preferred.

Fluoropolymer coating 12 is a material that is UV light resistant and fire retardant. THV is preferred. This preferred fluoropolymer coating is also advantageously flexible, adherent to the fabric 11 (without being limited by theory, it is believed that the THV is able to encapsulate the fibers of fabric 11 to form a mechanical bond rather than a chemical bond) and clear or translucent. Preferably, the coating on both sides of the fabric is the same material. THV can be filled for functionality, such as color, UV resistance (if needed, for example if no PTFE fabric is used), and flame resistance.

Fluoropolymer coating 12 is preferably applied to fabric 11 by extrusion coating, although other methods, such as solvent coating or lamination with or without the use of release layers are alternatives. Figure 2 depicts a preferred extrusion coating process for making the architectural fabric of this invention. Fabric 11 is passed between rolls 91 and 92 while fluoropolymer coating 12 is simultaneously extruded onto fabric 11 from extruder 90. The surfaces of rolls 91 and 92, as well as the temperature and speed of the rolls are critical processing parameters for making the present invention. Details of these parameters are given in the example below.

Surprisingly, Applicant has discovered that the article of the present invention functions well as an architectural fabric. Contrary to the conventional wisdom expressed in US Patent No. 6,770,577B2 to Kelmartin et al., Applicant has discovered that an architectural fabric made without the PTFE film disclosed in Kelmartin is durable, processable and aesthetically pleasing. As stated in this patent, “[w]hen THV alone is used to coat the fabric, the surface has a blotchy appearance that is tacky. With the inventive article, however, the surface appears uniform and is not tacky. This also provides unexpected improvements in processability. The article does not stick to or coat processing rolls during manufacture.” It was thus conventional wisdom before the present invention that elimination of the porous polytetrafluoroethylene film would be undesirable.

Also surprisingly, article 10 can be much more easily seam-sealed to itself using welding techniques known in the art of seam-sealing for example, with PTFE/fiberglass fabrics. This is a result of the elimination of the microporous PTFE element described in US Patent No. 6,770,577B2. A variety of seaming techniques can be used. A secure seam is formed by applying heat

(about 230 degrees C for 45 seconds) and pressure to overlapped portions of the inventive fabric. A suitable seam sealing device is an electric impulse hot bar welder available from Aline Heat Sealing Corporation, Cerritos CA, part number HD-25. Surprisingly, radio frequency welding can also be used, as can  
5 wedge welding and hot-air welding. Using the invention, one can easily get a strong weld without the need for special processing, or for adding additional adhesives or seam tape as with other fabrics currently used.

The following example is intended to illustrate, but not limit, the present  
10 invention.

### EXAMPLE

An architectural fabric was prepared as follows:

15

THV220 (Dyneon, Inc, Oakdale, MN) which was pigmented tan was extruded using a single screw extruder and a slotted die at a temperature of 250C. It was directed vertically downward into a nip created by two rolls; one being a TEFLON® -sleeved EPDM rubber roll and the other a TEFLON®-  
20 coated steel roll. The thickness of the extruded film was 175 micrometers. The EPDM roll had a surface temperature of 90C, and the steel roll had a surface temperature of 115C. The surface speed of the rolls was 2.75 meters per minute. Fabric woven of expanded PTFE fiber was obtained from W.L. Gore & Associates, Inc. This fabric was woven in a plain weave, 18 ends by 18 picks  
25 per centimeter. Each end and each pick yarn was composed of two 500 denier expanded PTFE fibers plied together.

The fabric entered the nip over the steel roll and was pressed against the molten THV220 in the nip. The nip force was 130 Newtons per centimeter.  
30 The THV220 was pushed into the voids in the fabric by the action of the nip. The resulting THV220/fabric composite was wound onto a roll at the end of the extrusion line.

The aforementioned THV220/fabric composite was then run a second  
35 time on the extrusion line except that a second coating of molten THV220 pigmented red was applied to the fabric face which was not extruded upon in the first pass. The machine conditions were the same for this second pass as they were for the first pass. This material produced in this example was identified as

360-75. The thickness of the THV220/fabric composite was 0.65 millimeters, and the mass per unit area was 1240 grams per square meter.

**TESTING**

5

The fabric produced according to the above example was tested for various properties as follows.

(1) Waterproofness

10

Apparatus:

RO/Distilled water

Thermometer

Low Hydrostatic Pressure Tester (Alfred Suter Co., Ramsey, NJ, Model No.

15

502 Suter LHPT)

Timer

Water Circulator

Test Specimens:

20

Specimen size: circular sample of 4½" (11.4 cm) diameter.

Specimens per sample: Three.

Conditioning: Condition the specimens at 21±1°C (70±2°F), 65±2% RH prior to testing.

25

Test Procedure:

1. Check the water level in the tank.

2. Add water if the level is too low.

3. Turn the pump on.

30

4. Check that the water temperature is at 27±3°C (80±5°F).

4.1 Run the motor to heat or add heated water to the tank if the water temperature is too low.

4.2 Float an ice pack, located in the freezer, in the tank to lower the temperature if the water temperature is too high (or becomes too

35

high while testing), or add cold water.

5. Purge the water lines.

6. Place a specimen face side down under the specimen holder.

7. Clamp the specimen in place.

8. Open the valves to start water flow.
9. Set a timer for 3 minutes.
10. Start the timer when the gauge on the LPHT tester reaches the specified pressure (1.1 psig).
- 5 11. Check each specimen for leaks. Samples that leak are reported as failures. Those that do not leak, pass.
  - 11.1 Failures should only be counted if leaks occur in the test area.
    - 11.1.1 Drops of water penetrating the specimen at the clamped edge of the specimen or within 0.32 cm (1/8") of this edge shall not be counted.

Three samples of the example material were tested as described above. All three samples passed with no leakage.

15            (2) Fire Retardance

The example fabric was tested for fire retardance as follows.

Apparatus:

- |    |                                  |                        |
|----|----------------------------------|------------------------|
| 20 | Cabinet including Tirrill Burner | Brass weights          |
|    | Metal specimen holder and clips  | Scissors or hole punch |
|    | Specimen mounting block          | Butane lighter         |
|    | Timer (tenths of seconds)        | Disposable gloves      |
|    | Metric ruler (1 mm graduations)  | Gas: methane 99% pure  |
| 25 | Plastic bag                      |                        |

Test Specimens:

Specimen size: 3"x12" with the 12" length parallel to the test direction.  
 Number of samples: two.

30

Conditioning: Condition the specimens at 70±2°F, 65±2%RH prior to testing.

Test Procedure:

- 35 1. Cut specimens as specified above.
  - 1.1. Ensure that the gas pressure is 2.5±0.25 psi.
  - 1.2. Turn power on (control panel on counter).
  - 1.3. Turn the pilot knob slightly counter-clockwise, so that it is on.

- 1.4. Ignite the pilot with the butane lighter.
- 1.5. Adjust the pilot size to 1/8" using the pilot knob. Measure the pilot flame from its lowest point to the tip.
- 1.6. Set the flame ignition timer to 120 seconds.
- 5 1.7. Turn the flame/fan knob to flame and burn the flame for at least 2 minutes prior to the beginning of each set up and testing session.
- 1.9. Adjust the flame height to 1.5" by turning the knob at the bottom of the burner clockwise to increase the height or counter  
10 clockwise to decrease the height. The tip of the flame should reach the top point of the flame indicator.
- 1.10. Re-set the flame ignition timer to 12 seconds and re-light the flame.
- 1.11. Turn the flame/fan knob to fan.
- 15 1.12. Place the metal specimen holder on the mounting block.
- 1.13. Align a dummy specimen in the metal holder with the short edge of the dummy aligned with the lower edge of the holder.
- 1.14. Close the specimen holder and clamp with the clips at two  
20 places on each side making sure the dummy is smooth and flat in the holder.
- 1.15. Turn the flame/fan knob to flame.
- 1.16. Light the flame with the butane lighter.
- 1.17. Immediately turn the flame/fan knob to off.
- 1.18. Position the specimen holder securely in the cabinet.
- 25 1.19. Make sure the holder is positioned in the groove of the holder rest at the back of the cabinet and the middle of the lower edge of the specimen is centered 3/4" above the burner.
- 1.20. Close the cabinet door and the hood sash.  
Note: The specimen must be tested within 2 minutes of being  
30 placed in the cabinet.
- 1.21. Turn the flame/fan knob to flame to start the 12-second flame.
- 1.22. Once the 12-second flame has extinguished confirm that the pilot light is the proper size.
- 1.23. Depress the door release button and allow the cabinet to  
35 ventilate for 30 seconds or until all smoke and fumes are removed.
- 1.24. Adjust the pilot light, if necessary, and repeat steps 1.15 through 1.24 as needed until proper pilot size is maintained.

## 2. Testing:

- 2.1. Place the metal specimen holder on the mounting block.
- 2.2. Align the specimen in the metal holder such that the test area  
5 does not contain any identification markings when the short  
edge of the specimen is aligned with the lower edge of the  
holder.
- 2.3. Close the specimen holder and clamp with clips at two places on  
each side making sure the specimen is smooth and flat in the  
holder.
- 10 2.4. Turn the flame/fan knob to flame.
- 2.5. Light the flame with the butane lighter.
- 2.6. Immediately turn the flame/fan knob to off.
- 2.7. Position the specimen holder securely in the cabinet.
- 2.8. Make sure that the holder is positioned in the groove of the  
15 holder rest at the back of the cabinet and that the middle of the  
lower edge of the specimen is centered 3/4" above the burner.
- 2.9. Close the cabinet door and the hood.
- Note: The specimens must be tested within 2 minutes of being place in  
the cabinet.
- 20 2.10. Turn the flame/fan knob to flame to start the 12-second flame.
- 2.11. Determine the after-flame, and after-glow time, and the presence  
of melting or dripping, after the 12-second flame extinguishes,  
and record in the lab database.
- 2.11.1. After-flame: Using the timer mounted on the hood,  
25 measure the number of seconds, to the nearest 0.1  
seconds, that the material continues to burn after the  
igniting flame extinguishes. Do not turn the fan on  
until the specimen has stopped glowing, regardless of  
whether or not the after-glow is being measured.
- 30 2.11.2. After-glow: Using the automatic timer, measure the  
number of seconds, to the nearest 0.1 seconds, that the  
material glows after the flaming ends. The glow shall  
not be extinguished even if after-glow time is not  
being evaluated because of the glow's effect on char  
35 length.
- 2.11.3. Melt/Drip: Look for signs of melting or dripping.

The example material tested for fire retardance had the following results, illustrating that the material was indeed fire retardant.

Sample:360-75

		A	B	C	Average	Standard Deviation
Warp	Afterflame(sec)	1.3	1.2	1.2	1.23	0.05
	Afterglow(sec)	0	0	0	0.00	0.00
	Melt/Drip	Melt/No Drip	Melt/No Drip	Melt/No Drip		
	Char Length(cm)	1.4	1.55	1.85	1.60	0.19
Fill	Afterflame(sec)	1.2	1.1	1	1.10	0.08
	Afterglow(sec)	0	0	0	0.00	0.00
	Melt/Drip	Melt/No Drip	Melt/No Drip	Melt/No Drip		
	Char Length(cm)	1.6	1.45	1.85	1.63	0.16

(3) Seam Strength

5

Two pieces of the example fabric were placed in overlapping relationship in the warp direction, such that 2.5 inches (6.35 cm) of each piece overlapped. No seam tape was used, nor was any scuffing or abrasion performed on the areas to be welded. The overlap was welded to form a seam with an Aline Welder Model HD-25 at 230 degrees C for 45 seconds. Strips of the fabric were cut 2 inches (5.08cm) wide by 14 inches (35.5cm) long with the long direction perpendicular to the seam. The seam strength was tested by pulling the seam on a tensile tester (Instron Corporation, Norwood MA, Model 5567) with 4 inch (10.16 cm) gauge length at 2 inches (5.08 cm) per minute extension rate. Five such specimens were produced. The results are tabulated below, and indicate a very strong seam was produced using this simple welding technique on the inventive fabric. A seam having a strength of at least 90% of the nominal strength of the fabric is desired.

20

<u>Specimen</u>	<u>Max Force (Lb/2 Inch)</u>	<u>Max Force (Lb/Inch)</u>	<u>Max Force (N/5cm)</u>	<u>Percent of Nominal Fabric Strength (456 Lb/in - 4000 N/5cm)</u>
1	929	465	4074	102%
2	901	451	3951	99%
3	868	434	3806	95%
4	884	442	3876	97%
5	882	441	3868	97%
<b>Average</b>	893	446	3915	98%
<b>Std. Dev.</b>	23.4	11.7	102.5	
<b>COV</b>	2.6%	2.6%	2.6%	

5 While particular embodiments of the present invention have been illustrated and described herein, the present invention should not be limited to such illustrations and descriptions. It should be apparent that the changes and modifications may be incorporated and embodied as part of the present invention within the scope of the following claims.

**CLAIMS**

What is claimed is:

- 5 1. An article consisting essentially of:
- (a) a layer of fabric having a first surface and a second surface and comprising polytetrafluoroethylene fibers; and
  - (b) a fluoropolymer coating disposed on said first surface and extending between and among said fibers from said first surface.
- 10 2. An article as defined in claim 1 further consisting essentially of a fluoropolymer coating disposed on said second surface and extending between and among said fibers from said second surface.
3. An article as defined in claim 1 wherein said fluoropolymer coating further comprises an additive.
- 15 4. An article as defined in claim 3 wherein said additive is a pigment.
5. An article as defined in claim 2 wherein said fabric comprises expanded polytetrafluoroethylene fibers.
6. An article as defined in claim 2 wherein said fluoropolymer coating is THV.
- 20 7. An article as defined in claim 2 wherein the article is waterproof.
8. An article as defined in claim 2 wherein the article is fire retardant.
9. An article as defined in claim 2 wherein the article is an architectural fabric for retractable, temporary, or permanent structures.
10. An article as defined in claim 2 wherein the article is an architectural  
25 fabric for retractable, temporary, or permanent structures and is adapted to be joined to itself by welding.
11. An article as defined in claim 10 wherein said welding is hot-bar welding.

12. An article as defined in claim 10 wherein said welding is radio-frequency welding.
13. An article as defined in claim 10 wherein said welding is hot air welding.
14. An article as defined in claim 10 wherein said welding is hot wedge  
5 welding.
15. An article as defined in claim 10 wherein said welding produces a seam having a strength of at least 90% of the nominal strength of the fabric.
16. An article as defined in claim 1 wherein the article is waterproof.
17. An article as defined in claim 1 wherein the article is fire retardant.
- 10 18. An article as defined in claim 1 wherein the article is an architectural fabric for retractable, temporary, or permanent structures.
19. An article as defined in claim 1 wherein the article is an architectural fabric for retractable, temporary, or permanent structures and is adapted to be joined to itself by welding.
- 15 20. An article as defined in claim 19 wherein said welding is hot-bar welding.
21. An article as defined in claim 19 wherein said welding is radio-frequency welding.
22. An article as defined in claim 19 wherein said welding is hot air welding.
- 20 23. An article as defined in claim 19 wherein said welding is hot wedge welding.
24. An article as defined in claim 19 wherein said welding produces a seam having a strength of at least 90% of the nominal strength of the fabric.
- 25 25. An article as defined in claim 1 wherein said fabric comprises expanded polytetrafluoroethylene fibers.

26. An article as defined in claim 1 wherein said fluoropolymer coating is THV.
27. An article as defined in claim 2 wherein said fluoropolymer coating further comprises an additive.
- 5 28. An article as defined in claim 27 wherein said additive is a pigment.
29. A method of making an architectural fabric comprising the steps of
- (a) providing a fluoropolymer fabric having a first surface and a second surface, and
- (b) extrusion coating the first surface of said fluoropolymer fabric with THV by simultaneously extruding the THV onto the fabric and nipping the fabric and extruded THV between a first roll and a second roll.
- 10
30. A method of making an architectural fabric as defined in claim 29 further comprising the step of extrusion coating the second surface of said fluoropolymer fabric with THV by simultaneously extruding the THV onto the fabric and nipping the fabric and extruded THV between a first roll and a second roll.
- 15
31. A method of making an architectural fabric for a retractable, temporary, or permanent structure comprising the steps of:
- (a) providing a layer of fabric having a first surface and a second surface and comprising polytetrafluoroethylene fibers;
- (b) coating THV onto said first surface of said fabric; and
- (d) coating THV onto said second surface of said fabric.
- 20
32. An architectural fabric for retractable, temporary, or permanent structures comprising a welded seam exclusive of seam tape or surface preparation through abrasion.
- 25
33. An architectural fabric for retractable, temporary, or permanent structures formed by the process of providing at least two pieces of fluoropolymer fabric

and welding said pieces together without the use of seam tape or surface preparation through abrasion.

1/2

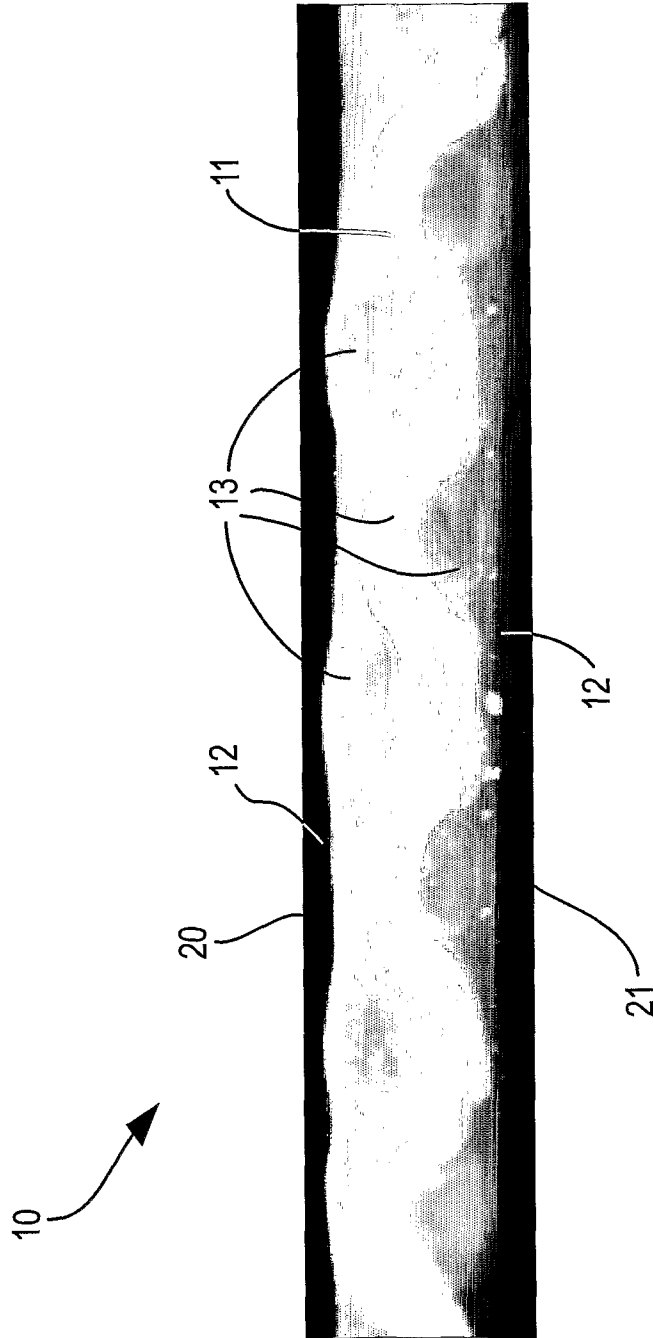
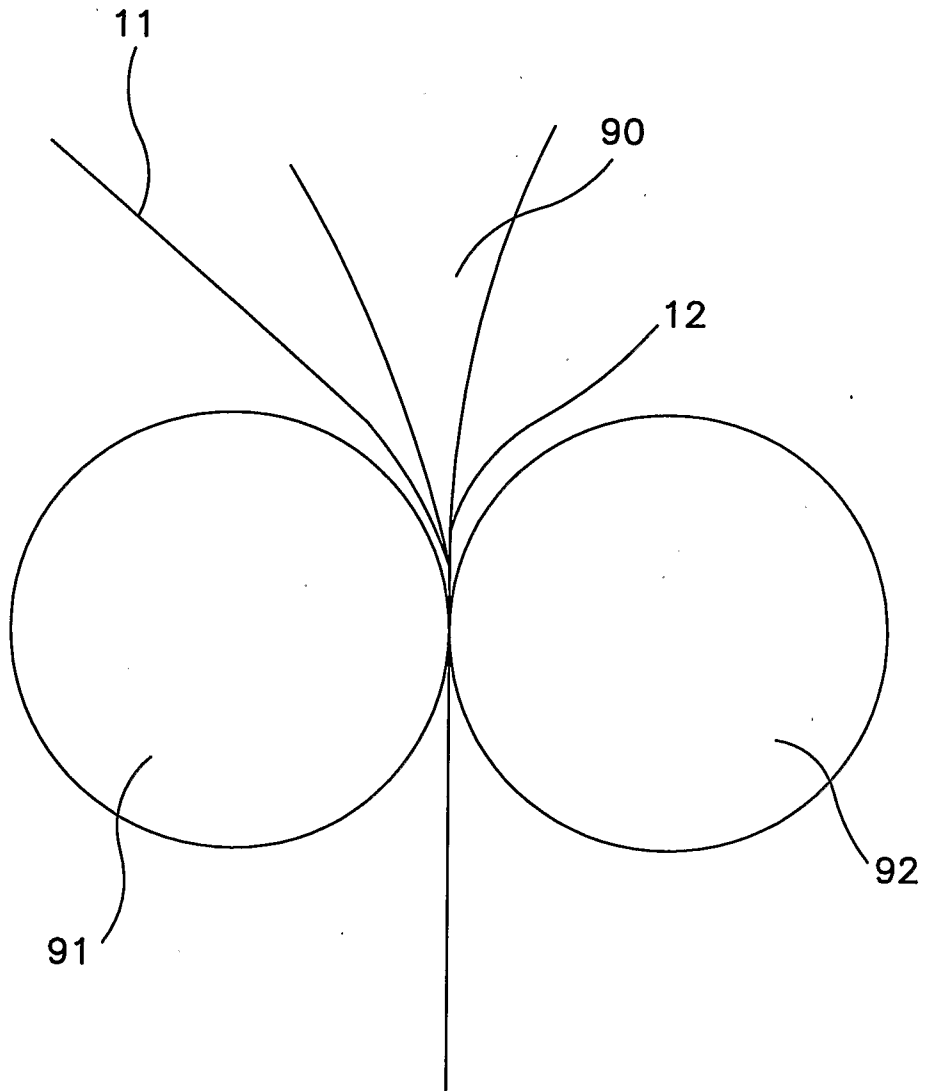


FIG. 1



**FIG. 2**