(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
25 March 2021 (25.03.2021)

WIPO | PCT

(10) International Publication Number
WO 2021/055309 A1

(51) International Patent Classification:
B05B 1/02 (2006.01) *B05B 1/16* (2006.01)
F15C 1/16 (2006.01) *A47K 3/28* (2006.01)
F15C 1/22 (2006.01) *B05B 1/30* (2006.01)
B05B 1/08 (2006.01)

(21) International Application Number:
PCT/US2020/050801

(22) International Filing Date:
15 September 2020 (15.09.2020)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/900,745 16 September 2019 (16.09.2019) US

(71) Applicant: **AS AMERICA, INC.** [US/US]; One Centennial Avenue, Piscataway, New Jersey 08854 (US).

(72) Inventor: **KOLEKAR, Nitin S.**; 128A Rutgers Road, Piscataway, New Jersey 08854 (US).

(74) Agent: **STEVENSON, Tyler A.** et al.; AS AMERICA, INC., One Centennial Avenue, Piscataway, New Jersey 08854 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: FLUIDIC OSCILLATOR

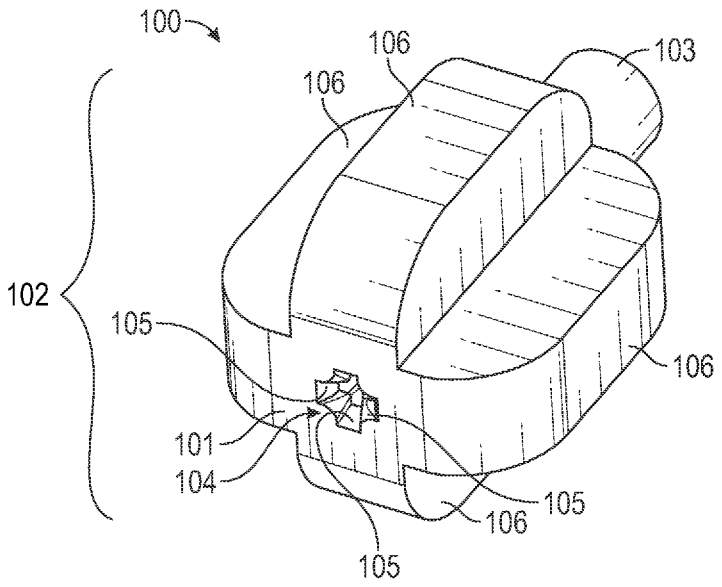


FIG. 1A

(57) Abstract: A fluidic oscillator, comprising an oscillator body comprising an exterior surface; an interior surface defining a three-dimensional space therein; a fluid inlet; and a fluid outlet, wherein the three-dimensional space, the fluid inlet, and the fluid outlet are in flow communication, the three-dimensional space comprises a first fluid interaction region fluidly coupled to a first pair of feedback flow paths, and a second fluid interaction region fluidly coupled to a second pair of feedback flow paths, and wherein the first and second fluid interaction regions intersect.

WO 2021/055309 A1

[Continued on next page]

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

Fluidic Oscillator

The disclosure is related to fluidic oscillators and to plumbing fixtures comprising fluidic oscillators. In some embodiments, the fluidic oscillators are passive 3D oscillators.

Background

Shower heads generally comprise a plurality of small annular nozzles designed to wet a certain area and to provide a pleasant shower experience. In order to achieve a desired effect, a large number of nozzles are employed and a large of amount of water is consumed.

Needed is a water-saving shower head capable of delivering water to a specified area while at the same time providing a pleasant shower experience with a desired cleaning and rinsing effect.

Summary

Accordingly, disclosed is a fluidic oscillator, comprising an oscillator body comprising an exterior surface; an interior surface defining a three-dimensional space therein; a fluid inlet; and a fluid outlet, wherein the three-dimensional space, the fluid inlet, and the fluid outlet are in flow communication, the three-dimensional space comprises a first fluid interaction region adjacent a first pair of feedback flow paths, and a second fluid interaction region adjacent a second pair of feedback flow paths, and wherein the first and second fluid interaction regions intersect to provide flow communication throughout the three-dimensional space..

Also disclosed is a plumbing fixture comprising one or more fluidic oscillators according to the invention.

Brief Description of the Drawings

The disclosure described herein is illustrated by way of example and not by way of limitation in the accompanying figures. For simplicity and clarity of illustration, features illustrated in the figures are not necessarily drawn to scale. For example, the dimensions of some features may be exaggerated relative to other features for clarity. Further, where

considered appropriate, reference labels have been repeated among the figures to indicate corresponding or analogous elements.

Fig. 1A shows a perspective view of a fluidic oscillator, according to an embodiment.

Fig. 1B shows a see-through view of a fluidic oscillator, according to an embodiment.

Fig. 1C shows a view of an internal three-dimensional space of a fluidic oscillator, according to an embodiment.

Fig. 1D shows a cross-section view of a fluidic oscillator, according to an embodiment.

Fig. 2 shows a shower head comprising a plurality of fluidic oscillators, according to an embodiment.

Fig. 3 provides cross-section views of fluidic oscillators 1-8 of Example 2, according to some embodiments.

Detailed Description

Fig. 1A shows fluidic oscillator **100**, according to an embodiment. Visible is an exterior surface of oscillator body **102**. Shown is planar face **101** on a downstream end of oscillator body **102**. Planar face **101** is flush with outlet **104**. Conduit **103** is coupled to an upstream end of body **102**. Outlet **104** contains outwardly flared walls **105**. Fluidic oscillator **100** comprises exterior walls (or fins) **106**. Walls **106** are disposed about 90 degrees from each other. Fluid is configured to enter fluidic oscillator at an upstream end through conduit **103** and exit at downstream end through outlet **104**.

Fig. 1B provides a see-through view of fluidic oscillator **100**, according to an embodiment. Visible is conduit **103** upstream of and in fluid communication with fluid inlet **107**. Inlet **107** is in flow communication with outlet **104**. Also visible are feedback flow paths **108a** and **108b**. Feedback flow paths **108a** constitute a pair and are positioned about 180 degrees apart. Likewise, feedback flow paths **108b** are another pair and are positioned about 180 degrees apart. Conduit **103** comprises a substantially cylindrical bore **109**. In this embodiment, feedback flow paths **108** are disposed about 90 degrees apart.

Fig. 1C shows a see-through view of the interior surface defining the internal three-dimensional space of fluidic oscillator **100**, according to an embodiment. Visible are conduit bore **109**, fluid inlet **107**, and fluid outlet **104**. Fluid inlet **107** is inwardly (downwardly) tapered. Fluid outlet **104** comprises outwardly flared walls **105**. Feedback flow paths (feedback loops)

108a and **108b** are disposed about 90 degrees apart from each other. A first pair of feedback flow paths **108a** are coupled to a first fluid interaction area **110a**. Second pair of feedback flow paths **108b** are coupled to second fluid interaction area **110b**. First fluid interaction area **110a** and second fluid interaction area **110b** intersect. Intersection of fluid interaction areas provides a central bore **111** through body **102** of fluidic oscillator **100**. The internal space is in flow communication throughout. A thickness **t** of a feedback flow path **108a** or **108b** is about 1.5 mm in this embodiment.

Fig. 1D shows a cross-section view of fluidic oscillator **100**, according to an embodiment. Shown are conduit **103** comprising bore **109**, inwardly tapered fluid inlet **107**, fluid outlet **104** having outwardly flared walls **105**, and a pair of feedback flow paths **108** coupled to fluid interaction area **110**. In this embodiment, body **102** has a largest diameter (or width) of about 32.1 mm; bore **109** has a diameter of about 5.2 mm and conduit **103** has an outer diameter of about 10.4 mm; fluid inlet **107** has a largest diameter of about 4.0 mm; fluid outlet **104** has a largest diameter of about 6.1 mm and a smallest diameter of about 3.9 mm; and fluid interaction area **110** has a central largest measure $\mathbf{d_L}$ of about 11.6 mm and a smallest measure $\mathbf{d_S}$ of about 5.7 mm.

Fig. 2 depicts a shower head **200** comprising a plurality of fluidic oscillators **100**, according to an embodiment. Fluidic oscillators **100** are randomly oriented with respect to positioning of oscillator body walls (and thereby feedback flow paths). Fluidic oscillators **100** are oriented in a regular pattern with respect to each other.

In some embodiments, a fluidic oscillator comprises an oscillator body having a continuous exterior surface and a continuous interior surface defining a three-dimensional space. The three-dimensional space includes fluid flow pathways configured to encourage and to provide for fluid oscillating spray. The oscillator body includes a fluid inlet and a fluid outlet. The fluid inlet, fluid outlet, and three-dimensional space within the body are in flow communication.

In some embodiments, the three-dimensional space includes a first fluid interaction area coupled to a first pair of fluid feedback flow paths, or fluid feedback loops; and a second fluid interaction area coupled to a second pair of fluid feedback flow paths; and wherein the first and second fluid interaction areas intersect. In some embodiments, the area of intersection provides

a substantially cylinder-shaped bore from inlet to outlet. In other embodiments, the area of intersection may take on other three-dimensional shapes.

In some embodiments, an exterior surface of an oscillator body may have any shape, for instance a smooth spherical shape, a “football” type shape, spheroid shape, prolate spheroid, or a shape having walls, edges, and/or points. An oscillator body shape may be symmetrical or non-symmetrical. In some embodiments, an oscillator body shape may comprise walls, wherein the walls correspond to fluid feedback pathways disposed therein. In some embodiments, body walls may be substantially evenly spaced, for instance wherein four walls form a cross shape. In other embodiments, body walls may be unevenly spaced, for instance wherein four walls form an X like shape having angles between walls of less than and greater than 90 degrees.

A feedback flow path may be positioned about 90 degrees from an adjacent feedback flow path. In some embodiments, a feedback flow path may be positioned less than or greater than about 90 degrees from an adjacent feedback flow path. In some embodiments, a pair of feedback flow paths may be positioned about 180 degrees apart. A positioning of feedback flow paths may be symmetrical or nonsymmetrical.

In some embodiments, a fluidic oscillator comprises a conduit coupled to the body at an upstream end of the body. The conduit may be in flow communication with a body inlet. In some embodiments, a conduit may have a substantially cylinder-shaped bore. In some embodiments, an oscillator body and conduit may be a unitary construct. In other embodiments, an oscillator body and conduit may be formed separately and coupled together. The fluidic oscillators may have no moving parts.

In some embodiments, a conduit bore may share an axis with a central body bore. In other embodiments, a conduit bore may be positioned at an angle, for example from about 30 degrees to about 90 degrees or more, relative to a body fluid inlet.

In some embodiments, a fluidic oscillator may comprise a planar face at a downstream end. A planar face may be flush with the oscillator outlet. In other embodiments, an outlet may extend beyond a downstream body face. In some embodiments, an oscillator outlet may have outwardly flared walls. In some embodiments, a fluid inlet may be inwardly tapered. A fluid inlet

may be symmetrically inwardly tapered or non-symmetrically inwardly tapered; “inwardly tapered” meaning a decreasing internal diameter from upstream to downstream.

Plumbing fixtures, for instance shower heads, faucets, body jet nozzles for walk-in bath tubs, etc. may comprise one or more present fluidic oscillators. Present plumbing fixtures may be configured to provide an effective and pleasant water stream while at the same time consuming less water. A plurality of fluidic oscillators may be positioned in a symmetrical pattern, or may be positioned non-symmetrically in or on a plumbing fixture. A plurality of fluidic oscillators may be oriented randomly, or may be oriented in a certain pattern in respect to oscillator walls or fins. For example, fluidic oscillators having walls or fins, may have the walls or fins oriented randomly or in a regular pattern. In an embodiment, a plurality of fluidic oscillators may be positioned symmetrically in or on a plumbing fixture and have oscillator walls or fins oriented in a regular pattern or randomly.

The fluidic oscillators may be configured to be coupled to a pressurized fluid source. Upon a pressurized fluid source being introduced into the fluidic oscillator, fluid will exit in an oscillating manner. Fluid may oscillate throughout x-y and x-z planes from a center axis.

In some embodiments, fluidic oscillators may comprise one or more thermoplastic polymers, for example one or more of polyolefins, polyamides, polyesters, polystyrenes, mixtures thereof or copolymers thereof.

In some embodiments, fluidic oscillators may be prepared via thermoplastic molding techniques, including injection molding, rotomolding, or 3D printing.

Fluidic oscillators described herein are not limited to use in plumbing fixtures. In some embodiments, present fluidic oscillators may be employed in any desired fluid delivery system, for instance, in fuel injectors, windshield wiper fluid nozzles, sprinkler systems, fire extinguisher nozzles, and the like. Present fluidic oscillators may also be suitable for delivering oscillating gas streams.

In some embodiments, disclosed is a passively controlled 3D fluidic oscillator, comprising an oscillator body comprising an exterior surface; an interior surface defining a three-dimensional space therein; a fluid inlet; and a fluid outlet, wherein the three-dimensional

space, the fluid inlet, and the fluid outlet are in flow communication, the three-dimensional space comprises a first fluid interaction region fluidly coupled to a first pair of feedback flow paths, and a second fluid interaction region fluidly coupled to a second pair of feedback flow paths, and wherein the first and second fluid interaction regions intersect causing 3D oscillations of a fluid spray as it exits the fluid outlet. In some embodiments, "passive" means having no moving parts.

Following are some non-limiting embodiments of the disclosure.

In a first embodiment, disclosed is a fluidic oscillator, the fluidic oscillator comprising an oscillator body comprising an exterior surface; an interior surface defining a three-dimensional space therein; a fluid inlet; and a fluid outlet, wherein the three-dimensional space, the fluid inlet, and the fluid outlet are in flow communication, the three-dimensional space comprises a first fluid interaction region fluidly coupled to a first pair of feedback flow paths, and a second fluid interaction region fluidly coupled to a second pair of feedback flow paths, and wherein the first and second fluid interaction regions intersect, providing fluid communication throughout the three-dimensional space.

In a second embodiment, disclosed is a fluidic oscillator according to the first embodiment, wherein the body comprises a planar face and wherein the fluid outlet is flush with the planar face. In a third embodiment, disclosed is a fluidic oscillator according to the first or second embodiments, wherein the outlet comprises outwardly flared walls.

In a fourth embodiment, disclosed is a fluidic oscillator according to any of the preceding embodiments, wherein the body exterior surface comprises exterior walls (or fins). In a fifth embodiment, disclosed is a fluidic oscillator according to any of the preceding embodiments, wherein the body exterior surface comprises exterior walls, and wherein an angle between adjacent exterior walls is about 90 degrees. In a sixth embodiment, disclosed is a fluidic oscillator according to any of the preceding embodiments, wherein the body exterior surface comprises exterior walls, and wherein an angle between adjacent exterior walls is less than or greater than 90 degrees.

In a seventh embodiment, disclosed is a fluidic oscillator according to any of the preceding embodiments, comprising a conduit coupled to and in flow communication with the

fluid inlet. In an eighth embodiment, disclosed is a fluidic oscillator according to the seventh embodiment, wherein the conduit comprises a substantially cylinder-shaped bore. In a ninth embodiment, disclosed is a fluidic oscillator according to embodiments 7 or 8, wherein the oscillator body and conduit are a unitary construct.

In a tenth embodiment, disclosed is a fluidic oscillator according to any of the preceding embodiments, wherein the fluid inlet is inwardly tapered from upstream to downstream.

In an eleventh embodiment, disclosed is a fluidic oscillator according to any of the preceding embodiments, wherein the three-dimensional space comprises a fluid pathway from inlet to outlet, the fluid pathway formed by the intersection of the first and second fluid interaction regions. In a twelfth embodiment, disclosed is a fluidic oscillator according to the eleventh embodiment, wherein the fluid pathway formed by the intersection is substantially cylinder-shaped.

In a thirteenth embodiment, disclosed is a fluidic oscillator according to any of the preceding embodiments, wherein each feedback flow path is positioned about 90 degrees from an adjacent feedback flow path.

In a fourteenth embodiment, disclosed is a fluidic oscillator according to any of the preceding embodiments, comprising no moving parts. In a fifteenth embodiment, disclosed is a fluidic oscillator according to any of the preceding embodiments, wherein the fluidic oscillator is a passive 3D oscillator.

In a sixteenth embodiment, disclosed is a fluidic oscillator according to any of the preceding embodiments, wherein the intersection of the first and second fluid interaction areas provides a central body bore.

In a seventeenth embodiment, disclosed is a plumbing fixture comprising one or more fluidic oscillators according to any of the preceding embodiments. In an eighteenth embodiment, disclosed is a plumbing fixture according to the seventeenth embodiment selected from a shower head or a faucet spray head. In a nineteenth embodiment, disclosed is a plumbing fixture according to embodiments 17 or 18 comprising a plurality of fluidic oscillators.

In a twentieth embodiment, disclosed is a plumbing fixture according to any of embodiments 17 to 19, wherein the fluidic oscillators are oriented randomly with respect to oscillator body walls. In a twenty-first embodiment, disclosed is a plumbing fixture according to any of embodiments 17 to 19, wherein the fluidic oscillators are oriented in a pattern with respect to oscillator body walls. In a twenty-second embodiment, disclosed is a plumbing fixture according to any of embodiments 17 to 21, wherein the fluidic oscillators are positioned in a symmetrical pattern in or on the fixture.

The term “adjacent” may mean “near” or “close-by” or “next to”.

The term “coupled” means that an element is “attached to” or “associated with” another element. Coupled may mean directly coupled or coupled through one or more other elements. An element may be coupled to an element through two or more other elements in a sequential manner or a non-sequential manner. The term “via” in reference to “via an element” may mean “through” or “by” an element. Coupled or “associated with” may also mean elements not directly or indirectly attached, but that they “go together” in that one may function together with the other.

The term “flow communication” means for example configured for liquid or gas flow there through and may be synonymous with “fluidly coupled”. The terms “upstream” and “downstream” indicate a direction of gas or fluid flow, that is, gas or fluid will flow from upstream to downstream.

The term “towards” in reference to a of point of attachment, may mean at exactly that location or point or, alternatively, may mean closer to that point than to another distinct point, for example “towards a center” means closer to a center than to an edge.

The term “like” means similar and not necessarily exactly like. For instance “ring-like” means generally shaped like a ring, but not necessarily perfectly circular.

The articles "a" and "an" herein refer to one or to more than one (e.g. at least one) of the grammatical object. Any ranges cited herein are inclusive. The term "about" used throughout is used to describe and account for small fluctuations. For instance, "about" may mean the numeric value may be modified by ±0.05%, ±0.1%, ±0.2%, ±0.3%, ±0.4%, ±0.5%, ±1%, ±2%,

±3%, ±4%, ±5%, ±6%, ±7%, ±8%, ±9%, ±10% or more. All numeric values are modified by the term "about" whether or not explicitly indicated. Numeric values modified by the term "about" include the specific identified value. For example "about 5.0" includes 5.0.

The term “substantially” is similar to “about” in that the defined term may vary from for example by ±0.05%, ±0.1%, ±0.2%, ±0.3%, ±0.4%, ±0.5%, ±1%, ±2%, ±3%, ±4%, ±5%, ±6%, ±7%, ±8%, ±9%, ±10% or more of the definition; for example the term “substantially perpendicular” may mean the 90° perpendicular angle may mean “about 90°”. The term “generally” may be equivalent to “substantially”.

Features described in connection with one embodiment of the disclosure may be used in conjunction with other embodiments, even if not explicitly stated.

Embodiments of the disclosure include any and all parts and/or portions of the embodiments, claims, description and figures. Embodiments of the disclosure also include any and all combinations and/or sub-combinations of embodiments.

Example 1 Shampoo Removal Test

In the following tests, a test wig is treated with 25 mL of shampoo. The shampoo-treated wig is rinsed with water from a shower head comprising a plurality of present fluidic oscillators (A) and commercial shower heads (B) and (C). Rinse water samples are taken at 5 seconds and at 10 second intervals thereafter. Rinse water samples are tested for turbidity, reported below as Nephelometric Turbidity Units (NTU). Lower NTU corresponds to more clear samples. A distance of a shower head from the wig is about 190 mm. A water flow rate is maintained at 1.45 gallons per minute. Water temperature is held constant with a thermostatic valve and water pressure is regulated on both hot and cold lines independently to achieve desired flow rate.

	Turbidity (NTU)		
Time (sec)	(A)	(B)	(C)
0	0	0	0
5	806	303	145

10	734	275	248
20	286	172	229
30	116	102	182
40	53	75	134
50	22	49	98
60	11	32	82
70	6	24	72
80	4	19	61
90	3	18	40
100	1	16	27
110	1	11	21
120	1	8	15

The results indicate that present shower head (A) rinses shampoo from the wig at a greater rate than commercial shower heads (B) and (C), as shown by higher turbidity values for rinse water samples taken early on at 5 seconds, 10 seconds, and 20 seconds. Thereafter, desired low turbidity values are obtained for rinse water samples collected from a wig rinsed with shower head (A) earlier than from a wig rinsed with commercial shower heads (B) and (C). Rinse water samples taken at 70 seconds show an NTU of less than 10 for the present shower head (A). Commercial shower head (B) does not provide a rinse water NTU of less than 10 until 120 seconds. Commercial shower head (C) does not provide a rinse water NTU of less than 10 even up to 120 seconds.

Example 2 Almond Butter Removal Test

A series of 8 fluidic oscillators having a same/similar external size and shape, and having differing internal cavity shapes which drive the amplitude and frequency of fluid oscillations are prepared via 3D printing. Cross-section views of fluidic oscillators 1-8 are shown in **Fig. 3**. Eight faucet assemblies are prepared having three fluidic oscillators of one of samples 1-8, respectively. A 32 g sample of almond butter, about 3 inches in diameter and about 4 mm thick, is applied to a ceramic plate at the plate center. Cold tap water is sprayed at the almond butter at a 30 degree angle from vertical at a flow rate of 1.1 gal per minute. A time taken to completely remove the almond butter is measured. The time varied from 14 seconds to 27 seconds for the eight different assemblies.

Claims

1. A fluidic oscillator, comprising

an oscillator body comprising
an exterior surface;
an interior surface defining a three-dimensional space therein;
a fluid inlet; and
a fluid outlet,

wherein
the three-dimensional space, the fluid inlet, and the fluid outlet are in flow communication,
the three-dimensional space comprises a first fluid interaction region fluidly coupled to a first pair of feedback flow paths, and a second fluid interaction region fluidly coupled to a second pair of feedback flow paths, and

wherein the first and second fluid interaction regions intersect.

2. The fluidic oscillator according to claim **1**, wherein the body comprises a planar face and wherein the fluid outlet is flush with the planar face.

3. The fluidic oscillator according to claim **1**, wherein the outlet comprises outwardly flared walls.

4. The fluidic oscillator according to claim **1**, wherein the body exterior surface comprises exterior walls, and wherein an angle between adjacent exterior walls is about 90 degrees.

5. The fluidic oscillator according to claim **1**, wherein the body exterior surface comprises exterior walls, and wherein an angle between adjacent exterior walls is less than or greater than 90 degrees.

6. The fluidic oscillator according to claim **1**, comprising a conduit fluidly coupled to the fluid inlet.

7. The fluidic oscillator according to claim **6**, wherein the conduit comprises a substantially cylinder-shaped bore.

8. The fluidic oscillator according to claim **6**, wherein the oscillator body and conduit are a unitary construct.

9. The fluidic oscillator according to claim **1**, wherein the fluid inlet is inwardly tapered.

10. The fluidic oscillator according to claim **1**, wherein the three-dimensional space comprises a fluid pathway from inlet to outlet, the fluid pathway defined by the intersection of the first and second fluid interaction regions.

11. The fluidic oscillator according to claim **10**, wherein the fluid pathway defined by the intersection is substantially cylinder-shaped.

12. The fluidic oscillator according to claim **1**, wherein each feedback flow path is positioned about 90 degrees from an adjacent feedback flow path.

13. The fluidic oscillator according to claim **1**, comprising no moving parts.

14. The fluidic oscillator according to claim **1**, wherein the intersection of the first and second fluid interaction areas defines a central body bore.

15. A plumbing fixture comprising one or more fluidic oscillators according to any of claims **1** to **14**.

16. The plumbing fixture according to claim **15** comprising a plurality of fluidic oscillators.

17. The plumbing fixture according to claim **16**, wherein the fluidic oscillators are oriented randomly with respect to oscillator body walls.

18. The plumbing fixture according to claim **16**, wherein the fluidic oscillators are oriented in a pattern with respect to oscillator body walls.

19. The plumbing fixture according to claim **16**, wherein the fluidic oscillators are positioned in a symmetrical pattern in or on the fixture.

20. The plumbing fixture according to claim **15**, wherein the plumbing fixture is a shower head or faucet spray head.

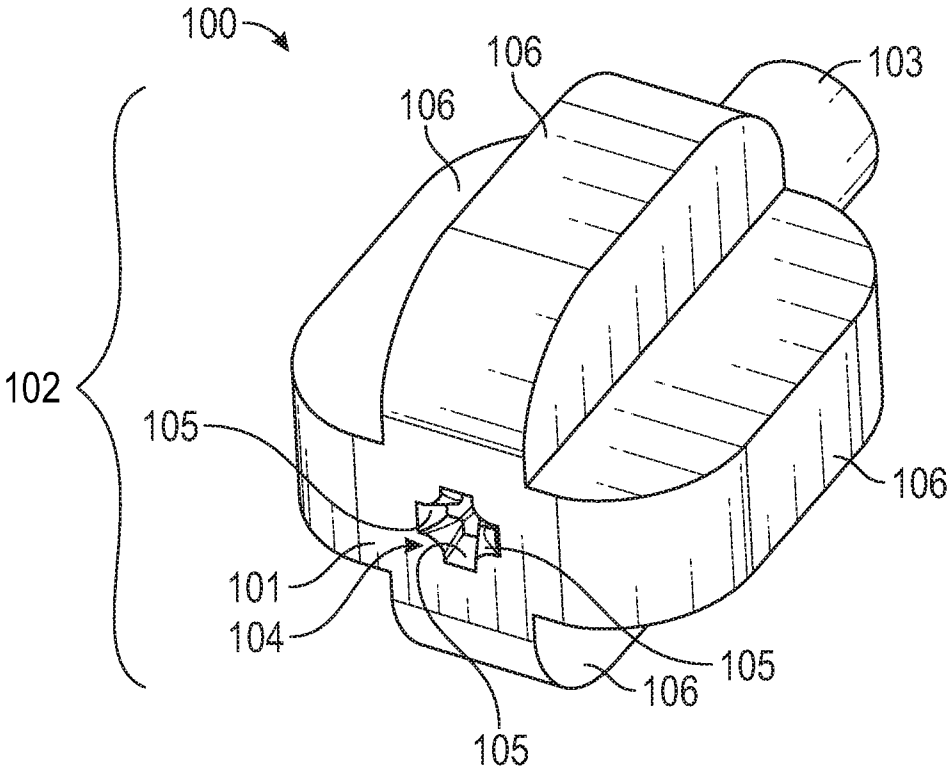

100
106
106
103
102
105
106
101
104
105
106
105

FIG. 1A

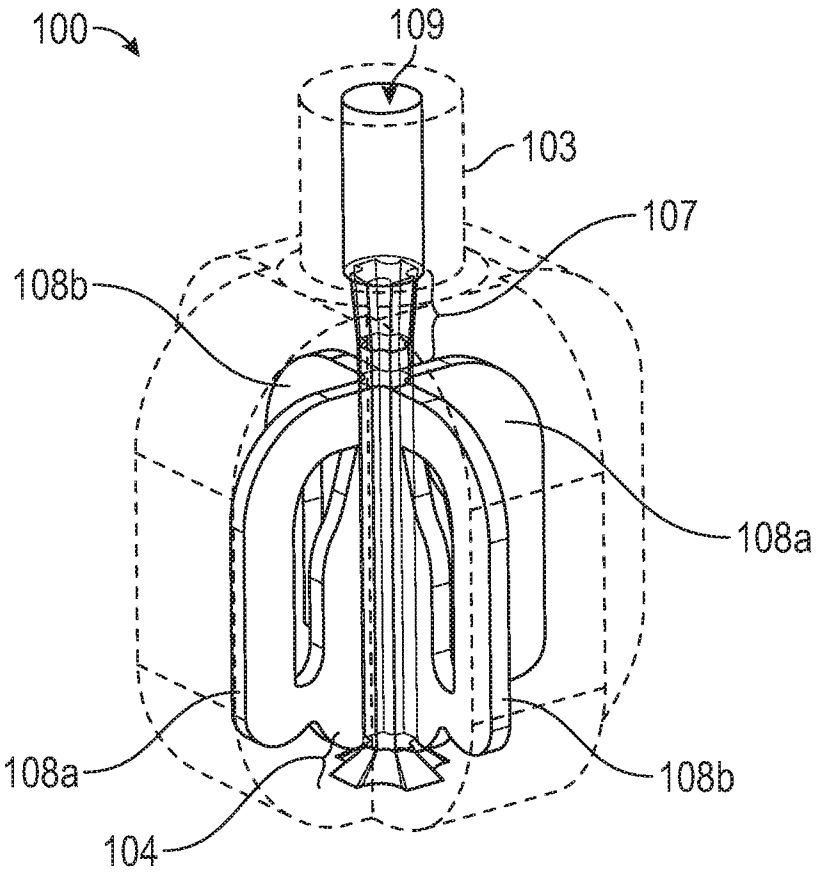

100
109
103
107
108b
108a
108a
108b
104

FIG. 1B

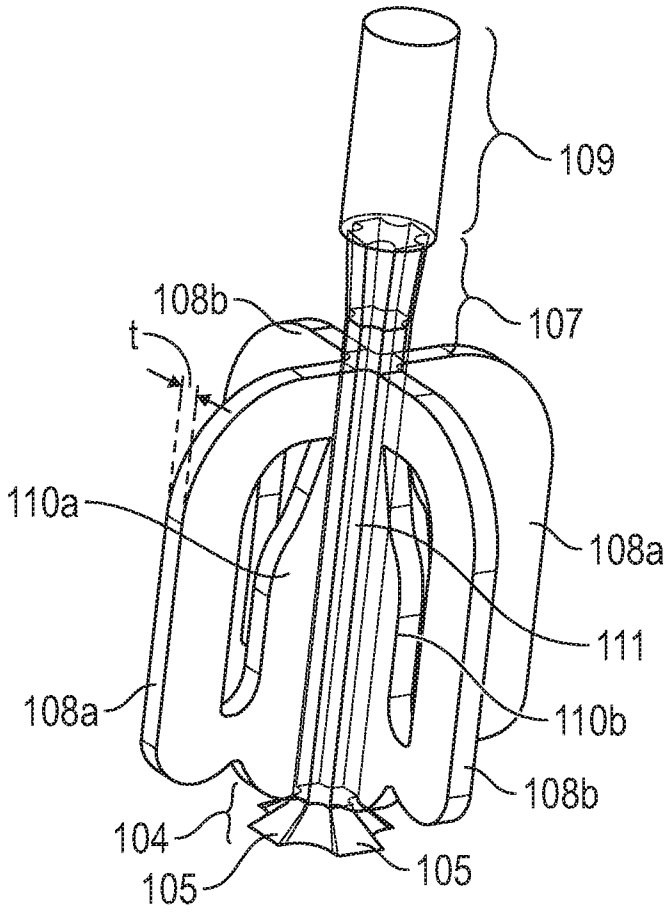

109
107
108b
t
110a
108a
111
108a
110b
108b
104
105
105

FIG. 1C

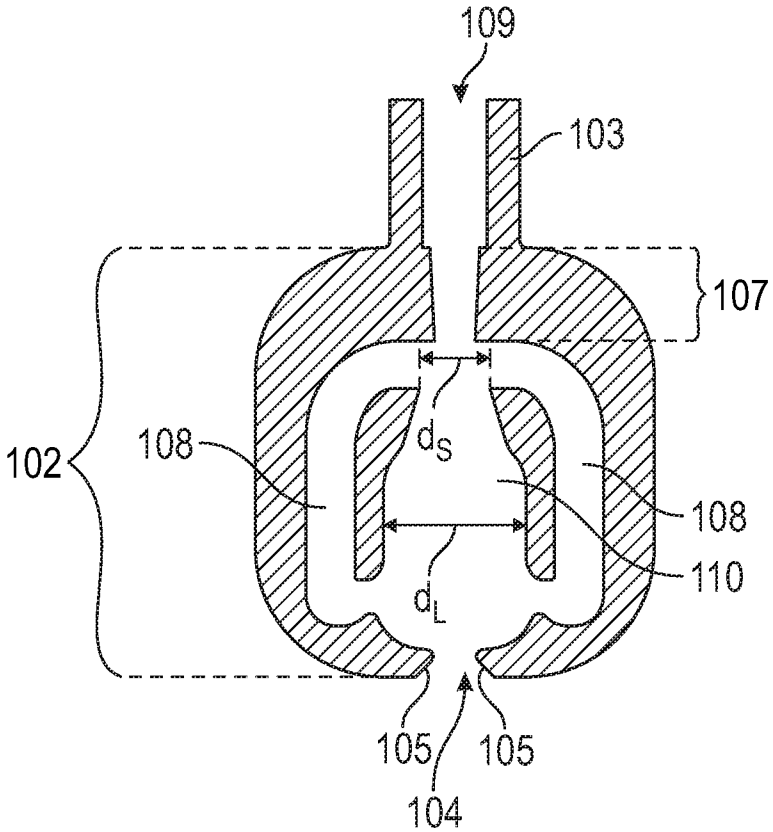

109
103
107
102
108
d_S
108
110
d_L
105
105
104

FIG. 1D

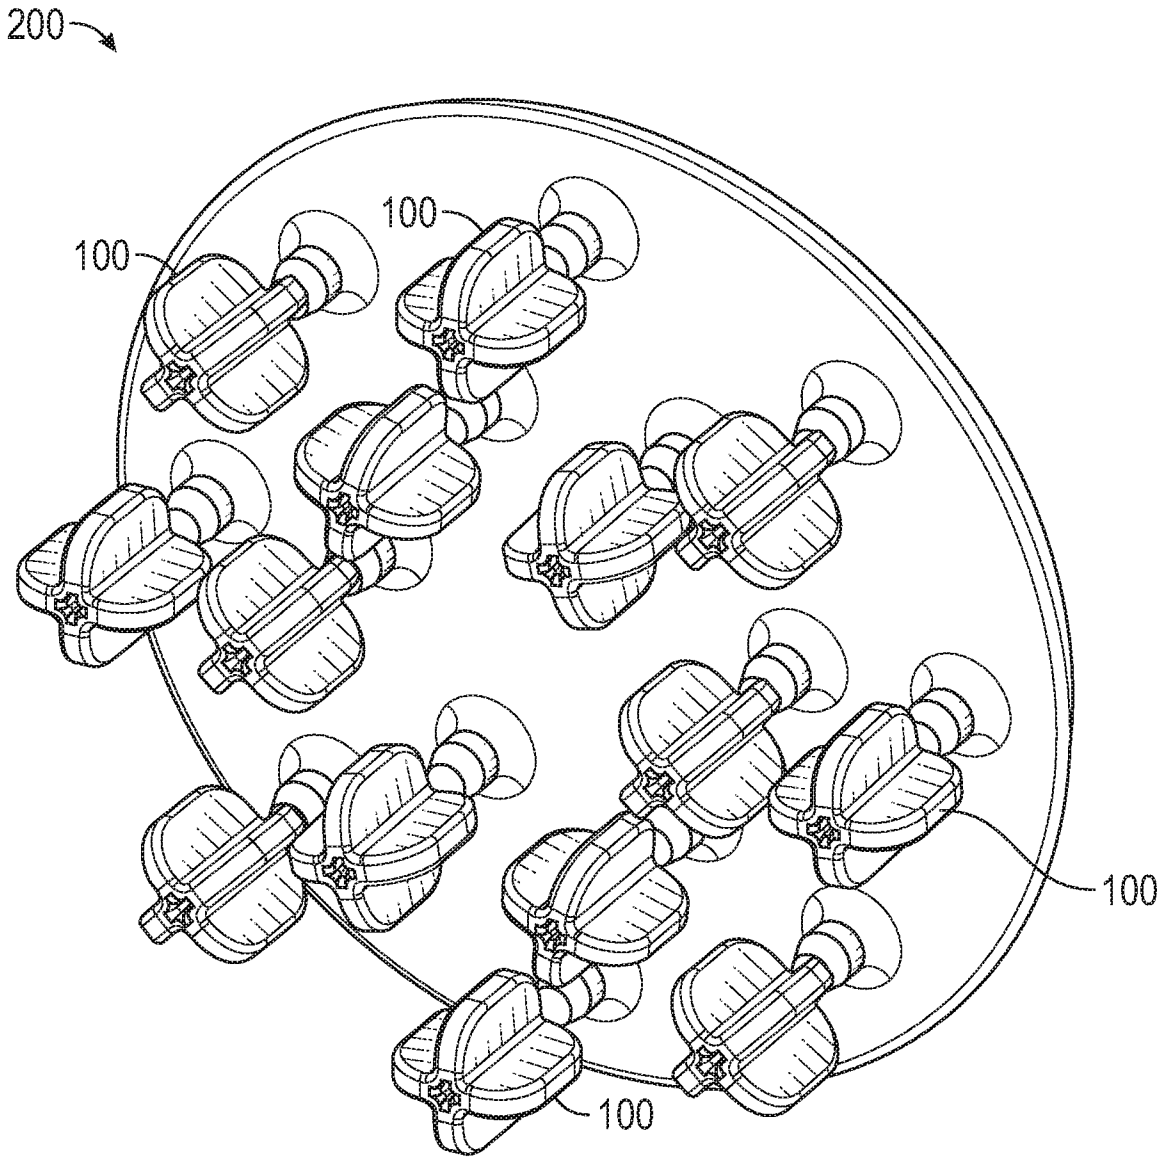


FIG. 2

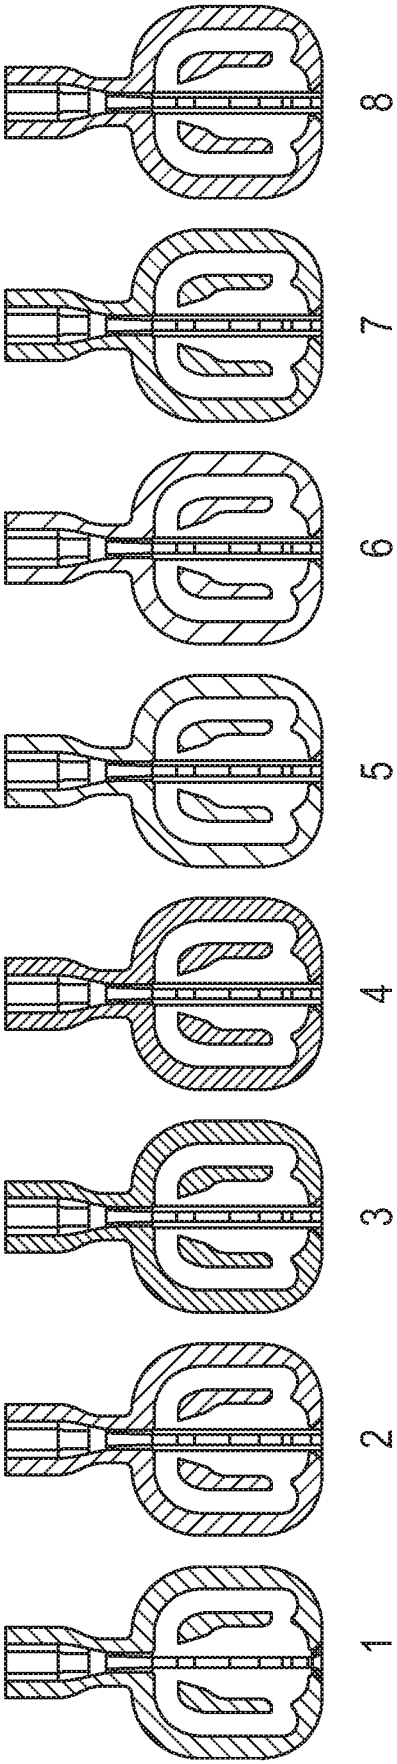


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 20/50801

A. CLASSIFICATION OF SUBJECT MATTER

IPC - B05B 1/02, F15C 1/16, F15C 1/22, B05B 1/08, B05B 1/16, A47K 3/28, B05B 1/30 (2020.01)

CPC - B05B 1/08, F15C 1/22, B05B 1/185, B05B 1/14, B60S 1/52, B05B 1/18, Y10T 137/2224, Y10T 137/2234, Y10T 137/2093, B05B 1/042, B05B 1/30, Y10T 137/2087, F15B 21/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X -- Y	'Phase-Synchronized Fluidic Oscillator Pair' (Tomac et al), 26 November 2018 (26.11.2018), [online] retrieved from <URL: https://arc.aiaa.org/doi/10.2514/1.J057065>, entire document, especially Fig 3, 6	1-10, 13 ---------- (15-20)/(1-10, 13)
X -- Y	WO 2018/197231 A1 (FDX FLUID DYNAMIX GMBH), 01 November 2018 (01.11.2018), entire document, especially Fig	1, 10-12, 14 ---------- (15-20)/(1, 10-12, 14)
Y	US 7,111,800 B2 (Berning et al), 26 September 2006 (26.09.2006), entire document, especially Figs 1-25	(15-20)/(1-14)
A	US 2016/0339457 A1 (Xiamen Runner Industrial Corporation), 24 November 2016 (24.11.2016), entire document	1-20
A	US 7,014,131 B2 (Berning et al), 21 March 2006 (21.03.2006), entire document	1-20

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"D" document cited by the applicant in the international application
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
29 October 2020	17 DEC 2020
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-8300	Authorized officer Lee Young Telephone No. PCT Helpdesk: 571-272-4300