



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
24.05.2006 Bulletin 2006/21

(51) Int Cl.:
B65D 5/54 (2006.01) B65D 5/16 (2006.01)

(21) Application number: **06000873.7**

(22) Date of filing: **06.07.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(72) Inventor: **AUCLAIR, Jean-Michel**
36000 Chateauroux (FR)

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
00947058.4 / 1 301 407

(74) Representative: **Hepworth, John Malcolm et al**
HLBBshaw
Bloxam Court
Corporation Street
Rugby,
Warwickshire CV21 2DU (GB)

(71) Applicant: **MeadWestvaco Packaging Systems**
LLC
Stamford,
Connecticut 06905 (US)

Remarks:

This application was filed on 17 - 01 - 2006 as a
divisional application to the application mentioned
under INID code 62.

(54) **Collapsible carton and method thereof**

(57) A carton, carton blank and method for packaging
one or more articles, for example, frozen or chilled food-
stuffs, the carton comprising a top wall (10) and a base
wall (14) interconnected by opposed side walls (12,16)
to define a tubular structure and end walls (18,20,22,24),

wherein the top wall comprises an elongate tear panel
defined by a pair of opposed frangible lines (364,368)
said tear panel being provided with a first fold line ex-
tending transversely across the tear panel to define a
pair of tear portions that are capable of being detached.

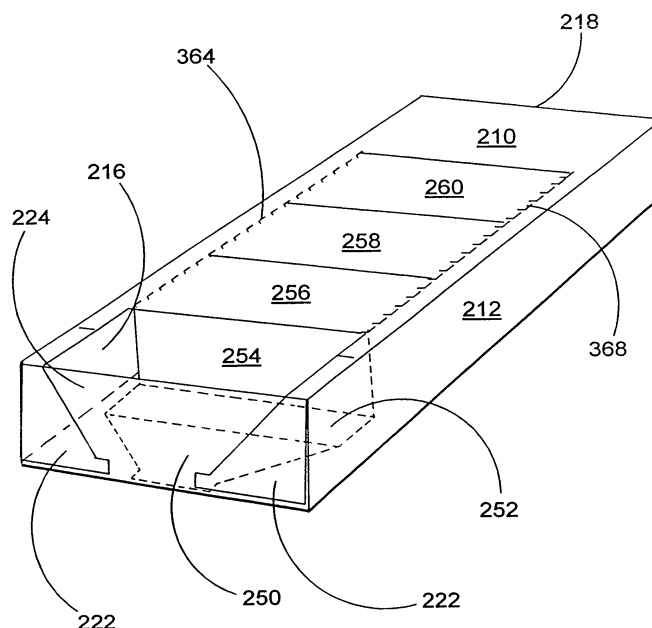


FIGURE 8

Description

Background of the invention

[0001] The present invention relates to a carton and more specifically though not exclusively to a carton incorporating an access means, and more specifically still though not exclusively, to a carton including an access means that may be opened incrementally so as to incrementally increase the size of the aperture through which articles contained within the carton may be accessed.

[0002] When one or more articles contained within a carton formed from paperboard or like foldable sheet material are purchased, it is often the case that such articles will not be removed from the carton all in one go. For example, in the case of frozen or chilled foodstuffs, the carton will be removed from the refrigerator or freezer, a number of articles will then be removed for preparation or consumption, and the carton containing the remainder will be replaced back in the refrigerator or freezer. Similarly, in the case of a carton of beer bottles, the bottles will be removed sequentially rather than all in one go.

[0003] There are many situations where it would be advantageous for the access means to be increased as the articles are removed. This allows the access means to be kept to minimal dimensions, since it may relieve the necessity of the access means to permit access to all the articles contained in the carton at any given moment. For example, in some instances, foodstuffs will spoil if they are not kept out of contact with air, and therefore, the larger access means would lead to greater circulation of air and thus a greater chance of spoilage. Alternatively, a larger access means presents an increase risks of unintentional egress of articles from the carton.

[0004] US 3 366 308 to Phillips discloses a container for milk or similar liquid products which is collapsible in its entirety once the entire contents thereof have been removed.

US 1 751 755 to Paris discloses a box which is reducible in size by removing portions thereof, and then subsequently replacing an end portion which functions as a lid. The present invention seeks to overcome or at least mitigate the problems of the prior art.

Summary of the Invention

[0005] One aspect of the invention provides a carton for packaging one or more articles, comprising a top wall and a bottom wall interconnected by opposed side walls to define a tubular structure and a pair of opposed end walls, wherein the top wall comprises an elongate tear panel defined by a pair of opposed frangible lines, wherein the tear panel is provided with a first fold line extending transversely across the tear panel to define a pair of tear portions that are capable of being detached, so as to incrementally increase the area of a resulting access aperture through which the articles may be removed.

[0006] According to a feature of this aspect of the invention, the tear panel may extend into one of the end walls.

[0007] According to another feature of this aspect of the invention, the carton may package a plurality of articles, and wherein a plurality of transverse fold lines are provided in register with the abutting edges of such articles.

[0008] Another aspect of the invention provides a blank for erecting into a carton for packaging one or more articles, for example frozen or chilled foodstuffs, the blank comprising a top wall panel, a first side wall panel, a bottom wall panel, and a second side wall panel hingedly interconnected in series, and a plurality of end wall panels hingedly interconnected to the end edges of the top wall panel and bottom wall panel wherein the top wall panel comprises an elongate tear panel defined by a pair of opposed frangible lines, wherein the tear panel is provided with a first fold line extending transversely across the tear panel to define a pair of tear portions that are capable of being folded inwardly to overlie the bottom wall after the or each article has been removed.

[0009] Preferably, the tear panel extends into one of the end walls.

[0010] Yet another aspect of the invention provides a method of reducing the bulk of a carton for packaging one or more articles having a top wall and a bottom wall interconnected by side walls to define a tubular structure and a pair of opposed end walls, wherein the top wall comprises an elongate tear panel defined by a pair of opposed frangible lines, and wherein the tear panel is provided with a first fold line extending transversely across the tear panel to define a pair of tear portions comprising the steps of: tearing the panel, and folding the torn panel inwardly inside the carton so one of the portions overlies the bottom wall after the or each article has been removed.

Brief Description of the Drawings

[0011] Exemplary embodiments of the present invention are now described, by way of example only, with reference to the accompanying drawings in which:

FIGURE 1 illustrates a blank according to a first embodiment of the invention;

FIGURE 2 is a perspective view of an erected carton formed from the blank of Figure 1;

FIGURE 3 is a perspective view of the carton of Figure 1 in a partially collapsed condition;

FIGURE 4 is a perspective view of the partially collapsed carton of Figure 3 in which the collapsed section has been folded over;

FIGURE 5 illustrates a blank according to a second

embodiment of the invention;

FIGURE 6 is a perspective view of a carton formed from the blank of Figure 5;

FIGURE 7 is a perspective view of the carton of Figure 6 in which a panel has been torn back to allow access to the contents of the carton; and

FIGURE 8 is a perspective view of the carton of Figure 7 in which the torn back panel has been placed inside the carton once some of the contents thereof have been removed.

Detailed Description of the Preferred Embodiments

[0012] Turning to the first embodiment as illustrated in Figures 1 to 4, there is shown a carton for packaging one or more articles for example, frozen or chilled foodstuffs formed from one or more blanks 100 made from paper-board or other foldable sheet material. The carton comprises a top wall 10 and a base wall 14 interconnected by opposed side walls 12, 16 to define a tubular structure and end walls 18, 20, 22, 24, wherein at least one of the end walls is arranged so as to allow access to the interior of the carton and there further comprises an endless fold line 164 defining a first and second tabular section and an arrangement 50, 51, 52, 53, 54, 56 is provided on one or more of said side walls whereby the corresponding one of the carton section may be collapsed whilst the other carton section remaining substantially erected.

[0013] Referring in particular to Figure 1, there is shown a blank 100 comprising a top wall panel 10, first side wall panel 12, a bottom wall panel 14 and a second side wall panel 16 hingedly interconnected in series along fold lines 110, 112, 114 respectively. A securing flap 48 which is hingedly attached to second side wall panel 16 along fold line 116 is also provided in this embodiment.

[0014] Upper end wall panels 18 and 22 are, in this embodiment, hingedly connected to the end edge of top wall panel 10 along fold lines 118 and 122 respectively. Preferably, hingedly connected thereto along fold lines 126 and 132 are upper end glue panels 26 and 32 respectively. Likewise, in this embodiment, lower end wall panels 20 and 24 are hingedly interconnected to base wall panel 14 along fold lines 120 and 124 respectively, and hingedly connected thereto are lower end securing panels 28 and 30 respectively.

[0015] In this embodiment, gusset panel arrangements 34, 36, 38, 40 are hingedly interconnected to the end edges of side wall panels 12 and 14 along fold lines 134, 136, and 138, 140 respectively. Each arrangement is substantially identical, therefore only gusset panel arrangement 34 is discussed in more depth. In addition to being hingedly interconnected to first side wall panel 12 along fold line 134, gusset panel arrangement 34 is further interconnected to upper end wall panel 18 along fold line 146, and lower end wall panel 20 along fold line 142.

The arrangement preferably comprises three triangular panels 42, 44, 46 hingedly interconnected along fold lines 144 and 145 which converge from the corners 11 and 15 of top wall panel 10 and base wall panel 14 respectively to the mid point 35 of the free edge of the arrangement 34.

[0016] Tubular segments are provided in the carton. In this embodiment, these are defined by fold lines 160, 162 and 164 extend transversely across top wall panel 10, first side wall panel 12, bottom wall panel 14 and second side panel 16 and are used to aid the progressive collapsing of the carton as described below. In alternative embodiments, the number of these fold lines may be changed according to the particular requirements of the carton. If the carton is intended to hold articles of regular size, it is preferable that the fold lines 160, 162, 164 are provided in register with the abutting edges of the articles in order to optimise the possible bulk reduction when articles are removed. Adjacent each fold line 160, 162, 164 on the first and second side wall panels 12, 16, are provided side collapsing arrangements 50, 51, 52, 53, 54, 56, two side collapsing arrangements preferably being provided for each fold line 160, 162, 164. Each side collapsing arrangement is substantially identical, therefore only arrangement 56 is discussed in more detail.

[0017] Arrangement 56 is preferably divided into a triangular portion 62, and two trapezoidal portions 58, 60. The triangular portion 62 is defined by an extension of fold line 164 and fold lines 161 and 163. Fold lines 161 and 163 intersect with fold line 158 which preferably runs substantially parallel to fold lines 114 and 116, and interconnects trapezoidal portions 58 and 60. Fold lines 161 and 163 are arranged with their intersection nearest the end of the carton which is to be opened by the user. For ease of construction, central fold line 158 may extend into triangular panel 62 and intersect with fold line 164, as can be seen in collapsing arrangement 52, for example. In any case, the fold line 158 preferably extends from the end of the carton intended to be opened (in this embodiment the end having gusset structures 38 and 40 attached thereto) to the most distant collapsing arrangement therefrom (in this embodiment, collapsing arrangements 54 and 56) to ease the folding operation, but this does not affect the functioning of the intermediate side collapsing arrangements (in this embodiment, side collapsing arrangements 50, 51, 52, 53).

[0018] Turning to the construction of the erected carton as illustrated in Figure 2, it is envisaged that the carton of the present invention can be formed by a series of sequential folding and gluing operations which can be performed in a straight line machine so that the carton is not required to be rotated or inverted to complete its construction. The folding process is not limited to that described below and be altered according to particular manufacturing requirements.

[0019] In this embodiment, glue is applied along one face of securing flap 48, and the blank is folded along fold lines 110, 112, 114, 116, such that flap 48 is secured in face contacting relationship with a portion of top wall

panel 10 so as to form a open ended tubular carton with fold lines 160, 162 and 164 endlessly encircling the carton. In other classes of embodiment, alternative securing means known in the art, such as mechanical locking means, may be provided. The contents of the carton may be loaded from either, or both, open ends of the carton, or be placed on the blank prior to it being formed into a tube.

[0020] Upper and lower end closure panels 18 and 20, and gusset panels 44 are preferably folded out of alignment with their respective top, bottom and side panels 10, 14, 12, 16, with fold lines 144 and 145 allowing gusset panels 44 to be tucked inside the upper and lower end closure panels 18 and 20. Upper and lower end securing panels 26 and 28 are simultaneously folded in the opposite direction, and are secured in face contacting relationship as seen in Figure 2 to form composite panels using glue or other suitable means known in the art. In the embodiment, a similar operation is also carried out on the end closure panels at the opposite end of the carton, such that the carton is substantially airtight. The composite panels 22, 24 and 26, 28 may optionally be secured in face contacting relationship with either the upper or lower end closure panels 18, 20 or 22, 24. This is particularly advantageous if applied to the end of the carton not intended to be opened so as to discourage the user from attempting to do so. It is envisaged that suitable alternative end closure panel arrangements may be provided within the scope of the invention, however it is preferred that such arrangements are resealable.

[0021] Referring now in particular to Figure 3, in order to gain access to the interior of the carton panels 30 and 32 are separated such that a proportion, or all of the contents of the carton may be removed. In order to reduce the bulk (i.e. the overall volume taken up by the carton) of the carton in instances when some of the contents remain, the centre fold line 158 of second side panel 16, and the corresponding fold line on first side wall panel 12 are pushed inwardly, thus facilitating the pressing of a section of top wall panel 10 and bottom wall panel 14 into substantially face contacting relationship as far along the carton as the remaining contents will allow. Endless fold lines 160, 162, 164 ease the pressing action. The converging nature of fold lines 161 and 163 allow the triangular portion 62 to hinge inwardly along fold line 164, providing a neat, and easy to form transition between the collapsed and erected portions of the carton. Panels 30, 32 are then preferably re-adhered to provide a substantially airtight seal.

[0022] It can be seen from Figure 3 that the overall bulk of the carton is now significantly reduced. To reduce the overall dimensions of the carton, the collapsed portion may be folded about one of the endless fold lines, fold line 162, for example, such that the collapsed portion overlies the remaining erected portion as shown in Figure 4. To gain access to the interior of the carton again, the above method is reversed.

[0023] Turning now to the second embodiment of the

present invention as illustrated in Figures 5 to 8, but referring particularly to Figure 5 which shows a blank 200 for forming the carton of the second embodiment of the invention. In this embodiment, the blank comprises a side wall panel 216, a bottom wall panel 214, a second side wall panel 212, a top wall panel 210, and a securing flap 248 hingedly interconnected in series along fold lines 314, 312, 310 and 348 respectively. End wall panels 220, 224 and 218, 222 are preferably hingedly interconnected to bottom wall panel 214 and top wall panel 210 along fold lines 320, 324 and 318, 322 respectively. End wall flaps 236, 238 and 234, 240 are optionally provided which are hingedly interconnected to first side wall panel 216 and second side wall panel 212 along fold lines 336, 338 and 334, 340 respectively.

[0024] There further comprises an elongate tear panel 251. In this embodiment, the tear panel is defined by opposed frangible lines 364, 368, and may comprise a series of tear portions 250, 252, 254, 256, 258, 260 is formed in top wall panel 210 and preferably end wall panel 222. The portions are hingedly interconnected along fold lines 322, 352, 354, 356, 358 respectively. Portion 260 is further hingedly interconnected to top wall panel along fold line 360. The frangible lines 364 and 368, in this embodiment, extend from the free edge of end wall panel 222 to the intersection with fold line 360. It is preferred that the frangible lines 364, 368 converge towards the free edge of end wall panel 222 to improve their tear initiation characteristics. It is envisaged that the number of tear portions may be increased or decreased in accordance with the requirements of a particular embodiment of the invention.

[0025] As in the first embodiment, it is envisaged that the carton can be formed by a series of sequential folding and gluing operations which can be performed in a straight line machine so the carton is not required to be rotated or inverted to complete its construction. The folding process is not limited to that described below and can be altered according to particular manufacturing requirements.

[0026] In this embodiment, glue is applied to one face of securing flap 248, and side, top and base wall panels 216, 214, 212, 210 are folded along fold lines 314, 312, 310, 348 such that an open ended tubular carton is formed. Securing flap 248 is secured in face contacting relationship with first side wall panel 216 thereby forming a composite side wall. The contents of the carton may be loaded from one or both open ends of the carton, or may have been placed within the blank prior to the above described folding operation. Glue is then applied as necessary to end wall panels and flaps 218, 220, 224, 224 and 234, 236, 238, 240 so as to preferably form a substantially sealed container as the respective panels are placed in face contacting relationship. It should however be ensured that end wall panel 222 is secured outwardly of end wall panel 224, and that glue is not applied to the face of tear portion 250 contacting end wall panel 224 which would otherwise compromise the subsequent tear-

ing operation. The blank is now fully erected into the carton illustrated in Figure 6. In other classes of embodiment, alternative securing means and/or end closure panel arrangements known in the art may be employed.

[0027] In order to gain access to the contents of the carton, the user preferably tears back the tear panel of the carton as far as is required along frangible lines 364 and 368. It can be seen in Figure 7 that tear portions 250, 252 and 254 have been torn back as far as fold line 354. A proportion of the contents of the carton may now be removed. If some of the carton contents remain, and the carton is to be stored away, for example in a refrigerator, then the user may fold the torn portions 250, 252, 254 downwardly such that portions 250 and 252 substantially overlie bottom wall panel 214, and portion 254 is out of alignment therewith, as shown in Figure 8.

[0028] In a preferred embodiment, the length of the tear portions is substantially identical to the depth of the carton, in order that angle between the torn off portion 254 and portion 252 shown in Figure 8 is substantially 90°, and the end edge of portion 250 engages with fold line 324 in the erected carton so as to hold the torn off portions in place. As the contents of the carton are removed, the tear portions may be torn back further and the process repeated to reduce the bulk of the carton further. If the carton is intended to hold articles of regular size, it is preferable that the fold lines 352, 354, 356, 358, 360 are provided in register with the abutting edges of the articles in order to optimise the possible bulk reduction when articles are removed.

[0029] In an alternative embodiment of the carton (not shown), the frangible lines 364, 368 are disposed along fold lines 310 and 348 such that when the access portions are folded downwardly, the side edges thereof contact the side wall panels 212 and 216, therefore minimising the ingress of air and other contaminants to the contents of the carton, thus reducing the risk of spoiling the foodstuffs and extending their shelf-life.

[0030] It will be recognised that, as used herein, the terms "top", "bottom", "side", "end", "lower" and "upper" with respect to the panels of the carton are relative terms, and that the carton may be reoriented as necessary or as desired. It will be further recognised that rather than the side wall or top wall being formed from a glued composite of panels, the carton blank may be rearranged whereby some other wall such as a bottom wall is formed from the glued composite of panels. Any reference to hinged connection should not be construed as necessarily referring to a single fold line only: indeed it is envisaged that hinged connection can be formed from one or more of one of the following, a score line, a frangible line or a fold line, without departing from the scope of invention.

[0031] The invention and its preferred embodiments relate to a carton or a sleeve which is shaped to provide satisfactory rigidity to hold items such as frozen or chilled foodstuffs. The shape of the blank minimises the amount of paperboard required for the carton. It is anticipated the invention can be modified without departing from the

scope of the invention: for example, side and end panels can be increased in height or width to provide a carton to receive one or more articles of different shapes and/or sizes. Furthermore, the collapsing and tearing structures can be applied to other known carton types, for example fully enclosed cartons or wraparound cartons for enclosing other article types, without departing from the scope of the invention.

Claims

1. A carton for packaging one or more articles,, comprising a top wall and a bottom wall interconnected by opposed side walls to define a tubular structure and a pair of opposed end walls, wherein the top wall comprises an elongate tear panel defined by a pair of opposed frangible lines, wherein the tear panel is provided with a first fold line extending transversely across the tear panel to define a pair of tear portions that are capable of being detached, so as to incrementally increase the area of a resulting access aperture through which the articles may be removed.
2. A carton according to claim 1, wherein the tear panel extends into one of the end walls.
3. A carton according to claim 1 or claim 2, wherein the carton packages a plurality of articles, and wherein a plurality of transverse fold lines are provided in register with the abutting edges of the articles.
4. A blank for erecting into a carton for packaging one or more articles, for example frozen or chilled foodstuffs, the blank comprising a top wall panel, a first side wall panel, a bottom wall panel, and a second side wall panel hingedly interconnected in series, and a plurality of end wall panels hingedly interconnected to the end edges of the top wall panel and bottom wall panel wherein the top wall panel comprises an elongate tear panel defined by a pair of opposed frangible lines, wherein the tear panel is provided with a first fold line extending transversely across the tear panel to define a pair of tear portions that are capable of being folded inwardly to overlie the bottom wall after the or each article has been removed.
5. A blank according to claim 4, wherein the tear panel extends into one of the end walls.
6. A blank according to claim 4 or claim 5, wherein when erected to form a carton, the blank packages a plurality of articles, and wherein a plurality of transverse fold lines are provided in register with the abutting edges of the articles.
7. A method of reducing the bulk of a carton for pack-

aging one or more articles having a top wall and a bottom wall interconnected by side walls to define a tubular structure and a pair of opposed end walls, wherein the top wall comprises an elongate tear panel defined by a pair of opposed frangible lines, and wherein the tear panel is provided with a first fold line extending transversely across the tear panel to define a pair of tear portions comprising the steps of: tearing the panel, and folding the torn panel inwardly inside the carton so one of the portions overlies the bottom wall after the or each article has been removed.

15

20

25

30

35

40

45

50

55

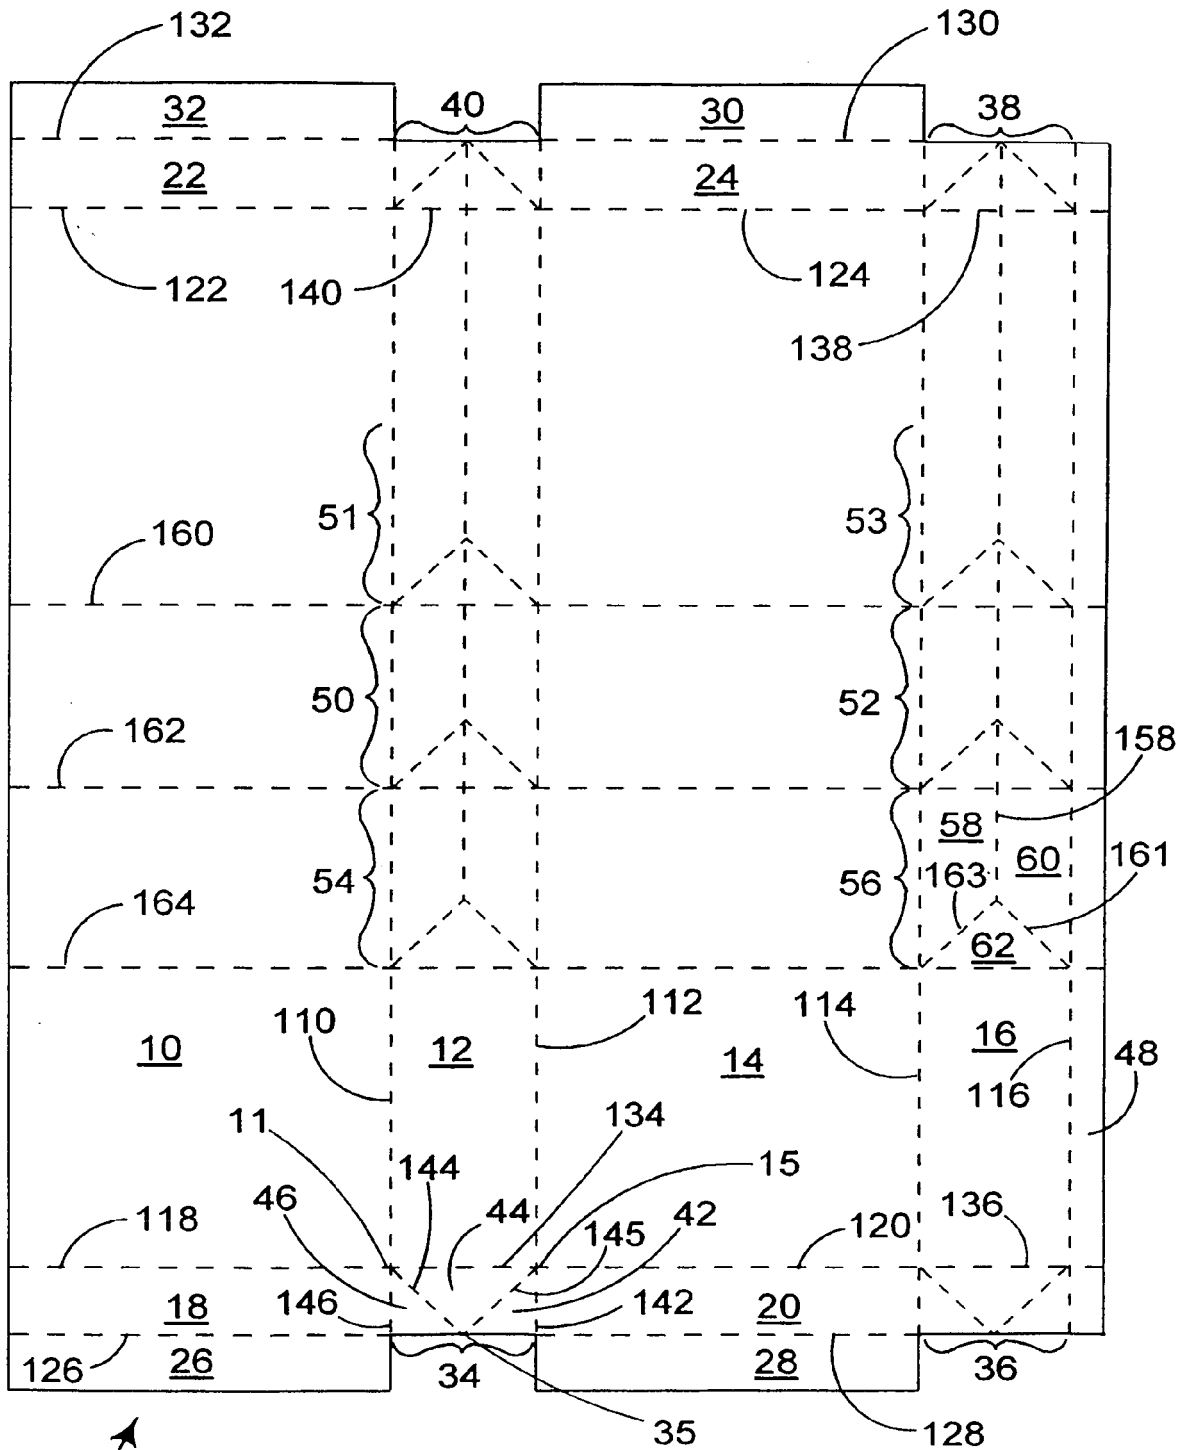


FIGURE 1

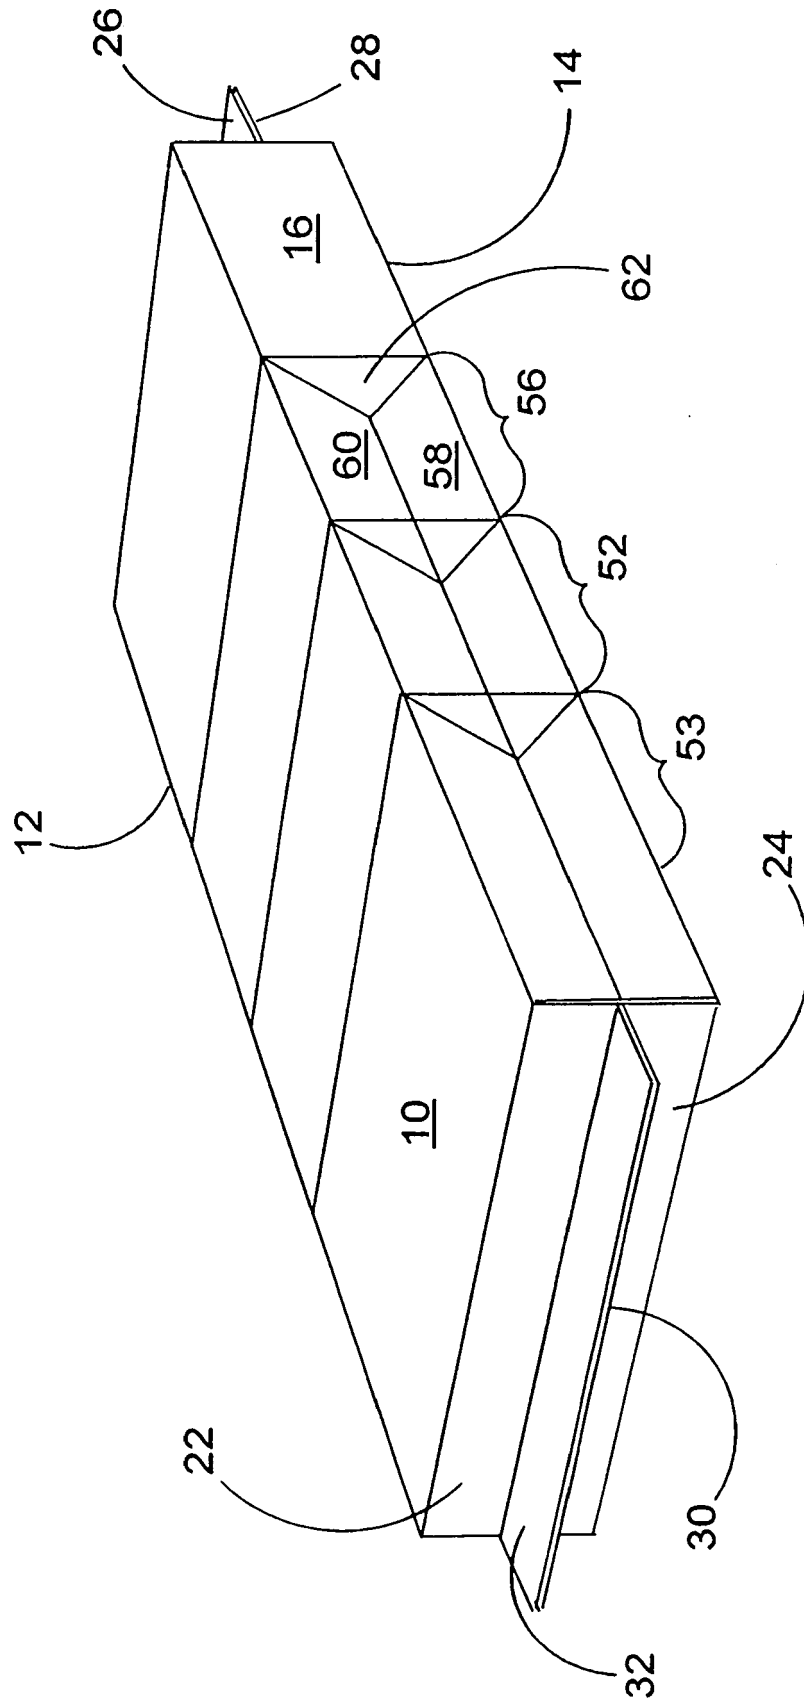
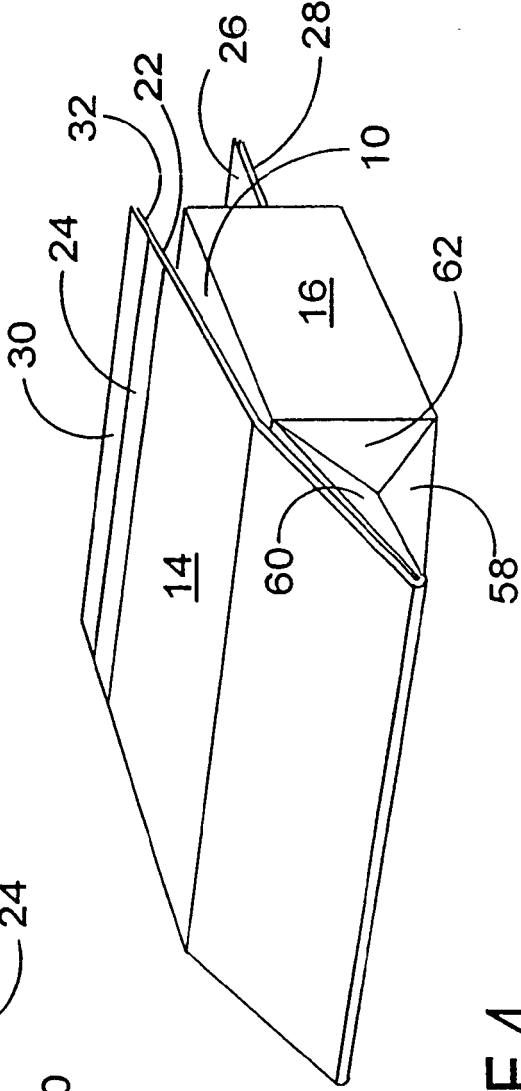
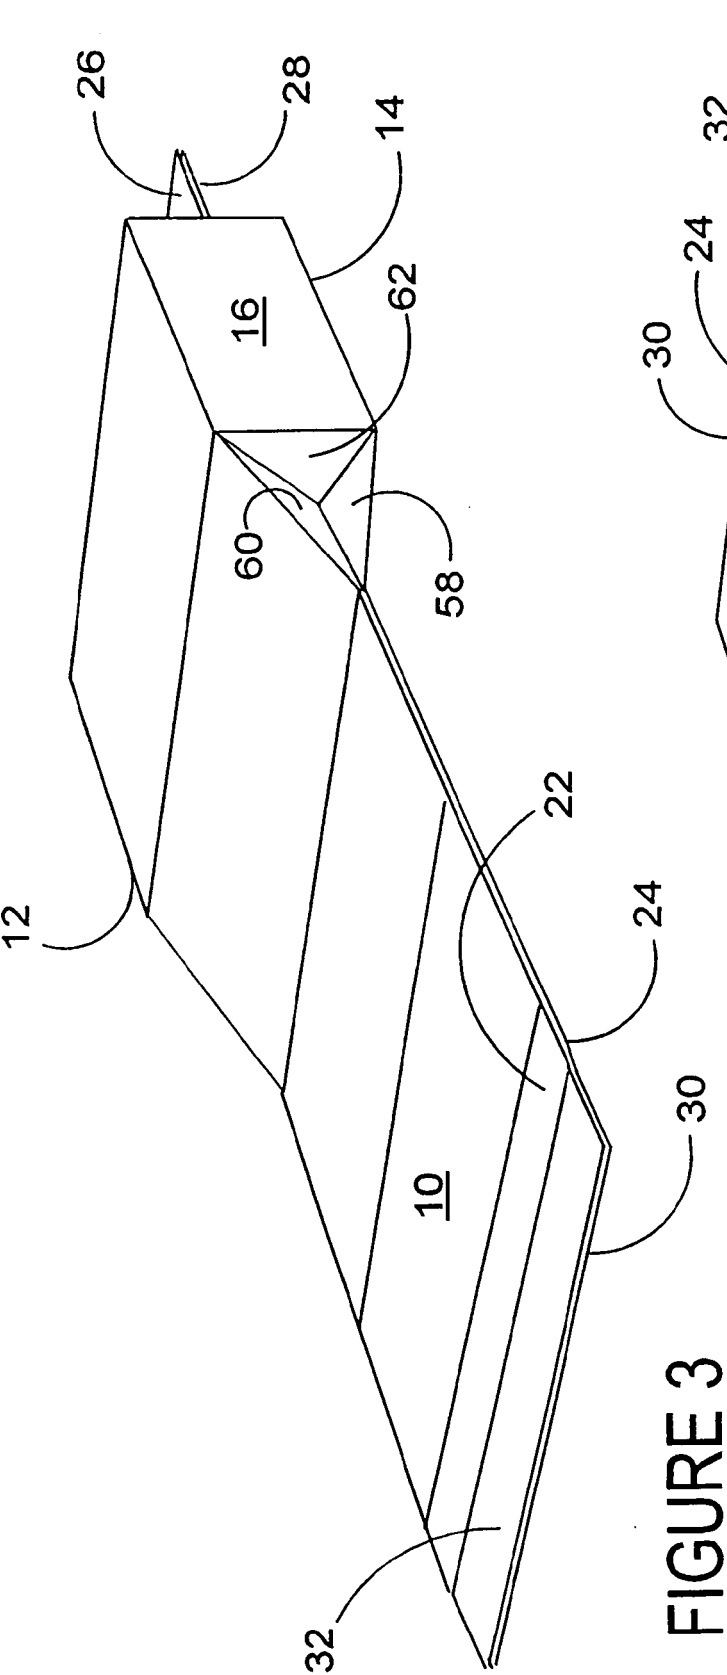


FIGURE 2



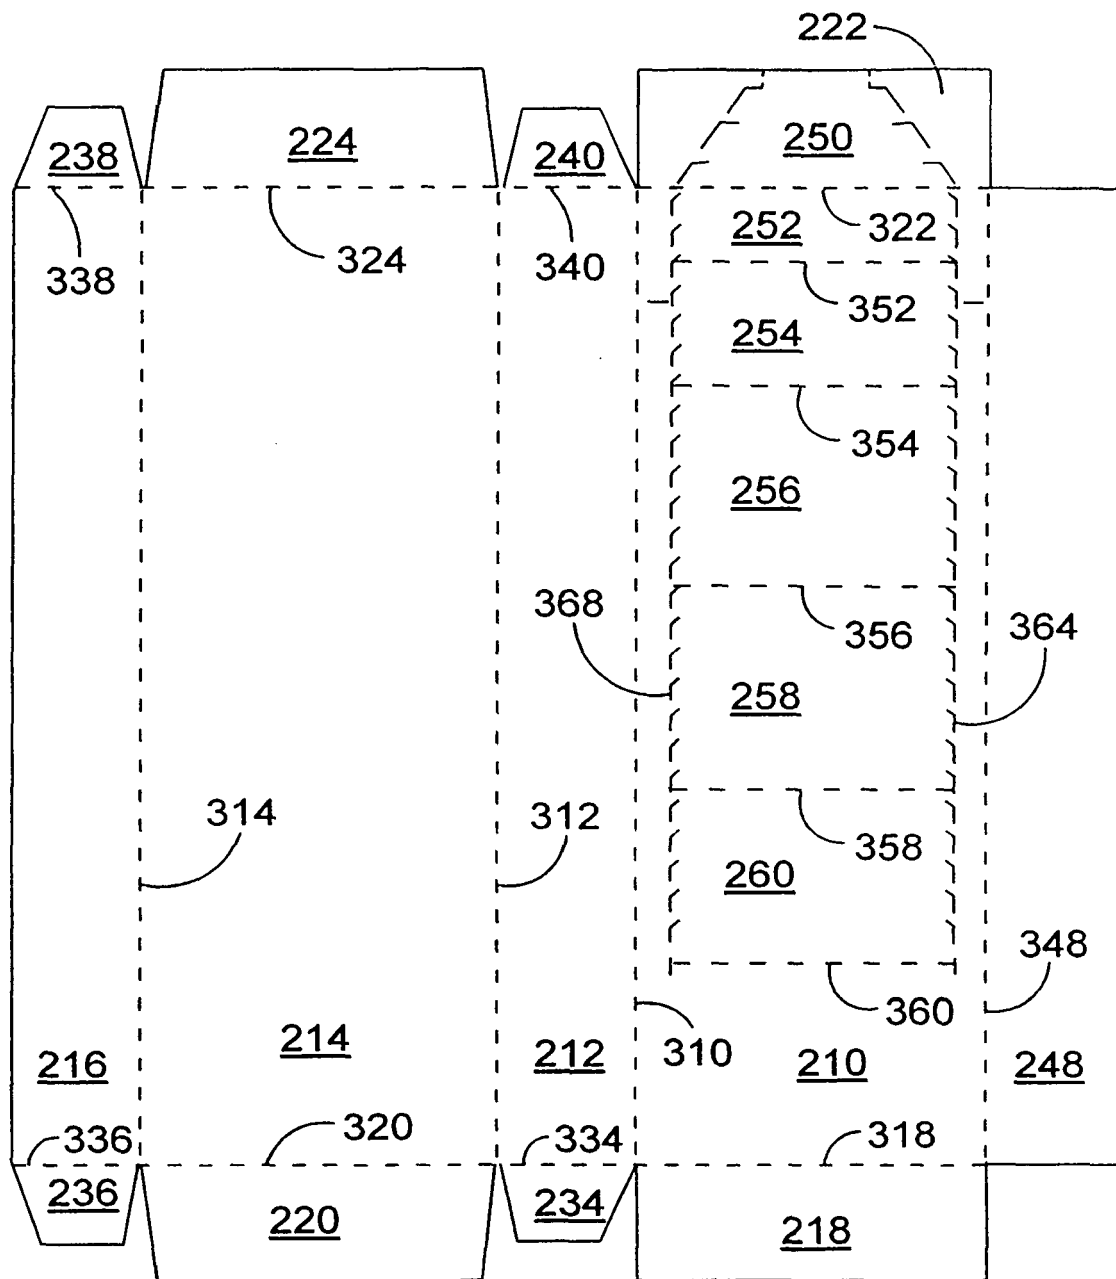


FIGURE 5

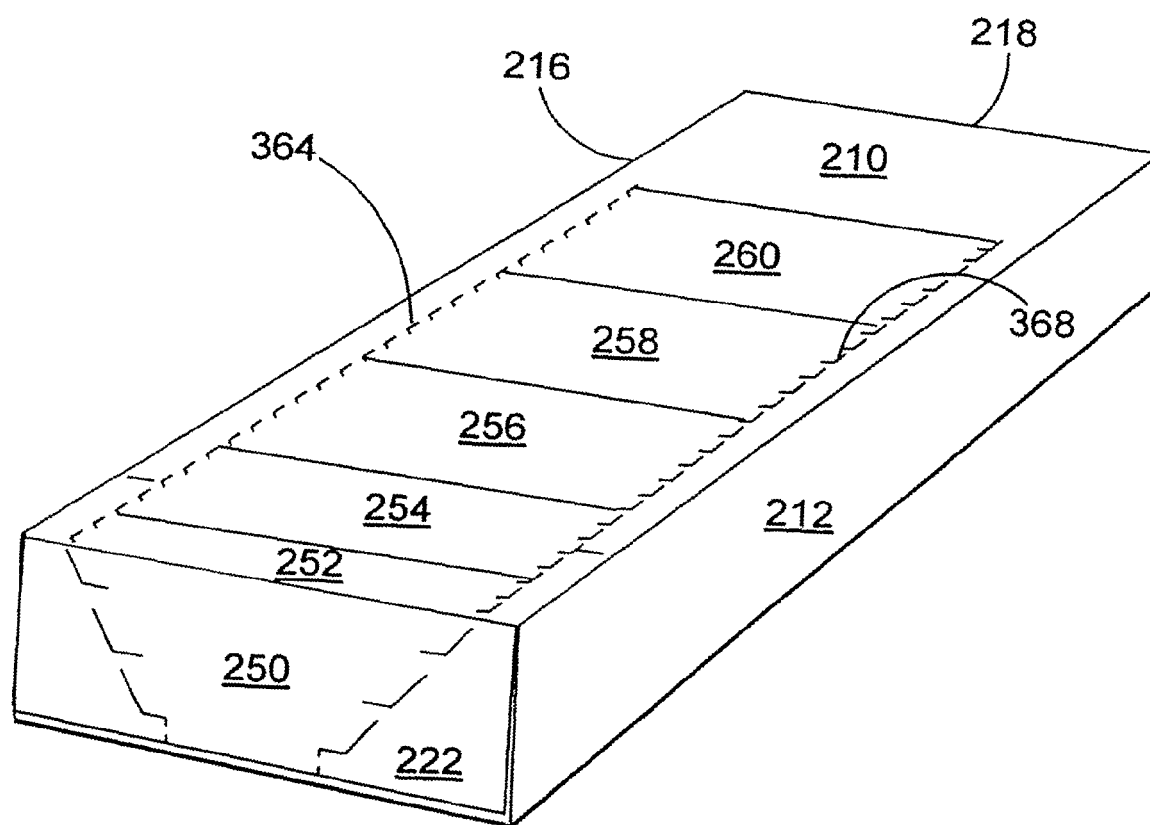


FIGURE 6

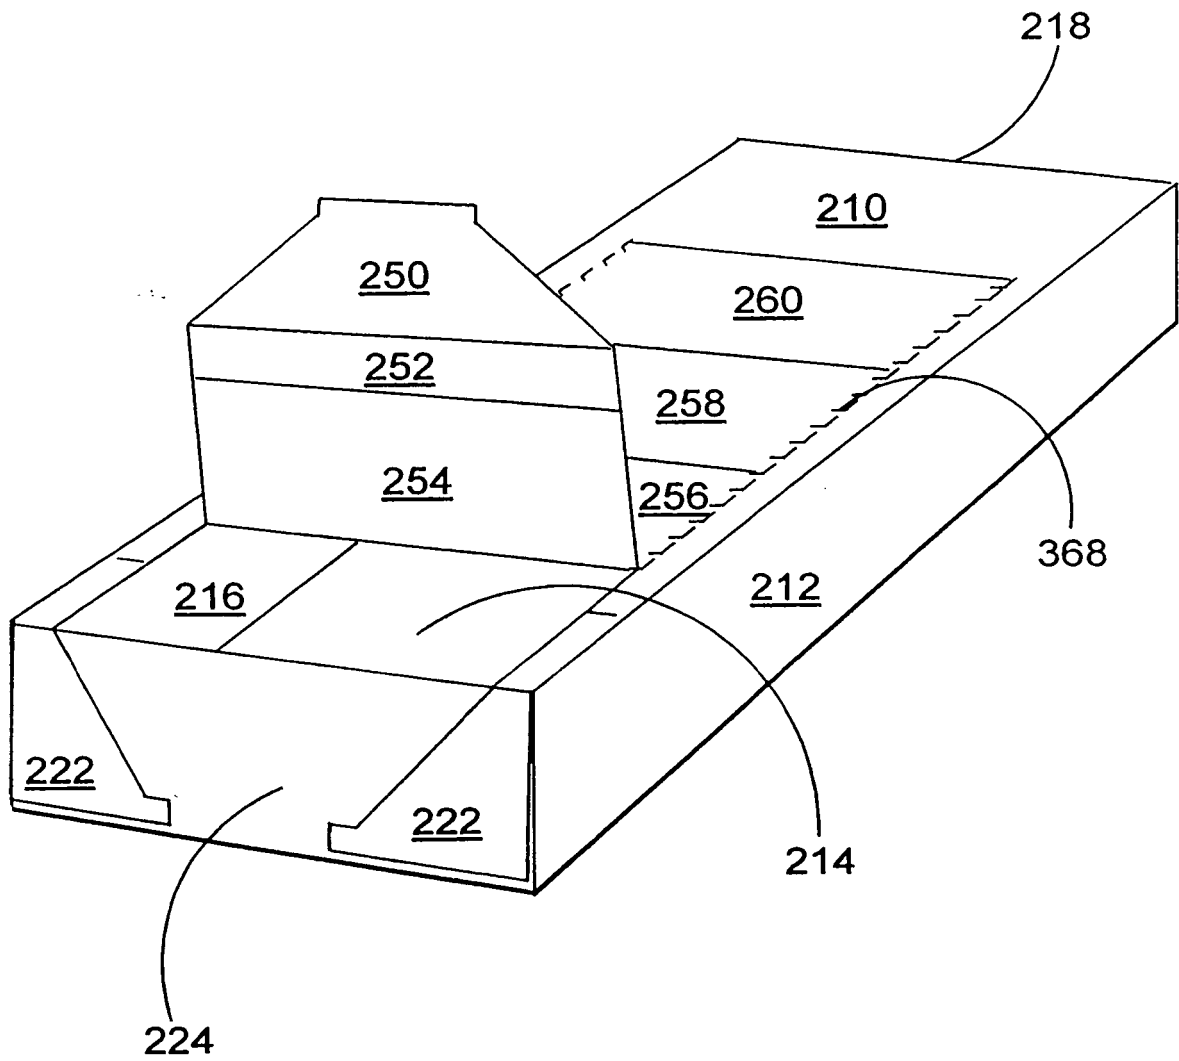


FIGURE 7

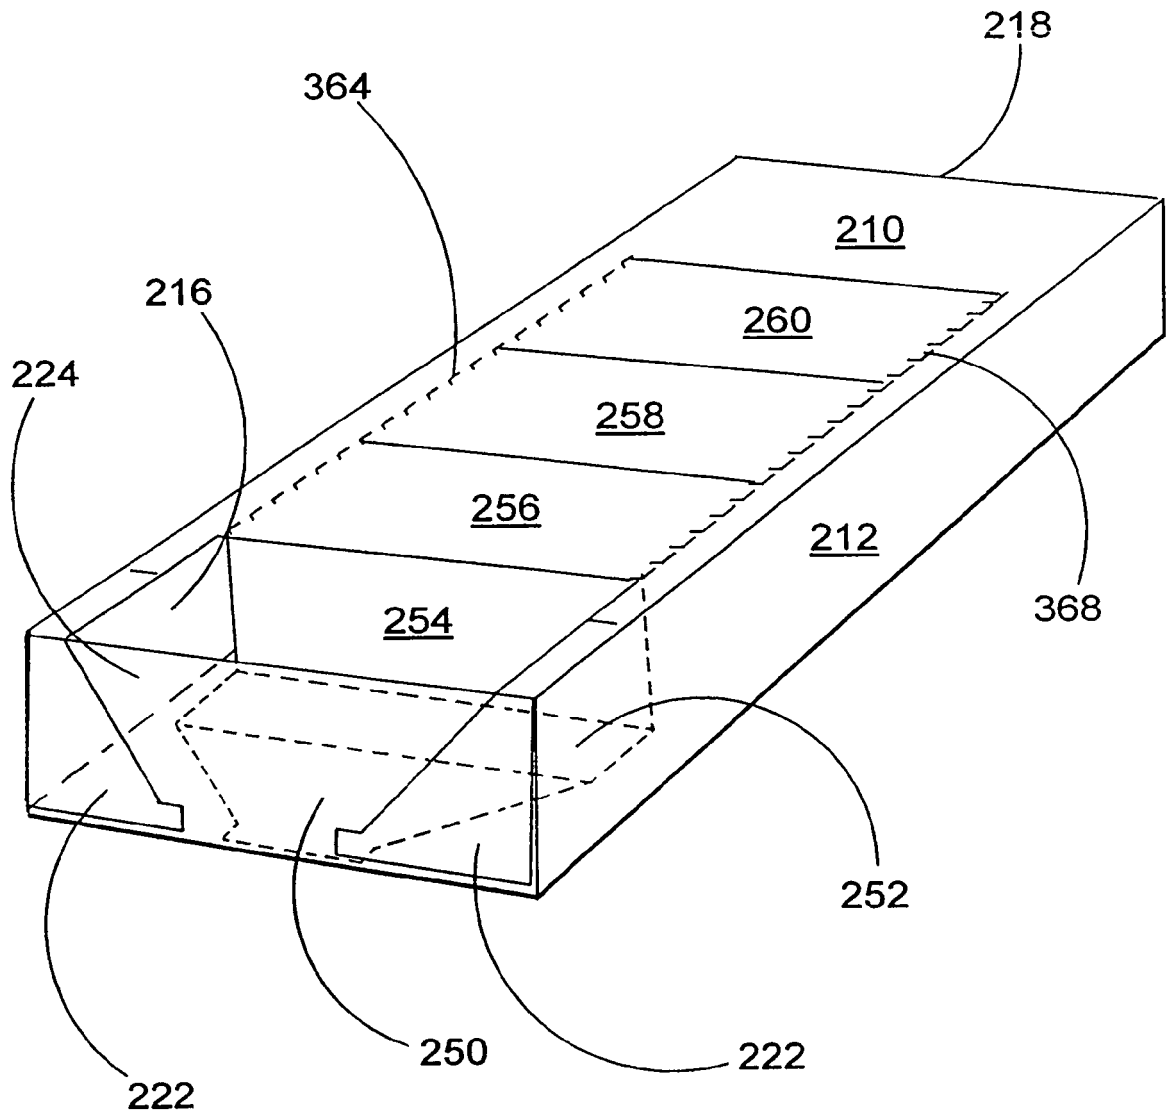


FIGURE 8