



(86) Date de dépôt PCT/PCT Filing Date: 2000/05/10  
(87) Date publication PCT/PCT Publication Date: 2000/11/23  
(45) Date de délivrance/Issue Date: 2008/11/18  
(85) Entrée phase nationale/National Entry: 2001/11/07  
(86) N° demande PCT/PCT Application No.: US 2000/012792  
(87) N° publication PCT/PCT Publication No.: 2000/070773  
(30) Priorité/Priority: 1999/05/12 (US09/310,232)

(51) Cl.Int./Int.Cl. *H04B 1/707* (2006.01)


(72) Inventeur/Inventor:  
LING, FUYUN, US

(73) Propriétaire/Owner:  
QUALCOMM INCORPORATED, US

(74) Agent: SMART & BIGGAR

(54) Titre : PROCEDE D'ESTIMATION D'AMPLITUDE ET DE PHASE DANS UN SYSTEME DE COMMUNICATION SANS  
FIL

(54) Title: AMPLITUDE AND PHASE ESTIMATION METHOD IN A WIRELESS COMMUNICATION SYSTEM

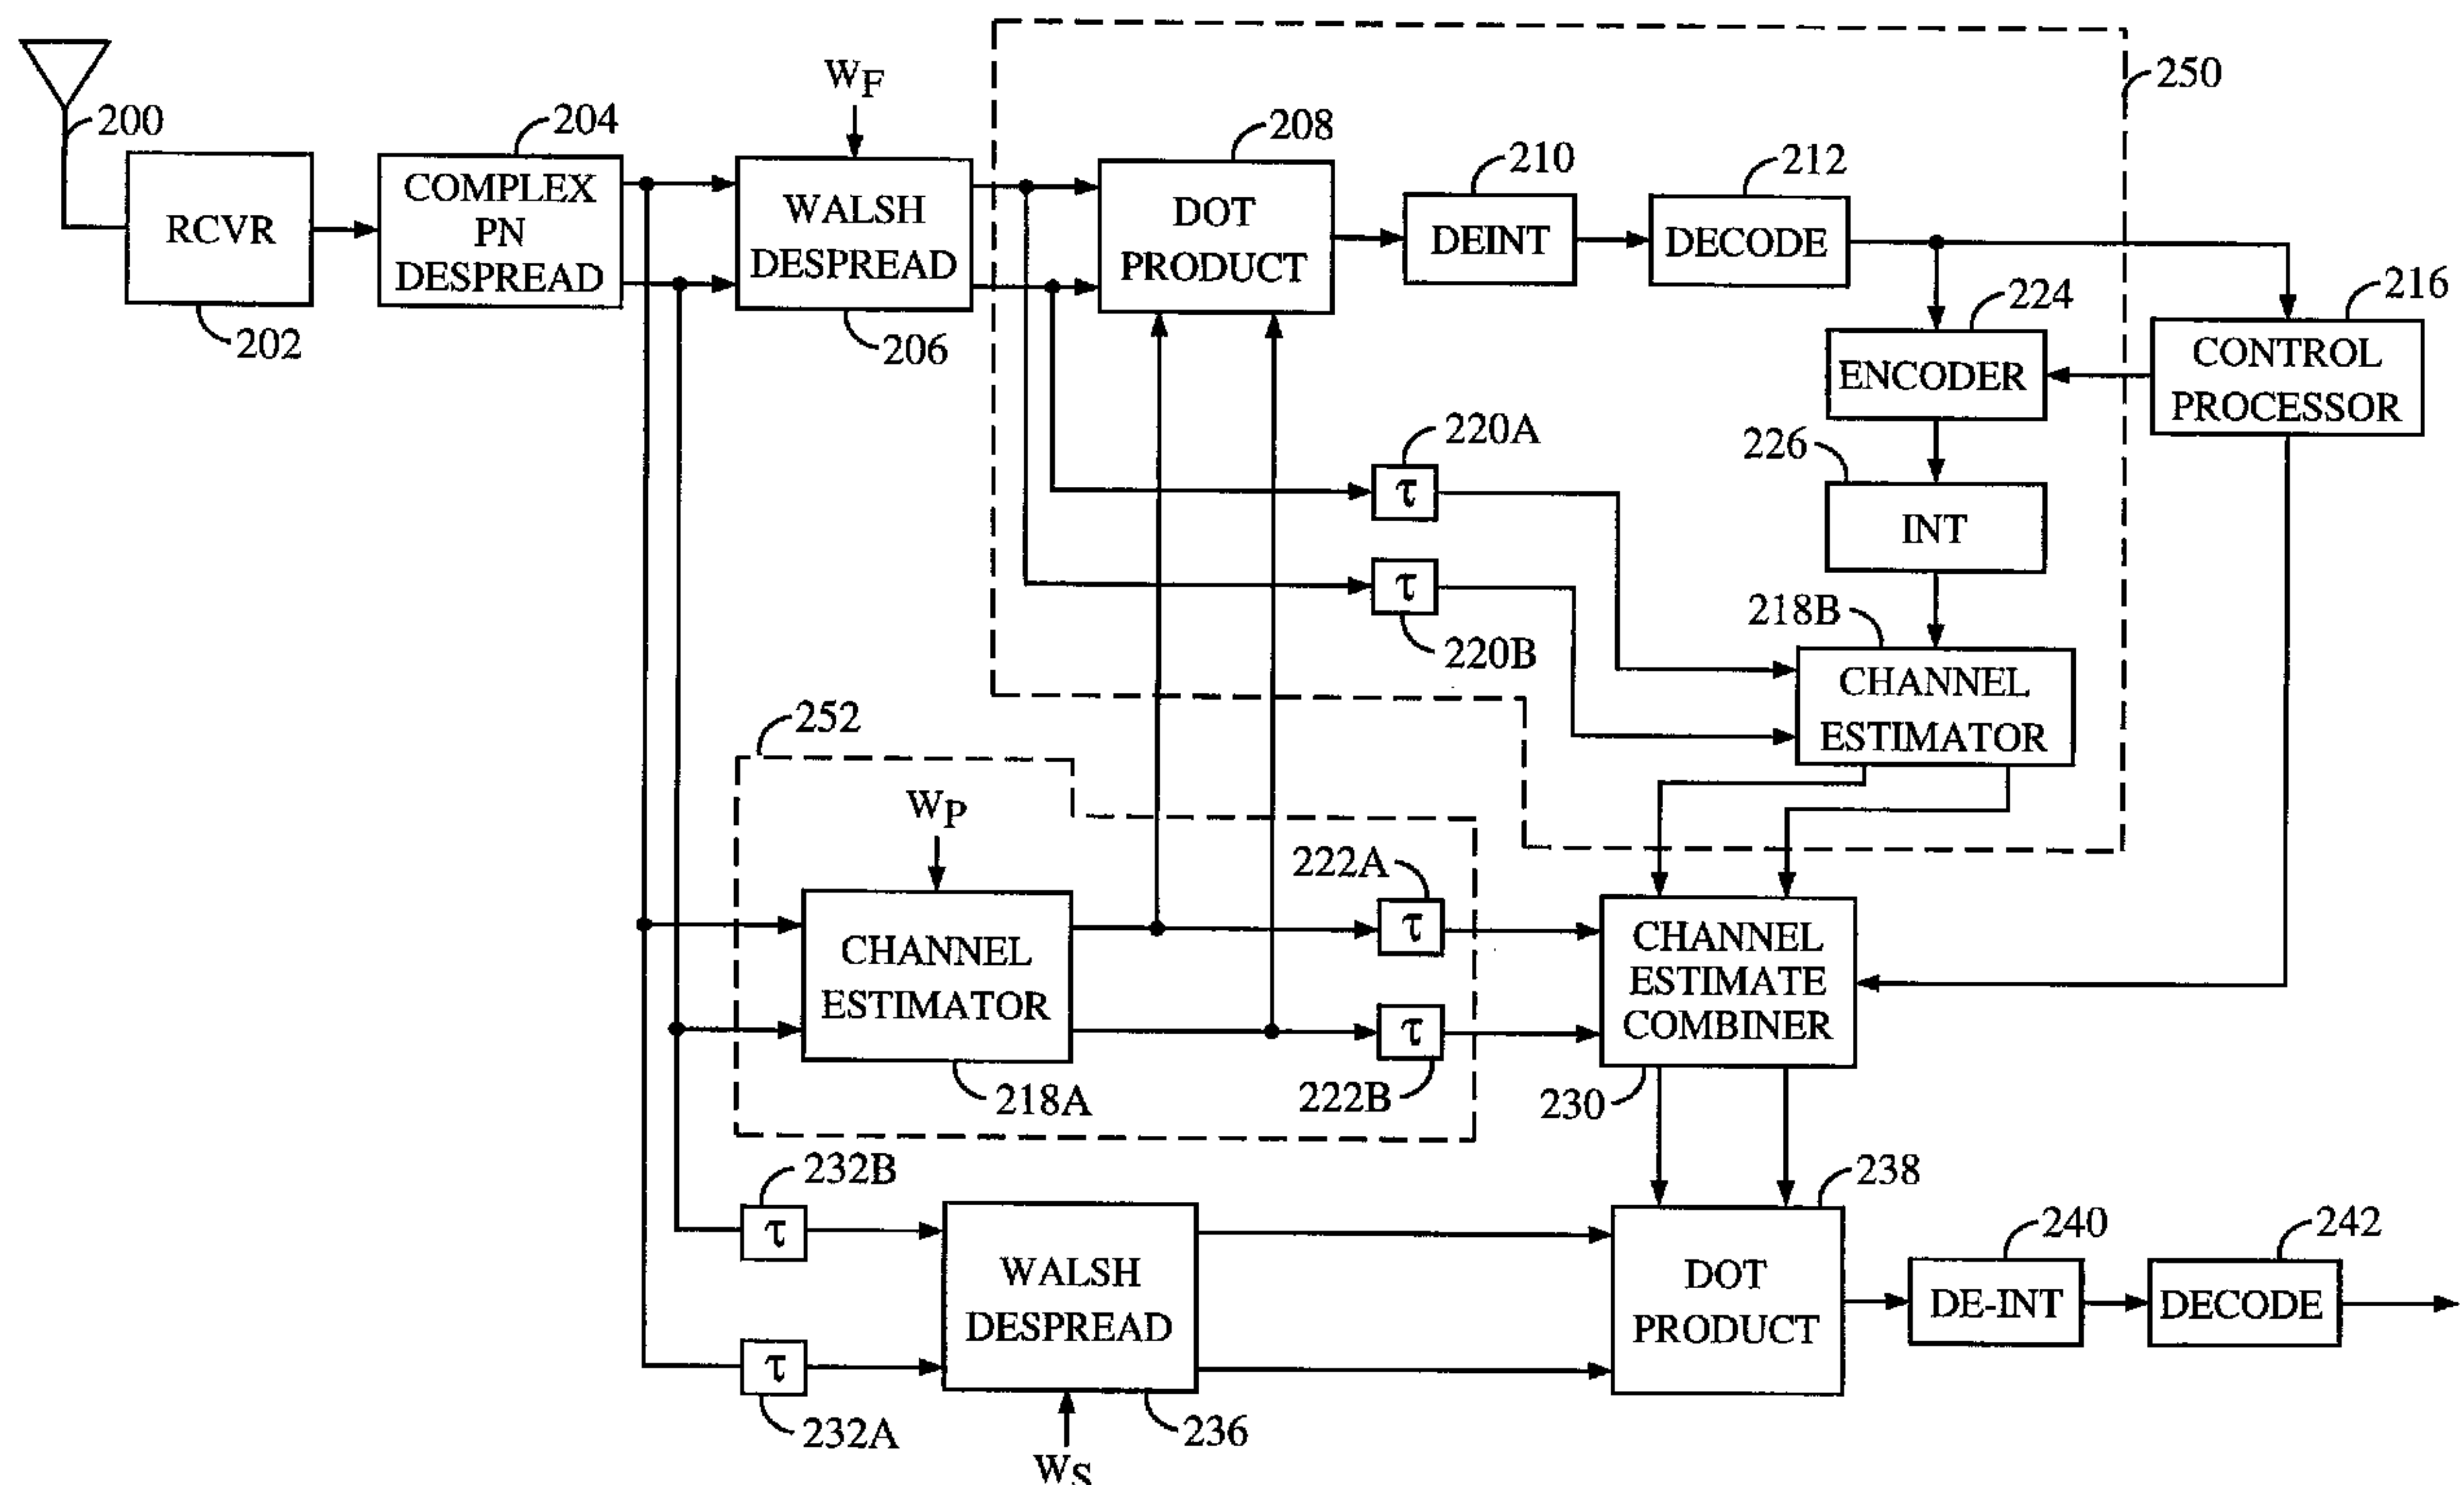

(57) Abrégé/Abstract:

Apparatuses for a transmitter and a receiver (202) which enhance the performance of a system coherent demodulation by utilizing non-pilot sub-channels to enhance the accuracy of estimates of amplitude and phase noise inherent in the transmission channel. This enhancement is accomplished by utilizing the corrected received data on a fundamental channel to enhance a pilot channel estimate, which is subsequently utilized by a dot product module in demodulating a supplementary data channel.



## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
23 November 2000 (23.11.2000)

PCT

(10) International Publication Number  
**WO 00/70773 A3**

- (51) International Patent Classification<sup>7</sup>: **H04L 25/02**, H04B 1/707, 7/005
- (21) International Application Number: PCT/US00/12792
- (22) International Filing Date: 10 May 2000 (10.05.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/310,232 12 May 1999 (12.05.1999) US
- (71) Applicant: QUALCOMM INCORPORATED [US/US];  
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (74) Agents: WADSWORTH, Philip, R. et al.; Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (88) Date of publication of the international search report:  
17 May 2001
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AMPLITUDE AND PHASE ESTIMATION METHOD IN A WIRELESS COMMUNICATION SYSTEM

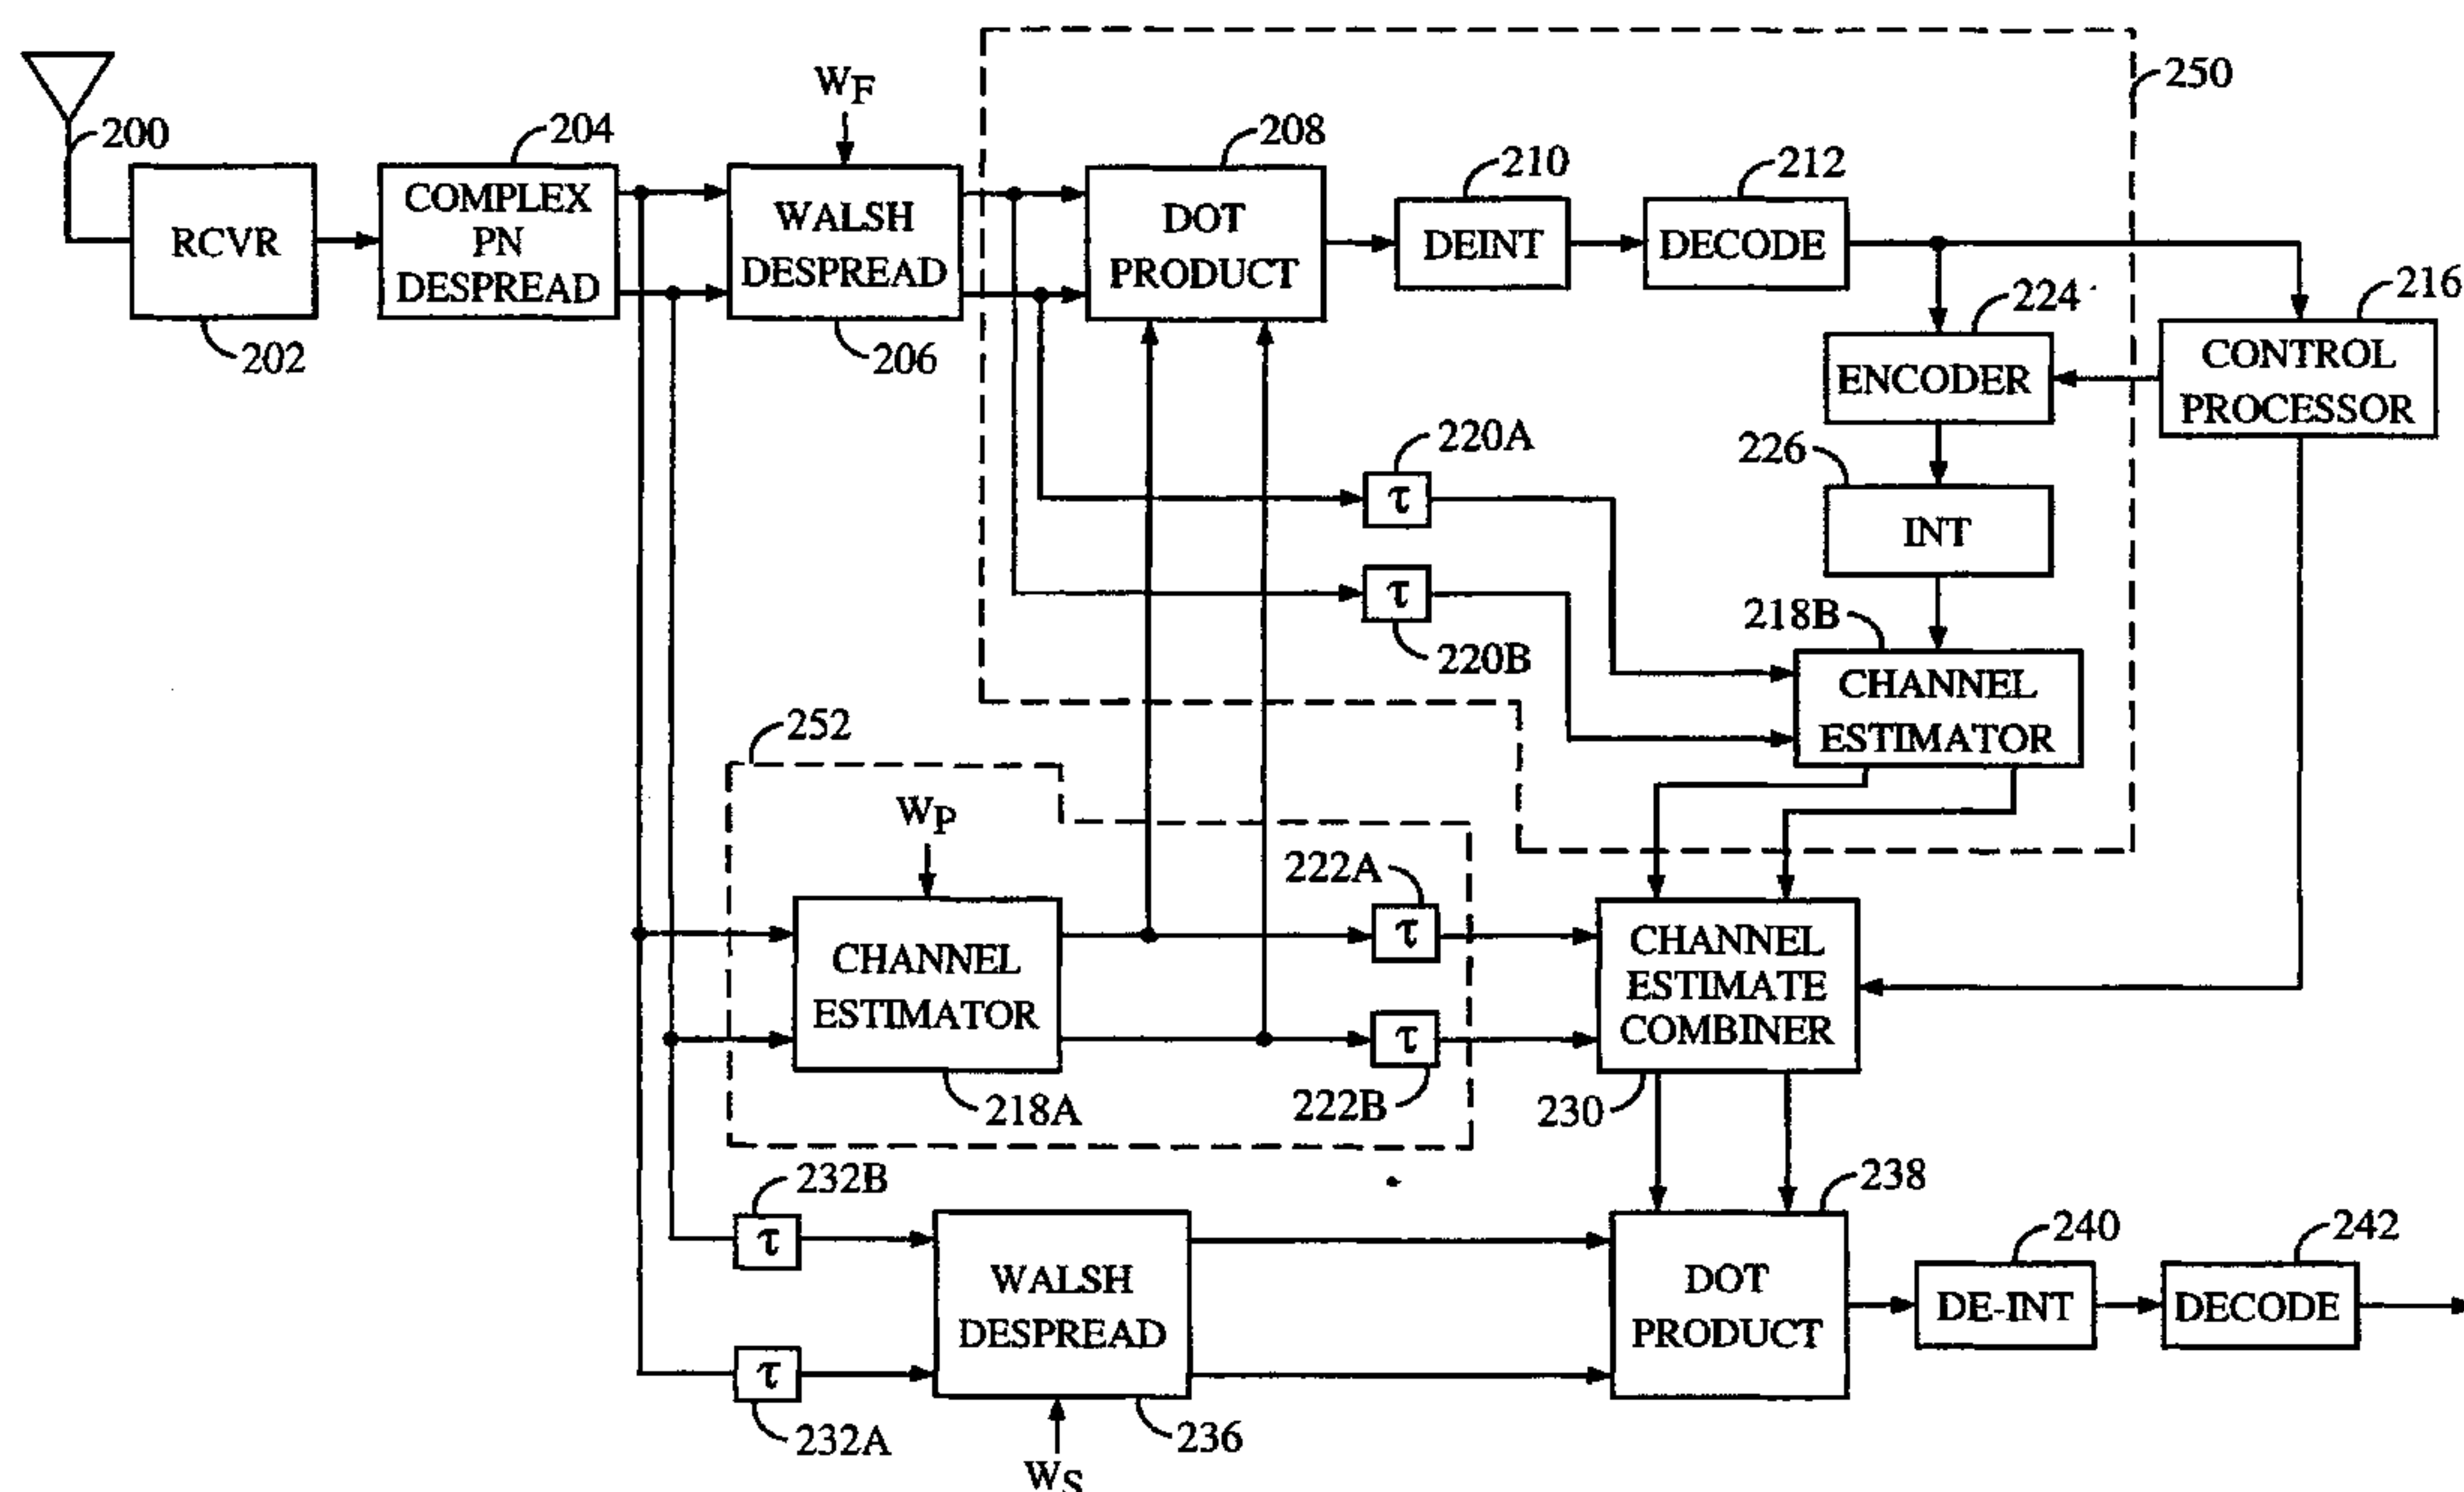

(57) Abstract: Apparatuses for a transmitter and a receiver (202) which enhance the performance of a system coherent demodulation by utilizing non-pilot sub-channels to enhance the accuracy of estimates of amplitude and phase noise inherent in the transmission channel. This enhancement is accomplished by utilizing the corrected received data on a fundamental channel to enhance a pilot channel estimate, which is subsequently utilized by a dot product module in demodulating a supplementary data channel.



# AMPLITUDE AND PHASE ESTIMATION METHOD IN A WIRELESS COMMUNICATION SYSTEM

## BACKGROUND OF THE INVENTION

5

### I. Field of the Invention

The current invention relates to wireless telecommunications. More particularly, the present invention relates to a novel and improved method of compensating for phase and amplitude distortion of multiple signals transmitted through a single channel.

10

### II. Description of the Related Art

The use of code division multiple access (CDMA) modulation techniques is one of several techniques for facilitating communications in which a large number of system users are present. Other multiple access communication system techniques, such as time division multiple access (TDMA), frequency division multiple access (FDMA) and AM modulation schemes such as amplitude companded single sideband (ACSSB) are known in the art. Techniques for distinguishing different concurrently-transmitted signals in multiple access communication systems are also known as channelization. The spread spectrum modulation technique of CDMA has significant advantages over other multiple access techniques.

15

20

The use of CDMA techniques in a multiple access communication system is disclosed in U.S. Patent No. 4,901,307, entitled "SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS", assigned to the assignee of the present invention. The use of

25

CDMA techniques in a multiple access communication system is further disclosed in U.S. Patent No. 5,103,459, entitled "SYSTEM AND METHOD FOR GENERATING SIGNAL WAVEFORMS IN A CDMA CELLULAR TELEPHONE SYSTEM", and in U.S. Patent No. 5,751,761, entitled "SYSTEM AND METHOD FOR ORTHOGONAL SPREAD SPECTRUM SEQUENCE GENERATION IN VARIABLE DATA RATE SYSTEMS", both assigned to the assignee of the present invention and incorporated by reference herein.

30

35

Code division multiple access communications systems have been standardized in the United States in Telecommunications Industry



Association TIA/EIA/IS-95-A, entitled "MOBILE STATION-BASE STATION COMPATIBILITY STANDARD FOR DUAL-MODE WIDEBAND SPREAD SPECTRUM CELLULAR SYSTEM", hereafter referred to as IS-95.

5       The International Telecommunications Union recently requested the submission of proposed methods for providing high rate data and high-quality speech services over wireless communication channels. A first of these proposals was issued by the Telecommunications Industry Association, entitled "The cdma2000 ITU-R RTT Candidate Submission",  
10       hereafter referred to as cdma2000. A second of these proposals was issued by the European Telecommunications Standards Institute (ETSI), entitled "The ETSI UMTS Terrestrial Radio Access (UTRA) ITU-R RTT Candidate Submission". And a third proposal was submitted by U.S. TG 8/1 entitled "The UWC-136 Candidate  
15       Submission" (referred to herein as EDGE). The contents of these submissions is public record and is well known in the art.

      In the CDMA demodulator structure used in some IS-95 systems, the pseudonoise (PN) chip interval defines the minimum separation two paths must have in order to be combined. Before the distinct paths can be  
20       demodulated, the relative arrival times (or offsets) of the paths in the received signal must first be determined. The demodulator performs this function by "searching" through a sequence of offsets and measuring the energy received at each offset. If the energy associated with a potential offset exceeds a certain threshold, a demodulation element, or "finger" may be  
25       assigned to that offset. The signal present at that path offset can then be summed with the contributions of other fingers at their respective offsets. The use of CDMA searchers is disclosed in U.S. Patent No. 5,764,687, entitled "MOBILE DEMODULATOR ARCHITECTURE FOR A SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM", assigned to the  
30       assignee of the present invention.

      In the CDMA receiver structure used in some IS-95 systems, data passing from transmitter to receiver is divided into frames which are transmitted at fixed time intervals. Depending on the varying amount of data to be transmitted during each interval, the transmitter places the data  
35       into one of several sizes of frame. Since each of these frame sizes corresponds to a different data rate, the frames are often referred to variable-rate frames. The receiver in such a system must determine the rate of each received frame to properly interpret the data carried within the received



74769-448

3

frame. Such rate determination methods often include the generation of frame quality metrics, which may be used to assess the level of uncertainty associated with the determined frame rate. Methods of performing rate determination and generating frame quality metrics are disclosed in U.S. Patent No. 5,751,725, entitled "METHOD AND APPARATUS FOR DETERMINING THE RATE OF RECEIVED DATA IN A VARIABLE RATE COMMUNICATION SYSTEM", assigned to the assignee of the present invention.

Signals in a CDMA system may be complex PN spread as described in a PCT/application published Nov. 19, 1998 having publication No. WO 1998/52365 "REDUCED PEAK TO AVERAGE TRANSMIT POWER HIGH DATA RATE IN A CDMA WIRELESS COMMUNICATION SYSTEM," filed April 9, 1996, assigned to the assignee of the present invention and in accordance with the following equations:

$$I = I' PN_I + Q' PN_Q \quad (1)$$

$$Q = I' PN_Q - Q' PN_I \quad (2)$$

where  $PN_I$  and  $PN_Q$  are distinct PN spreading codes and  $I'$  and  $Q'$  are two channels being spread at the transmitter.

As described in cdma2000, transmission signals are constructed utilizing orthogonal Walsh coding, with one Walsh code used to transmit a pilot sub-channel signal. The orthogonal Walsh sub-channels used to construct such transmission signals are added together before being transmitted, and travel through the same transmission channels or pathways before being received at the receiver. Each transmission channel, by its inherent nature, alters the phase and amplitude of the signals passing through it, and also adds a component of thermal noise. These channel characteristics change with any movement by transmitter or receiver, but may vary over time even when both receiver and transmitter are stationary. Channel characteristics generally change very slowly compared with the data symbols transmitted through the channel.

Some CDMA receivers employ circuits which estimate the phase and amplitude distortion of the channel. These estimates are then used to compensate for channel distortion, enabling more accurate decoding and demodulation of the received signals. One such circuit for estimating phase and amplitude of a channel, and performing a dot product of that output with the demodulated data signal, is described in detail in U.S. Patent No.



74769-448

4

5,506,865, entitled "PILOT CARRIER DOT PRODUCT CIRCUIT", assigned to the assignee of the present invention.

In that described implementation, an all-zero pilot channel is received and used to estimate the channel characteristics. The resultant channel  
5 estimates are then used to convert demodulated signals to scalar digital values.

All CDMA signals transmitted on orthogonal sub-channels cause mutual interference to each other, as well as acting as jammers for adjacent cell areas. To enable coherent demodulation of orthogonal sub-channel  
10 signals, one sub-channel is often dedicated as a pilot carrier. As detailed in aforementioned U.S. Patent No. 5,506,865, the pilot carrier is used in the receiver to produce estimates of the channel characteristics. The accuracy of these channel estimates is dependent on the strength of the pilot channel signal. Unfortunately, the pilot channel carries no data, so it is desirable to  
15 minimize the pilot transmit power. Conventionally the pilot power relative to the data signal power is selected by balancing between these two factors such that the best overall system performance can be achieved. For this reason, a method of producing accurate channel estimates which does not require increased pilot signal strength is highly desirable.

20

## SUMMARY OF THE INVENTION

The present invention describes a method and apparatus for improving the performance of a receiver that receives multiple sub-channel  
25 signals transmitted together through a common propagation path, also called a transmission channel. In order to compensate for phase and amplitude distortion introduced into the signals by the transmission channel, the receiver uses a pilot sub-channel signal to estimate the phase and amplitude distortion of the transmission channel. The process of  
30 estimating of distortion inherent in the transmission channel is called channel estimation, which is used to produce channel estimates. The invention includes a novel method of utilizing data-carrying sub-channels (not the pilot sub-channel) to improve the accuracy of channel estimates. The present invention is applicable to any communication system  
35 employing simultaneous transmission of multiple sub-channels and coherent demodulation.

The sub-channel signals within an information signal may be either time division multiplexed (TDMed) or code division multiplexed (CDMed).

The exemplary embodiment describes the present invention in the context of the reverse link proposed in cdma2000. Because of overriding commonalties in channel structure, the present invention is equally applicable to reception of the reverse link transmissions according to the candidate submission proposed by the European Telecommunications Standards Institute (ETSI), entitled "The ETSI UMTS Terrestrial Radio Access (UTRA) ITU-R RTT Candidate Submission" (hereafter WCDMA). Moreover, the present invention is equally applicable to reception of the forward link of these systems.

10 In cdma2000, the data-bearing sub-channels include a high data rate (e.g. 76.8 kbps) supplemental channel and a low data rate (e.g. 9.6 kbps) fundamental channel. The nominal power of the pilot channel is optimized for demodulation of the fundamental channel (e.g.,  $\frac{1}{4}$  of the fundamental channel power). In order to enable proper demodulation of the high data rate supplemental channel, the cdma2000 standard proposes to increase the pilot power beyond nominal levels when the supplemental channel is in use. In addition, the cdma2000 standard proposed to use different levels of pilot power depending on which of several available data rates the supplemental channel is using.

20 Varying the pilot power according to data rate causes other difficulties in system design. For example, it requires the receiver to know the data rate in advance in order for the power control loop to behave correctly. This also makes the selection of searching/finger locking more difficult. Moreover, it is desirable to reduce the pilot overhead to improve overall system performance if it can be done without sacrificing demodulation performance.

By enabling the formation of channel estimates based on the fundamental channel signal, the present invention enables a system to achieve superior supplementary channel demodulation performance. If enough channel estimate information can be extracted from the fundamental channel, acceptable supplementary channel demodulation performance may be achieved without varying the pilot power at all. Because the fundamental signal can be transmitted with as much as 4 times the power of the pilot signal, a channel estimate formed using both signals is much more accurate than an estimate based on the pilot signal alone. Subsequent demodulation using the more accurate channel estimate will have improved performance as well.



In cdma2000, the transmit power of the fundamental channel is four times that of the nominal pilot. The combined power of the pilot and fundamental channels would be five times the power of just the nominal pilot channel. A combined channel estimate derived from both the nominal pilot and fundamental channels would be accurate enough for demodulating a cdma2000 supplemental channel. Though increasing the pilot power whenever the supplemental channel is in use would still be an option, it may not be necessary given the enhanced accuracy of the combined channel estimate.

The added accuracy of a channel estimate extracted from the received fundamental channel depends on the use of a correct reference signal, which is optimally identical to the transmitted fundamental channel signal. Any inaccuracy in the decoded symbols used in forming fundamental channel estimates will degrade the quality of the combined channel estimate. Though the supplemental channel is likely to be a packet data channel, which has a high tolerance for frame errors, it may still be desirable to minimize the frame error rate when demodulating the supplemental channel.

In the preferred embodiment of the invention, the received fundamental channel signal is first deinterleaved and forward error correction (FEC) decoded to take advantage of the transmitter's complementary FEC encoding and interleaving functions. Then, the corrected symbol stream is re-encoded and re-interleaved to produce an ideal replica of the transmitted signal for use as a reference signal by the channel estimator.

In an alternative embodiment of the invention, fundamental channel power is increased as necessary to reduce the fundamental channel error rate. Because decreasing the fundamental channel error rate produces a more accurate channel estimate, increasing fundamental channel power also results in a reduced error rate when demodulating the supplemental channel. When the data rate ratio between the supplemental and the fundamental channels is large, a slight increase in fundamental channel power has little effect on the total transmitted power and hence causes little degradation.

In a more general sense, the present invention can be used where a single channel of information is transmitted. In an alternate embodiment using a single data channel, the channel is artificially split into two physical channels, which are transmitted synchronously at different data rates. Upon



74769-448

7

receipt, the low rate channel is first demodulated and decoded using pilot based channel estimates. The decoded bits are then re-encoded and used to improve the channel estimates used to coherently demodulate the high data rate supplemental channel. This scheme may enable data throughput which draws nearer to the theoretical capacity limit in a fading environment.

According to one broad aspect, the invention provides a method of demodulating an information signal, wherein the information signal is received through a channel having channel characteristics, and wherein the information signal comprises a pilot signal, a first data-carrying signal, and a second data-carrying signal, the method comprising: first estimating the channel characteristics based on the pilot signal to provide a pilot channel estimate; second estimating the channel characteristics based on the first data-carrying signal to provide a data channel estimate; and combining said pilot channel estimate with said data channel estimate to provide a combined channel estimate.

According to another broad aspect, the invention provides an apparatus for demodulating an information signal, wherein the information signal is received through a channel having channel characteristics, and wherein the information signal comprises a pilot signal, a first data-carrying signal, and a second data-carrying signal, the apparatus comprising: first means for estimating the channel characteristics based on the received pilot signal to provide a pilot channel estimate; second means for estimating the channel characteristics based on the first data-carrying signal to provide a data channel estimate; and

74769-448

7a

means for combining said pilot channel estimate with said data channel estimate to provide a combined channel estimate.

According to another broad aspect, the invention provides an apparatus for demodulating an information signal, wherein the information signal is received through a channel having channel characteristics, and wherein the information signal comprises a pilot signal, a first data-carrying signal, and a second data-carrying signal, the apparatus comprising: pilot channel estimator configured to estimate the channel characteristics based on the pilot channel signal to provide a pilot channel estimate; data channel estimator configured to estimate the channel characteristics based on the first data channel signal to provide a data channel estimate; channel estimate combiner configured to combine said pilot channel estimate with said data channel estimate to generate a combined channel estimate.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

**FIG. 1** is a diagram illustrating basic components of a wireless communication system incorporating an embodiment of the invention.

**FIG. 2** is a block diagram of a preferred embodiment of the invention in a wireless transmitter.



74769-448

7b

**FIG. 3** is a block diagram of a preferred embodiment of the invention in a wireless receiver.

**FIG. 4** is a block diagram of an exemplary channel estimator circuit.

5

#### **DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

**FIG. 1** shows the present invention in the context of a wireless communication system. In the exemplary embodiment, subscriber station **2** transmits several code division multiplexed signals through a transmission  
10 channel **8** to a base station transceiver subsystem (BTS) **4** through receive antenna **6**. In the exemplary embodiment of a cdma2000 or WCDMA reverse link, the code division multiplexed channels are distinguished from one another using orthogonal coding. This method of providing  
15 orthogonal coding is described in detail in aforementioned PCT publication.

In the exemplary embodiment, the three types of CDMA signals transmitted from subscriber station **2** to base station transceiver subsystem **4** are pilot **10**,  
20 fundamental **12**, and supplemental **14**. In the exemplary embodiment, the signals transmitted from subscriber station **2** are code division multiple access communication signals including a pilot channel, a fundamental channel, and a supplemental channel, as defined in cdma2000.

The generation and transmission of code division multiple access communication signals is well known in the art and is described in detail in the aforementioned U.S. Patent No. 5,103,459 and in the IS-95 specification.

5 The subscriber station 2 is shown as a mobile station, but could also be a wireless modem, wireless local loop subscriber station, a BTS, or any other wireless communication equipment which transmits multiple synchronous sub-channels. The receiver station 4 is shown as a BTS, but could also be a wireless subscriber station or any other receiver which coherently demodulates multiple sub-channels. The method and apparatus for  
10 simultaneously receiving multiple transmissions is well known in the art. In the exemplary embodiment, the signals transmitted from subscriber station 2 are received at BTS 4 using a RAKE receiver, the implementation of which is well known in the art and is described in the aforementioned U.S. Patent No. 5,109,390.

15 FIG. 2 shows subscriber station 2 capable of transmitting multiple synchronous sub-channels in accordance with one embodiment of the invention. In FIG. 2, pilot, supplemental, and fundamental channel signals are produced for transmission on orthogonal sub-channels.

The pilot channel is a known, constant transmitted waveform, and  
20 therefore carries no data. For this reason, forward error correction and interleaving are unnecessary on the pilot channel. The pilot channel is sent directly into a Walsh spreader 110 which spreads the data according to a pilot channel Walsh function  $W_p$ , thus producing a Walsh covered pilot channel signal. The Walsh covered pilot channel signal is then sent to a relative  
25 gain module 116, which adjusts the amplitude of the covered pilot channel signal relative to the signals carried by other orthogonal transmit sub-channels. In the preferred embodiment, the pilot channel Walsh function is the all-zero Walsh code, the pilot channel Walsh spreader 110 is omitted, and a DC signal is sent directly into relative gain module 116.

30 The fundamental channel data is first sent to a forward error correction (FEC) encoder 102, which produces an encoded fundamental channel signal. The resultant encoded fundamental channel signal is sent to an interleaver 106, which produces an interleaved fundamental channel signal. The interleaved fundamental channel signal is then sent to the  
35 Walsh spreader 112, which spreads the data according to a fundamental channel Walsh function  $W_f$ , thus producing a covered fundamental channel signal. The covered fundamental channel signal is then sent to a relative gain module 118, which adjusts the amplitude of the covered



fundamental channel signal relative to the signals carried by other orthogonal transmit sub-channels.

The supplemental channel data is first sent to a forward error correction (FEC) encoder **104**, which produces an encoded supplemental channel signal. The resultant encoded supplemental channel signal is sent to an interleaver **108**, which produces an interleaved supplemental channel signal. The interleaved supplemental channel signal is then sent to the Walsh spreader **114**, which spreads the data according to a supplemental channel Walsh function  $W_s$ , thus producing a covered supplemental channel signal. The covered supplemental channel signal is then sent to a relative gain module **120**, which adjusts the amplitude of the covered supplemental channel signal relative to the signals carried by other orthogonal transmit sub-channels.

Though the preferred embodiment shown uses orthogonal Walsh functions to accomplish sub-channel coding, one skilled in the art will appreciate that the sub-channel coding could also be accomplished using TDMA or PN coding without departing from the current invention. In an embodiment utilizing PN coding, the reference signals  $W_s$ ,  $W_p$ , and  $W_F$  are replaced by PN codes corresponding to the supplemental, pilot, and fundamental channels respectively.

One skilled in the art will appreciate that the FEC modules **102** and **104** could employ any of a number of forward error correction techniques without departing from the current invention. Such techniques include turbo-code encoding, convolutional coding, or other form of coding such as block coding. In addition, the interleavers **106** and **108** could utilize any of a number of interleaving techniques, including convolutional interleaving, turbo-interleaving, block interleaving and bit reversal interleaving. Turbo code encoders and turbo interleavers are described in aforementioned cdma2000 specification.

The output of each relative gain module **116**, **118**, and **120** is then sent to the PN spreader module **122**. The output of the PN spreader module **122** is then sent to transmitter **124**. Transmitter **124** provides additional control of transmit gain by varying the gain of the entire composite signal received from PN spreader module **122** before transmitting the signal through antenna **126**.

In an alternative embodiment, the optional relative gain module **116** is omitted, and the pilot signal is sent directly to the PN spreader module **122**. The gains of other channels are adjusted with respect to the gain of the

74769-448

10

pilot channel. One skilled in the art will appreciate that the two methods of controlling relative gains of the channels, using the system including relative gain module **116** or without relative gain module **116**, are  
5 functionally equivalent.

One skilled in the art will appreciate that any sub-channel signal may be "turned off" by causing its effective transmit gain to equal zero. This may be accomplished by so configuring its respective relative gain  
10 module **116**, **118**, or **120**. The same result may be obtained by discontinuing the progress of the sub-channel signal through the PN spreader, such as with a logic switch. One skilled in the art will appreciate that one may use either method of setting a sub-channel's effective transmit gain to zero  
15 without departing from the present invention.

PN spreader **122** spreads the orthogonal channel signals using a pseudorandom generated spreading sequence and sends the resultant composite signal to the transmitter **124** for transmission through the antenna **126**.  
20 In the preferred embodiment, the PN spreader **122** utilizes complex PN spreading, as described in aforementioned PCT publication. As shown in Figure 33 of aforementioned cdma 2000 specification, the PN spreader **122** may additionally rotate the signals of the fundamental and  
25 supplemental channel outputs of gain modules **118** and **120** by 90 degrees relative to the pilot channel signal output by gain module **116** prior to performing PN spreading.

One skilled in the art will appreciate that PN spreader **122** could produce one complex spread signal for  
30 each input signal, allowing relative gain modules **116**,



74769-448

10a

**118**, and **120**, to be placed after PN spreader **122** and before transmitter **124**.

In an alternative embodiment, the relative gains applied by relative gain modules **116**, **118**, and **120** are  
5 controlled dynamically by gain control processor **128**. The gain of each module may be altered according to data rates of the channels. For example, the pilot channel gain may be increased when data is being transmitted on both the fundamental and the supplemental channel. Or, the  
10 fundamental channel gain may be increased when data is being transmitted on the supplemental channel.

**FIG. 3** shows a preferred embodiment of the invention as used in a wireless receiver. The composite signal containing three orthogonal sub-channels is received  
15 through the antenna **200** and is downconverted in the receiver **202**. The resultant downconverted signal is then sent to the complex PN despreaders **204** to produce I and Q component samples used in subsequent processing. Complex PN despreaders operate in accordance with

74769-448

11

the aforementioned PCT publication. The operation of fundamental channel estimation apparatus 250, pilot channel estimation apparatus 252, and channel estimate combiner 230 are explained in detail below.

5       The I and Q component samples are sent to a Walsh despreader 206, which uses the same Walsh function  $W_F$  used to spread the fundamental channels in the Walsh spreader 112. The Walsh despreader 206 produces I and Q components for the discovered fundamental channel.

10       The I and Q component signals are also input into pilot channel estimator 218a, to produce filtered Pilot I and Pilot Q samples. Pilot channel estimator 218a is shown with an input of Walsh code  $W_P$ , which corresponds to the  $W_P$  used to spread the pilot channel in Walsh spreader 110.

15       FIG. 4 shows an exemplary embodiment of a channel estimator 218. The complex input signal is provided to channel estimator 218 as I and Q sample streams. The I samples are mixed with a reference signal in mixer 302a, to extract a real component of the complex input signal. The output of mixer 302a is provided to noise rejection filter 304a to remove noise from  
20 the extracted real component. In mixer 302b, The Q samples are mixed with the same reference signal as used in mixer 302a in order to extract an imaginary component of the complex input signal. The output of mixer 302b is provided to noise rejection filter 304b to remove noise from the extracted imaginary component. One skilled in the art will appreciate that  
25 the noise rejection filters 304 may be implemented as low-pass filters, matched filters, or accumulators without departing from the current invention.

The reference signal used in a channel estimator 218 could be real, imaginary, or complex. In an alternative embodiment of a channel  
30 estimator 218 appropriate for use with a complex reference signal, mixers 302 are complex multipliers (which may also be called complex mixers), each having both real and imaginary outputs. The real outputs of mixers 302 are then summed before being filtered in real-component filter 304a. The imaginary outputs of mixers 302 are summed before being filtered in  
35 imaginary-component filter 304b. In the same fashion, complex multipliers could be used in a Walsh spreader or despreader to allow the use of complex Walsh codes as reference functions during spreading and despreading. Walsh spreading using complex Walsh codes is known as complex Walsh



spreading, and Walsh despread using complex Walsh codes is known as complex Walsh despread.

In the proposed cdma2000 standard, the pilot channel is transmitted 90 degrees out of phase with the fundamental and supplemental channels. In the preferred embodiment, therefore, the pilot channel estimator 218a rotates its output by 90 degrees. This rotation may be accomplished in many ways, including multiplying the reference by an imaginary value, or by rotating the real and imaginary outputs of noise rejection filters 304. The same end result may also be accomplished by rotating the signals of the fundamental and supplementary channels without departing from the current invention. Also, the relative rotation of the pilot channel in relation to the fundamental and supplementary channels may be positive or negative without departing from the current invention.

Together, the extracted real and imaginary components constitute a channel estimate vector containing amplitude and phase information for any signal component which correlates with the reference signal. The quality of the channel estimate depends on the degree of correlation between the received complex input signal and the reference signal. To achieve the highest degree of correlation between the received complex input signal and the reference signal, the reference signal used by the receiver must exactly match that transmitted by the transmitter, for example Walsh code  $W_p$  in the case of the pilot channel. Any difference between the reference signal and the transmitted signal can cause inaccuracy in the channel estimate.

In an IS-95 system, the pilot Walsh code  $W_p$  is an all-zero Walsh code, in which case a channel estimate can be made using just a pair of filters, as is described in aforementioned U.S. Patent 5,506,865. In this case, pilot channel Walsh spreader 110 is omitted from the transmitter. The channel estimator in the receiver could then be implemented such that the mixers 302 could be omitted from pilot channel estimator 218a. A channel estimator for an all-zero Walsh code pilot, consisting of filters without mixers, is also known as a pilot filter. The embodiment of the channel estimator depicted in FIG. 4, however, allows the use of a pilot Walsh code other than the all-zero Walsh code.

Together, the Pilot I and Pilot Q signals are used as an estimate of the amplitude and phase characteristics of the CDMA transmission channel 8. The resultant Pilot I and Pilot Q, along with the discovered fundamental channel I and Q components are provided to dot product module 208. Dot product module 208 which computes the scalar projection of the



fundamental channel signal onto the pilot channel estimate vector, in accordance with the circuit described in aforementioned U.S. Patent No. 5,506,865. Because the pilot channel signal 10, the fundamental channel signal 12, and the supplemental channel signal 14 have traversed the same propagation path 8, the channel induced phase error is the same for all three signals.

This phase error is removed by performing the dot product operation described in aforementioned U.S. Patent 5,506,865. In the exemplary embodiment, the fundamental channel is coherently demodulated in a dot product module 208 using a pilot channel estimate. The dot product module produces a scalar signal for each symbol period, which is indicative of the magnitude of the fundamental channel signal that is in phase with the pilot signal received through the transmission channel 8.

The fundamental channel symbols output by the dot product module 208 is then sent into deinterleaver 210, which performs the inverse of the function of transmit interleaver 106. The resultant deinterleaved signal is then sent to forward error correction (FEC) decoder 212. Decoder 212 performs the inverse function of the FEC encoder 102 and outputs a forward error corrected signal.

The corrected signal output by decoder 212 is also sent to an encoder 224, which re-encodes the signal using the same FEC function as the transmitter FEC encoder 102. In this way, encoder 224 produces an ideal representation of the transmitted fundamental signal. This ideal representation is then sent to an interleaver 226, which performs the same function as the transmitter interleaver 106, producing an ideal representation of the interleaved fundamental channel data transmitted by subscriber station 2.

The I and Q component samples produced by Walsh despreader are also input into delays 220, which produce I and Q components which are synchronized with the output of the interleaver 226. Delays 220 are designed to compensate for the delays introduced by the dot product module 208, the deinterleaver 210, the decoder 212, the encoder 224, and the interleaver 226.

The synchronized I and Q components output by delays 220 are then sent, along with the output of interleaver 226, into channel estimator 218b. Channel estimator 218b uses the output of interleaver 226 as a reference signal, and uses the outputs of delays 220 as the I and Q sample stream from which it forms a channel estimate output.



The corrected bits output by FEC decoder 212 are re-encoded and re-interleaved to produce a reference signal which has a higher probability of matching what was actually transmitted on the fundamental channel. By using this more reliable reference signal as input for channel estimator 218b, the accuracy of fundamental channel estimates produced by channel estimator 218b is improved.

In a suboptimal embodiment, instead of using deinterleaver 210, decoder 212, encoder 224, and interleaver 226 to create an ideal representation of the fundamental channel signal, the output of dot product module 208 could be provided directly to channel estimator 218b. In this case, delay elements 220 would only compensate for the time required to perform the dot product operation in dot product module 208. However, the fundamental channel estimator would not gain the error correction benefits of the bypassed components.

The complex output components of the pilot channel estimator 218a are subjected to delay elements 222 to compensate for the delay inherent in performing channel estimation using the fundamental channel signal. The channel estimation parameters produced by processing of the fundamental channel is sent, along with the delayed channel estimation parameters from the delay elements 220 and 222 into channel estimate combiner 230. Channel estimate combiner 230 combines the channel estimation data for both pilot and fundamental channel processing and produces output containing a third, combined channel estimate. As the characteristics of the transmission channel change over time, pilot channel estimator 218a and channel estimator 218b provide updated channel estimates to channel estimate combiner 230, which updates the combined channel estimation output accordingly.

In the preferred embodiment, the output of decoder 212 sent to encoder 224 is additionally sent to control processor 216. Control processor 216 produces frame rate information for each received frame of data. Control processor 216 also performs validity checking of the received frames. Control processor 216 produces a fundamental channel quality metric based on the results of its rate determination and validity checking of received data. The fundamental channel quality metric is used to assign an appropriate weighting factor to the fundamental channel estimate in relation to the weighting factor assigned to the pilot channel estimate. The fundamental channel quality metric varies based on the validity of received frames based on the correctness of the CRC. Since different rate frames may also use

different numbers of CRC bits, or have varying degrees of frame error checking protection, control processor **216** may additionally vary the fundamental channel quality metric according to received frame rate.

Control processor **216** is also connected to encoder **224**. Control processor **216** sends frame rate information to encoder **224** for use in re-encoding the data received from decoder **212**.

In the exemplary embodiment, channel estimate combiner **230** is a weighted-average combiner, which produces the combined channel estimation signal by performing a weighted average of the pilot and fundamental channel estimates in accordance with the following equations:

$$R_{\text{COMB}} = X R_{\text{PILOT}} + (1-X) R_{\text{FUND}} \quad (3)$$

$$I_{\text{COMB}} = X I_{\text{PILOT}} + (1-X) I_{\text{FUND}} \quad (4)$$

where  $R_{\text{COMB}}$  and  $I_{\text{COMB}}$  are the real and imaginary components of the combined channel estimate,  $R_{\text{PILOT}}$  and  $I_{\text{PILOT}}$  are the real and imaginary components of the pilot channel estimate,  $R_{\text{FUND}}$  and  $I_{\text{FUND}}$  are the real and imaginary components of the fundamental channel estimate, and  $X$  is a scaling factor. The scaling factor  $X$  has a value from 0 to 1. A scaling factor value of 1 results in a combined channel estimate which is equal to the pilot channel estimate. A scaling factor value of 0 results in a combined channel estimate which is equal to the fundamental channel estimate. The value of  $X$  represents a first multiplier, which is multiplied by the pilot channel estimate to produce a scaled channel estimate for the pilot channel. The value of  $(1-X)$  represents a second multiplier, which is multiplied by the fundamental channel estimate to produce a scaled channel estimate for the fundamental channel. The two scaled channel estimates are added together to produce the combined channel estimate.

Channel estimate combiner **230** additionally uses the fundamental channel quality metric provided by control processor **216** as a dynamic weighting factor to the channel estimates produced from the fundamental channel. When the fundamental channel quality metric indicates a high rate of frame errors, channel estimate combiner **230** increases the value of the scaling factor  $X$ . When frame errors occur, therefore, the combined channel estimate used for demodulating the supplemental channel is derived more from the pilot channel estimate and less from the fundamental channel estimate. In an alternative embodiment, a frame



error causes the value of scaling factor  $X$  to be equal to 1 until a valid frame is received.

5 In an alternative embodiment of the invention, control processor 216 includes a smoothing module, which performs smoothing, or low-pass filtering, of the fundamental channel quality metric before it is sent to channel estimate combiner 230. This smoothing helps to make the weighted average performed by channel estimate combiner 230 less susceptible to high-frequency noise inherent in the channel.

10 In yet another embodiment of the current invention, the receiver knows the relative gains used by relative gain modules 116 and 118 when transmitting the pilot and fundamental channel signals. In this embodiment, the value of  $X$  is adjusted such that the ratio of the first multiplier over the second multiplier is equal to the ratio of the transmit gain of the pilot channel over the transmit gain of the fundamental  
15 channel.

In the preferred embodiment, the fundamental channel quality metric provided by control processor 216 to channel estimate combiner 230 is synchronized with the reference signal provided to channel estimator 218b. This can be accomplished by incorporating a delay or buffer into control  
20 processor 216. Control processor 216 may also perform a smoothing function to the fundamental channel quality metric before providing it to channel estimator 218b. In the preferred embodiment, however, the fundamental channel quality metric produced by control processor 216 is not smoothed, and may change suddenly on frame boundaries.

25 The I and Q component samples used as input to Walsh despreader 236 are sent through delay elements 232, which serve to synchronize the output of Walsh despreader 236 with the output of channel estimate combiner 230. Delay elements 232 could instead be placed between Walsh despreader 236 and dot product module 238 without departing from the  
30 present invention. Walsh despreader 236 uses the Walsh function  $W_s$  used by the transmitter's Walsh spreader 114, and produces discovered supplemental channel I and Q components. These discovered supplemental channel components, along with the combined channel estimation signal from channel estimate combiner 230, are used as input for dot product  
35 module 238.

Dot product module 238 computes the magnitude of the projection of the supplemental channel signal onto the combined channel estimate vector, resulting in a scalar projection output. The output of dot product

module 238 is then deinterleaved in deinterleaver 240, which performs the inverse function of interleaver 108. The output of deinterleaver 240 is provided to decoder 242, which performs the inverse function of interleaver 104.

5           Throughout the wireless receiver portrayed in FIG. 3, one skilled in the art will appreciate that any of the delay elements 220, 222, or 232 could be implemented as accumulators or buffers without departing from the current invention. In addition, one skilled in the art will appreciate that pairs of delay elements, for example delay elements 232a and 232b, may be  
10 implemented separately, or combined into a single delay module which performs the same function, without departing from the current invention.

          Though the preferred embodiment shown uses orthogonal Walsh functions to accomplish sub-channel decoding, one skilled in the art will appreciate that the sub-channel decoding could also be accomplished using  
15 TDMA or PN coding without departing from the current invention. In an embodiment utilizing PN coding, reference signals  $W_s$ ,  $W_p$ , and  $W_f$  are replaced by PN codes corresponding to the supplemental, pilot, and fundamental channels respectively.



74769-448

18

CLAIMS:

1. A method of demodulating an information signal, wherein the information signal is received through a channel having channel characteristics, and wherein the information  
5 signal comprises a pilot signal, a first data-carrying signal, and a second data-carrying signal, the method comprising:  
  
first estimating the channel characteristics based on the pilot signal to provide a pilot channel estimate;  
  
10 second estimating the channel characteristics based on the first data-carrying signal to provide a data channel estimate; and  
  
combining said pilot channel estimate with said data channel estimate to provide a combined channel  
15 estimate.
2. The method of claim 1 further comprising generating a scalar projection of the information signal in accordance with the combined channel estimate.
3. The method of claim 1 further comprising  
20 pseudonoise despread the information signal.
4. The method of claim 3 wherein the pseudonoise despread is complex pseudonoise despread.
5. The method of claim 1 wherein said second  
estimating comprises generating a scalar projection of the  
25 information signal in accordance with the pilot channel estimate.
6. The method of claim 5 wherein said second estimating further comprises generating an ideal representation of the first data-carrying signal.

74769-448

19

7. The method of claim 6 wherein said generating an ideal representation comprises:

deinterleaving the first data-carrying signal to provide a deinterleaved signal; and

5 interleaving the deinterleaved signal.

8. The method of claim 6 wherein said generating an ideal representation comprises:

decoding the first data-carrying signal to provide a decoded signal; and

10 encoding the decoded signal.

9. The method of claim 1 further comprising introducing a delay into the pilot channel estimate to provide synchronization between the pilot channel estimate and the data channel estimate.

15 10. The method of claim 1 wherein said combining comprises:

multiplying said pilot channel estimate by a pilot multiplier to produce a scaled pilot channel estimate;

20 multiplying said data channel estimate by a data multiplier to produce a scaled data channel estimate; and

adding said scaled pilot channel estimate to said scaled data channel estimate to provide said combined channel estimate.

11. The method of claim 10 wherein a ratio of said  
25 pilot multiplier over said data multiplier is based on a ratio of a gain used to transmit the pilot signal over a gain used to transmit said first data-carrying signal.



74769-448

20

12. The method of claim 10 further comprising generating the pilot multiplier and the data multiplier.

13. The method of claim 10 further comprising changing a ratio of the pilot multiplier to the data multiplier based  
5 on a data rate of the first data-carrying signal.

14. The method of claim 10 further comprising changing a ratio of the pilot multiplier to the data multiplier based on a frame quality metric of the first data-carrying signal.

15. The method of claim 1 wherein said first  
10 estimating comprises filtering the information signal to provide the pilot channel estimate.

16. The method of claim 15 wherein said first estimating further comprises multiplying the information signal by a reference pilot code.

15 17. The method of claim 1 wherein said second estimating comprises:

generating a scalar projection of the information signal in accordance with the pilot channel estimate to provide a scalar information signal;

20 decoding the scalar information signal to provide a decoded signal;

encoding the decoded signal to provide an ideal representation of the first data-carrying signal; and

25 multiplying the information signal by the ideal representation to provide the data channel estimate.

18. The method of claim 17 wherein said second estimating further comprises:

74769-448.

21

deinterleaving the scalar information signal prior to said decoding; and

interleaving the ideal representation prior to said multiplying.

5 19. An apparatus for demodulating an information signal, wherein the information signal is received through a channel having channel characteristics, and wherein the information signal comprises a pilot signal, a first data-carrying signal, and a second data-carrying signal, the  
10 apparatus comprising:

first means for estimating the channel characteristics based on the received pilot signal to provide a pilot channel estimate;

15 second means for estimating the channel characteristics based on the first data-carrying signal to provide a data channel estimate; and

means for combining said pilot channel estimate with said data channel estimate to provide a combined channel estimate.

20 20. The apparatus of claim 19 further comprising means for generating a scalar projection of the information signal in accordance with the combined channel estimate.

21. The apparatus of claim 19 further comprising means for pseudonoise despreading the information signal.

25 22. The apparatus of claim 19 further comprising means for complex pseudonoise despreading the information signal.

23. The apparatus of claim 19 wherein said second means for estimating comprises means for generating a scalar



74769-448

22

projection of the information signal in accordance with the pilot channel estimate.

24. The apparatus of claim 23 wherein said second means for estimating further comprises means for generating  
5 an ideal representation of the first data-carrying signal.

25. The apparatus of claim 24 wherein said means for generating an ideal representation comprises:

means for deinterleaving the first data-carrying signal to provide a deinterleaved signal; and

10 means for interleaving the deinterleaved signal.

26. The apparatus of claim 24 wherein said means for generating an ideal representation comprises:

means for decoding the first data-carrying signal to provide a decoded signal; and

15 means for encoding the decoded signal.

27. The apparatus of claim 19 further comprising means for introducing a delay into the pilot channel estimate to provide synchronization between the pilot channel estimate and the data channel estimate.

20 28. The apparatus of claim 19 wherein said means for combining comprises:

means for multiplying said pilot channel estimate by a pilot multiplier to produce a scaled pilot channel estimate;

25 means for multiplying said data channel estimate by a data multiplier to produce a scaled data channel estimate; and

74769-448

23

means for adding said scaled pilot channel estimate to said scaled data channel estimate to provide said combined channel estimate.

29. The apparatus of claim 28 further comprising means  
5 for generating the pilot multiplier and the data multiplier.

30. The apparatus of claim 28 further comprising means for changing a ratio of the pilot multiplier to the data multiplier based on a data rate of the first data-carrying signal.

10 31. The apparatus of claim 28 further comprising means for changing a ratio of the pilot multiplier to the data multiplier based on a frame quality metric of the first data-carrying signal.

15 32. The apparatus of claim 19 wherein said first means for estimating comprises means for filtering the information signal to provide the pilot channel estimate.

33. The apparatus of claim 32 wherein said first means for estimating further comprises means for multiplying the information signal by a reference pilot code.

20 34. The apparatus of claim 19 wherein said second means for estimating comprises:

means for generating a scalar projection of the information signal in accordance with the pilot channel estimate to provide a scalar information signal;

25 means for decoding the scalar information signal to provide a decoded signal;

means for encoding the decoded signal to provide an ideal representation of the first data-carrying signal;  
and



74769-448

24

means for multiplying the information signal by the ideal representation to provide the data channel estimate.

35. The apparatus of claim 34 wherein said second  
5 means for estimating further comprises:

means for deinterleaving the scalar information signal prior to said decoding; and

means for interleaving the ideal representation prior to said multiplying.

10 36. An apparatus for demodulating an information signal, wherein the information signal is received through a channel having channel characteristics, and wherein the information signal comprises a pilot signal, a first data-carrying signal, and a second data-carrying signal, the  
15 apparatus comprising:

pilot channel estimator configured to estimate the channel characteristics based on the pilot channel signal to provide a pilot channel estimate;

20 data channel estimator configured to estimate the channel characteristics based on the first data channel signal to provide a data channel estimate;

channel estimate combiner configured to combine said pilot channel estimate with said data channel estimate to generate a combined channel estimate.

25 37. The apparatus of claim 36 further comprising a first dot product module configured to modify a phase of the information signal based on the combined channel estimate to producing a sub-channel symbol stream.

74769-448

25

38. The apparatus of claim 36 further comprising dot product module for generating a scalar projection of the information signal in accordance with the combined channel estimate.

5 39. The apparatus of claim 36 further comprising pseudonoise desreader for multiplying the information signal by a pseudonoise code.

40. The apparatus of claim 39 wherein the pseudonoise desreader is a complex pseudonoise desreader for  
10 multiplying the information signal by a complex pseudonoise code.

41. The apparatus of claim 36 wherein said data channel estimator comprises dot product module for generating a scalar projection of the information signal in  
15 accordance with the pilot channel estimate to provide a scalar information signal.

42. The apparatus of claim 41 wherein said data channel estimator further comprises means for generating an ideal representation of the first data-carrying signal based  
20 on the scalar information signal.

43. The apparatus of claim 42 wherein said data channel estimator further comprises:

deinterleaver configured to deinterleave the scalar information signal to provide a deinterleaved signal;  
25 and

interleaver configured to interleave the deinterleaved signal.

44. The apparatus of claim 42 wherein said data channel estimator further comprises:



74769-448

26

decoder configured to decode the scalar  
information signal to provide a decoded signal; and

encoder configured to encode the decoded signal.

45. The apparatus of claim 36 further comprising delay  
5 means for introducing a delay into the pilot channel  
estimate to provide synchronization between the pilot  
channel estimate and the data channel estimate.

46. The apparatus of claim 36 wherein said channel  
estimate combiner is a weighted-average combiner.

10 47. The apparatus of claim 36 wherein said channel  
estimate combiner is a weighted-average combiner configured  
to provide the combined channel estimate in accordance with  
the following equations:

$$R_{\text{COMB}} = X * R_{\text{PILOT}} + (1 - X) * R_{\text{DATA}}$$

$$I_{\text{COMB}} = X * I_{\text{PILOT}} + (1 - X) * I_{\text{DATA}}$$

15 wherein  $R_{\text{COMB}}$  and  $I_{\text{COMB}}$  are the real and imaginary components  
of the combined channel estimate,  $R_{\text{PILOT}}$  and  $I_{\text{PILOT}}$  are the real  
and imaginary components of the pilot channel estimate,  
 $R_{\text{DATA}}$  and  $I_{\text{DATA}}$  are the real and imaginary components of a  
fundamental channel estimate, and  $X$  is a scaling factor.

20 48. The apparatus of claim 47 wherein said weighted-  
average combiner is configured to use a value of  $X$  that is  
based on a ratio of a gain used to transmit the pilot signal  
over a gain used to transmit said first data-carrying  
signal.

25 49. The apparatus of claim 47 further comprising  
control processor configured to provide the value  $X$  to said  
weighted-average combiner.

74769-448

27

50. The apparatus of claim 49, wherein said control processor is configured to adjust said value X based on a data rate of the first data-carrying signal.

51. The apparatus of claim 49, wherein said control  
5 processor is configured to adjust said value X based on a frame quality metric of the first data-carrying signal.

52. The apparatus of claim 36 wherein said pilot channel estimator comprises filter for filtering the information signal to provide the pilot channel estimate.

10 53. The apparatus of claim 52 wherein said pilot channel estimator comprises mixer for multiplying the information signal by a reference pilot code.

54. The apparatus of claim 36 wherein said data channel estimator comprises:

15 dot product module configured to multiply the information signal with the pilot channel estimate to provide a scalar information signal;

decoder configured to decode the scalar information signal to provide a decoded signal;

20 encoder configured to encode the decoded signal to provide an ideal representation of the first data-carrying signal; and

25 mixer for multiplying the information signal by the ideal representation to provide the data channel estimate.

55. The apparatus of claim 54 wherein said data channel estimator further comprises:



74769-448

28

deinterleaver configured to deinterleave the  
scalar information signal; and

interleaver configured to interleave the ideal  
representation.

SMART & BIGGAR

OTTAWA, CANADA

PATENT AGENTS

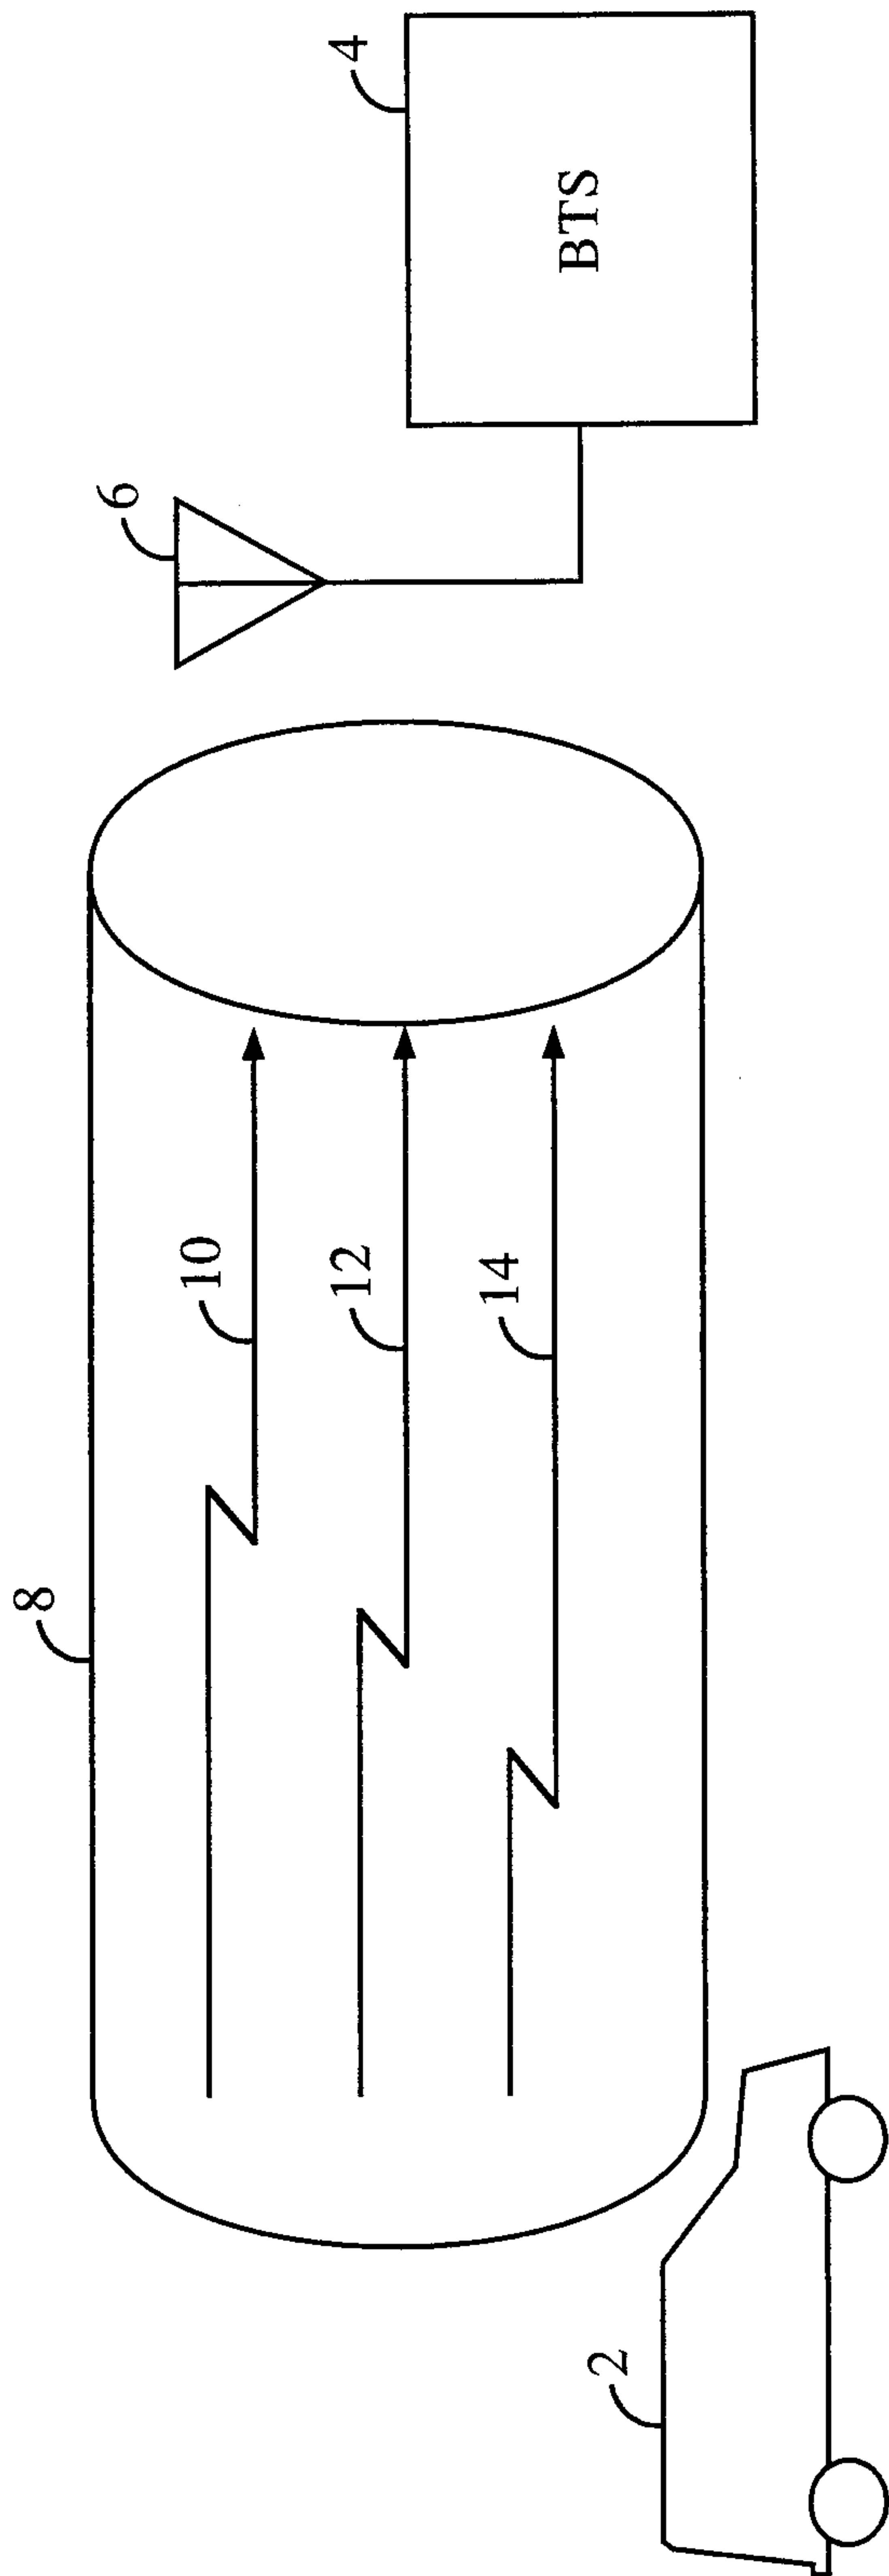


FIG. 1



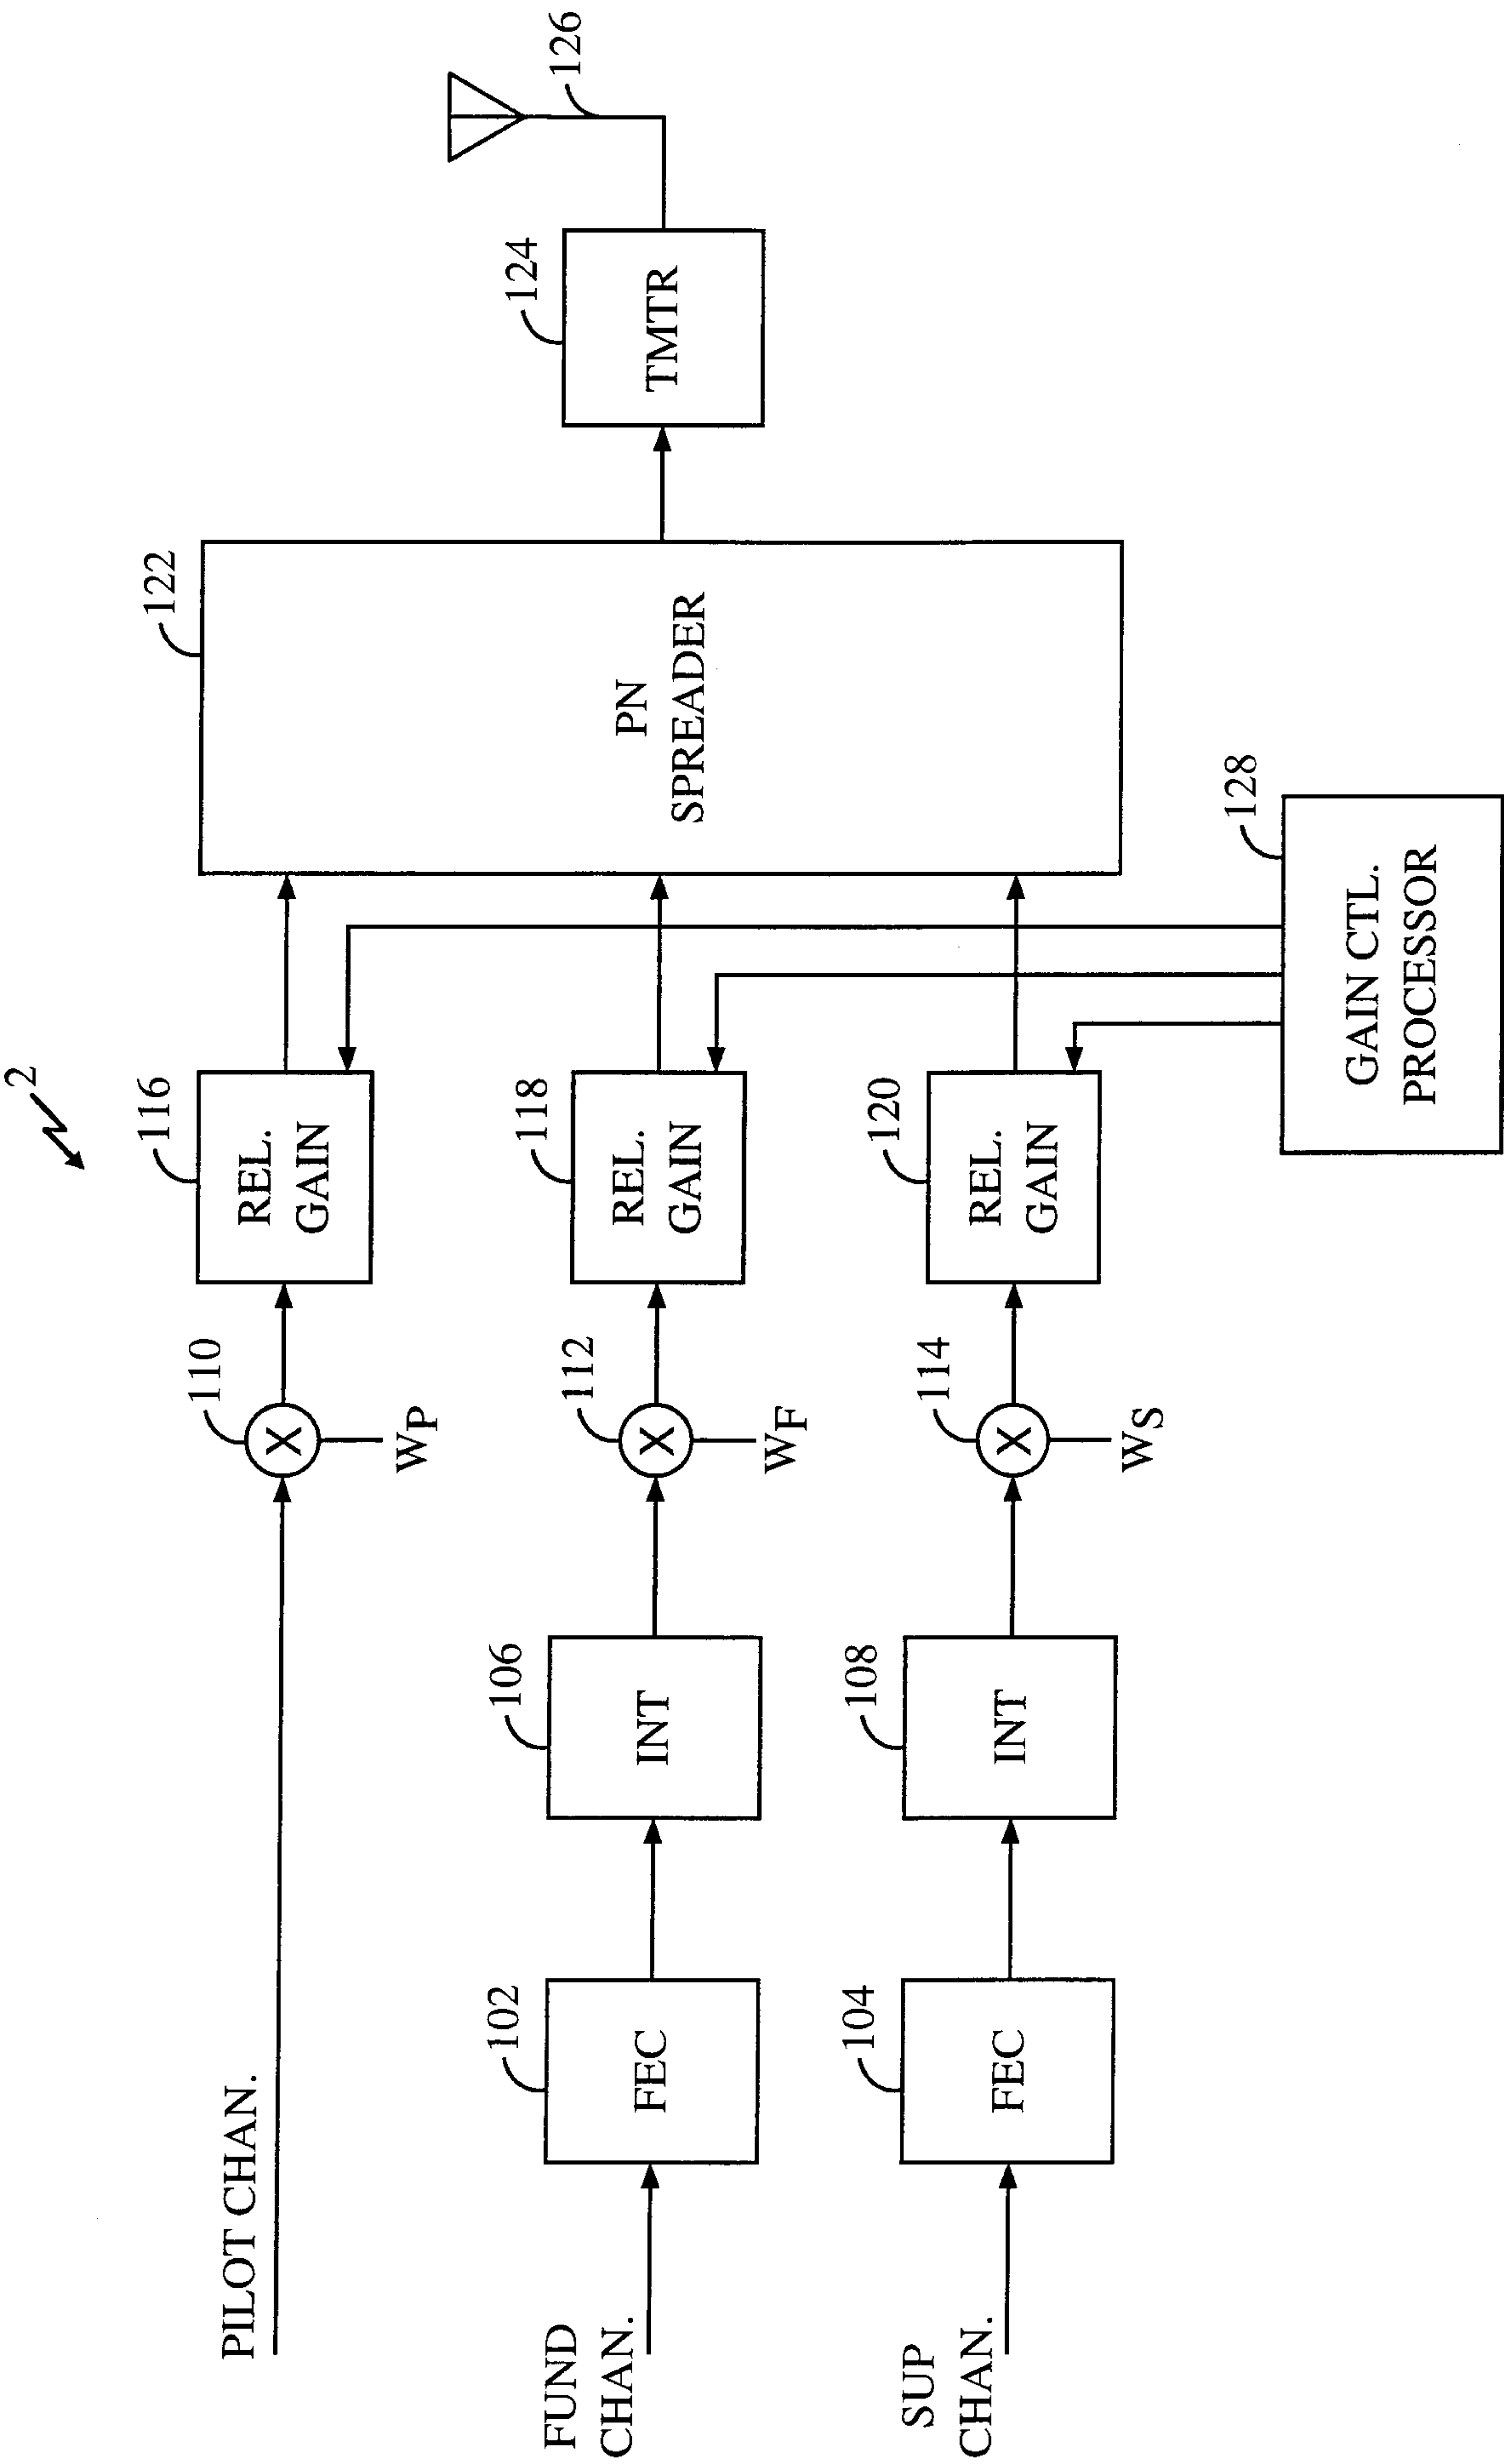


FIG. 2

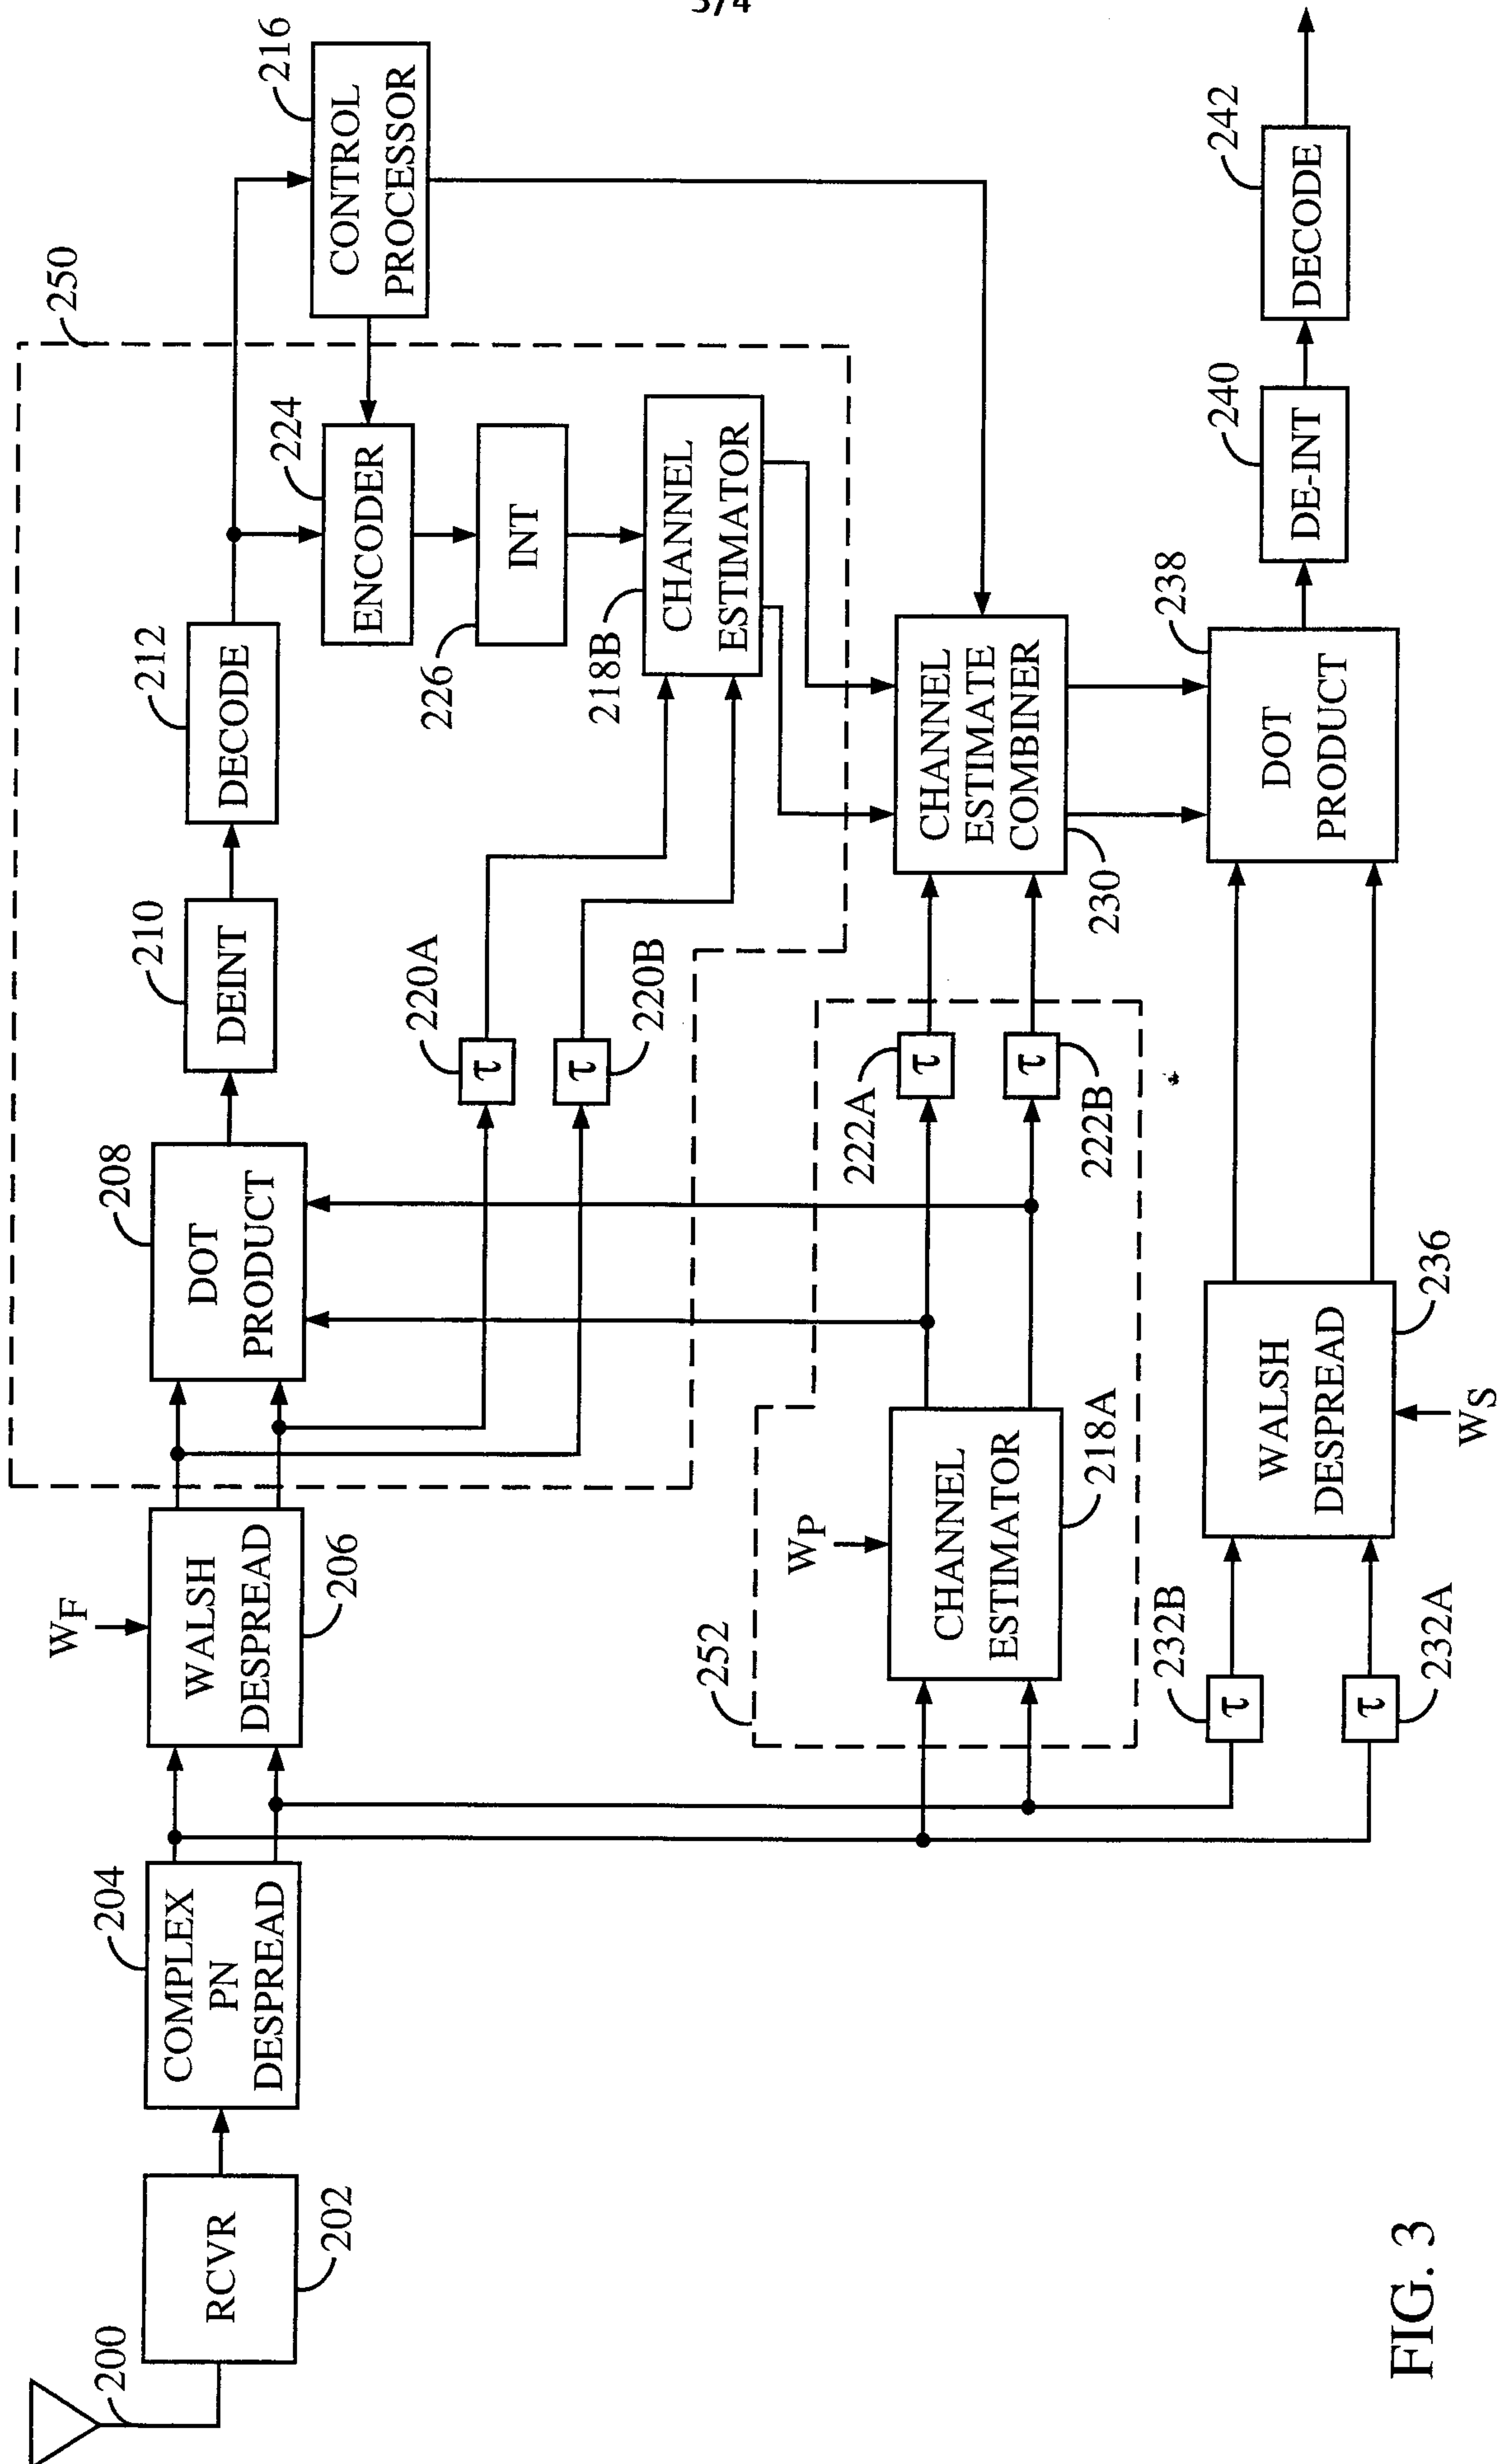


FIG. 3



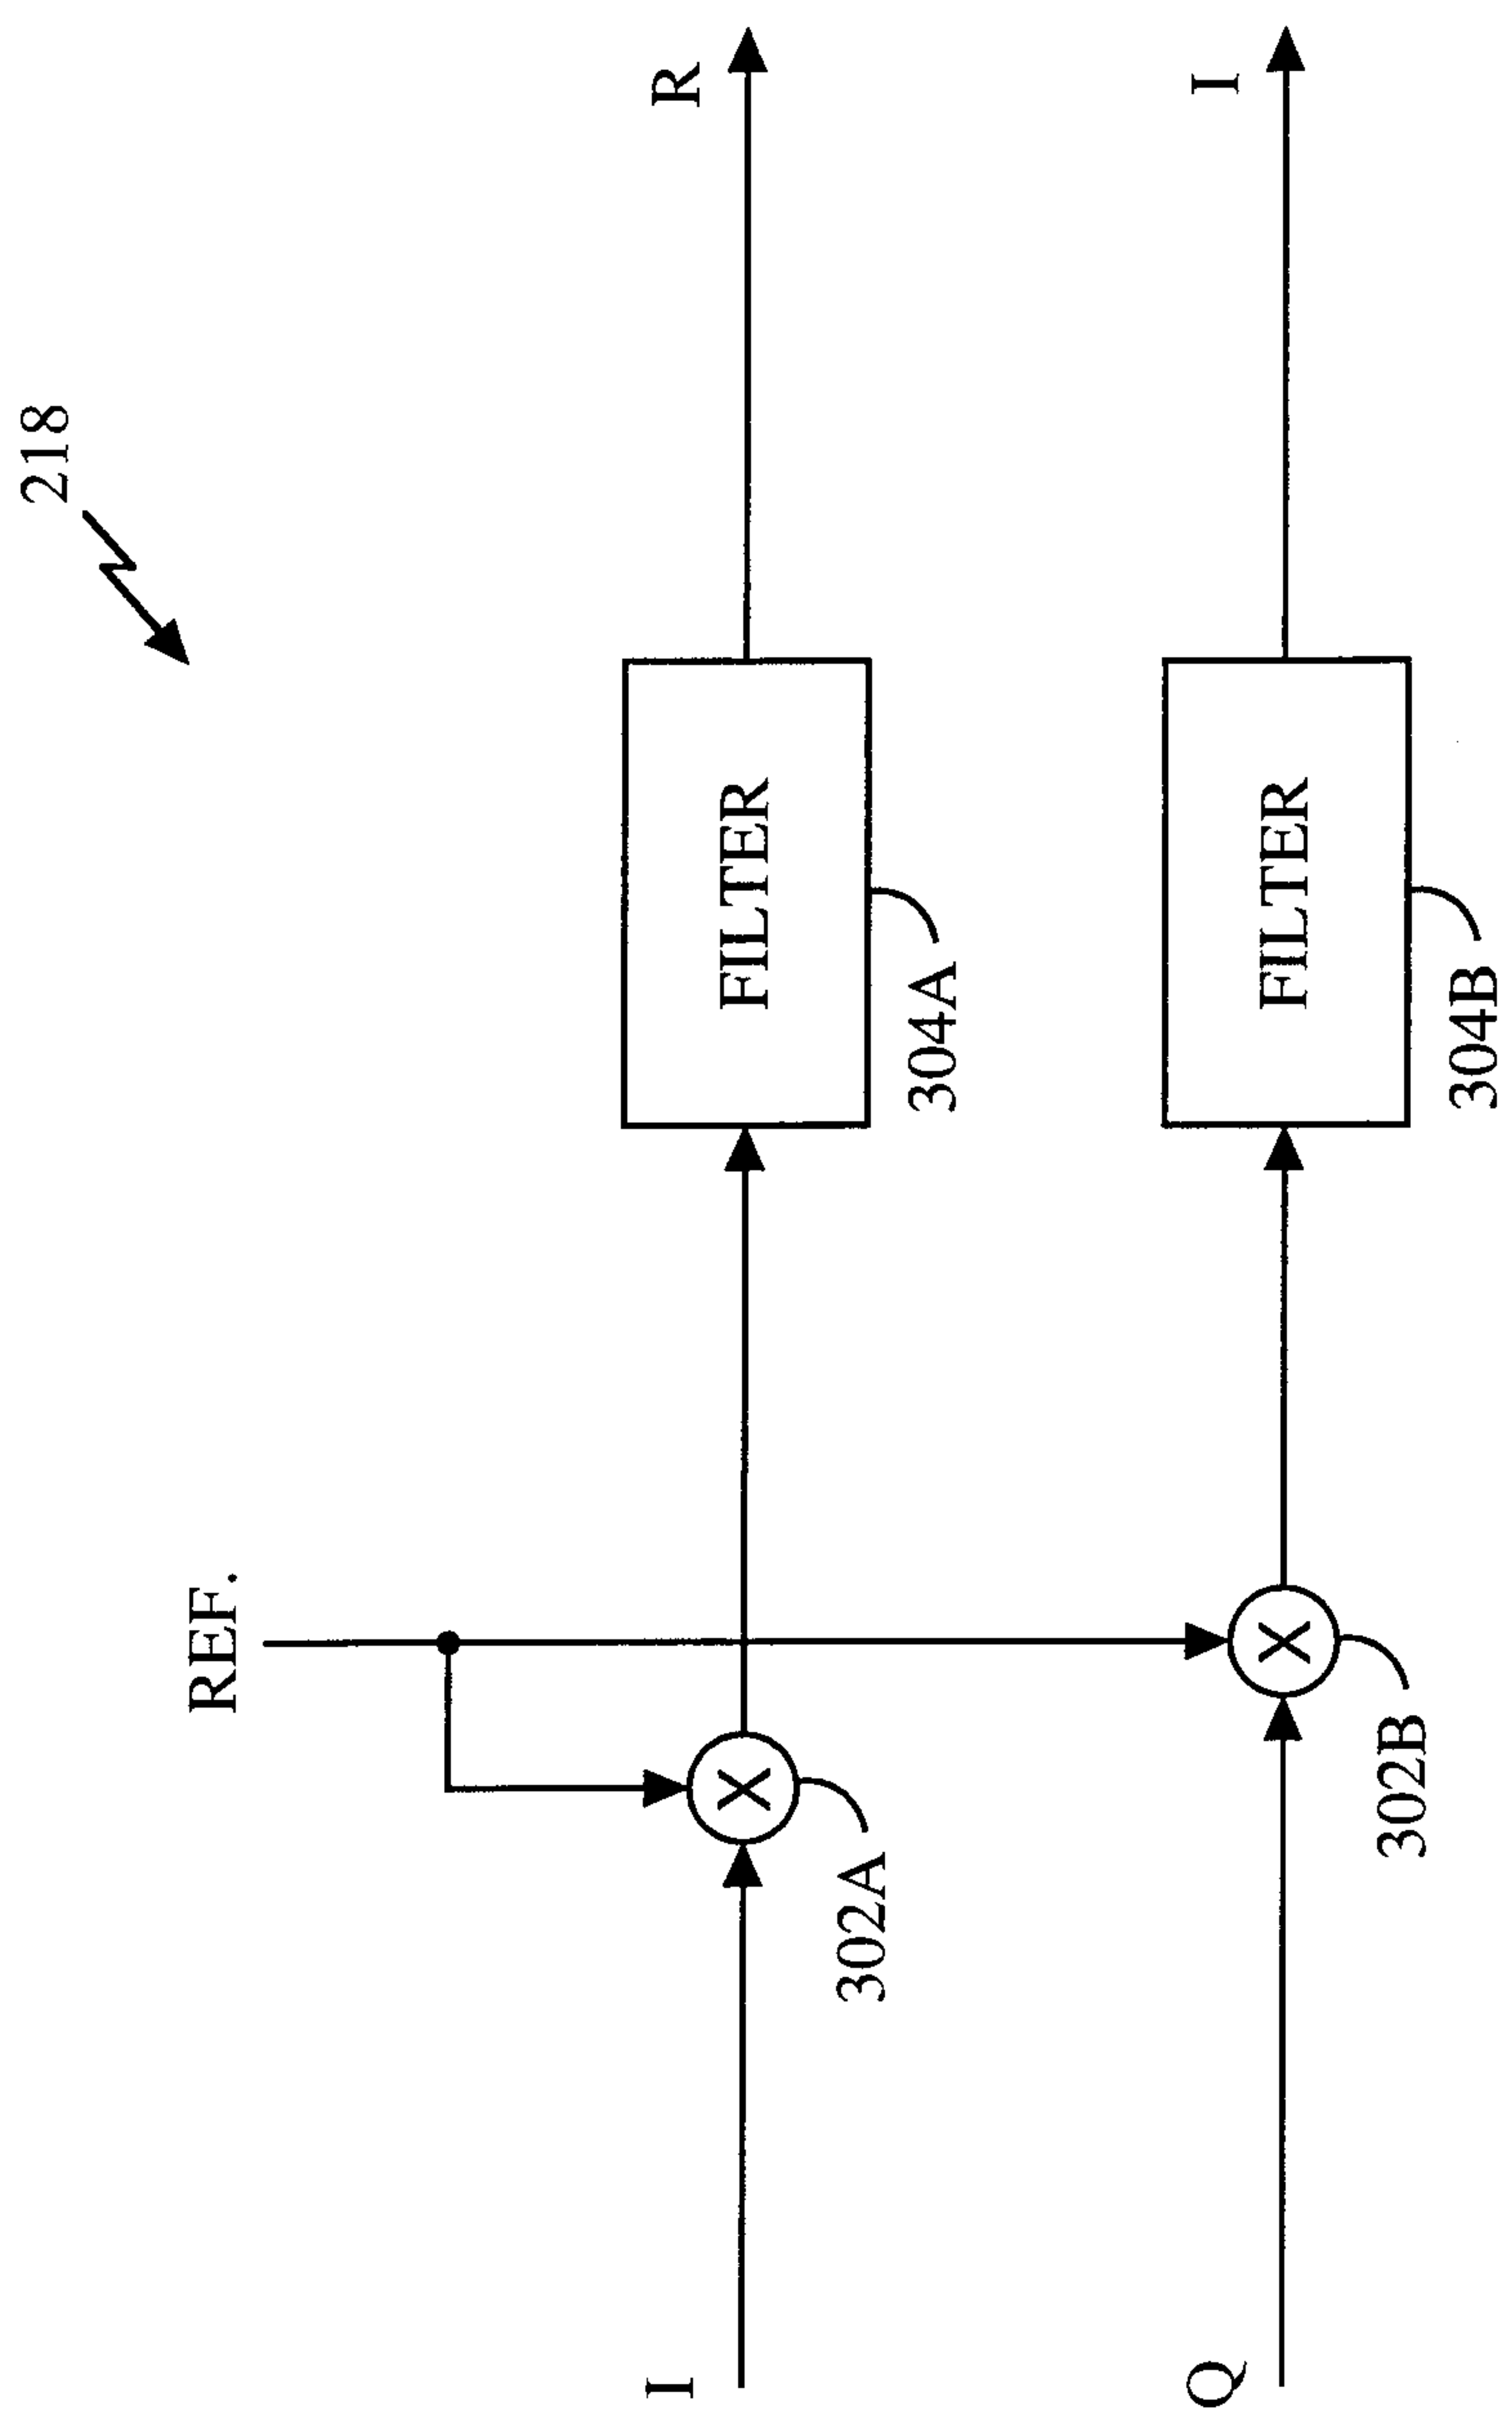


FIG. 4

