

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 162 014 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

23.03.2005 Bulletin 2005/12

(51) Int Cl.7: **B21J 5/12**, B21J 5/04,
B21C 23/00, B21C 23/10,
B21K 1/12, B21K 1/30

(21) Application number: **01304835.0**

(22) Date of filing: **01.06.2001**

(54) **Pressure controlled fluid pressure extrusion method**

Verfahren zum druckgesteuerten, hydraulischen Druckstrangpressen

Procédé d'extrusion par pression hydraulique à pression contrôlée

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **09.06.2000 JP 2000173006**

(43) Date of publication of application:
12.12.2001 Bulletin 2001/50

(73) Proprietor: **Aida Engineering Ltd.**
Sagamihara-shi, Kanagawa 229-1181 (JP)

(72) Inventors:
• **Kanamaru, Hisanobu**
Sagamihara-shi, Kanagawa 229-1181 (JP)

• **Kobayashi, Kazuto**
Sagamihara-shi, Kanagawa 229-1181 (JP)

(74) Representative: **Shelley, Mark Raymond et al**
K R Bryer & Co.,
7 Gay Street
Bath BA1 2PH (GB)

(56) References cited:
GB-A- 1 215 452 **US-A- 3 382 691**
US-A- 3 765 222 **US-A- 3 983 730**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 162 014 B1

Description

[0001] The present invention relates to a pressure controlled fluid pressure extrusion method. The term "fluid pressure extrusion method" defines a method in which extrusion is conducted under the action of fluid pressure. Pressure control describes the adjustment of this fluid pressure in order to conduct proper extrusion. These extrusions can be used to make parts for automobiles such as helical gears and the like.

[0002] Examples of the prior art include forward extrusion methods as shown in Figure 1 of Japanese Laid-Open patent Publication Number 11-254082 and Figure 3 of Japanese Laid-Open Patent Publication Number 7-308729.

[0003] Referring to Figures 3(A)-3(D), steps of these prior art methods are schematically shown in order to compare these prior art methods with the present invention. A material blank 11 progresses through the steps of 3(A), 3(B), 3(C) and 3(D) to produce a manufactured product 15. In the example shown the manufactured product 15 comprises a throughbore. The blank material 11 also comprises a throughbore for receiving a mandrel in the metal mold.

[0004] Referring to Figure 3(A), the outer diameter of the material blank 11 is approximately the same size as the inner diameter of a container part 12b of a die 12. Referring to Figure 3(C), when the material blank 11 is extruded into the die 12 and molded by a punch 13, a large frictional force is generated between the outer diameter of the material blank and the container. Furthermore, when molding a helical gear part 15a of the manufactured product 15 with a helical gear part 12a of the die 12, the product 15 rotates as it advances along the die. This rotation generates a large additional frictional force in the direction of rotation as well as the frictional force which is generated in the axial direction as described above. As a result, the working load is increased, and there are negative effects on the product precision and on the die life. With this method, the outer diameter part of the material blank must be straight. If the outer diameter is tiered, that is to say, the material blank comprises one or more different diameter parts, the smaller diameter part could become deformed and could expand during molding such that the specified molding is not achieved.

[0005] In US 3,382,691, a hydrostatic extrusion process is described wherein the plunger is provided with a passage therethrough to allow bleeding of liquid in a controlled manner from the bore of an extrusion chamber during the extrusion process.

[0006] The present invention provides a pressure controlled fluid pressure extrusion method comprising:

placing a material blank to be molded in a die;
sealing a fluid in an area between said die and an end of said material blank by a first seal formed by contact between said material blank and said die

and forming a second seal by contact between said die and a punch, wherein said first seal is a complete seal which prevents any leakage therepast of any of said fluid and said second seal is an incomplete seal having a clearance between said die and said punch which permits leakage of said fluid therepast to control the pressure of said fluid; applying a fluid pressure to an outer perimeter surface of said material blank; and pushing said material blank directly by said punch into the said die for molding, whereby said material blank is molded into a desired shape.

[0007] A suitable fluid pressure acts on the outer perimeter surface of a material and the material is pushed directly by a punch into die for molding, whereby the material is molded into a desired shape.

[0008] Preferably, the fluid is suitably sealed by the material, the die, and the punch. The action of the die and the punch pressurizes the fluid. The fluid pressure acts on the material to form the product.

[0009] In preferred embodiments, the fluid pressure is adjusted by a clearance of the die and the punch.

[0010] The invention will now be more particularly described, by way of example, with reference to the accompanying drawings, in which:

Figures 1(A) through 1(D) are schematic representations of the steps in a process according to an arrangement of the invention;

Figure 2 is an expanded view of the principal part of Figure 1(B); and,

Figures 3 (A) through 3(D) are schematic representations illustrating the method of the prior art.

[0011] Referring to Figures 1(A)-1(D), the process of molding a material blank 1 into a molded product 5 is shown. A metal mold 100 is constructed from a die 2, a punch 3, and a mandrel 4. The metal mold 100 is set into a conventional press (not shown). The metal mold 100 is actuated by the ascending and descending motion of a slide of the press.

[0012] Referring to Figure 1(A), the die 2 includes a cavity 10 having the shape of the desired molded product. In the illustrated arrangement, the molded product is a helical gear. Teeth 2a are formed on the lower part of a cavity 10, that is to say towards the bottom of the mold 100 in the drawings of Figures 1(A) to 1(D). Teeth 5a of the molded product 5 are formed by teeth 2a.

[0013] Referring to Figure 1(B) and Figure 2, the material blank 1 is supplied to die 2. The material blank 1 is transported to die 2 by a transport device (not shown) and is inserted into a cavity 10 of the die 2. After inserting the material blank 1 into the cavity 10, the mandrel 4 is inserted into a central throughbore in the material blank 1. A fluid is supplied to cavity 10. In the present arrangement, oil is used as the fluid.

[0014] Next, the punch 3 is lowered into cavity 10. The

lower end surface of the punch 3 contacts the upper surface of the material blank 1. As the punch 3 descends further, a fluid pressure chamber 6 is defined and sealed between the punch 3 and the lower portion of the material blank 1. With further descent of the punch 3 the fluid inside cavity 10 is pressurised. In other words, the fluid is sealed by a first seal 7 at the contact surface between material 1 and punch 3, a second seal 8 at the insertion surface between die 2 and punch 3, and a third seal 9 at the insertion surface between die 2 and the lower end of material blank 1.

[0015] The seal 9 must completely seal to prevent leakage of fluid from the fluid pressure chamber 6 to the portion of the die 2 containing the teeth 2a. If the pressurized fluid from fluid pressure chamber 6 penetrates into teeth 2a, the presence of the material 1 may produce partial depressions in teeth 5a of molded product 5. This would prevent achieving the desired shape.

[0016] The seal 7 may have some leakage without producing any problems. In the present arrangement, because teeth 2a are a helical gear, while molding, material 1 rotates with respect to punch 3. As punch 3 advances, a film of fluid penetrates between the teeth 2a and the teeth 5a being formed. The resulting lubrication reduces the frictional force that accompanies this rotation.

[0017] With the seal 8, the pressurized fluid must be actively released. If the fluid pressure in the fluid pressure chamber 6 rises without limit, problems such as rupture of members such as die 2 and the like can occur. However, if a large amount of fluid in fluid pressure chamber 6 leaks from seal 8, material 1 expands radially. This can cause problems such as an incomplete molding action of the material blank 1. Taking these points into account, it is necessary to determine the clearance for the restriction of seal 8. In this way, the seal 8 acts as a pressure relief valve.

[0018] As described above, the clearance of seal 8 is determined so that an optimal fluid pressure in the fluid pressure chamber 6 is achieved.

[0019] Referring to Figure 1(C), while the fluid pressure from fluid pressure chamber 6 is applied to the material blank 1, the material blank 1 is pushed by punch 3 to become molded into the molded product 5. In this situation, because the fluid in fluid pressure chamber 6 is disposed between the die 2 and the material blank 1, frictional forces between the die and the blank material are not generated. Therefore, the material blank 1 is molded with only the molding pressure that is needed for molding. In the present arrangement, because teeth 2a of die 2 form a helical gear, the material blank 1 is rotated while being pushed into die 2. However, due to the action of the above fluid, frictional resistance associated with the rotation is not generated.

[0020] Referring to Figure 1(D), the molded product 5 inside die 2 is impelled from below by a knockout device (not shown) and is removed from above the die 2. In other words, the molded product is lifted to the top of die

2 by a rotatable lifting member (not shown).

[0021] In the present arrangement, a tiered material blank is used, but the present invention can be used for a straight or constant diameter material blank as well. Although there is a throughbore in the center of the molded product, the present invention does not require a throughbore to be provided. In the present arrangement, the molded product is a helical gear, but the present invention can be used for molded parts with super gears or with no gears as well.

[0022] According to the present invention, because there is no associated frictional force, the load needed for molding is reduced. As a result, the stress on the die is reduced, and product precision is improved. There are advantages such as having a die with a long life and conserving energy. Furthermore, even if there is a space between the die and the material blank, there is no deformation of the material blank and extrusion of tiered material blanks becomes possible. As a result, the cross-section reduction rate for the extrusion is small, and the molding load is further reduced.

[0023] The fluid pressure in fluid pressure chamber 6 is controlled by the clearance of seal 8. As a result, control is easy and stable. In this regard, the method of the present invention permits molding of parts that have heretofore been considered difficult to process.

[0024] Having described preferred arrangements of the invention with reference to the accompanying drawings it is to be understood that the invention is not limited to those precise arrangements, and that the various changes and modifications may be effected therein by one skilled in the art without departing from the scope of the invention as defined in the appended claims.

Claims

1. A pressure controlled fluid pressure extrusion method comprising:

placing a material blank (1) to be molded in a die (2);
sealing a fluid in an area between said die (2) and an end of said material blank (1) by a first seal (9) formed by contact between said material blank and said die (2) and forming a second seal (8) by contact between said die (2) and a punch (3), wherein said first seal (9) is a complete seal which prevents any leakage therepast of any of said fluid and said second seal (8) is an incomplete seal having a clearance between said die (2) and said punch (3) which permits leakage of said fluid therepast to control the pressure of said fluid;
applying a fluid pressure to an outer perimeter surface of said material blank (1); and
pushing said material blank (1) directly by said punch (3) into the said die (2) for molding,

whereby said material blank (1) is molded into a desired shape.

2. A pressure controlled fluid pressure extrusion method according to Claim 1, wherein the step of applying fluid pressure includes compressing and pressurizing said fluid by an action of said die (2) and said punch (3). 5
3. A pressure controlled fluid pressure extrusion method according to Claim 2, wherein the step of applying fluid pressure includes adjusting said clearance to adjust said leakage to control the pressure of said fluid. 10 15

Patentansprüche

1. Verfahren zum druckgesteuerten Fließpressen bestehend aus: 20

Einlegen eines Materialformlings (1), der geformt werden soll, in eine Form (2);
 Einschließen eines Fluids in einem Bereich zwischen der Form (2) und einem Ende des Materialformlings (1) mittels einer ersten Dichtung (9), die durch den Kontakt zwischen dem Materialformling und der Form (2) gebildet wird und Bilden einer zweiten Dichtung (8) durch den Kontakt zwischen der Form (2) und einem Stempel (3), wobei die erste Dichtung (9) eine vollständige Dichtung ist, die jeden Durchtritt des Fluids hinter sich verhindert und die zweite Dichtung (8) eine unvollständige Dichtung ist mit einem Spiel zwischen der Form (2) und dem Stempel (3), das das Durchtreten der Flüssigkeit hinter sich zulässt, um den Druck des Fluids zu steuern; 25 30 35

Anlegen eines hydraulischen Drucks an eine äußere Umfangsfläche des Materialformlings (1); und 40

Stoßen des Materialformlings (1) zum Formen unmittelbar durch den Stempel (3) in die Form (2), wodurch der Materialformling (1) zu einer gewünschten Form geformt wird. 45
2. Verfahren zum druckgesteuerten Fließpressen gemäß Anspruch 1, wobei der Schritt des Anlegens von hydraulischem Druck das Pressen und unter Druck setzen des Fluids durch ein Zusammenwirken der Form (2) und des Stempels (3) einschließt. 50
3. Verfahren zum druckgesteuerten Fließpressen nach Anspruch 2, wobei der Schritt des Anlegens von hydraulischen Druck die Einstellung des Spiels einschließt, um das Durchtreten von Fluid zur Steuerung des Fluiddrucks zu regeln. 55

Revendications

1. Procédé d'extrusion par pression hydraulique contrôlée comprenant les étapes consistant à :

placer une ébauche ou une préforme (1) à mouler dans une matrice (2) ;

assurer une étanchéité vis-à-vis du fluide dans une zone comprise entre ladite matrice (2) et une extrémité de ladite ébauche ou préforme (1) à l'aide d'un premier joint (9) formé par le contact entre ledit flan ou préforme et ladite matrice (2) et former un deuxième joint (8) par contact entre ladite matrice (2) et un poinçon (3), dans lequel ledit premier joint (9) est un joint complet qui empêche le passage de toute fuite dudit fluide et dans lequel ledit deuxième joint (8) est un joint incomplet qui laisse un jeu entre ladite matrice (2) et ledit poinçon (3) qui permet le passage de fuites dudit fluide pour contrôler la pression dudit fluide ;

appliquer une pression hydraulique sur une surface périphérique externe de ladite ébauche ou préforme (1) ; et

poser ledit flan (1) directement à l'aide dudit poinçon (3) dans ladite matrice (2) pour le mouler et obtenir la forme moulée souhaitée à partir de ladite ébauche ou préforme (1).
2. Procédé d'extrusion par pression hydraulique contrôlée selon la revendication 1, dans lequel l'étape d'application d'une pression hydraulique comprend la compression et la pressurisation dudit fluide par une action de ladite matrice (2) et dudit poinçon (3).
3. Procédé d'extrusion par pression hydraulique contrôlée selon la revendication 2, dans lequel l'étape d'application de la pression hydraulique comprend le réglage dudit jeu pour contrôler la pression dudit fluide.

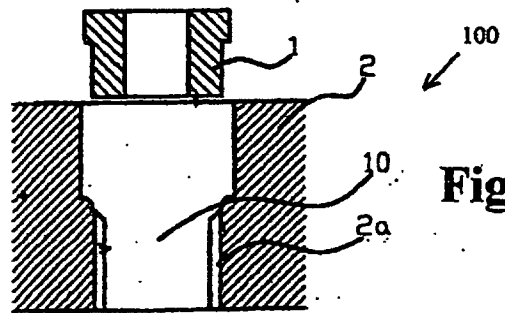


Fig. 1(A)

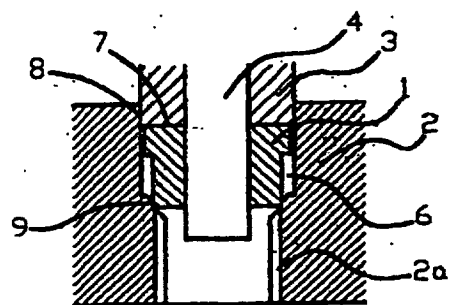


Fig. 1(B)

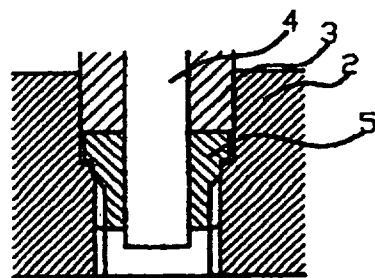


Fig. 1(C)



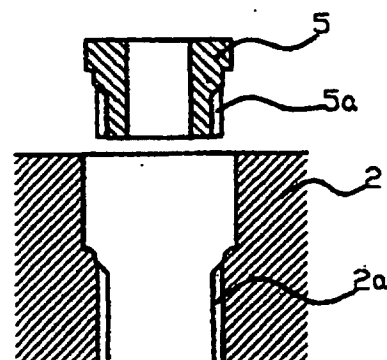



Fig. 1(D)

Fig. 2

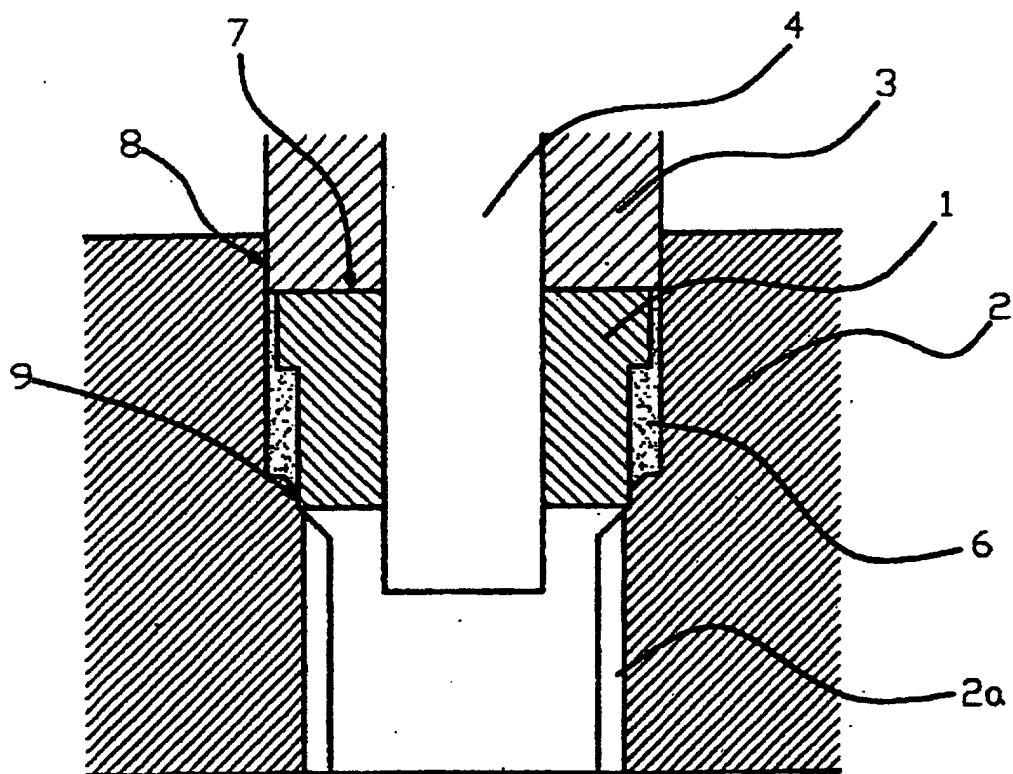


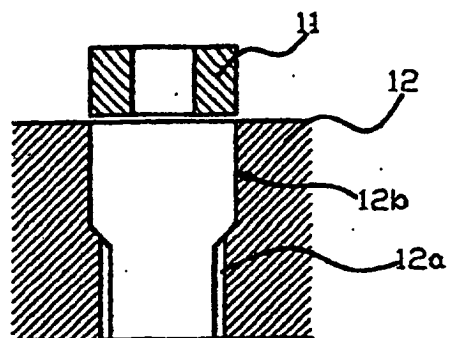


**PRIOR
ART
Fig. 3(A)**

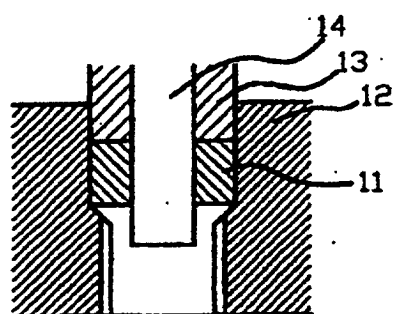

**PRIOR
ART
Fig. 3(B)**

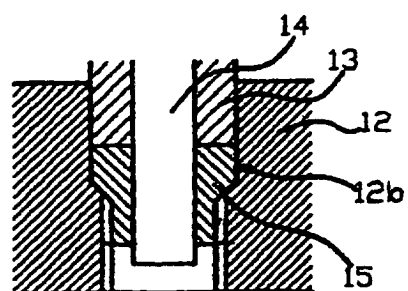

**PRIOR
ART
Fig. 3(C)**

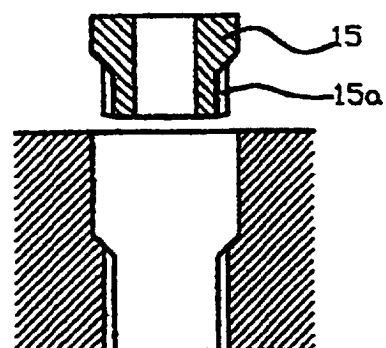

**PRIOR
ART
Fig. 3(D)**